

# ZDBC240NBS – GE Monogram Stainless Steel Beverage Center


## **Dimensions and Specifications (in inches)**

#### **Installation Space**

The Monogram<sup>®</sup> Beverage Center may be installed beneath a countertop or can be used free-standing.

• If installing between frameless cabinets, a 1/2"-wide filler strip or side panel may be required. The filler strip will act as a spacer between the door case and adjacent cabinet and will prevent interference with cabinet door swing. The width of the opening must include filler panels.

**Note:** When installed, the door should project forward 1" of adjacent 24"-deep cabinets.



### **Location Requirements**

All Monogram Refrigeration Modules may be closed in on the top and sides as long as the front is unobstructed for air circulation and door swing.

- Do not install these products where the temperatures will go below 55°F (13°C) or above 90°F (32°C).
- Do not install where they will be subject to direct sunlight, heat or moisture.
- These products are not designed to be stacked one over the other.

### **Side-by-Side Installation**

For a complete refreshment center, install a Monogram Wine Reserve and Beverage Center together.


• Products must operate from separate properly grounded receptacles.

#### **Door Swing Clearances**

All Monogram Refrigeration Modules are factory set for a 110° door swing.

#### When installed in a corner:

- Allow the minimum door swing clearances shown.
- The minimum clearance shown at 90° will allow full extension of drawers and shelves.



#### Electrical

A 120V, 60Hz, 15 or 20 amp power supply is required. An individual properly grounded branch circuit or circuit breaker is recommended. Install a properly grounded 3-prong electrical recessed into the back wall as shown. Electrical must be located on rear wall as shown. **Note:** GFCI (ground fault circuit interrupter) is not recommended.


Listed by Underwriters Laboratories

For answers to your Monogram,<sup>®</sup> GE Profile<sup>™</sup> or GE<sup>®</sup> appliance questions, visit our website at GEAppliances.com or call GE Answer Center<sup>®</sup> service, 800.626.2000.

Specification Revised 4/06 120022



# ZDBC240NBS – GE Monogram Stainless Steel Beverage Center

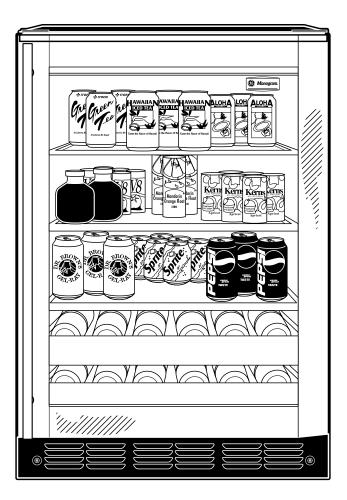

# **Features and Benefits**

- Adjustable manual thermostat Maintains the ideal temperature for aging or serving wine
- Removable spillproof glass shelves Helps contain spills for ease of cleaning
- Beverage shelf on full-extension slides Holds up to five wine bottles or ten 12-oz. cans
- Unfinished heart-of-cherry wood shelf fronts Can be finished to complement surrounding cabinetry
- See-through glass door Affords a full view of contents
- Soft interior lighting Automatically illuminates when the door is open, but can be activated by on internal on/off switch
- Stainless steel tubular handle Designed to coordinate with other Monogram appliances
- Flush installation Allows near-seamless integration with surrounding cabinetry
- Reversible door swing Easily reversed to left or right door swing as needed
- Model ZDBC240NBS Stainless steel

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com