




STEEL CORE

5 IN 1 DIGITAL TIRE PRESSURE GAUGE

35598

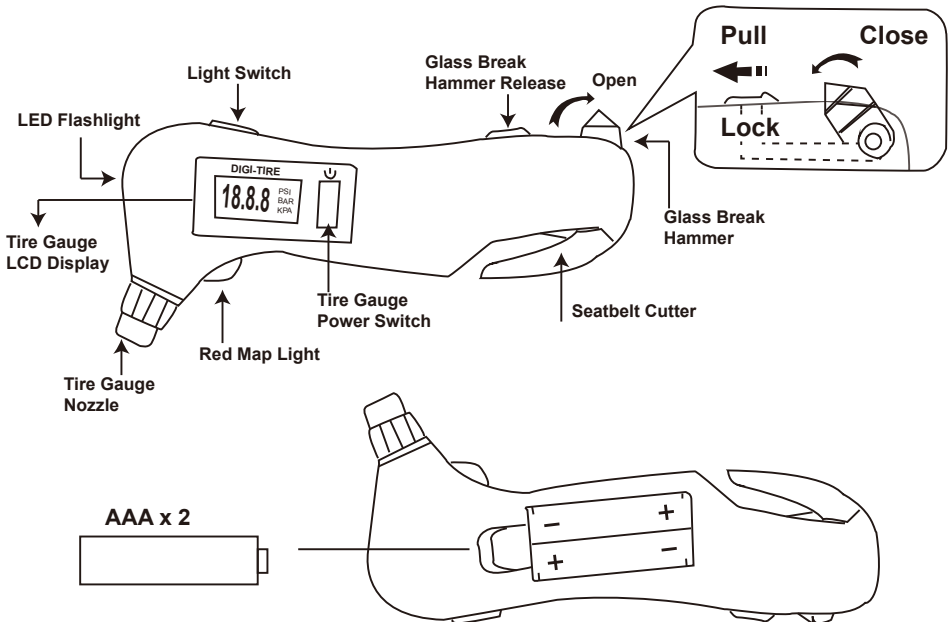

Specifications:

Operating Temperature:	-4°F to 122° F (-20° to 50° C)
Measurement Range:	3 to 150 PSI (min.-max.)
Accuracy:	5~100 PSI +/- 1 PSI 100-150 PSI +/- 1.5 PSI
Power Source:	Two AAA batteries (Included)

⚠ WARNING

This product contains or, when used, produces a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.
(California Health & Safety Code § 25249.5, et seq.)

**Actual product may vary slightly*

Please carefully read and save these instructions before attempting to assemble, maintain, install, or operate this product.

Observe all safety information to protect yourself and others. Failure to observe the instructions may result in property damage and/or personal injury. Please keep instructions for future reference.

For warranty purchases, please keep your dated proof of purchase. File or attach to the manual for safe keeping.

-
1. Before operating the digital tire pressure gauge, be sure that your vehicle is in park and safely away from oncoming traffic.
 2. Press the tire gauge power switch to turn display on. It will automatically reset to “0.0”.
 3. Remove the tire valve cap and press the tire gauge nozzle firmly onto the tire valve and hold until the reading is stable.
 4. The readout will display for approximately 90 seconds before automatically turning off.
 5. To turn off manually, press and hold the power switch for 3 seconds.
 6. This gauge can measure tire pressure in 3 modes: PSI, BAR and KPa. Select the desired mode by repeatedly pressing the power switch.
 7. To operate the LED flashlight, slide the light switch to the appropriate position.

Limited Manufacturer Warranty

FOT makes every effort to ensure that this product meets high quality and durability standards. FOT warrants to the original retail consumer a 1-year limited warranty from the date the product was purchased at retail and each product is free from defects in materials. Warranty does not apply to defects due directly or indirectly to misuse, abuse, negligence or accidents, repairs or alterations, or a lack of maintenance. FOT shall in no event be liable for death, injuries to persons or property, or for incidental, special or consequential damages arising from the use of our products. To receive service under warranty, the original manufacturer part must be returned for examination by an authorized service center. Shipping and handling charges may apply. If a defect is found, FOT will either repair or replace the product at its discretion.

DO NOT RETURN TO STORE

For Customer Service:

Email: customerservice@focus-ontools.com or Call 1-800-348-5004

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>