



VELOCITY POWER CLASS D AMPLIFIER with DSP **MPD 46 A**



Enjoy it.

CAUTIONS

This device has been manufactured according to established safety guidelines. However, dangers may still occur if the safety notes in this manual is not observed. This manual is intended to familiarize the user with the device's important functions. Read this carefully, prior to using the car radio. Keep this manual in an easily accessible location. In addition, do observe the instructions of other devices used in conjunction with this device.

Installation Safety Notes

Always observe the following safety notes:

- Device must be used in a way that compliments safety of the user when driving the vehicle. It is recommended for the user to install at an appropriate location when operating the device. While driving, user is not recommended to use applications that can be prone to distraction.
- Before installation, disconnect the negative terminal of the battery. Refer to the safety vechicle manufacturer's user manual.
- Ensure positions of the holes are nowhere near the vehicle component to avoid any damage during drilling.
- Ensure corss section of the cables i no less than 2.5mm if the positive and the negative cables are too long, incorrect installation may result in malfunction of the device or the car sound system.
- Select a dry and well-ventilated location to install the device.
- The device must not be installed in overly exposed location.
- The installation location must be suitable for screw holes and stable ground support

General Safety Notes:

Observe the following for protection against injuries:

User is advised to keep the volume of the car radio
to a moderate level for the protection of the ears and
to increase the ability to hear any emergency warning signals (e.g. police and ambulance sirens). Do not
increase the car radio volume while the car radio is
muted as it is not audible. The car radio volume can
be too loud when the car radio is unmuted.

Disclaimer

- Blaupunkt is not liable for any loss or damage caused or resulting from unauthorized disassembly or modification to the product.
- In no event shall Blaupunkt be liable for any direct, indirect, punitive, incidental, special consequential damages, to property or life, improper storage, whatsoever arising out of or connected with the use or misuse of our products.
- USA & CANADA: Products not intended for sales in the United States and Canada. If purchased in the U.S. or Canada, this product is purchased as-is. No warranty, expressed or implied is provided in the U.S. and Canada.

Voltage Supply

- +12V: Positive connection terminal for car 12V power supply.
- · GND: Power supply negative connection terminal.
- Firmly and carefully connect the ground lead to a bare metal point ont he vehicle chassis.
- Operation temperature: 0° 70°C

Compatible PC OS

- · PC with or higher than Windows XP
- Android mainstream Android devices with Bluetooth

Scope of Delivery

- DSP Digital Signal Processor (153 x 112 x 45mm)
- 1.5m USB Cable
- 2 Tapping Screws (M3 x 10)
- · Universal 20p Wiring Harness


Disposal Notes




1

Do not dispose of your old unit in the household trash!

Use the return and collection systems available to dispose of the old device.



- 1. Connect to computer for software tuning.
- Press the button to select the preferable mode. (There are maximum 6 sound effect modes can be saved by using software).



- 1. Power indicator light.
- 2. Power input.
- 3. 4-channel high level input.
- 4. 4-channel speaker output.
- 5. Selector switch between Hi-Input selection or ACC powered selection for amplifier wake up triggering.
- 6. 2-channel low level RCA output.

SPECIFICATION

ADJUSTMENT RANGE

Audio

• RMS Power : 43W x 4(4Ω)

• DSP Resolution: 32 Bit

. Output Power RMS @ 4 Ohms (≤1% THD +N): 43W/CH

Distortion (THD): <0.015%

• Dampling Factor: >70

Operating Voltage: 10 -15V

Sampling Rate: 48kHz

• Signal Converter A/D : Burr-Brown

Signal Converter D/A : Burr-Brown

Output

- 2 x RCA/ Cinch
- · 4 High Level Speaker Output
- Voltage RCA/ Cinch : 0.9V RMS

Inpu

• 4 High Level Speaker Input

1 x USB

· Impedence High Level: 1000 Ohms

· S/N Ratio Analog-in: 100dB

Feature

• 4 x 43W, Class D Amplifier

Max. Output Power: 180W

Frequency Response: 10Hz-20kHz
 Max. Current Consumption: 10A

Dimension (W x H x D): 153 x 112 x 45mm

Weight: 0.92 kg

Equalizer adjustment

- · Equalizer selector: On/Off
- Frequency range step: 1hz step (20hz 20khz)
- Q value step: 0.1 step (0.1 10.0)
- Volume adjustment : 0.2 step (-24 11.7)

Crossover adjustment


- · Crossover type selector: Link, Bessel, Butterworth
- Frequency adjustment: 1hz step (20Hz 20Khz)
- · Decibel Slope selector: 6 dB, 12 dB and 24 dB

Time Delay adjustment


- Delay unit cm: 0.72 step (0.72 159.3) centimetre
- Delay unit in ms: 0.21 step (0.21 4.604) millisecond

Channel adjustment

- Polarity phase selector: 0° and 180°
- Volume gain: 1.0 step (-60 0)
- Mute selector: On /Off




Car Specific Wiring Hardness

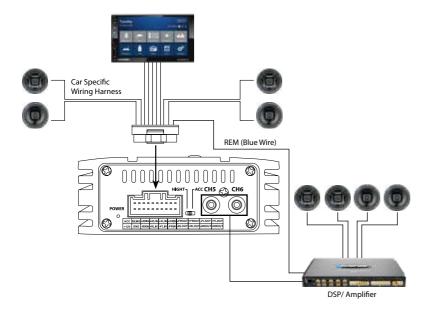

WIRING DIAGRAM

Universal Wiring Method

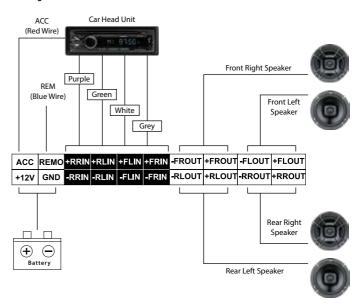

4 5


SOFTWARE OPERATION (WINDOWS)

Blaupunkt MPD 46 A Software

Visit www.blaupunkt.com/ase to download the software.



Blaupunkt.exe

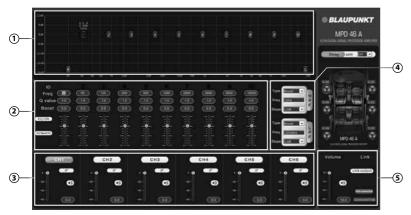

Channel panel (10-band Tuning)

1. 10-band tuning waveform



SOFTWARE OPERATION (WINDOWS)

2. 10-band equalizer control



3. Channel Control



- 4. Crossover frequency setting:
 - 3 Types of High-pass frequency
 - · 3 Types of Low-pass frequency



5. Main Volume Control



6 7



Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com