Operation Guide 3284

 Note that the product illustrations in this manual are intended for reference only. and so the actual product may appear somewhat different than depicted by an illustration.

About This Manual



 Depending on the model of your watch, display text appears either as dark figures on a light background, or light figures on a dark background. All sample displays in this manual are shown using dark figures on a light background. background. Button operations are indicated using the letters shown

in the illustration. • Each section of this manual provides you with the information you need to perform operations in each

Е

| Contents | |
|----------------|------|
| General Guide | E-4 |
| Timekeeping | E-6 |
| Alarm | |
| Stopwatch | |
| Time Setting | E-13 |
| Specifications | E-15 |

Procedure Lookup

The following is a handy reference list of all the operational procedures contained in this manual.

| To to only bottom 10 hours and 04 hours time to only a | 5.0 |
|---|------|
| To toggle between 12-hour and 24-hour timekeeping | |
| To set the alarm time | |
| To stop the alarm | |
| To switch the Daily Alarm and Hourly Time Signal on and off | |
| To test the alarm | |
| To measure times with the stopwatch | E-12 |
| To set the time and date | F-13 |

The watch returns to the Timekeeping Mode automatically if you do not perform any button operation for one or two minutes in the Alarm Mode and Time Setting Mode.
In any mode, press [©] to illuminate the display.

• With the 24-hour format, times are displayed in the range of 0:00 to 23:59, with 24H

E-3


E-5

E-7

E-2

General Guide Press
 B to change from mode to mode. After you perform an operation in any mode, pressing (B) returns to the Timekeeping

Mode



indicato

E-4

Timekeeping PM indicato

Use the Timekeeping Mode to view the current time and Day of the week is displayed as follows Day of week

> SU : Sunday TU : Tuesday

SA : Saturday

ΤН · Thursday



Hour : Minutes Seconds

No toggle between 12-hour and 24-hour timekeeping Mode, press (a) to switch between the 12-hour and 24-hour formats.
With the 12-hour format, the PM indicator appears for times in the range of noon to 11:59 p.m. and no indicator appears for times in the range of midnight to 11:59 a.m.

To toggle between 12-hour and 24-hour timekeeping

MO : Monday


FR : Friday

WE : Wednesday

E-6

Alarm

F-8



When the Daily Alarm is turned on, the alarm sounds for 20 seconds at the preset time each day. When the Hourly Time Signal is turned on, the watch beeps every hour on

- All of the operations in this section are performed in the Alarm Mode, which you enter by pressing (B) (page E-4). To set the alarm time
- 1. In the Alarm Mode, press ©. The hour digits flash because they are selected.
- This operation automatically turns on the alarm.

Mode indicator

2. Press (C) to change the selection in the following sequence



- 3. Press (Å) to increase the selected digits. Holding down (Å) changes the number at
 - high speed. The format (12-hour and 24-hour) of the alarm time matches the format you select
- Ine format (12-hour and 24-hour) of the alarm time matches the format you select for normal timekeeping.
 When setting the alarm time using the 12-hour format, take care to set the time correctly as morning or afternoon (PM).
 After you set the alarm time, use © to return to the Alarm Mode.
 If you do not operate any button for one or two minutes while a selection is flashing, the flashing stops and the watch goes back to the Timekeeping Mode automatically.

E-1

CASIO.

Operation Guide 3284

To stop the alarm

Press any button to stop the alarm after it starts to sound. To switch the Daily Alarm and Hourly Time Signal on and off Press (a) while in the Alarm Mode to change the status of the Daily Alarm and Hourly Time Signal in the following sequence.



To test the alarm

Hold down (A) while in the Alarm Mode to sound the alarm.

E-10

To measure times with the stopwatch

| (a) Elapsed time measurement | | | | | |
|--|---|------------------------------------|--|-------|--|
| \land | A | A | A | C | |
| Start | Stop | Re-start | Stop | Clear | |
| (b) Split time measurement | | | | | |
| \land | ©> | ©> | A | C | |
| Start | Split (SPL displayed) | Split release | Stop | Clear | |
| (c) Split time and 1st-2nd place times | | | | | |
| \land \longrightarrow | ©> | A | ©> | C | |
| Start | Split First runner finishes. Display time of first runner. | Stop Second runner finishes. | Split release Display time of second runner. | Clear | |

E-12

While the second's digits are selected (flashing), press (a) to reset the seconds to (a). If you press (b) while the second's count is in the range of 30 to 59, the seconds are reset to (a) and 1 is added to the minutes. If the second's count is in the range of 00 to 29, the minute's count is unchanged.
 While any other digits (besides seconds) are selected (flashing), press (b) to increase the number. While the day of the week is selected, pressing (b) advances to the next day. Holding down (c) changes the current selection at high speed.
 After you set the time and date, press (c) to return to the Timekeeping Mode.
 If you do not operate any button for one or two minutes while a selection is flashing, the flashing stops and the watch goes back to the Timekeeping Mode automatically.

Stopwatch


Mode indicator A ST 04:0 Izs B Min tes Seconds

The Stopwatch Mode lets you measure elapsed time, split times, and two finishes. The range of the stopwatch is

- times, and two finishes. The range of the stopwatch is 59 minutes, 59.99 seconds.
 The stopwatch continues to run, restarting from zero after it reaches its limit, until you stop it.
 The stopwatch measurement operation continues even if you exit the Stopwatch Mode.
 Exiting the Stopwatch Mode while a split time is frozen on the display clears the april time and returns to clearced.
- on the display clears the split time and returns to elapsed time measurement.

All of the operations in this section are performed in the Stopwatch Mode, which you enter by pressing (B) (page E-5). 1/100 second

F-11

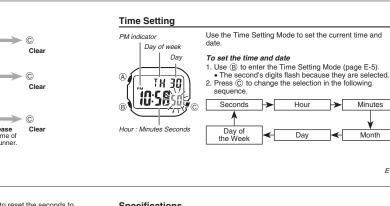

Specifications

Accuracy at normal temperature: ±30 seconds a month

Timekeeping: Hour, minutes, seconds, p.m., day, and day of the week Time system: Switchable between 12-hour and 24-hour formats Calendar system: Auto-calendar set at 28 days for February

Alarm: Daily alarm, Hourly time signal

Stopwatch Measuring units: 1/100 seconds Measuring capacity: 59 minutes, 59.99 seconds Measuring modes: Elapsed time, split time, and two finishes

Illumination: LED (light-emitting diode)

Battery: One lithium battery Type: CR1616

Battery life: Approx. 5 years

1 second of illumination operation per day
20 seconds of alarm operation per day

E-15

E-13

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com