


The LX Series is constructed of heavy duty 20 gauge steel with a white powder coat finish standard. Illumination is accomplished with long lasting, high output LEDs for long service life.

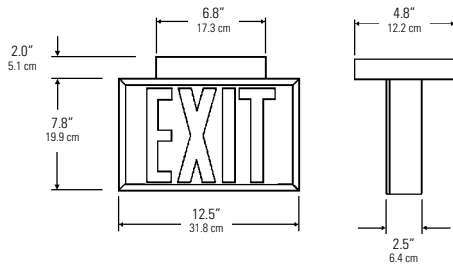

Complete Fixture consists of base exit sign. Select options and accessories below.

How to Specify:

LX				W
SERIES	Battery	# OF FACES	LETTER COLOR	HOUSING COLOR
LX = LX Series Heavy Duty Steel Exit Sign	A = AC Only N = Emergency Operation	1 = Single 2 = Double U = Universal	R = Red G = Green	W = White

Features

- Illumination:** Illumination is accomplished with long lasting, high output Light Emitting Diodes (LEDs). LEDs and support electronics have an expected life of 25 years.
- Housing:** Constructed of 20 gauge steel. Suitable for ceiling, end and surface mount applications. Includes universal stencil with field selectable chevrons. White housing is standard.
- Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Emergency operation version includes a charging system complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- Battery:** Maintenance free, sealed nickel cadmium battery has an estimated service life of 10 years, and an operating temperature range of 20°F (-7°C) to 95°F (35°C).
- Self-Diagnostics:** Self-diagnostics option includes a fault indicator LED and microprocessor circuitry that automatically indicates battery and charger status. An automatic monthly test assists user in meeting requirements of NFPA 31-1.
- Input Power Requirements (at 120 VAC):**
AC Only
 Red = .046A (120 VAC), .020A (277 VAC)
 Green = .033A (120 VAC), .014A (277 VAC)
Self-Powered
 Red = .090A (120 VAC), .039A (277 VAC)
 Green = .090A (120 VAC), .039A (277 VAC)
- Warranty:** Electronics: 3 years; Battery: 5 years full, 5 years pro-rata

Code Compliance

UL 924 listed, UL Damp Location Listing optional.
National Electrical Code (NEC), NFPA70 and NFPA101 life safety codes; and OSHA safety code illumination standards.

Options

- 2CKT1** = Two circuit, 120 VAC
- 2CKT2** = Two circuit, 277 VAC
- SD** = Self-Diagnostics
- BF** = Buzzer/Flasher (emergency operation only)*
- BZ** = Audible Buzzer (emergency operation only)*
- EX** = Special Input Transformer (specify voltage & frequency)
- FA** = 24V Fire Alarm Interface*
- FL** = Emergency Flasher
- SW** = Special Wording (per face charge, one-time artwork setup charge will apply)

* Not available with self-diagnostics (SD) option

Accessories

- XCKITW** = Canopy Kit, white finish
- DCKCE06** = DC Conversion Kit, 6 VDC, 5.4 watt lamps
- DCKCE22** = DC Conversion Kit, 12 VDC, 5.5 watt lamps
- XPKIT12W** = Pendant Kit, 12", white finish (consult factory for pendant lengths in excess of 12")
- WG4** = Wireguard for Exit Wall Mounting
- WG10** = Wireguard for Exit End Mounting

Job Information	Type:
Job Name:	
Cat. No.:	
Lamp(s):	
Notes:	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • D0308

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>