


Fluorescent or optional incandescent lamp AC-only and emergency exit models meet Chicago requirements. Rugged steel signs for wall, ceiling or end mount applications.


*Standard Exit*



NOTE: Add 1" (2.5cm) for canopy if ceiling or end mounted.



*Combination Model (DEH option)*

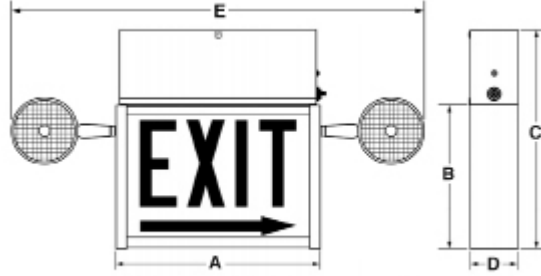

NOTE: Add 1" (2.5cm) for canopy if ceiling or end mounted.

A	B	C	D	E
12.75"	9.5"	14.5"	2.5"	26.25"
32.4cm	24.1cm	36.8cm	6.4cm	66.7cm

**How to Specify:**



**SERIES**

MJ5 = Chicago Exit



**MODE OF OPERATION**

A = AC Only Exit  
E = Emergency Operation Exit



**# OF FACES**

1 = Single face  
2 = Double face



**LETTER COLOR**

RW = Red on White



**EXIT FACE DESIGNATOR**

*Single Face Models*

- 3 = EXIT (No Arrow)
- 6 = EXIT (Right Arrow)
- 9 = EXIT (Left Arrow)
- 12 = EXIT (Double Arrow)
- 2 = STAIRS (No Arrow)
- 5 = STAIRS (Right Arrow)
- 8 = STAIRS (Left Arrow)
- 11 = STAIRS (Double Arrow)

*Double Face Models*

- 18 = EXIT (No Arrow)
- 21 = EXIT (Right or Left Arrow)
- 24 = EXIT (Double Arrow)
- 17 = STAIRS (No Arrow)
- 20 = STAIRS (Right or Left Arrow)
- 23 = STAIRS (Double Arrow)

**Features**

- 1. Illumination:** AC Light Source: Standard exit face illumination is provided by two 7 watt PL type fluorescent lamps. Letter brightness and illumination uniformity exceed UL requirements with both incandescent and fluorescent models. Emergency Light Source: Exit illumination in all models is provided by two 6 volt, 5.4 watt wedge base incandescent DC lamps. MJ5E-DEH combination models with side mounted lighting heads are provided with 6 volt, 12 watt halogen bi-pin lamps.
- 2. Housing:** MJ5 Series exits are constructed of heavy duty steel finished in white baked-on powder paint providing scratch and corrosion resistance. Exit face features 6" letters with 3/4" stroke on translucent glass panels and Full length directional arrows to meet City of Chicago visibility requirements. Mounting canopy is standard.
- 3. Electronics:** 120/277 VAC dual voltage input with surge-protected, solid-state circuitry. Fully automatic, temperature compensating, variable rate float charging system is complete with low voltage disconnect, AC lockout, brownout protection, AC indicator lamp and test switch.
- 4. Battery:** Maintenance-free, sealed, lead calcium battery has an estimated service life of 5 years, and an operating temperature range of 65°F (19°C) to 85°F (30°C).
- 5. Input Power Requirements:** AC Only: 19W; Emergency Operation: 29W
- 6. Warranty:** Unit: (excluding lamps) 3-years full coverage against defects in materials and workmanship from date of shipment. Battery: 3 years full warranty plus an additional 7 years of pro-rata coverage

**Code Compliance**

All models are UL Listed and meet NFPA 101 Life Safety Code, NEC, OSHA and City of Chicago codes. Emergency models are UL924 Listed.

**Options**

- DEH** = Combination Model w/ Side Mounted Par 36 12W Halogen Heads
- 277** = 277VAC, 60Hz. Input (AC models only)
- SW** = Special Wording (consult factory)
- SX** = Self-Diagnostic Circuit (emergency models only)
- IA** = Audible Intermittent Alarm (emergency models only)
- IV** = Visual Intermittent Alarm (emergency models only)
- FA** = Fire Alarm Panel Interface
- INC** = Two candelabra base 15T6 120 volt, 15 watt incandescent AC lamps.

**Accessories**

- MJSKW** = 18" Stem Mounting Kit (white)
- MJSKB** = 18" Stem Mounting Kit (black)
- MJPG9** = Wire Guard - Wall Mount (AC and emergency models)
- MJPG10** = Wire Guard - Wall Mount (combination models)

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2008 Philips Group • A0508

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>