ClearOne Aura

Quick-Start Guide



UNITE® 180 4K Panoramic Camera

Contact Information

Headquarters

5225 Wiley Post Way Suite 500 Salt Lake City, UT 84116 US: +1.801.975.7200

International: +1.801.975.7200

Aura Sales

US: +1.888.HEY.AURA International: +1.801.975.7200 aurasales@clearone.com

Aura Tech Support

US: +1.888.HEY.AURA International: +1.801.975.7200 auratechsupport@clearone.om

© 2021 ClearOne, Inc. All rights reserved.

Information in this document is subject to change without notice.


Document: QSG-0131-002v1.1, August 2021



Important Safety Information

- 1. Before you set up the camera, read this manual carefully. Follow the setup instructions indicated in this manual.
- 2. Keep this manual for future use.
- 3. To prevent electric shock, do not remove screws or the camera housing. No self-serviceable parts are inside the housing.
- 4. Avoid direct sunlight or other heat sources. Keep unit away from moisture and humidity. Avoid inserting any sharp objects into the product. Avoid dropping the product to avoid damage.
- 5. Normal operating temperature is 32 to 104 °F (0 to 40 °C)
- 6. Careful installation
 - · Install the camera on a smooth desktop or on the top of a computer monitor.
- 7 Do not disassemble
 - Damage caused by the user's disassembly is not covered by warranty.
- 8. Power
 - Use only the included adaptor to power the camera.
- Electromagnetic fields at specific frequencies may affect the camera's image.

WARNING: TO PREVENT FIRE OR ELECTRICAL SHOCK HAZARD, DO NOT EXPOSE THIS PRODUCT TO RAIN OR MOISTURE





Use only in non-tropical locations.



Use only at altitudes of 2000 meters

Packing List



Carefully inspect the shipment. If the shipment shows obvious signs of damage, retain the box and packing material for inspection by the carrier. Contact the carrier immediately.


ClearOne is not responsible for product damage incurred during shipment.

Installation


Wall Mounting

- Use a ¼ in (6 mm) drill bit to drill two holes with a horizontal spacing of 1.1 in (28 mm) on the wall.
- Push a rubber expansion plug into each hole.
- Use a #2 Phillips screwdriver and the two self-tapping screws to attach the wall bracket to the wall.

Expansion screw mounting holes




• Use the thumb screws to secure the camera to the bracket.




Monitor Mounting

 On the underside of the camera body, open the damped rotating shaft bracket.




· Place camera on top of a flat-panel monitor and adjust to your preferred position.



Connections

Use the included USB cable to connect the UNITE 180 to your computer.

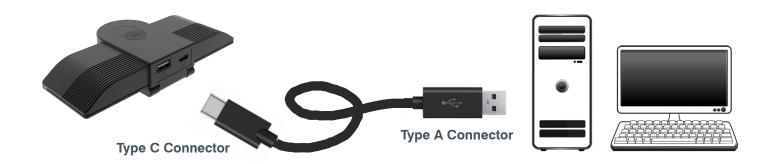

Starting Up and Selecting a Viewing Mode

Immediately after you connect the UNITE 180 to a computer (if the computer is powered-on), Windows recognizes the UNITE 180 and the camera is available to use with your video collaboration software.

Six viewing modes are available with the UNITE 180, as follows:

- Compose
- Manual
- Autoframing
- Grid
- Presentation
- Speaker

To change the viewing mode, lightly tap the button on the top of the camera.



An explanation of the viewing modes is included in the UNITE 180 datasheet, available in ClearOne's Resource Library. Details about how to use more powerful features of the UNITE 180 are included in the UNITE 180 User Manual, available in ClearOne's Resource Library.

Troubleshooting

Problem	Resolution
The Image jitters	Check stability of the location: Remove vibrating objects
The image flashes	Eliminate unstable lighting.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com