

# M32170T-PTC

Converter Board for In-circuit Connection (for 32170 Group MCUs)

## User's Manual

Keep safety first in your circuit designs!

- Renesas Technology Corporation and Renesas Solutions Corporation put the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

- These materials are intended as a reference to assist our customers in the selection of the Renesas Technology product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corporation, Renesas Solutions Corporation or a third party.
- Renesas Technology Corporation and Renesas Solutions Corporation assume no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
- All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corporation and Renesas Solutions Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corporation, Renesas Solutions Corporation or an authorized Renesas Technology product distributor for the latest product information before purchasing a product listed herein. The information described here may contain technical inaccuracies or typographical errors. Renesas Technology Corporation and Renesas Solutions Corporation assume no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors. Please also pay attention to information published by Renesas Technology Corporation and Renesas Solutions Corporation by various means, including the Renesas home page (<http://www.renesas.com>).
- When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corporation and Renesas Solutions Corporation assume no responsibility for any damage, liability or other loss resulting from the information contained herein.
- Renesas Technology semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corporation, Renesas Solutions Corporation or an authorized Renesas Technology product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
- The prior written approval of Renesas Technology Corporation and Renesas Solutions Corporation is necessary to reprint or reproduce in whole or in part these materials.
- If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination. Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
- Please contact Renesas Technology Corporation or Renesas Solutions Corporation for further details on these materials or the products contained therein.

Precautions to be taken when using this product

- This product is a development supporting unit for use in your program development and evaluation stages. In mass-producing your program you have finished developing, be sure to make a judgment on your own risk that it can be put to practical use by performing integration test, evaluation, or some experiment else.
- In no event shall Renesas Solutions Corporation be liable for any consequence arising from the use of this product.
- Renesas Solutions Corporation strives to renovate or provide a workaround for product malfunction at some charge or without charge. However, this does not necessarily mean that Renesas Solutions Corporation guarantees the renovation or the provision under any circumstances.
- This product has been developed by assuming its use for program development and evaluation in laboratories. Therefore, it does not fall under the application of Electrical Appliance and Material Safety Law and protection against electromagnetic interference when used in Japan.

Renesas Tools Homepage <http://www.renesas.com/en/tools>



### CAUTION

If the requirements shown in the "CAUTION" sentences are ignored, the equipment may cause personal injury or damage to the products.

Rev.1.00

September 1, 2003

REJ10J0268-0100Z

Renesas Technology

[www.renesas.com](http://www.renesas.com)

## 1. Outline

The M32170T-PTC is a converter for featuring the debugging function such as real-time tracing when using emulators M32170T-SDI or M32100T-SDI-E with the M32170FxVFP.

## 2. Package Components

- (1) M32170T-PTC converter
- (2) YQPACK240SD (made by Tokyo Eletech Corporation)
- (3) NQPACK240SD (made by Tokyo Eletech Corporation)
- (4) YQ-GUIDE (4 pieces)
- (5) Screwdriver (made by Tokyo Eletech Corporation)
- (6) M32170T-PTC User's Manual (This manual)

## 3. Specifications

Table 1 Specifications

Applicable package	240P6Y-A (240-pin 0.5-mm-pitch QFP)
Supported MCU	M32170FxVFP
Supported emulator	M32170T-SDI M32100T-SDI-E
Mounted MCU	M32170F6VWG
Mounted clock	10 MHz
Power supply	Supplied from target board

## 4. Usage

The M32170T-PTC can be used for debugging and board mounted evaluation in common by mounting the NQPACK240SD on the target board.

### (1) For debugging

Mount the NQPACK240SD (included with the M32170T-PTC) on the 240QFP foot pattern of the target board. Then connect the M32170T-PTC via the YQPACK240SD. As the M32170F6VWG is mounted on the M32170T-PTC, all functions such as real-time tracing can be used.

### (2) For board-mounted evaluation

Mount the M32170FxVFP and the HQPACK240SD (separately available) in that order on the NQPACK240SD on the target system.

Before using the M32170T-PTC, be sure to read "7. Precautions" on page 4.

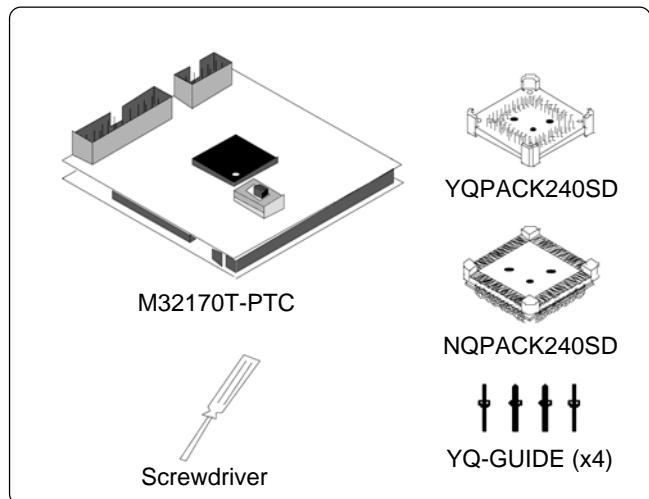


Figure 1 Package components of M32170T-PTC

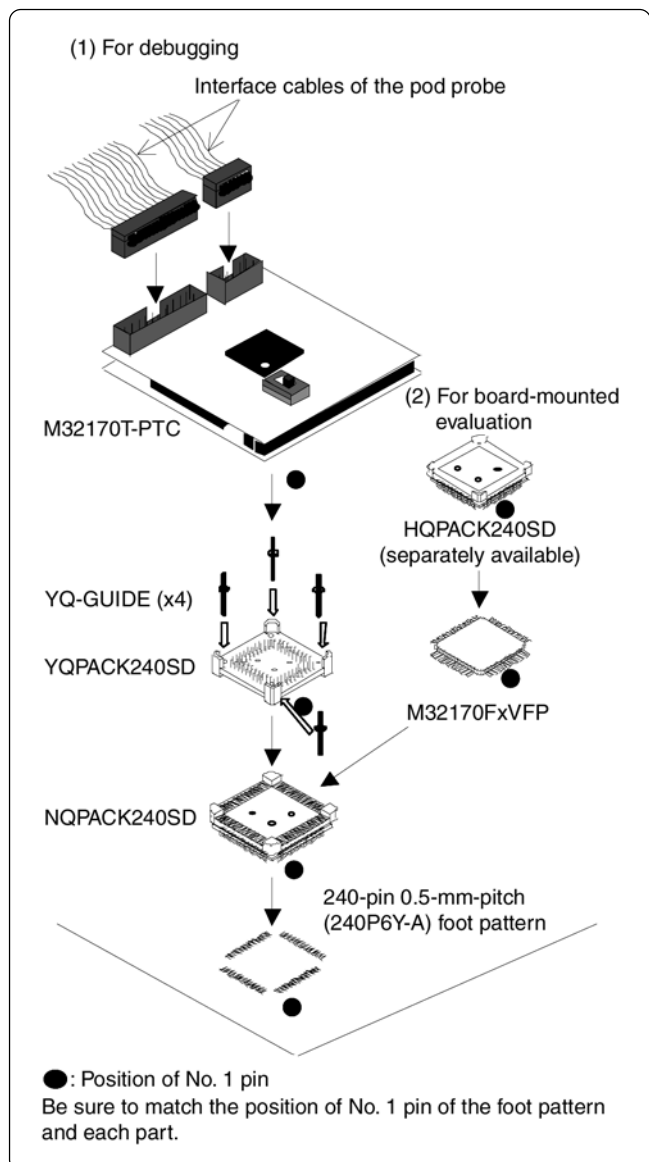


Figure 2 Usage of M32170T-PTC

## 5. Connection Procedure

The procedure for connecting the M32170T-PTC is shown below.

- (1) Mount the NQPACK240SD.
- (2) Mount the YQPACK240SD on the NQPACK240SD.
- (3) Secure the four corners of the YQPACK240SD with the YQ-GUIDE's.
- (4) Set the clock select switch.
- (5) Connect the probe of the emulation pod and the M32170T-PTC via the SDI MCU control interface cable and the SDI trace interface cable.
- (6) Mount the M32170T-PTC on the YQPACK240SD.

\*1 When setting to "EXT", make note of the fact that the oscillation by the oscillator on the target board does not occur. Connect the output of the oscillator etc. to the XIN pin.

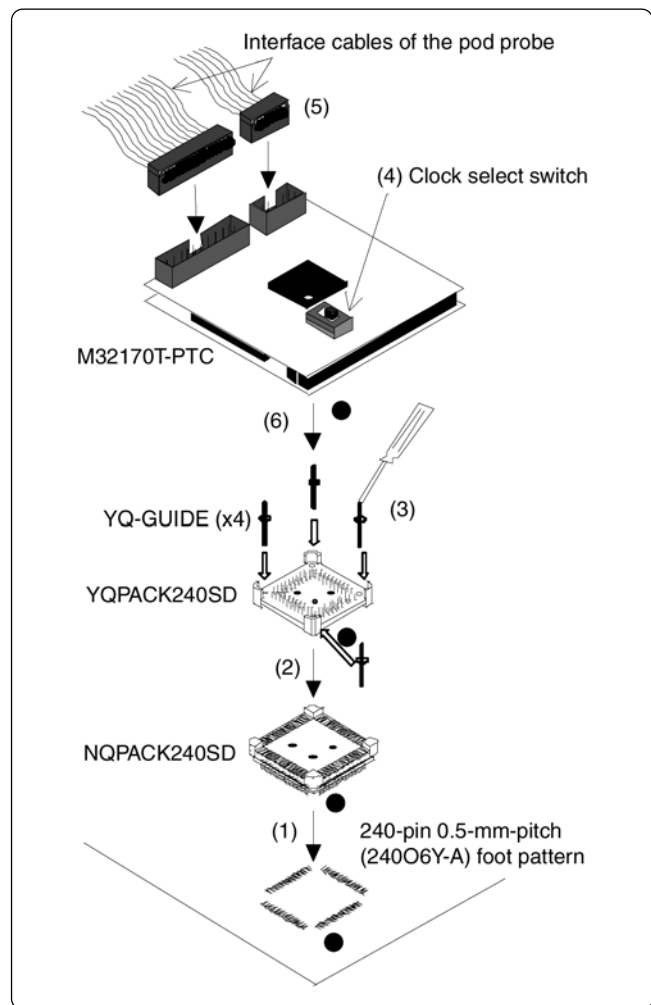


Figure 3 Connection procedure of M32170T-PTC

## 6. External Dimensions and Sample Foot Pattern of M32170T-PTC

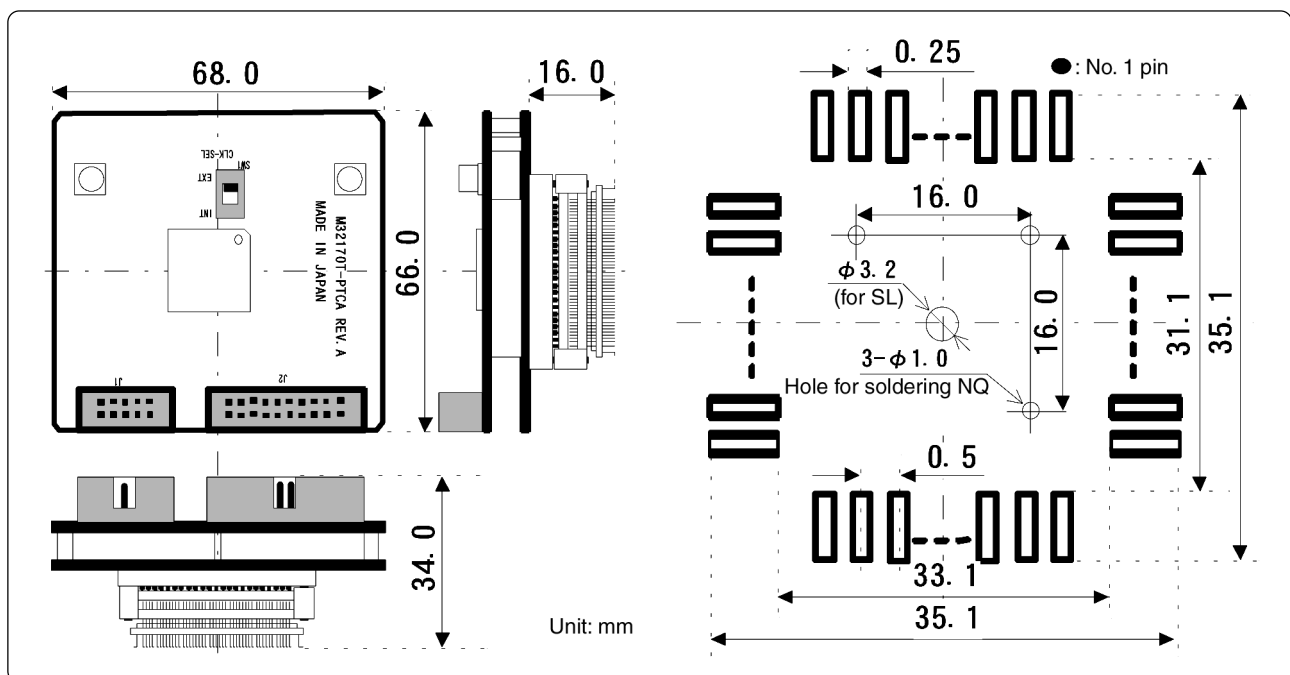


Figure 4 External dimensions and sample foot pattern of M32170T-PTC

## 7. Precautions

### CAUTION

#### Cautions to Be Taken for Emulator:



- When debugging, use this product in the combination with the M32170T-SDI or M32100T-SDI-E emulator.
- When starting up emulator debugger PD32R, select the MCU file below according to the type name and the operation mode of the MCU to be debugged.

MCU type name	Single-chip and memory expansion modes	Microprocessor mode
M32170F3VFP	M32170F3PTC_MCU.MCU	M32170F3PTC_MPU.MCU
M32170F4VFP	M32170F4PTC_MCU.MCU	M32170F4PTC_MPU.MCU
M32170F6VFP	M32170F6VWG_MCU.MCU	M32170F6VWG_MPU.MCU

- Connect the both cables for connecting the emulator, the SDI MCU control interface cable (10-pin) and the SDI trace interface cable (20-pin).
- For the precautions for the combination of the emulator, refer to the user's manuals of the M32170T-SDI or M32100T-SDI-E.

#### Cautions for Differences between MCU and this Product:



- When debugging, as the M32170F6VWG (768KB internal flash ROM) on the M32170T-PTC is used, be careful about the difference of the flash ROM size.
- When setting to the clock select switch to the "EXT" side, connect the clock generated by the oscillator on the target board etc. to the XIN pin. The oscillation by the oscillator on the target board between the XIN and XOUT does not occur.
- The capacity load of the all lines of the MCU will increase depending on wirings and connectors. Use the part whose timing is critical after checking it works properly.

#### Cautions to Be Taken for This Product:



- When connecting the YQPACK240SD, be sure to use the included YQ-GUIDE's.
- We cannot accept any request for repair.
- For purchasing the NQPACK240SD, YQPACK240SD and HQPACK240SD, contact the following:

Daimaru Kogyo Ltd.

URL: <http://www.daimaru-kogyo.com/>

Tokyo Eletech Corporation

URL: [http://www.tetc.co.jp/e\\_tet.htm](http://www.tetc.co.jp/e_tet.htm)

- For inquiries about the product or the contents of this manual, contact your local distributor.

Renesas Tools Homepage <http://www.renesas.com/en/tools>

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>