INSIGNIA

Congratulations on your purchase of a high-quality Insignia product. Your NS-HT511 represents the state of the art in home theater system design and is designed for reliable and trouble-free performance.

AM antenna

• 11 ft. (3) • 26 ft. (2)

• Speaker cables:

• RCA cable 10 ft.

• Quick Setup Guide

User Guide

• Color labels for speaker cables

• Rubber spacers for speakers (20)

Package contents


- Surround Sound
- Receiver (NS-AV511)
- Front speakers (2)
- Center speaker
- Curround crockers (2)
- Surround speakers (2)
- Subwoofer
- Remote control
- AA batteries (2)
- FM antenna

Back view features


ITEM	DESCRIPTION	FUNCTION		
1	DIGITAL IN jacks	Plug the optical digital cable from a game (1) or TV/CD (2) into the upper jacks, or the coaxial digital cable from a BD/DVD into the lower jack.		
2	HDMI jacks	Plug the HDMI signal input cable from a GAME (IN4), CBL/SAT (IN3), VCR/DVR (IN2), BD/DVD (IN1). Plug the HDMI output signal cable to a TV or monitor into the OUT jack.		
3	ANTENNA connectors	Connect a 75 ohm FM antenna to the coaxial connector or an AM loop antenna to the wire connectors.		
4	FRONT SPEAKERS SURROUND SPEAKERS CENTER SPEAKER	Connect the front speakers to these jacks. Connect the left and right surround speakers and the center speaker to these connectors. If you use the RF-RBCARD to connect your surround speakers, do not connect them here.		
5	AC power cord	Plug this cord into an AC power outlet.		
6	COMPONENT video jacks	Plug the cables from a component video source into the #1 (BD/DVD) or #2 (CBL/SAT) jacks. Plug the cables to a component video monitor into the OUT jacks. The jacks are color coded (red, green, and blue) to correspond to the cable connectors.		
7	Composite Video and Audio L/R jacks	Plug the composite video and audio L/R output cables from the indicated devices into these jacks. For video recording, plug the composite video and audio L/R input cables to a VCR or DVR into the OUT jacks		
8	MONITOR OUT V (Video)	Connect this jack to a TV monitor.		
9	SUBWOOFER	Connect the subwoofer to this jack.		


Features

Front controls

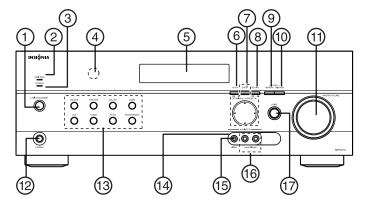

Fluorescent display

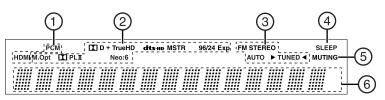

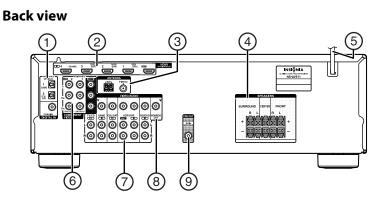


Quick Setup Guide NS-HT511 5.1 Home Theater System

Front controls features

ITEM	DESCRIPTION	FUNCTION		
1	ON/STANDBY button	Press to turn on your stereo receiver.		
2	HDMI THRU indicator	Lights when the HDMI pass-through function is activated in standby mode.		
3	STANDBY indicator	Lights red when your stereo receiver is in standby mode.		
4	Remote control sensor	Receives the signal from the remote control.		
5	Display	Provides information about receiver functions and settings.		
6	SETUP button	Press to open the on-screen menus.		
7	TUNING 🔺 / 🔻	Press TUNING \blacktriangle / \blacktriangledown to tune the radio to the next or previous station		
	PRESET ┥ / 🕨	Press PRESET / to tune the radio to the next or		
		previous station preset.		
	ENTER	Press ENTER to confirm a selection.		
8	RETURN button	In menu mode, press to return to the main menu.		
9	MEMORY button	Press to save a radio station preset. Press with the TUNING MODE button to clear presets.		
10	TUNING MODE button	Press to turn on the receiver tuning mode and listen to the radio. Press with the MEMORY button to clear presets.		
11	MASTER VOLUME knob	Turn to increase or decrease the volume.		
12	Headphone jack	Plug your headphones into this jack.		
13	Input selector buttons	Press to select the input signal source you want.		
14	Protective cap	Remove when using jack.		
15	AUX INPUT VIDEO jack	Plug an external video source into this jack.		
16	AUX INPUT AUDIO L/R jacks	Plug an external sound source into this jack.		
17	HOME button	Press to access audio settings.		

Fluorescent display features

ITEM	DESCRIPTION	ITEM	DESCRIPTION
1	Audio input indicator	5	MUTING indicator
2	Listening mode indicator	6	DIGITAL display
3	Tuning indicators		
4	SLEEP indicator		

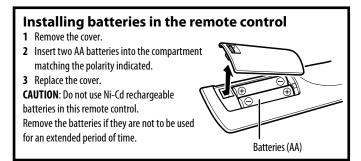

Actual product may vary from image shown.

Setting up your home theater system

1 Finding a location for your home theater system

- Install your home theater system on a stable flat surface. Position your receiver so that it has a direct line of sight to the remote control.
- Do not expose your system to extremes of temperature or humidity.
- Avoid placing your system on a hot surface such as on top of other hot running equipment. Make sure that there is adequate ventilation to your system.

CAUTION: Connect the AC cord only after the speakers, antenna, and all optional equipment have been connected. Never make or change any connections with the power turned on.

2 Placing your speakers

1 Center speaker

This speaker enhances the front speakers, making sound movements distinct and providing a full-sound image. In movies it is used mainly for dialog. Position it close to your TV facing forward at about ear level, or at the same height as the front speakers.

2 Front speakers

These provide the overall sound. Their role in a home theater system is to provide a solid anchor for the sound image. They should be positioned

facing the listener at about ear level, and equidistant from the TV. Angle them inward so as to create a triangle, with the listener at the apex.

3 Subwoofer

The subwoofer handles the bass sounds of the LFE (Low-Frequency Effects) channel. The volume and quality of the bass output from your subwoofer will depend on its position, the shape of your listening room, and your listening position. In general, a good bass sound can be obtained by installing the subwoofer in a front corner, or at one-third the width of the wall, as shown.

4 Surround speakers

These speakers are used for precise sound positioning and to add realistic ambience. Position them at the sides of the listener, or slightly behind, about two to three feet (60 to 100 cm) above ear level. Ideally they should be equidistant from the listener.

For additional information on setting up your speakers, refer to the User Guide.

3 Connecting your speakers to the receiver *Speaker configuration*

The following table indicates the channels you should use depending on the number of speakers that you have. For 5.1-channel surround-sound playback, you need five speakers and a powered subwoofer.

For additional information on configuring your speakers, refer to the *User Guide*.

To connect the speaker cables:

- 1 Strip 1/2" to 5/8" (12 to 15 mm) of insulation from the ends of the speaker cables, and twist the bare wires tightly together. (Supplied speaker cables are already stripped.)
- **2** Push in on the speaker terminals on the receiver and insert the speaker wires into the terminals. The following illustration shows which speaker should be connected to each pair of terminals.

3 Release the terminals to secure the wire.

Number of channels 2 3

Front speakers

Center speaker

Surround speakers

4 5

Х

XXXX

Powerd subworker Surroad rig 4 Connecting devices Connecting the antenna Nete: The science up of the link up

Front right speak

G

0

Note: The receiver won't pick up any radio signals without any antenna connected, so you must connect the antenna to use the tuner.
1 Connect the FM antenna to your receiver.
2 Connect the AM loop antenna to the receiver.

<u>n</u>

4 Press and hold the push-terminals on each speaker and insert the speaker wire, then

release the push-terminal to secure the wire (black wires go to the negative (-) terminals).

To connect the subwoofer:

SUBWOOFER PRE OUT jack


to the powered subwoofer,

connect the receiver's


as shown.

Using the subwoofer RCA cable,

Connecting audio components

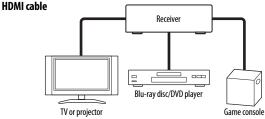

¢

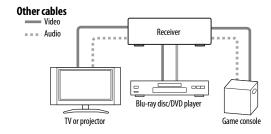

For additional information on deciding which connections to use, refer to the User Guide.


Connecting components with HDMI




Connect your components to the appropriate jacks.

For information on assigning inputs, see "Setting up HDMI input (HDMI Input menu)" in your User Guide. Download from Www.Somanuals.com. All Manuals Search And Download.

Connecting external components Front





Connect your components to the appropriate jacks.

For information on assigning inputs, see "Setting up HDMI input (HDMI Input menu)" in your User Guide.

5 Connecting the power

• Plug the power cord into an AC outlet.



Rocketboost [™]Wireless Card Ready Installing a Rocketboost Wireless Card (sold separately) enables this product to send and receive wireless audio with your other Rocketboost products. For instructions on setting up Rocketboost, see your user guide.

Troubleshooting

For information on troubleshooting, refer to the User Guide.

Specifications

For information on specifications, refer to the User Guide.

FCC Part 15

This device complies with Part 15 of the FCC Rules.

FCC warning

Changes or modifications not expressly approved by the party responsible for compliance with the FCC Rules could void the user's authority to operate this equipment.

ICES-003 Class B Notice

This Class B digital apparatus complies with Canadian ICES-003.

One-year limited warranty Visit <u>www.insigniaproducts.com</u> for details.

Contact Insignia:

For customer service please call 1-877-467-4289 <u>www.insigniaproducts.com</u> Distributed by Best Buy Purchasing, LLC 7601 Penn Avenue South, Richfield, Minnesota, U.S.A. 55423-3645 Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com