

R-140™

User's Guide



Zebra R-140™

User's Guide

Customer order # 48040L
Manufacturer part # 48040LB Rev. 1

Proprietary Statement

This manual contains proprietary information of Zebra Technologies Corporation. It is intended solely for the information and use of parties operating and maintaining the equipment described herein. Such proprietary information may not be used, reproduced, or disclosed to any other parties for any other purpose without the expressed written permission of Zebra Technologies Corporation.

Product Improvements

Continuous improvement of products is a policy of Zebra Technologies Corporation. All specifications and signs are subject to change without notice.

FCC Compliance Statement

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

In order to insure compliance, this printer must be used with a Shielded Power Cord and Shielded Communication Cables.

"The user is cautioned that any changes or modifications not expressly approved by Zebra Technologies Corporation could void the user's authority to operate the equipment."

Canadian DOC Compliance Statement

This digital apparatus does not exceed the Class A limits for radio noise emissions from digital apparatus as set out in the radio interference regulations of the Canadian Department of Communications.

CE Compliance

If the accompanying printer displays the CE mark, it also meets EMC directive 89/336/EEC, with amendments effective at the time of manufacture.

Liability Disclaimer

Zebra Technologies Corporation takes steps to assure that its published Engineering Specifications and Manuals are correct; however, errors do occur. Zebra Technologies Corporation reserves the right to correct any such errors and disclaims liability resulting therefrom.

No Liability for Consequential Damage

In no event shall Zebra Technologies Corporation or anyone else involved in the creation, production, or delivery of the accompanying product (including hardware and software) be liable for any damages whatsoever (including, without limitation, damages for loss of business profits, business interruption, loss of business information, or other pecuniary loss) arising out of the use of or the results of use of or inability to use such product, even if Zebra Technologies Corporation has been advised of the possibility of such damages. Because some states do not allow the exclusion or limitation of liability for consequential or incidental damages, the above limitation may not apply to you.

Copyrights

This copyrighted manual and the label printer described herein are owned by Zebra Technologies Corporation. All rights are reserved. Unauthorized reproduction of this manual or the software in the label printer may result in imprisonment of up to one year and fines of up to \$10,000 (17 U.S.C.506). Copyright violators may be subject to civil liability.

All products and brand names are trademarks of their respective companies. All rights reserved.

© 2000 Zebra Technologies Corporation. All rights reserved.

DECLARATION OF CONFORMITY

I have determined that the Zebra printer identified as the

R - 140™

manufactured by:

Zebra Technologies Corporation

333 Corporate Woods Parkway
Vernon Hills, Illinois 60061-3109 U.S.A.

have been shown to comply with the applicable technical standards of the FCC

for Home, Office, Commercial, and Industrial use

if no unauthorized change is made in the equipment,
and if the equipment is properly maintained and operated.


Clive Kausey



Table of Contents

Introduction

Hello!	1
Print Mechanism Capabilities	2
RFID Capabilities	2
Media Transport Mechanism Capabilities.	2
System Requirements	2
Unpacking and Inspection	3
Reporting Damage	3
Storage	3
Media and Ribbon Requirements	4
Power Cord	4
Printer Anatomy 101	5
RFID Overview	6
Supported Tags.	6
Tag-it Tags	7
I•Code Tags	8

Calibrating the Printer

Purpose	9
Types of Media	10
Non-Continuous Web Media	10
Non-Continuous Black Mark Media	11
Continuous Media	11
Choosing the Print Mode	12
Loading the Media	13
Positioning the Media Sensors	14
Transmissive Sensor	14
Black Mark Sensor	16

Loading the Ribbon	17
Operator Controls	18
POWER Switch.	18
Front Panel	18
Configuring the Printer	19
Configuring the Software or Printer Driver	20
Media and Ribbon Calibration	21
Printing a Test Label	23

Establishing Communication

System Considerations	25
Interfaces	25
Data Specifications	25
Cabling Requirements	26

Printer Basics

Operator Controls	27
POWER Switch	27
Front Panel Display	28
Front Panel Keys	29
Front Panel Lights	30
Roll Media Loading	31
Tear-Off Mode	31
Peel-Off Mode	32
Rewind Mode (for Printers Without the Cutter Option)	34
Cutter Mode	36
Rewind Mode (for Printers With the Cutter Option)	38
Fanfold Media Loading	40
Removing the Label Backing Material	42
Ribbon Loading	43
Ribbon Removal	45

Configuration

Entering the Setup Mode	47
Changing Password-Protected Parameters	48
Leaving the Setup Mode	49
Configuration and Calibration Sequence	50

Routine Care and Adjustment

Cleaning	69
Cleaning the Exterior	70
Cleaning the Interior	70
Cleaning the Printhead and Platen Roller	70
Cleaning the Sensors	71
Cleaning the Snap Plate	72
Cleaning the Cutter Module	74
Lubrication	74
Fuse Replacement	74
Adjustments	76
Toggle Positioning	76
Printhead Pressure Adjustment	77
Media Sensor Position Adjustment	77

Troubleshooting

LED Error Conditions and Warnings	79
Print Quality Problems	82
Wrinkled Ribbon	83
Communications	83
RFID Symptoms	85
Printer Diagnostics	87
Power-On Self Test	87
Additional Printer Self Tests	87

Specifications

Media Handling	93
Options	93
Zebra Programming Language (ZPL II®)	94
Bar Codes	94
General Specifications	95
Printing Specifications	96
Ribbon Specification	96
Media Specifications	97
Power Line Cord Specifications	98

Appendix

Printer Interface Technical Information	99
RS-232/RS-422/RS-485 Serial Data Port	99
Parallel Data Port	103
ZPL II Commands for RFID	104
^WT – Write Tag	104
^RT – Read Tag	105
^RS – RFID Setup	107
^RI - RFID Get Tag Unique ID	107
Sample ZPL II Label Formats	109
Format 1: Simple Text and a Barcode	110
Format 2: Saving a Label Format As a Graphic Image	110
Format 3: Using a Serialized Data Field	111
Format 4: RFID Sample	111

Index

Introduction

Hello!

Congratulations! You have just purchased the highest quality thermal demand printer with RFID capability in the industry. Manufactured by Zebra Technologies Corporation, the industry leader in quality, service, and value. For over 30 years, Zebra Technologies Corporation has provided customers with the highest caliber of products and support

- This manual provides all of the information you will need to operate your printer.
- The *ZPL II[®] Programming Reference Volumes I and II* (part # 45540L) show you how to create the perfect label format for your application. These books also explain how, through ZBI[™], you can extend the power of ZPL II by allowing custom programs to be written that operate within the printer, directly interfacing with, for example, bar code scanners and keyboard display devices. In addition, the books contain information about the enhanced operating system features of your printer. There are three ways to obtain these books: on the accessory CD-ROM (supplied with the printer), on our web site (www.zebra.com), and printed manuals can be ordered from your distributor.
- The *ZebraNet[®] Networking: PrintServer II[™] Installation and User's Guide* (part # 45537L) explains how you can quickly set up your printer on an IP network (optional ZebraNet PrintServer II required).

The Zebra R-140 printer, when connected to a host computer, functions as a complete system for printing and encoding “Smart” labels, tickets, and tags. The printer receives instructions from the host computer. Microprocessors continuously monitor these signals along with the inputs received from the control panel and various sensors. The microprocessors interpret this information and control the Zebra R-140 printer’s mechanical drive, printhead, RFID Subsystem, command interpretation, label formatting, and media and ribbon movement.

Print Mechanism Capabilities

The Zebra R-140 print mechanism has been designed to print information on labels, tickets, and tags. It uses a square or rectangular dot thermal printhead that heats a ribbon as it passes beneath the print elements, melting its ink onto the media (direct thermal print mode involves using heat-sensitive media instead of an inked ribbon). Print speeds are selected via software control.

RFID Capabilities

Transponders used with the R-140 work on the 13.56 MHz international frequency for RFID. Currently, smart labels based on chip/antenna inlays using Texas Instruments' Tag-It[®], and Philips Semiconductors' I•Code[®] RFID transponder chips are fully supported. Transponder data may be read, written and write-verified through RFID enhancements to Zebra's ZPL II programming language. Encoding and verifying data through ZPL II is as easy as printing a bar code.

Media Transport Mechanism Capabilities

The media transport mechanism of the Zebra R-140 printer has been designed to accommodate various types of media including die-cut labels, ticket and tag stock, continuous roll media, fanfold media, and black-mark media.

System Requirements

In addition to the Zebra R-140 printer, you will need the following items to form a complete label preparation system:

- Label-, ticket-, tag-, or "Smart" RFID label-stock
- Thermal transfer ribbon (if printing in Thermal Transfer mode).

- A device, such as a personal computer (PC), for data entry and output of label formats to the printer.
- A data communication cable to connect the controlling device to the Zebra R-140 printer. (Remote installations may require additional cables and communication devices such as modems and/or protocol converters.)

Unpacking and Inspection

Inspect the printer for possible damage incurred during shipment.

- Check all exterior surfaces.
- Raise the media access door and inspect the media compartment.

In case shipping is required, save the carton and all packing material. Contact your authorized Zebra reseller for instructions.

Reporting Damage

If you discover shipping damage:

- Immediately notify and file a damage report with the shipping company. *Zebra Technologies Corporation is not responsible for any damage incurred during shipment of the equipment and will not repair this damage under warranty.*
- Keep the carton and all packing material for inspection.
- Notify your authorized Zebra reseller.

Storage

If you are not placing the printer into operation immediately, repackage it using the original packing materials. The printer may be stored under the following conditions:

- Temperature: -4° to +140° F (-20° to +60° C)
- Relative humidity: 5 to 85% non-condensing

Media and Ribbon Requirements

Since print quality is affected by media and ribbon, printing speeds, and printer operating modes, it is very important to run tests for your applications.

High quality RFID Labels are recommended to ensure against premature printhead wear.

For non-RFID applications, we **STRONGLY RECOMMEND** the use of Zebra Technologies Corporation-brand supplies for continuous high-quality printing. A wide range of paper, polypropylene, polyester, and vinyl stock has been specifically engineered to enhance the printing capabilities of the printer and to ensure against premature printhead wear.

- Continuous roll media, fanfold media, or card stock with optional perforations and registration holes may be used.
- Printhead life may be reduced by the abrasion of exposed paper fibers when using perforated media.
- The ribbon **MUST** be as wide as or wider than the media being used. If the ribbon is narrower than the media, areas of the printhead will be unprotected and subject to premature wear. (When printing in direct thermal mode, ribbon is not used and should not be loaded in the printer.)

Power Cord

WARNING! For personnel and equipment safety, always use a three-prong plug with a ground (earth) connection.

NOTE: Depending on how your printer was ordered, a power cord may or may not be included. If one is not included, or if the one included is not suitable for your requirements, refer to [“Power Line Cord Specifications” on page 98.](#)

The power cord connector must be plugged into the mating connector on the rear of the printer.

Make sure that the POWER on/off switch (located at the back of the printer) is in the off position before connecting the power cable to an electrical outlet.

Printer Anatomy 101

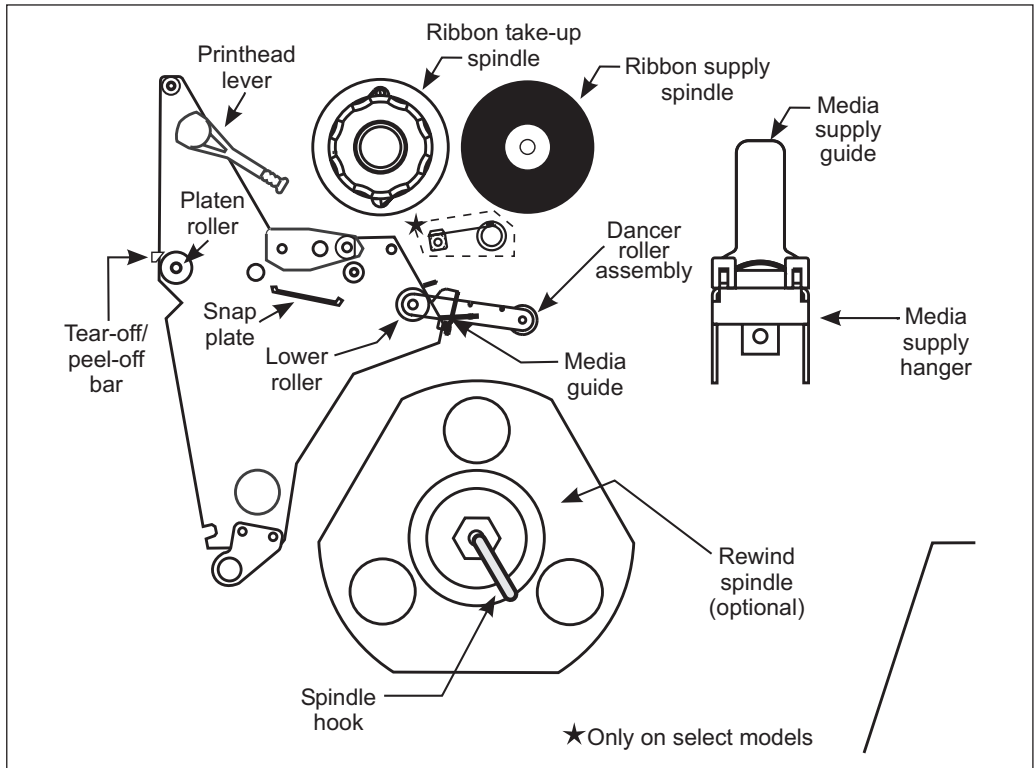


Figure 1

Depending on the options you have selected, your printer may look slightly different.

RFID Overview

The R140 printer contains special hardware necessary to program RFID tags. To use the RFID capabilities of this printer, you will need the appropriate RFID media. Currently the Tag-It and I•Code tag types are supported. This media is collectively known as an RFID tag, and includes the label, backing, and an RFID transponder inlay encased by the label material.

The RFID capabilities of the printer allow you to program, read, and obtain certain information regarding the status of the RFID subsystem. The RFID printers incorporate an antenna to program the RFID tags. RFID tags have coils built into them. When these tags line-up over the antenna, you are able to communicate to the tag to obtain information and program the tag.

Before printing on the label, the RFID commands are executed. This is done through newly added ZPL commands. After the RFID tag is programmed and verified, the printer will format and print the remaining ZPL commands.

Each tag has memory blocks that are programmed and read through ZPL commands. The ZPL commands allow the user to adjust the number of retries to get a successful execution of the command. If a block can not be programmed within the number of retries, then the formatted label is fed out with the word VOID overlaid.

After the failed tag is fed, an attempt will be made to program the tag again with the corresponding format. The reprogramming of the tag will follow the same series of commands to the tag, and the same number of retries for each block. If this tag fails to program, then this label will be fed out overlaid with a the word VOID. One final attempt will be made to reprogram the tag. If unsuccessful, a third VOID tag will be printed.

After three VOID tags, the customer format will be removed from the print queue, and will proceed with the next format (if one exists in the buffer).

Supported Tags

The R-140 currently supports two transponder types: Tag-it and I•Code.

Tag-it Tags

Tag-it labels are high frequency (13.56MHz) devices. Tag-it is a read/write RFID tag with 256 bits of storage capacity for user data. Data is addressed in eight blocks of 32 bits, each block containing four bytes.

Tag-it Blocks		
Block #	Description	Bytes
0	User Data	32 User
1	User Data	
2	User Data	
3	User Data	
4	User Data	
5	User Data	
6	User Data	
7	User Data	

I•Code Tags

I•Code labels are also high frequency (13.56MHz) devices but have 512 bits of storage capacity. Data is addressed in sixteen blocks of 32 bits, each block containing four bytes. The first two blocks of data (block 0 and 1) are used for storage of a unique 64 bit serial number. The next two blocks (blocks 2 and 3) are used for storage of configuration information; block 4 is used for family or application identification and blocks 5 to 15 are free for user application use.

If you are using I•Code tags for your own use, and don't require universal special function or family codes, then you can program blocks 3 through 15.

I•Code Blocks		
Block #	Description	Bytes
0	Serial Number (write protected)	8 Optional
1	Serial Number (write protected)	
2	Write Protect Block (Caution!)	
3	Special Function Block	
4	Family Code	40 User
5	User Data	
6	User Data	
7	User Data	
8	User Data	
9	User Data	
10	User Data	
11	User Data	
12	User Data	
13	User Data	
14	User Data	
15	User Data	

Calibrating the Printer

This chapter of the user's guide is *so* important that we've printed it on a different color paper! That way, it will be easy for you to find when you must calibrate (set up) the printer for your particular application.

Purpose

- **To calibrate the printer.**
- **To verify that the printer is properly set up by printing a test label.**

NOTE: This procedure *must* be performed when the printer is first installed or when it cannot properly detect the top of the label.

To calibrate the printer, you must do the following (all of the instructions are contained in this chapter):

- Determine the **type of media** (labels) being used.
- Choose the **print method**.
- Position the **media sensors** (if necessary).
- **Configure the printer and software or driver** based on the label being used.
- Perform a **media and ribbon calibration**.
- Print a **test label**.

Types of Media

Non-Continuous Web Media

Non-continuous web media (refer to Figure 2) refers to individual labels that are separated by a gap, notch, or hole. When you look at the media, you can tell where one label ends and the next one begins.

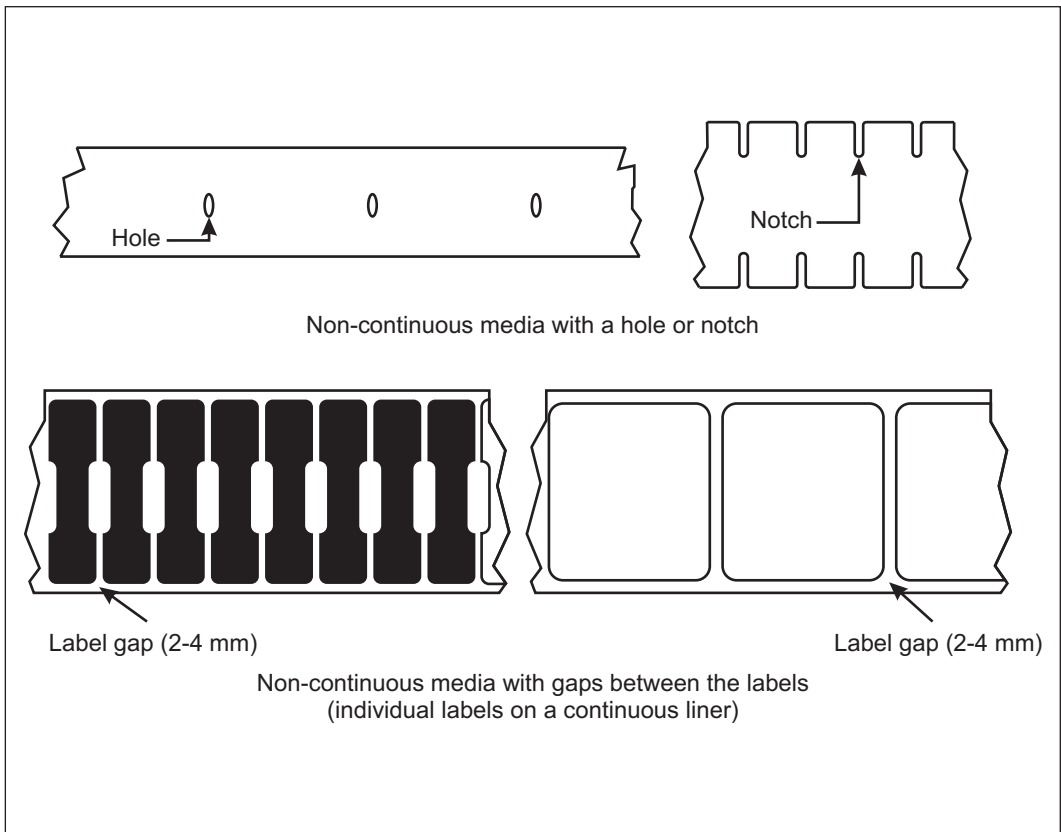


Figure 2

Non-Continuous Black Mark Media

Non-continuous black mark media has black marks printed on the back that indicate the start and end of each label (refer to Figure 3).

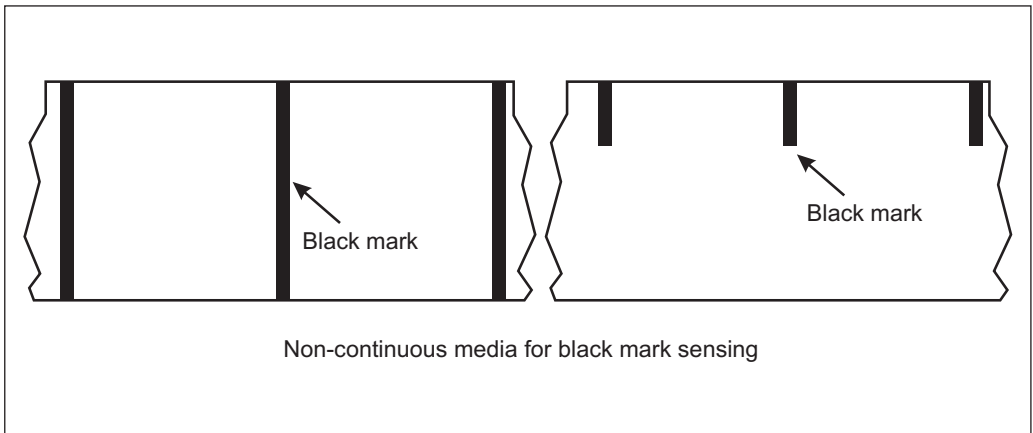


Figure 3

Continuous Media

Continuous media (refer to Figure 4) is one uninterrupted roll of material that allows the image to be printed anywhere on the label.

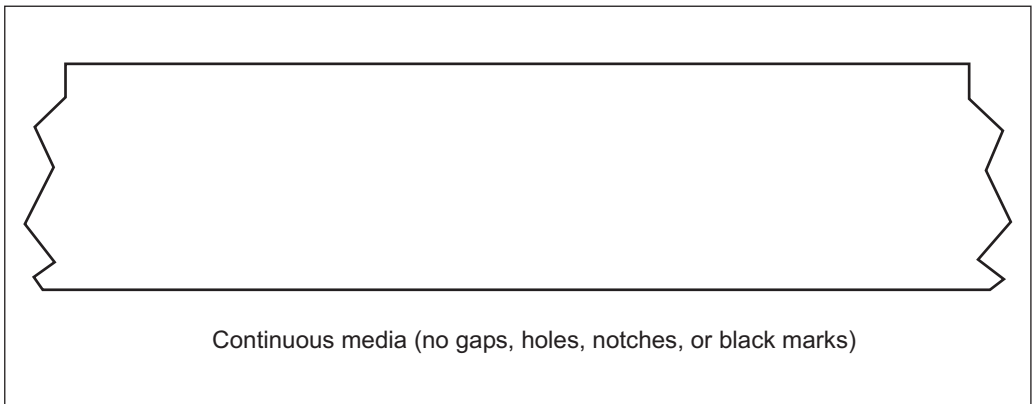


Figure 4

Choosing the Print Mode

- **Tear-off** mode allows you to tear off each label, or a strip of labels, after it is printed.
- In **Peel-off** mode, backing material is peeled away from the label as it is printed. After this label is removed from the printer, the next one is printed.
- When in **cutter** mode, the printer automatically cuts the label after it is printed.
- In **rewind** mode, the media and backing are rewound onto a core as the labels are printed.

NOTE: Peel-off and Rewind mode may not be suitable for all RFID media types.

Loading the Media

Figure 5 illustrates one method of media loading. For more detailed instructions, as well as information about how to load the different types of media and the various printing modes, refer to the instructions that begin on [page 31](#).

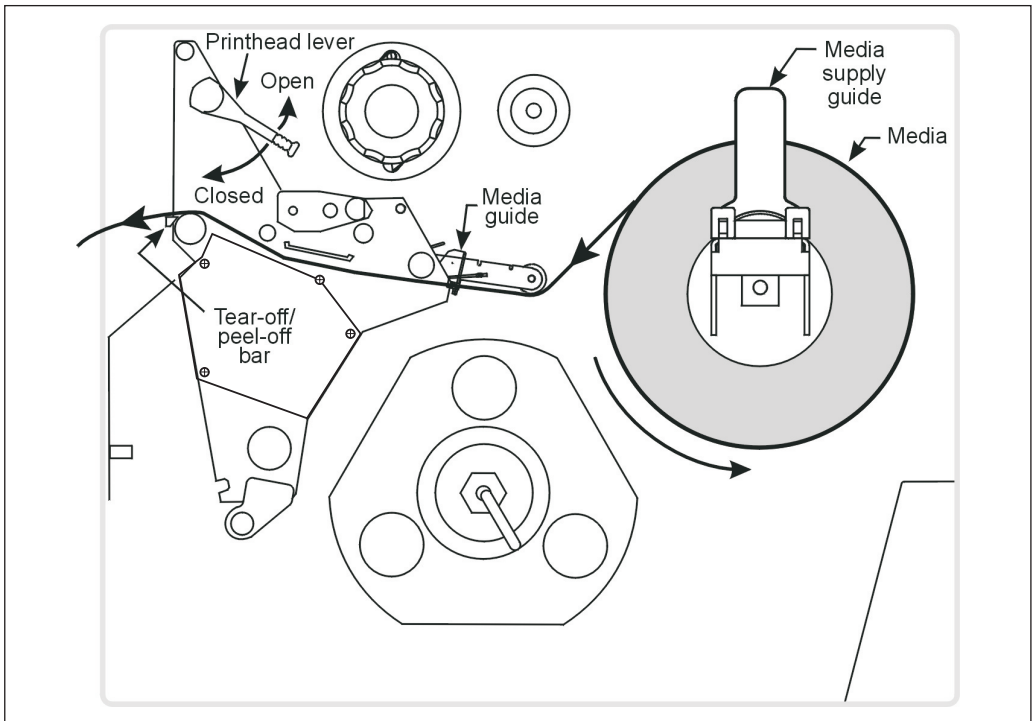


Figure 5

Positioning the Media Sensors

The correct positioning of the media sensors is important. It can make the difference between a perfect label and a call to Technical Support!

Transmissive Sensor

The web or gap sensor, better known as the “transmissive sensor,” detects the gap between labels.

The transmissive sensor actually consists of two sections: a light source (the lower media sensor) and a light sensor (the upper media sensor). The media passes between the two.

The upper media sensor must be positioned:

- Directly over the hole or notch, or
- Anywhere along the width of the media if there is a gap between labels.

NOTE: If you are using continuous media, position the upper media sensor over the media so that the printer can detect an out-of-paper condition.

Adjusting the Upper Media Sensor

Refer to Figure 6. (For clarity, not all printer parts are shown.)

1. Remove the ribbon (if it is installed).
2. Locate the upper media sensor. The upper media sensor “eye” is directly below the adjustment screw head.
3. Slightly loosen the upper media sensor adjustment screw (Phillips head).
4. Using the tip of the screwdriver, slide the upper sensor along the slot to the desired position.
5. Secure the upper media sensor adjustment screw.

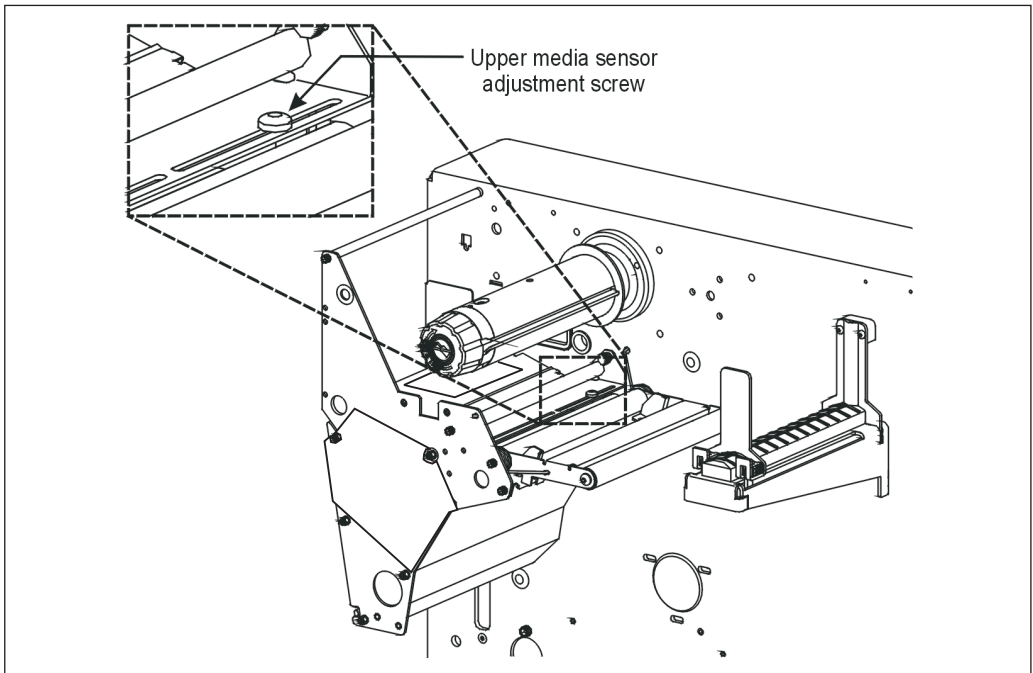


Figure 6

Adjusting the Lower Media Sensor

Position the lower media sensor (refer to Figure 7) by sliding it in its slot until it is positioned under the upper media sensor.

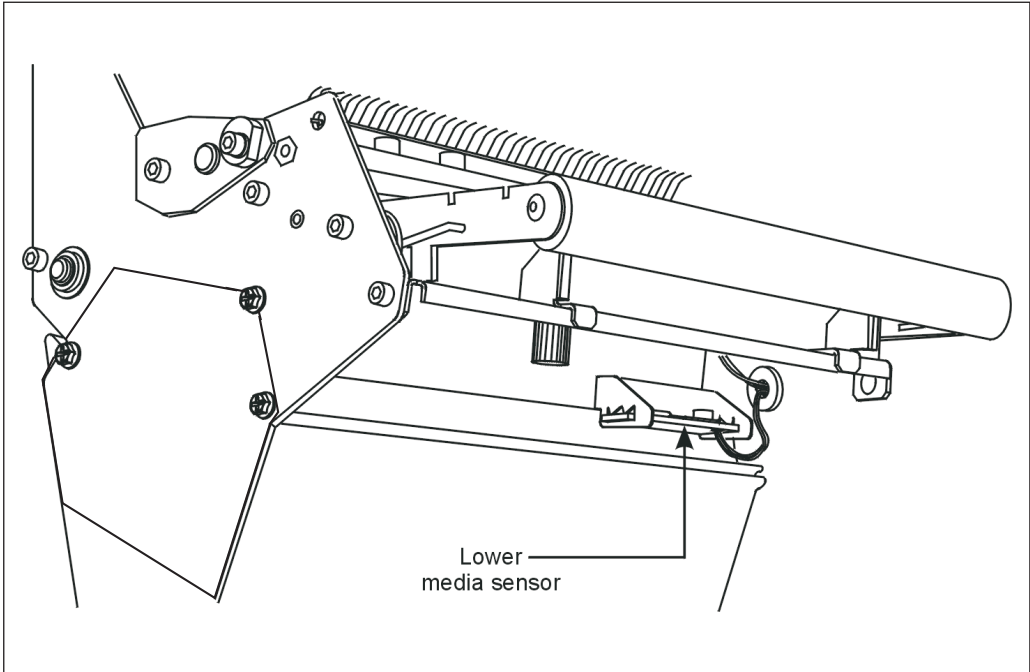


Figure 7

Black Mark Sensor

The black mark sensor is in a fixed position and enabled via the front panel (details in [“Configuring the Printer”](#) on page 19).

Loading the Ribbon

To load ribbon, refer to Figure 8. For more detailed information, refer to the instructions that begin on [page 43](#).

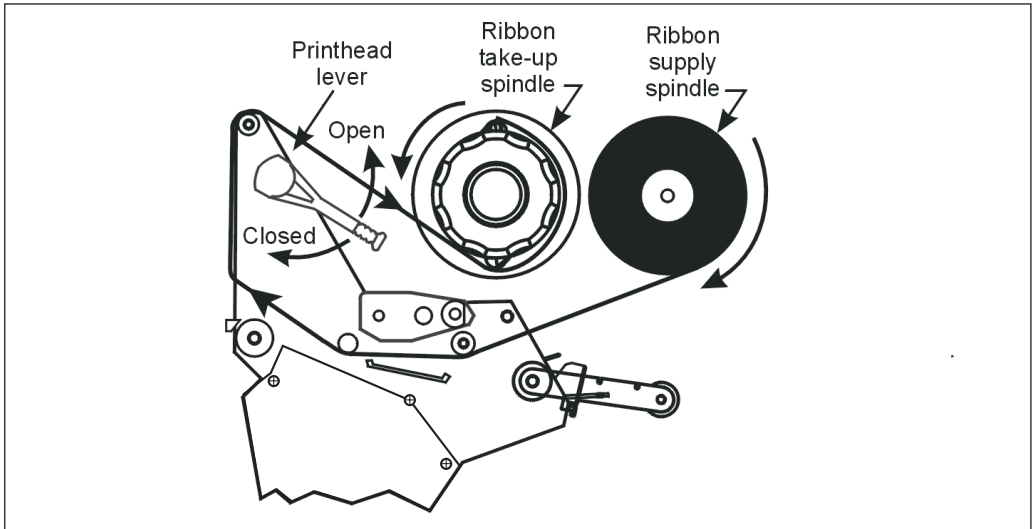


Figure 8

Operator Controls

POWER Switch

The POWER switch is located at the back of the printer above the power cord and fuse. Turn on the printer.

Front Panel

The step-by-step instructions in this section tell you which keys to press and what appears on the liquid crystal display (LCD) during the calibration procedure.

For a more detailed explanation of the front panel keys and lights (as shown in Figure 9), refer to the instructions that begin on [page 28](#).

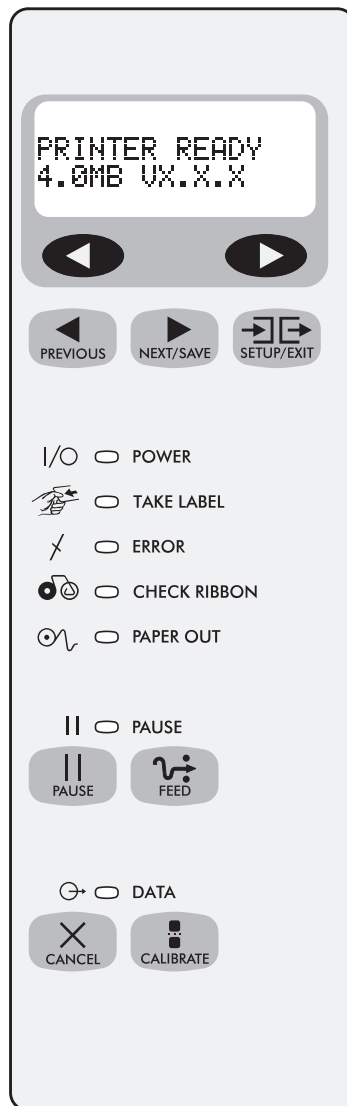


Figure 9

Configuring the Printer








The configuration procedure in the next table contains the information you need to get your printer up and running, *but it is not comprehensive*. Refer to [page 47](#) for more information.

- Enter the configuration mode by pressing the SETUP/EXIT key at the “PRINTER READY” display.

NOTE: You will need to press the NEXT/SAVE key more than once to advance to some of the displays.

- To increase the value, answer “yes,” indicate “on,” or move to the next selection, use the RIGHT BLACK OVAL key.
- To decrease the value, answer “no,” indicate “off,” or return to the previous selection, use the LEFT BLACK OVAL key.

NOTE: When changing parameters, an asterisk (*) in the upper left-hand corner of the display indicates that you have changed this setting from what is currently stored in memory.

Press	Display Shows	Action/Explanation
-	PRINTER READY	Normal printer operation.
	DARKNESS	Press the BLACK OVAL keys to increase or decrease the print darkness setting. (You <i>may</i> need to change this setting when you print your label.)
	PRINT MODE	Press the BLACK OVAL keys to select tear-off, peel-off, cutter, or rewind mode.
	MEDIA TYPE	Press the BLACK OVAL keys to select continuous or non-continuous media type. (If you choose continuous media, you must also include a label length instruction in your label format.)
	SENSOR TYPE	Press the BLACK OVAL keys to select transmissive or black mark sensing mode. Unless your media has black marks on the back, leave your printer at the default setting (web).
	PRINT METHOD	Press the BLACK OVAL keys to select thermal transfer (if you are using ribbon) or direct thermal (no ribbon).
	MAXIMUM LENGTH	Press the BLACK OVAL keys to set the value that is closest to, but not less than, the length of the label you are using.
	SAVE SETTINGS	Press the BLACK OVAL keys to select: PERMANENT -- saves the changes when the power is turned off. Press NEXT/SAVE to accept the selection.
-	PRINTER READY	You have exited the configuration mode and are now ready to calibrate the printer.

Configuring the Software or Printer Driver

Many printer settings may also be controlled by your printer's driver or label preparation software. Refer to the driver or software documentation for more information.

Media and Ribbon Calibration

NOTE: All steps *must* be performed in the following procedure, even if only one sensor needs to be adjusted.

6. Press the SETUP/EXIT key.
7. Press the NEXT/SAVE key until “MEDIA AND RIBBON CALIBRATE” displays.
8. To start the calibration procedure, press the RIGHT BLACK OVAL key. “LOAD BACKING CANCEL CONTINUE” displays.
9. Open the printhead. Remove approximately 8” (203 mm) of labels from the media roll, enough so that only the backing material is threaded between the media sensors when the media is loaded (refer to Figure 10).

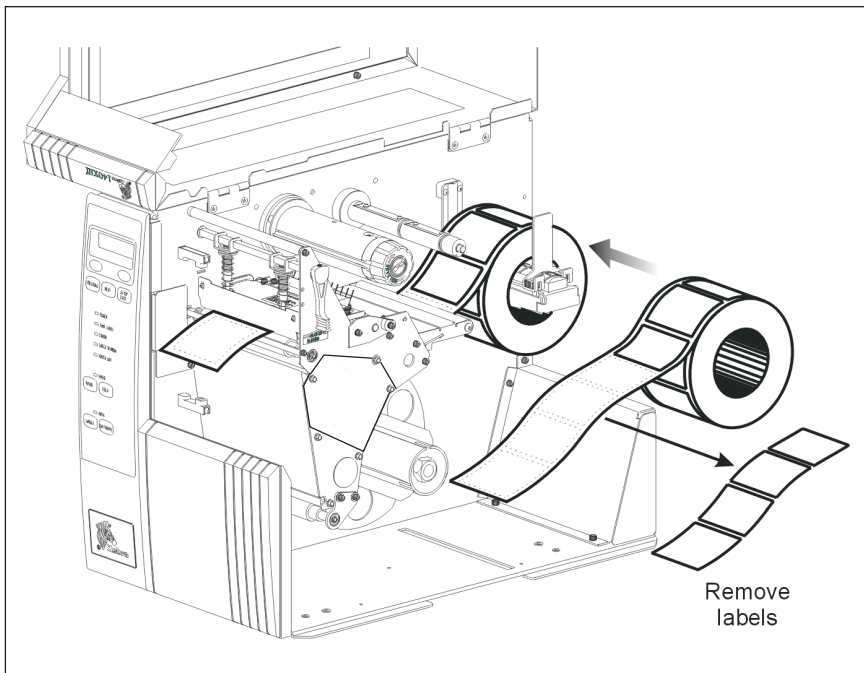


Figure 10

10. Press the RIGHT BLACK OVAL key. The front panel display will show “REMOVE RIBBON CANCEL CONTINUE.”
11. Either remove the ribbon or slide it as far from the printer frame as possible.
12. Close the printhead, trapping the ribbon in this position.
13. Press the RIGHT BLACK OVAL key. The front panel will show “CALIBRATING PLEASE WAIT.”
14. When this part of the calibration process is completed, the display will read “RELOAD ALL CONTINUE.”
15. Open the printhead. Pull the backing material until a label is positioned between the media sensors.
16. Either load the ribbon or return the ribbon to its proper position.
17. Close the printhead. Press the RIGHT BLACK OVAL key to perform the next part of the calibration sequence. “MEDIA AND RIBBON CALIBRATE” displays. The printer is calibrated when the media stops feeding.
18. Press the SETUP/EXIT key to leave the programming mode. Choose “permanent” when SAVE CHANGES displays.

Printing a Test Label

To print a test label:

19. Turn off the printer.
20. Press and hold the CANCEL key while turning on the printer.

A configuration label, which shows the printer's currently stored parameters, will print (similar to the one shown in Figure 11).

PRINTER CONFIGURATION	
Zebra Technologies ZTC 140xiIII-200dpi	
+10	DARKNESS
+000	TEAR OFF
TEAR OFF	PRINT MODE
NON-CONTINUOUS	MEDIA TYPE
WEB	SENSOR TYPE
THERMAL-TRANS.	PRINT METHOD
128 0/8 MM.	PRINT WIDTH
1722	LABEL LENGTH
39.01N	MAXIMUM LENGTH
PARALLEL	PARALLEL COMM.
RS232	SERIAL COMM.
19200	BAUD
8 BITS	DATA BITS
NONE	PARITY
2 STOP BITS	STOP BITS
XON/XOFF	HOST HANDSHAKE
NONE	PROTOCOL
000	NETWORK ID
NORMAL MODE	COMMUNICATIONS
< >	CONTROL PREFIX
< >	FORMAT PREFIX
< >	DELIMITER CHAR
ZPL II	ZPL MODE
FEED	MEDIA POWER UP
FEED	HEAD CLOSE
DEFAULT	BACKFEED
+010	LABEL TOP
+0000	LEFT POSITION
0000	HEAD TEST COUNT
0500	HEAD RESISTOR
OFF	VERIFIER PORT
OFF	APPLICATOR PORT
PULSE MODE	START PRINT SIG
FEED MODE	RESYNCH MODE
ENABLED	RIBBON LOW MODE
DISABLED	REPRINT MODE
057	WEB S.
075	MEDIA S.
064	RIBBON S.
092	MARK S.
092	MARK MED S.
013	MEDIA LED
0045	RIBBON LED
000	MARK LED
+10	LCD ADJUST
DPSWFXM	MODES ENABLED
	MODES DISABLED
1024 8/MM FULL	RESOLUTION
	SOCKET 1 ID
V33.10 IP1 <-	FIRMWARE
	HARDWARE ID
CUSTOMIZED	CONFIGURATION
4096	R: RAM
NONE	B: MEMORY CARD
1536	E: ONBOARD FLASH
NONE	FORMAT CONVERT
007 POWER SUPPLY	J12 INTERFACE
*** CUTTER	J11 INTERFACE
005 DISPLAY	J10 INTERFACE
*** NONE	J9 INTERFACE
*** NONE	J8 INTERFACE
*** NONE	J7 INTERFACE
	TWINAX/COAX ID
NONE	ZEBRA NET II
hfDep: Version 1	RFID VERSION
2000-05-17 12:27:15	TIME STAMP

FIRMWARE IN THIS PRINTER IS COPYRIGHTED

Figure 11

If you encounter any problems while you are configuring or calibrating the printer or printing a test label, refer to [Troubleshooting](#), which starts on [page 79](#). Otherwise, refer to [Establishing Communication on page 25](#) to set up the communication parameters.



Establishing Communication

System Considerations

Interfaces

The method of interfacing this printer to a data source depends on the communication options installed in the printer. The standard interfaces are an RS-232/RS-422/RS-485 serial data port and a bi-directional parallel port. The optional ZebraNet PrintServer II enables printers to be connected to 10 BaseT Ethernet networks. In addition, the IBM[®] Twinax or IBM Coax option is available for those applications that require them.

Data Specifications

When communicating via an asynchronous serial data port (refer to Figure 12), the baud rate, number of data and stop bits, parity, and handshaking are user selectable. Parity only applies to data transmitted by the printer since the parity of received data is ignored.

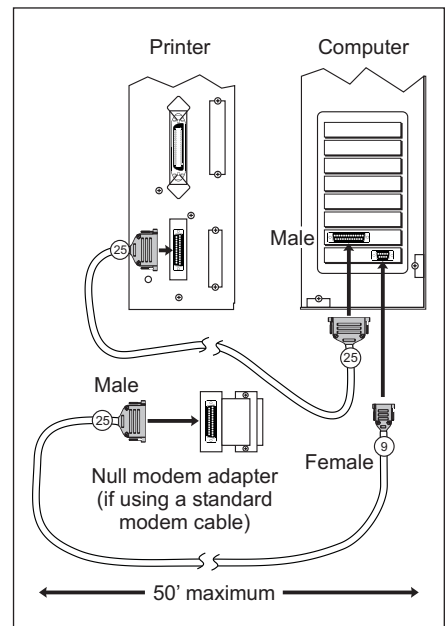


Figure 12

When communicating via the parallel port (refer to Figure 13), the previously mentioned parameters are not considered. Refer to [page 57](#) to configure the communication parameters for the printer. The values selected must be the same as those used by the host equipment connected to the printer.

For serial and parallel pinout and technical information, refer to the [Appendix on page 99](#).

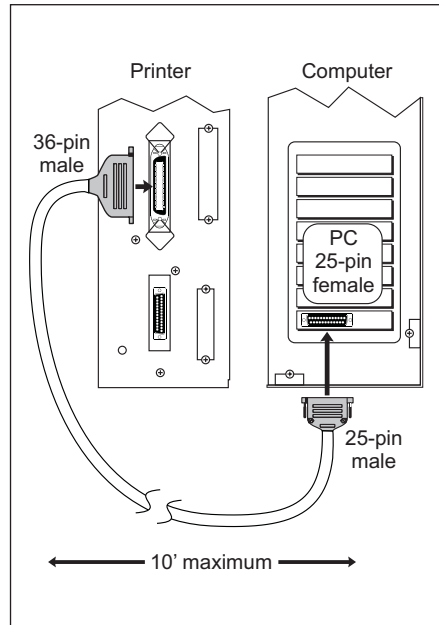


Figure 13

Cabling Requirements

Data cables must be fully shielded and fitted with metal or metalized connector shells. Shielded cables and connectors are required to prevent radiation and reception of electrical noise.

To minimize electrical noise pickup in the cable:

- Keep data cables as short as possible.
- Do not bundle the data cables tightly with the power cords.
- Do not tie the data cables to power wire conduits.

NOTES: Zebra printers comply with FCC “Rules and Regulations”, Part 15, for Class B Equipment, using fully shielded data cables. Use of unshielded cables may increase radiated emissions above the Class B limits.

RS-422 and RS-485 applications should use twisted shielded pairs as recommended in the Appendix of the TA/EA.-485 Specification.

Operator Controls

This section discusses the functions of the various controls and indicators on the printer. The operator should become familiar with each of these functions.

POWER Switch

This switch is located at the back of the printer above the power cord and fuse. The POWER switch should be turned off before connecting or disconnecting any cables.

External influences, such as lightning storms or noise on the power or data cables, may cause erratic printer behavior. Turning the printer's power off and back on may re-establish proper printer operation.

Front Panel Display

The front panel display communicates operational status and programming modes and parameters.

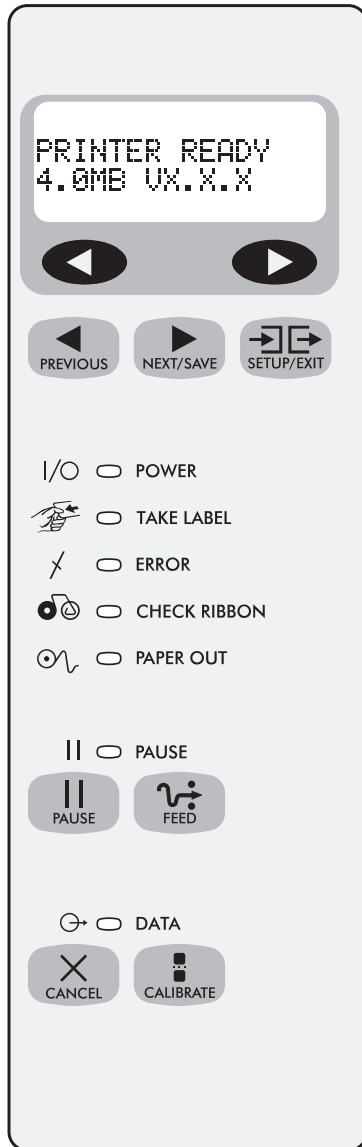
















Figure 14

Front Panel Keys

Key	Function
 PAUSE	<p>Starts and stops the printing process.</p> <ul style="list-style-type: none"> • If the printer is not printing: no printing can occur. • If the printer is printing: printing stops once the current label is complete. <p>Press to remove error messages from the display.</p> <p>NOTE: Pause mode can also be activated via ZPL II (~PP, ^PP).</p>
 FEED	<p>Forces the printer to feed one blank label each time the key is pressed.</p> <ul style="list-style-type: none"> • Printer not printing: one blank label immediately feeds. • Printing: one blank label feeds after the current batch of labels is complete. <p>NOTE: Equivalent to the Slew to Home Position (~PH, ^PH) ZPL II instruction.</p>
 CANCEL	<p>When in the pause mode, this key will cancel print jobs.</p> <ul style="list-style-type: none"> • Print job in queue: press once for each print job to be deleted. • Press and hold for several seconds to cancel all print jobs in the printer's memory. The DATA light will turn off.
 CALIBRATE	<p>When in Pause mode, this key will calibrate the printer for:</p> <ul style="list-style-type: none"> • Media length. • Media type (continuous or non-continuous). • Print mode (direct thermal or thermal transfer). • Sensor values.
<p>NOTE: The keys below are used only when configuring the printer. Specific uses of these keys are explained in Configuration, starting on page 47.</p>	
 PREVIOUS	<ul style="list-style-type: none"> • Scrolls back to the previous parameter. • Press <i>and hold</i> to quickly go backward through parameter sets.
 NEXT/SAVE	<ul style="list-style-type: none"> • Scrolls forward to the next parameter. (Saves any changes you've made in the configuration and calibration sequence.) • Press <i>and hold</i> to quickly advance through parameter sets.
 SETUP/EXIT	<p>Enters and exits the configuration mode.</p>
 	<p>These keys change the parameter values. They are used in different ways depending on the parameter displayed. Common uses are: to increase/decrease a value, answer "yes" or "no," indicate "on" or "off," scroll through several choices, input the password, or set up the printer for a firmware download.</p>

Front Panel Lights

NOTE: If two operating conditions occur simultaneously (for example, one that causes a light to be on constantly and one that causes the same light to flash), the light will flash.

Light	Status	Indication
POWER I/O	Off	The printer is off or power is not applied.
	On	The printer is on.
TAKE LABEL 	Off	Normal operation.
	Flashing	(Peel-off mode only.) The label is available. Printing is paused until the label is removed.
ERROR 	Off	Normal operation — no printer errors.
	Flashing	A printer error exists. Check the display screen for more information.
CHECK RIBBON 	Off	Normal operation — ribbon (if used) is properly loaded.
	On	Printing is paused, the front panel displays a warning message, and the PAUSE light is on. <ul style="list-style-type: none"> • If the printer is in direct thermal mode: Ribbon is loaded. • If the printer is in thermal transfer mode: No ribbon is loaded.
PAPER OUT 	Off	Normal operation — media is properly loaded.
	On	No media is under the media sensor. Printing is paused, the display shows an error message, and the PAUSE light is on.
PAUSE II	Off	Normal operation.
	On	The printer has stopped all printing operations. Either the PAUSE key was pressed, a pause command was included in the label format, the on-line verifier detected an error, or a printer error was detected. Refer to the display screen for more information.
DATA 	Off	Normal operation. No data being received or processed.
	On	Data processing or printing is taking place. No data is being received.
	Flashing	The printer is receiving data from <i>or</i> sending status information to the host computer. Flashing slows when the printer cannot accept more data, but returns to normal once data is again being received.

Roll Media Loading

NOTE: A calibration must be performed when media and ribbon (if used) are first installed in the printer, or when a different type of media or ribbon is being used.

Tear-Off Mode

Refer to Figure 15.

1. Open the printhead.
2. Slide the media guide and media supply guide as far from the printer frame as possible. Flip down the media supply guide.
3. Load media as shown.
4. Flip up the media supply guide. Slide in the media guide and media supply guide so they just touch, but not restrict, the edge of the roll.
5. Close the printhead.

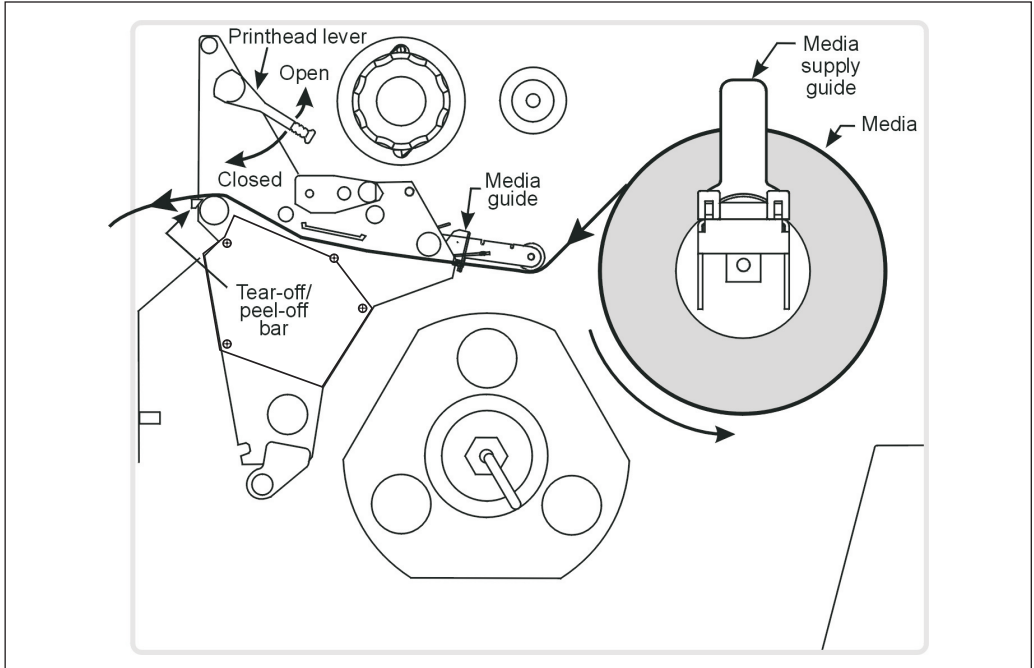


Figure 15

Peel-Off Mode

NOTE: Rewind option required.

NOTE: The Peel-Off Mode may not be suitable for some RFID media types. The user should test for each application

Refer to [Figure 16](#).

1. Remove the rewind plate from the front of the printer (if installed). Store it on the two mounting screws on the inside of the front panel.
2. Open the printhead.
3. Slide the media guide and media supply guide as far from the printer frame as possible. Flip down the media supply guide.
4. Load media as shown.
5. When loading media, allow approximately 36" (914 mm) of media to extend past the tear-off/peel-off bar. Remove all labels from this portion to create a leader.
6. Remove the hook from the rewind spindle. If you are using a core, slide it onto the rewind spindle until it is flush against the guide plate.
7. Wind the label backing around either the 3" (76 mm) core *or* the rewind spindle and reinstall the hook.
8. Flip up the media supply guide. Slide in the media guide and media supply guide so they just touch, but not restrict, the edge of the roll.

Before closing the printhead, make sure:

- The media is positioned against the inside guides.
 - The media is taut and parallel with itself and the pathway when wound onto the rewind spindle/core.
9. Close the printhead.
 10. To discard the label backing from the rewind spindle, refer to ["Removing the Label Backing Material" on page 42](#).

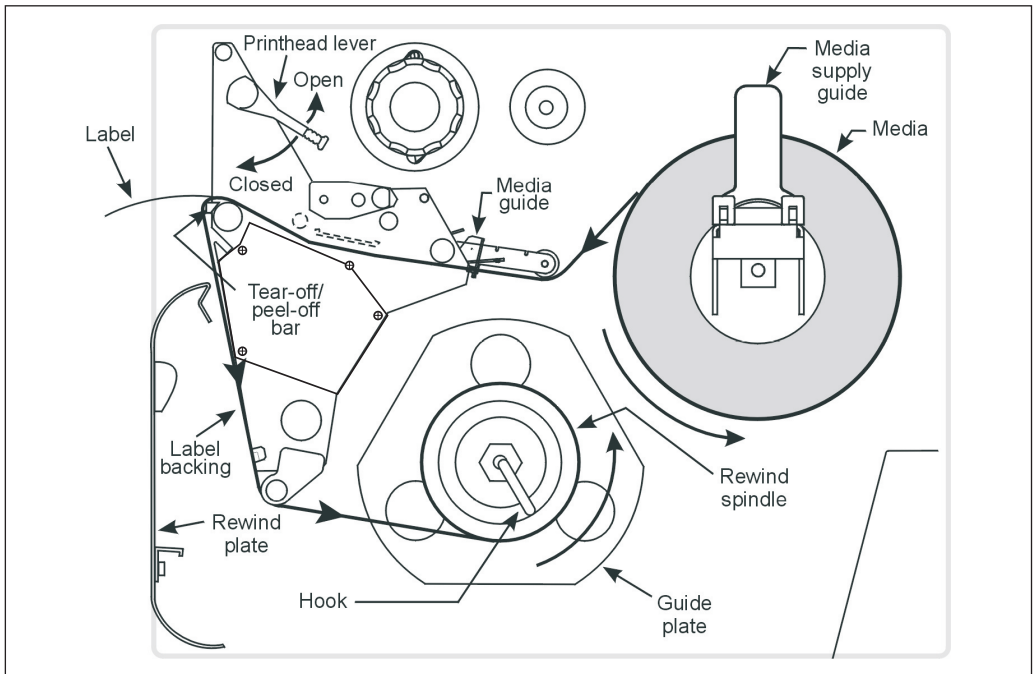


Figure 16

Rewind Mode (for Printers Without the Cutter Option)

NOTE: Rewind option required.

NOTE: Rewind mode may not be suitable for RFID applications.

Refer to Figure 17.

1. Remove the rewind plate from its storage location in front of the print mechanism inside the media compartment.
2. Invert the rewind plate so that the lip on the attached hook plate points down.
3. Insert the hook plate lip a short distance ($\frac{1}{2}$ "/13 mm) into the lower opening in the side plate.
4. Align the upper end of the rewind plate with the corresponding opening in the side plate. Slide in the rewind plate so that it stops against the printer's main frame.
5. Open the printhead.
6. Slide the media guide and media supply guide as far from the printer frame as possible. Flip down the media supply guide.
7. Load media as shown.
8. When loading media, allow approximately 36" (914 mm) of media to extend past the printhead. Remove all labels from this portion to create a leader.
9. Remove the hook from the rewind spindle. If you are using a core, slide it onto the rewind spindle until it is flush against the guide plate.
10. Wind the label backing around either the 3" (76 mm) core *or* the rewind spindle and reinstall the hook.
11. Flip up the media supply guide. Slide in the media guide and media supply guide so they just touch, but not restrict, the edge of the roll.

Before closing the printhead, make sure:

- The media is positioned against the inside guides.
- The media is taut and parallel with itself and the pathway when wound onto the rewind spindle/core.

12. Close the printhead.

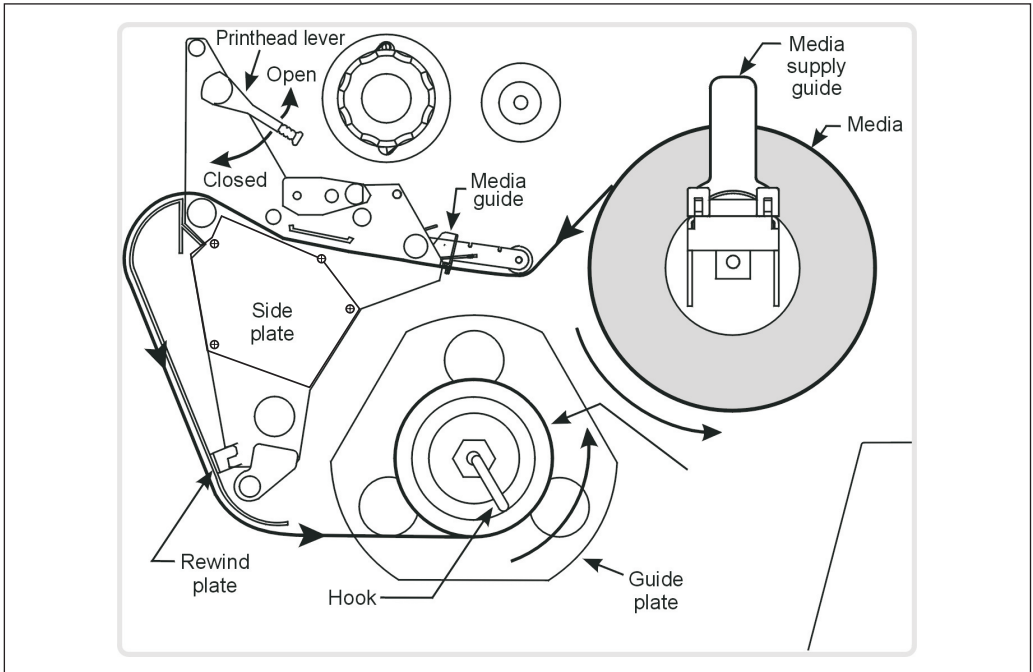


Figure 17

Cutter Mode

NOTE: Cutter option required.

[Refer to Figure 18.](#)

1. Open the printhead.
2. Slide the media guide and media supply guide as far from the printer frame as possible. Flip down the media supply guide.
3. Load media as shown.
4. Flip up the media supply guide. Slide in the media guide and media supply guide so they just touch, but not restrict, the edge of the roll.
5. Close the printhead.
6. The printer will automatically feed out and cut one label when the printer is turned on.

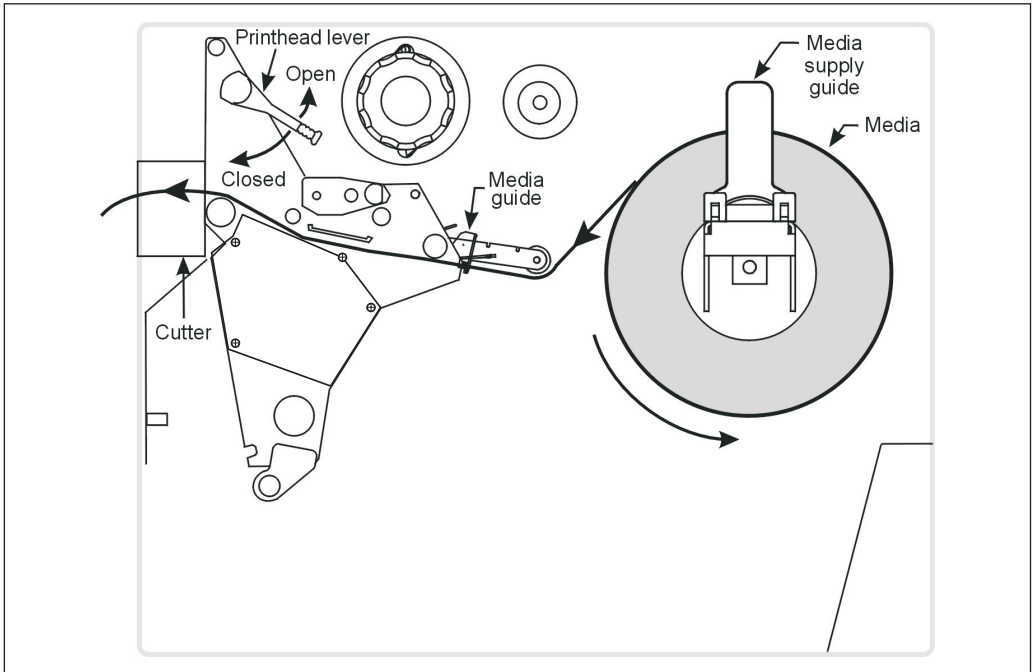


Figure 18

Rewind Mode (for Printers With the Cutter Option)

NOTE: Cutter and rewind options required.

NOTE: Rewind mode may not be suitable for RFID applications.

Refer to Figure 19.

1. Remove the rewind plate from its storage location in front of the print mechanism inside the media compartment.
2. Invert the rewind plate so that the lip on the attached hook plate points down.
3. Insert the hook plate lip a short distance ($\frac{1}{2}$ "/13 mm) into the lower opening in the side plate. Slide in the rewind plate so that it stops against the printer's main frame.
4. Insert the two small tabs on the rewind plate into the corresponding slots in the cutter support bracket. (The rewind plate should spring into the proper position.)
5. Open the printhead.
6. Slide the media guide and media supply guide as far from the printer frame as possible. Flip down the media supply guide.
7. Load media as shown.
8. When loading media, allow approximately 36" (914 mm) of media to extend past the printhead. Remove all labels from this portion to create a leader.
9. Remove the hook from the rewind spindle. If you are using a core, slide it onto the rewind spindle until it is flush against the guide plate.
10. Wind the label backing around either the 3" (76 mm) core *or* the rewind spindle and reinstall the hook.
11. Flip up the media supply guide. Slide in the media guide and media supply guide so they just touch, but not restrict, the edge of the roll.

Before closing the printhead, make sure:

- The media is positioned against the inside guides.
- The media is taut and parallel with itself and the pathway when wound onto the rewind spindle/core.

12. Close the printhead.

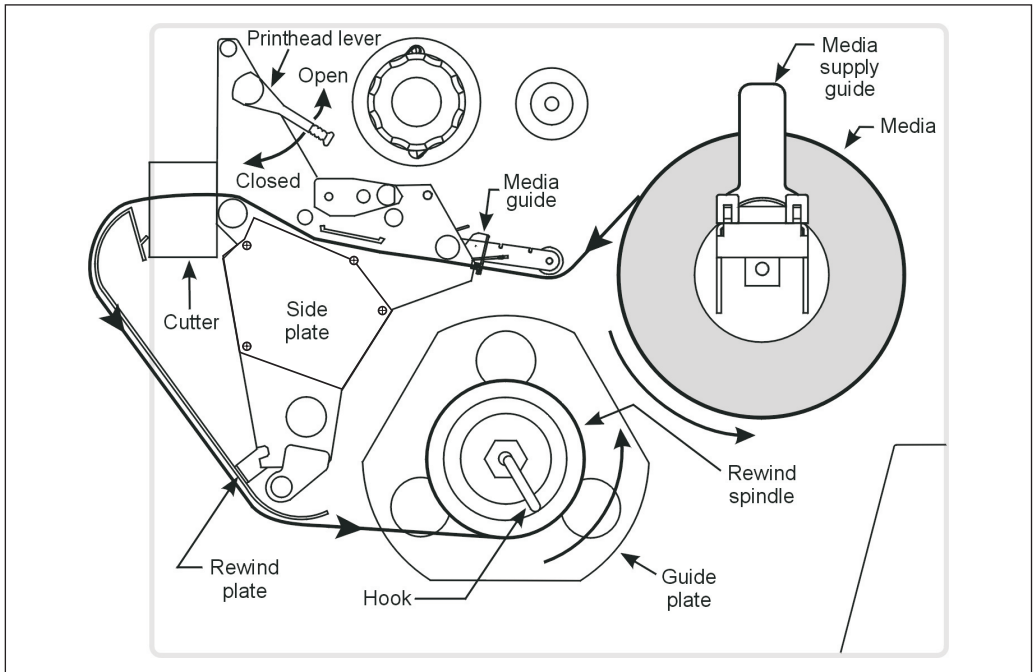


Figure 19

Fanfold Media Loading

NOTE: A calibration must be performed when media and ribbon (if used) are first installed in the printer, or when a different type of media or ribbon is being used.

Fanfold media feeds through either the bottom or rear access slot from outside the printer.

[Refer to Figures 20 and 21.](#)

1. Open the printhead.
2. Slide the media guide as far from the printer frame as possible.
3. Load media as shown. If in cutter mode, route media through the cutter.
4. Slide in the media guide so it just touches, but not restricts, the edge of the roll.
5. Close the printhead.

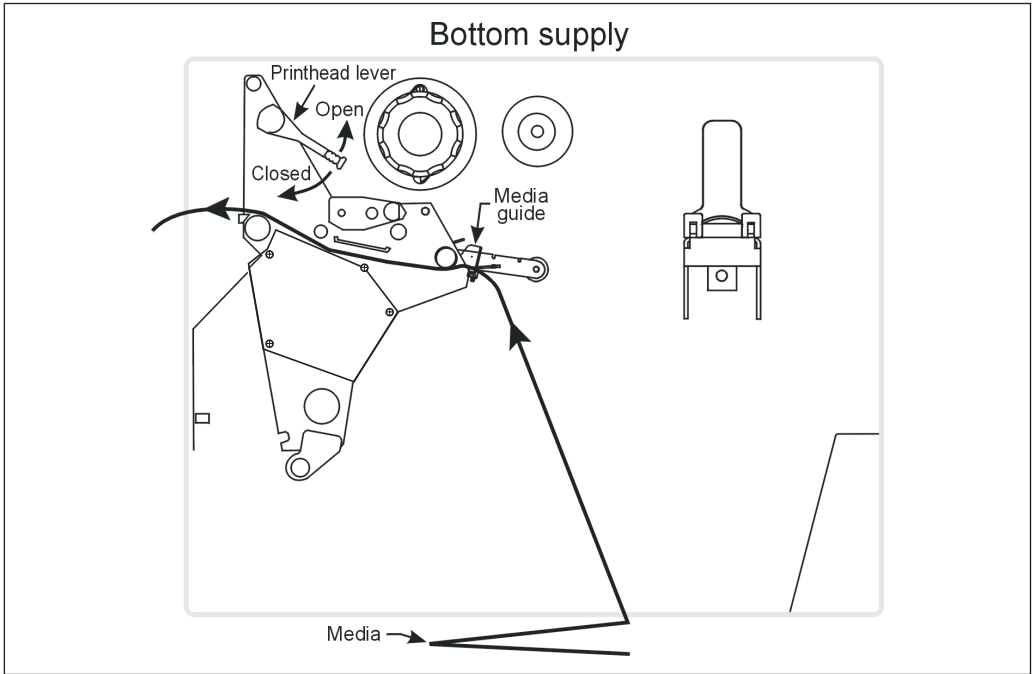


Figure 20

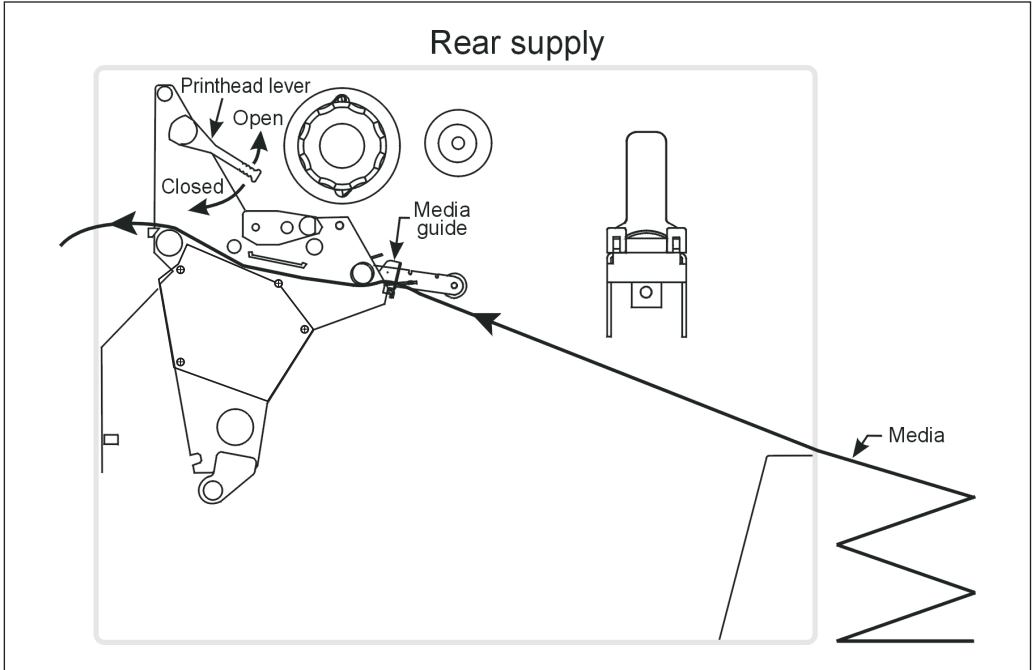


Figure 21

Removing the Label Backing Material

Since the rewind spindle holds the backing from a standard-size media roll, we recommend that you perform this procedure whenever you change the media.

To remove the backing material from the rewind spindle, follow these steps (you don't need to turn off the printer for this procedure).


1. Unwind approximately 36" (914 mm) of backing from the rewind spindle. Cut it off at the spindle.
2. Pull out the hook. Slide the backing material off of the rewind spindle and discard.
3. Wind the media around the rewind spindle once or twice and reinstall the hook. Continue winding to remove any slack in the media.

Ribbon Loading

To load ribbon, refer to [Figure 22](#) and follow the procedure below.


NOTE: Use ribbon that is at least as wide as the media. The smooth backing of the ribbon protects the printhead from wear and premature failure due to excessive abrasion. (*For direct thermal print mode, ribbon is not used and should not be loaded in the printer.*)

1. Align the segments of the ribbon supply spindle.
2. Place the ribbon roll on the ribbon supply spindle.



NOTE: Make sure that the core is pushed up against the stop on the ribbon supply spindle and that the ribbon is aligned squarely with its core. If this is not done, the ribbon may not cover the printhead entirely on the inside, exposing print elements to potentially damaging contact with the media.

3. Open the printhead.
4. (Optional) To make ribbon loading and unloading easier, make a leader for your ribbon roll if it doesn't already have one.
5. Tear off a strip of media (labels and backing) about 6-12" (152-305 mm) long from the roll. Peel off a label from this strip. Apply half of this label to the end of the strip and the other half to the end of the ribbon. This acts as a ribbon leader.

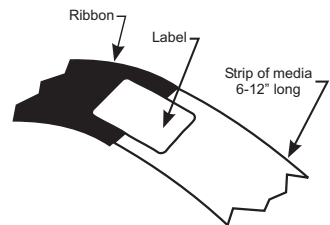

6. Thread the ribbon (with leader, if used) as shown without creasing or wrinkling it.

7. Before wrapping the ribbon around the ribbon take-up spindle, ensure that the arrow on the knob aligns with the indented notch (see Figure 23 inset).
8. Place the ribbon (with leader, if used) around the ribbon take-up spindle and wind counterclockwise for several turns.
9. Close the printhead.

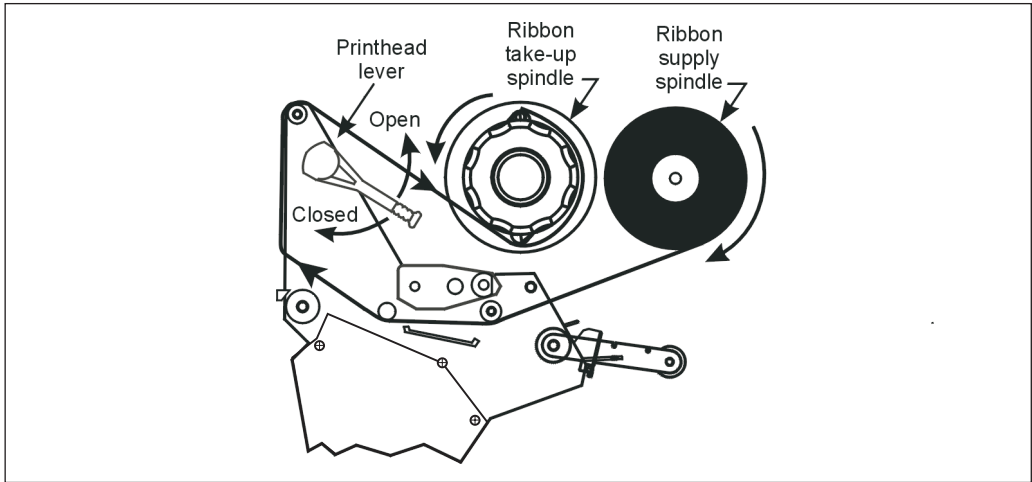


Figure 22

Ribbon Removal

1. Break the ribbon as close to the ribbon take-up spindle as possible.
2. Refer to Figure 23. While holding the ribbon take-up spindle, turn the knob (1) clockwise until it stops. This will cause the ribbon release bars to pivot down (2), easing the spindle's "grip" on the wound ribbon.
3. Slide the ribbon off of the ribbon take-up spindle. Once the spent ribbon has been removed, ensure that the arrow on the knob aligns with the indented notch in the ribbon take-up spindle (see Figure 23 inset).
4. Remove the empty core from the ribbon supply spindle.
5. Follow the ribbon loading procedure on [page 43](#) to load the new ribbon.

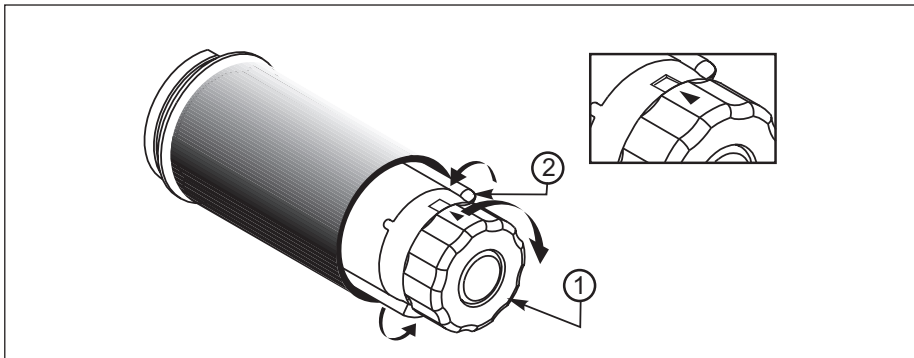


Figure 23



Configuration

After you have installed the media and ribbon and the power-on self test (POST) is complete, the front panel display will show “PRINTER READY.” (If the printer fails its POST, refer to [page 87](#).) You may now set printer parameters for your application using the front panel display and the five keys directly below it.

NOTE: Printers that are operating on an IP network can be quickly configured via ZebraNet[®] WebView[™] (optional ZebraNet PrintServer II required). For information, refer to *ZebraNet Networking: PrintServer II Installation and User’s Guide*.

If it becomes necessary to restore the initial printer defaults, see “[FEED Key and PAUSE Key Self Test](#)” on [page 91](#).

NOTE: Unless otherwise noted, all parameters are listed in the order they are displayed, starting with “DARKNESS.”

Entering the Setup Mode

To enter the programming mode, press the SETUP/EXIT key. Press either the NEXT/SAVE key or PREVIOUS key to scroll to the parameter you wish to set.

NOTE: You may also press *and hold* the NEXT/SAVE and PREVIOUS keys to quickly advance through the configuration parameters.

Parameters in this section are shown in the order displayed when pressing the NEXT/SAVE key. Throughout this process, press the NEXT/SAVE key to continue to the next parameter, or press the PREVIOUS key to return to the previous parameter in the cycle.

An asterisk (*) in the upper left-hand corner of the display indicates that the value displayed is different than the currently stored value.

Changing Password-Protected Parameters

Certain parameters are password-protected by factory default.

CAUTION: Do not change password-protected parameters unless you are sure you know what you are doing! If they are set incorrectly, these parameters could cause the printer to function in an unpredictable way.

The first attempt to change one of these parameters (pressing one of the BLACK OVAL keys) will require you to enter a four-digit password. This is done via the “ENTER PASSWORD” display. The LEFT BLACK OVAL key changes the selected digit position. The RIGHT BLACK OVAL key increases the selected digit value. After entering the password, press the NEXT/SAVE key. The parameter you wish to change will be displayed. If the password was entered correctly, you can now change the value.

The default password value is 1234. The password can be changed using the ^KP (Define Password) ZPL II instruction or through ZebraNet WebView (optional ZebraNet PrintServer II required).

NOTE: Once the password has been entered correctly, it will not have to be entered again unless you leave and re-enter the programming mode using the SETUP/EXIT key.

NOTE: You can disable the password protection feature so that it no longer prompts you for a password by setting the password to 0000 via the ^KP0 ZPL/ZPL II command. To re-enable the password-protection feature, send the ZPL/ZPL II command ^KPx, where “x” can be any number, one to four digits in length, except 0.

Leaving the Setup Mode




You can leave the program mode at any time by pressing the SETUP/EXIT key. The “SAVE CHANGES” display will appear. There are five choices, described below. Pressing the LEFT or RIGHT BLACK OVAL key displays other choices and pressing the NEXT/SAVE key selects the displayed choice.

- PERMANENT - Permanently saves the changes. Values are stored in the printer even when power is turned off.
- TEMPORARY - Saves the changes until changed again or until power is turned off.
- CANCEL - Cancels all changes since pressing the SETUP/EXIT key except the darkness and tear-off settings (if they were changed).
- LOAD DEFAULTS - Loads factory defaults. The factory defaults are shown on the following pages.




NOTE: Loading factory defaults will require printer calibration.



- LOAD LAST SAVE - Loads values from the last permanent save.







Configuration and Calibration Sequence





Press	Display Shows	Action/Explanation
----	PRINTER READY	Normal printer operation.
Setting Print Parameters		
	DARKNESS	<p>Adjusting Print Darkness Press the RIGHT BLACK OVAL key to increase darkness. Press the LEFT BLACK OVAL key to decrease darkness.</p> <p>Default: +10</p> <p>Range: 0 to +30</p> <p>Darkness settings are dependent upon a variety of factors including ribbon type, media, and the condition of the printhead. You may adjust the darkness for consistent high-quality printing. If printing is too light, or if there are voids in printed areas, you should increase the darkness. If printing is too dark, or if there is spreading or bleeding of printed areas, you should decrease the darkness.</p> <p>The FEED key self test on page 90 can also be used to determine the best darkness setting. Since the darkness setting takes effect immediately, you can see the results on labels that are currently printing.</p> <p>CAUTION: Set the darkness to the lowest setting that provides good print quality. Darkness set too high may cause ink smearing and/or it may burn through the ribbon.</p> <p><i>Darkness settings also may be changed by the driver or software settings.</i></p>
	TEAR OFF	<p>Adjusting the Tear-Off Position Press the RIGHT BLACK OVAL key to increase the value, press the LEFT BLACK OVAL key to decrease the value. Each press of the key adjusts the tear-off position by four dot rows.</p> <p>Default: +0</p> <p>Range: -120 to +120</p> <p>This parameter establishes the position of the media over the tear-off/peel-off bar after printing. The label and backing can be torn off or cut between labels.</p>
	PRINT MODE	<p>Selecting Print Mode Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Tear-off</p> <p>Selections: Tear-off, peel-off, cutter, rewind, applicator*</p> <p>Print mode settings tell the printer the method of media delivery that you wish to use. Be sure to select a print mode that your hardware configuration supports since some selections displayed are for optional printer features.</p>

* Option required

Press	Display Shows	Action/Explanation
	MEDIA TYPE	<p>Setting Media Type Press the RIGHT or LEFT BLACK OVAL key to display other choices. Default: Continuous Selections: Continuous, non-continuous This parameter tells the printer the type of media you are using. Selecting continuous media requires that you include a label length instruction in your label format (^LLxxxx if you are using ZPL or ZPL II). When non-continuous media is selected, the printer feeds media to calculate label length (the distance between two detections of the inter-label gap, webbing, or alignment notch or hole).</p>
	SENSOR TYPE	<p>Setting the Sensor Type Press the RIGHT or LEFT BLACK OVAL key to display other choices. Default: Web Selections: Web, mark This parameter tells the printer whether you are using media with a web (gap/space between labels, notch, or hole) to indicate the separations between labels or if you are using media with a black mark printed on the back. If your media does not have black marks on the back, leave your printer at the default (web).</p>
	PRINT METHOD	<p>Selecting Print Method Press the RIGHT BLACK OVAL key for the next value; press the LEFT BLACK OVAL key for the previous value. Default: Thermal transfer Selections: Thermal transfer, direct thermal The print method parameter tells the printer the method of printing you wish to use: direct thermal (no ribbon) or thermal transfer (using thermal transfer media and ribbon). NOTE: Selecting direct thermal when using thermal transfer media and ribbon creates a warning condition, but printing will continue.</p>

Press	Display Shows	Action/Explanation
	PRINT WIDTH	<p>Setting Print Width Press the RIGHT BLACK OVAL key to increase the value, press the LEFT BLACK OVAL key to decrease the value. To change the unit of measurement, press the LEFT BLACK OVAL key until the unit of measurement is active, then press the RIGHT BLACK OVAL key to toggle to a different unit of measure (inches, mm, or dots).</p> <p>Default:, Range: The default and range of acceptable values vary depending on what printer you have. Refer to “Printing Specifications” on page 96 for further information about the ranges available for your model.</p> <p>Print width determines the printable area across the width of the label.</p>
	MAXIMUM LENGTH	<p>Setting Maximum Length Press the LEFT BLACK OVAL key to decrease the value, press the RIGHT BLACK OVAL key to increase the value.</p> <p>Default:, Range: The default and range of acceptable values vary depending on your printer’s configuration. Values are adjustable in 1” (25.4 mm) increments.</p> <p>Maximum length is used in conjunction with the calibration procedure. The value of this setting determines the maximum label length that will be used during the media portion of the calibration process. Only a few labels are required to set media sensors. Always set the value that is closest to, but not lower than, the length of the label you are using. For example, if the length of the label is 14.5 inches (368 mm), set the parameter for 15.0 inches (381 mm).</p>

Listing Printer Information		
Press	Display Shows	Action/Explanation
	LIST FONTS	List Fonts Press the RIGHT BLACK OVAL key to print a label listing all of the available fonts. This selection is used to print a label that lists all of the fonts currently available in the printer, including standard printer fonts plus any optional fonts. Fonts may be stored in RAM, FLASH memory, font EPROMs, or font cards.
	LIST BAR CODES	List Bar Codes Press the RIGHT BLACK OVAL key to print a label listing all of the available bar codes. This selection is used to print a label that lists all of the bar codes currently available in the printer.
	LIST IMAGES	List Images Press the RIGHT BLACK OVAL key to print a label listing all of the available images. This selection is used to print a label that lists all of the images currently stored in the printer's RAM, FLASH memory, optional EPROM, or optional memory card.
	LIST FORMATS	List Formats Press the RIGHT BLACK OVAL key to print a label listing all of the available formats. This selection is used to print a label that lists all of the formats currently stored in the printer's RAM, FLASH memory, optional EPROM, or optional memory card.
	LIST SETUP	List Setup Press the RIGHT BLACK OVAL key to print a label listing the current printer configuration. This selection is used to print a label that lists the current printer configuration information. (Same as CANCEL key self test.)
	LIST ALL	List All Press the RIGHT BLACK OVAL key to print a label listing all of the available fonts, bar codes, images, formats, and the current printer configuration. This selection is used to print a label that lists the five previous selections, as described.

Press	Display Shows	Action/Explanation
	INITIALIZE CARD	<p>Initialize Memory Card </p> <p>CAUTION: Perform this operation only when it is necessary to erase all previously stored information from the optional memory card. Press the NEXT//SAVE key to bypass this function.</p> <ol style="list-style-type: none"> 1. Press the RIGHT BLACK OVAL key to select “YES.” If your printer is set to require a password, you will now be prompted to enter the password. Enter the password and then press the NEXT/SAVE key. 2. The display will ask “INITIALIZE CARD?”. Press the RIGHT BLACK OVAL key “YES.” 3. The front panel LCD will ask “ARE YOU SURE?”. 4. Press the RIGHT BLACK OVAL key “YES” to begin initialization. <i>or</i> Press the LEFT BLACK OVAL key “NO” to cancel the request and return to the “INITIALIZE CARD” prompt. 5. Press the SETUP/EXIT key followed by the NEXT/SAVE key. If initialization is still in process, the front panel display will flash back and forth between the two phrases “CHECKING B: MEMORY” and “PRINTER IDLE.” When initialization is complete, the printer will automatically exit the configuration mode and the front panel will display “PRINTER READY.” <p>NOTE: Depending on the amount of memory in the memory card, initialization may take up to five minutes to complete.</p>
	INIT FLASH MEM	<p>Initialize Flash Memory </p> <p>CAUTION: Perform this operation only when it is necessary to erase all previously stored information from the FLASH memory. Press the NEXT//SAVE key to bypass this function.</p> <ol style="list-style-type: none"> 1. Press the RIGHT BLACK OVAL key to select “YES.” If your printer is set to require a password, you will now be prompted to enter the password. Enter the password and then press the NEXT/SAVE key. 2. The display will ask “INITIALIZE FLASH?”. Press the RIGHT BLACK OVAL key “YES.” 3. The front panel LCD will ask “ARE YOU SURE?”. 4. Press the RIGHT BLACK OVAL key “YES” to begin initialization. <i>or</i> Press the LEFT BLACK OVAL key “NO” to cancel the request and return to the “INITIALIZE FLASH” prompt. 5. Press the SETUP/EXIT key followed by the NEXT/SAVE key. If initialization is still in process, the front panel display will flash back and forth between the two phrases “CHECKING E: MEMORY” and “PRINTER IDLE.” When initialization is complete, the printer will automatically exit the configuration mode and the front panel will display “PRINTER READY.” <p>NOTE: Depending on the amount of free FLASH memory, initialization may take up to one minute to complete.</p>


Media and Ribbon Sensor Calibration

NOTE: Before you begin this procedure, make sure that the maximum length is set to a value equal to or greater than the length of the labels you are using. If the maximum length is set to a lower value, the calibration process will assume that continuous media is in the printer. See [page 52](#) for more information.

There are two different types of calibration that can be performed by the printer:

1) Standard Calibration. Pressing the CALIBRATE key on the printer's front panel causes the printer to feed media and ribbon and set the values it detects for media, media backing material (the spaces between labels), media out, and ribbon or no ribbon (which determines the print mode — thermal transfer or direct thermal). This type of calibration also occurs as part of the sensor profile and media and ribbon calibration procedures.

2) Media and Ribbon Sensor Sensitivity Calibration. Performing the media and ribbon calibration procedure first resets the sensitivity of the sensors to better detect the media and ribbon you are using. With the sensors at their new sensitivity, the printer then performs the standard calibration described above. Changing the type of ribbon and/or media may require resetting the sensitivity of the media and ribbon sensors. Indications that the sensitivity may need to be reset would be a CHECK RIBBON light on with the ribbon properly installed or non-continuous media being treated as continuous media.

Press	Display Shows	Action/Explanation
	SENSOR PROFILE	<p>Sensor Profile Press NEXT/SAVE to skip this standard calibration procedure and continue with the media and ribbon calibration parameter which follows. Press the RIGHT BLACK OVAL key to initiate this standard calibration procedure and print a media sensor profile.</p> <p>See Figure 24. The media sensor profile may be used to troubleshoot registration problems that may be caused when the media sensor detects preprinted areas on the media or experiences difficulty in determining web location. If the sensitivity of the media and/or ribbon sensors MUST be adjusted, use the media and ribbon sensor sensitivity procedure.</p>

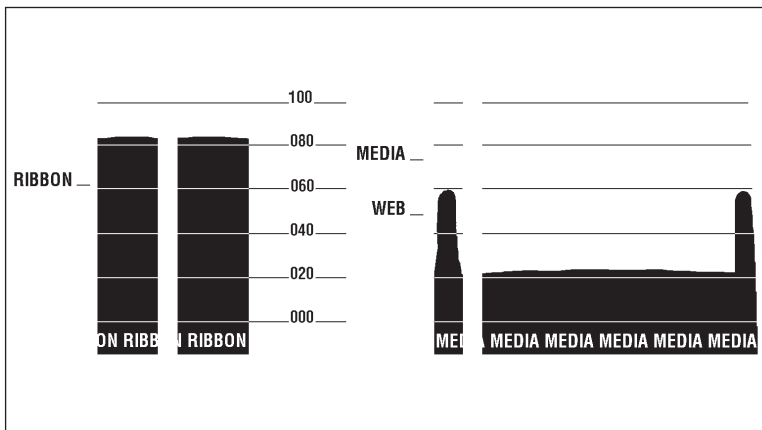























Figure 24





Press	Display Shows	Action/Explanation
	MEDIA AND RIBBON CALIBRATE	<p>Media and Ribbon Sensor Sensitivity Press NEXT/SAVE to skip the calibration procedure and continue with the host port selection parameters that follow. Press the RIGHT BLACK OVAL key to start the calibration procedure.</p> <p>This procedure is used to adjust the sensitivity of the media and ribbon sensors.</p> <p>NOTE: The procedure must be followed exactly as presented. All steps must be performed even if only one of the sensors requires adjustment.</p>
Media and Ribbon Calibration Procedure		
	LOAD BACKING	<p>Press the LEFT BLACK OVAL key to cancel the operation, or do the following:</p> <ol style="list-style-type: none"> 1) Open the printhead. 2) Remove approximately 8" (203 mm) of labels from the media roll, enough so that only the backing material is threaded between the media sensors when the media is loaded.
	REMOVE RIBBON	<p>Press the LEFT BLACK OVAL key to cancel the operation or do the following:</p> <ol style="list-style-type: none"> 1) Remove the ribbon (sliding it as far to the right as possible will have the same effect as removing it). 2) Close the printhead.
	CALIBRATING PLEASE WAIT	The printer automatically adjusts the scale (gain) of the signals it receives from the media and ribbon sensors based on the specific media and ribbon combination you are using. On the sensor profile, this essentially corresponds to moving the graph up or down to optimize the readings for your application.
----	RELOAD ALL	<p>When "RELOAD ALL" is displayed:</p> <ol style="list-style-type: none"> 1) Open the printhead and pull the media forward until a label is positioned under the media sensor. 2) Move the ribbon back to its proper position. 3) Close the printhead.
	MEDIA AND RIBBON CALIBRATE	Now that the scale has changed, the printer performs a calibration equivalent to pressing the CALIBRATE key. During this process, the printer checks the readings for the media and ribbon based on the new scale you have established, determines the label length, and determines whether you are in direct thermal or thermal transfer print mode. The process is now complete! To see the new readings on the new scale, print a sensor profile.

Setting Communication Parameters

Communication parameters must be set correctly for the printer to communicate with the host. These parameters make sure that the printer and host are “speaking the same language.” All communications parameters are password protected.

Press	Display Shows	Action/Explanation
	PARALLEL COMM	<p>Setting Parallel Communications  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Parallel</p> <p>Selections: Parallel, twinax/coax</p> <p>Select the communications port that matches the one being used by the host computer.</p>
	SERIAL COMM	<p>Setting Serial Communications  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: RS232</p> <p>Selections: RS232, RS422/485, RS485 multidrop</p> <p>Select the communications port that matches the one being used by the host computer.</p>
	BAUD	<p>Setting Baud  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: 9600</p> <p>Selections: 110, 300, 600, 1200, 2400, 4800, 9600, 14400, 19200, 28800, 38400, 57600</p> <p>The baud setting of the printer must match the baud setting of the host for accurate communications to take place. Select the value that matches the one being used by the host.</p>
	DATA BITS	<p>Setting Data Bits  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: 7-bits</p> <p>Selections: 7-bits, 8-bits</p> <p>The data bits of the printer must match the data bits of the host for accurate communications to take place. Set the data bits to match the setting being used by the host.</p> <p>NOTE: Must be set to 8 data bits to use Code Page 850.</p>







Press	Display Shows	Action/Explanation
	PARITY	<p>Setting Parity  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Even</p> <p>Selections: Even, odd, none</p> <p>The parity of the printer must match the parity of the host for accurate communications to take place. Select the parity that matches the one being used by the host.</p>
	STOP BITS	<p>Setting Stop Bits  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: 1 stop bit</p> <p>Selections: 1 stop bit, 2 stop bits</p> <p>The stop bits of the printer must match the stop bits of the host for accurate communications to take place. Select the stop bits that match the one being used by the host.</p>
	HOST HANDSHAKE	<p>Setting Host Handshake  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: XON/XOFF</p> <p>Selections: XON/XOFF, DTR/DSR</p> <p>The handshake protocol of the printer must match the handshake protocol of the host for communications to take place. Select the handshake protocol that matches the one being used by the host.</p>
	PROTOCOL	<p>Setting Protocol  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: None</p> <p>Selections: None, Zebra, ACK/NACK</p> <p>Protocol is a type of error checking system. Depending on the selection, an indicator may be sent from the printer to the host signifying that data has been received. Select the protocol that is requested by the host. Further details on protocol can be found in the <i>ZPL II Programming Reference Volumes I and II</i>.</p> <p>NOTE: Zebra is the same as ACK/NACK except that with Zebra the response messages are sequenced.</p> <p>NOTE: If Zebra is selected, printer must use "DTR/DSR" host handshake protocol.</p>







Press	Display Shows	Action/Explanation
	NETWORK ID	<p>Setting Network ID  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to increase the value of the digit.</p> <p>Default: 000</p> <p>Range: 000 - 999</p> <p>Network ID is used to assign a unique number to a printer used in an RS-422/RS-485 network. This gives the host the means to address a specific printer. If the printer is used in a network, you must select a network ID number. This does not affect TCP/IP or IPX networks.</p>
	COMMUNICATIONS	<p>Setting Communications Mode  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Normal mode</p> <p>Selections: Normal mode, diagnostics</p> <p>The communication diagnostics mode is a troubleshooting tool for checking the interconnection between the printer and the host. When “diagnostics” is selected, all data sent from the host to the printer will be printed as straight ASCII hex characters. The printer prints all characters received including control codes, like CR (carriage return). A sample printout is shown in Figure 34 on page 91.</p> <p>NOTES on diagnostic printouts:</p> <ul style="list-style-type: none"> • An FE indicates a framing error. • An OE indicates an overrun error. • A PE indicates a parity error. • An NE indicates noise. <p>For any errors, check that your communication parameters are correct. Set the print width equal to or less than the label width used for the test. See page 52 for more information.</p>





Selecting Prefix and Delimiter Characters







Prefix and delimiter characters are 2-digit hex values used within the ZPL/ZPL II formats sent to the printer. The printer uses the last prefix and delimiter characters sent to it, whether from a ZPL II instruction or from the front panel.











NOTE: DO NOT use the same hex value for the control, format, and delimiter character. The printer needs to see different characters to function properly.









Press	Display Shows	Action/Explanation
	CONTROL PREFIX	<p>Control Prefix Character  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to increase the value of the digit.</p> <p>Default: 7E (tilde - displayed as a black square)</p> <p>Range: 00-FF</p> <p>The printer looks for this 2-digit hex character to indicate the start of a ZPL/ZPL II control instruction.</p>
	FORMAT PREFIX	<p>Format Prefix Character  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to increase the value of the digit.</p> <p>Default: 5E (caret)</p> <p>Range: 00 - FF</p> <p>The printer looks for this 2-digit hex character to indicate the start of a ZPL/ZPL II format instruction.</p>
	DELIMITER CHAR	<p>Delimiter Character  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to increase the value of the digit.</p> <p>Default: 2C (comma)</p> <p>Range: 00 - FF</p> <p>The delimiter character is a 2-digit hex value used as a parameter place marker in ZPL/ZPL II format instructions. Refer to the <i>ZPL II Programming Reference Volumes I and II</i> for more information.</p>

Selecting ZPL Mode		
Press	Display Shows	Action/Explanation
	ZPL MODE	<p>Selecting ZPL Mode  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: ZPL II</p> <p>Selections: ZPL II, ZPL</p> <p>The printer will remain in the selected mode until it is changed by this front panel instruction or by using a ZPL/ZPL II command. The printer accepts label formats written in either ZPL or ZPL II. This eliminates the need to rewrite any ZPL formats you already have. Refer to the <i>ZPL II Programming Reference Volumes I and II</i> for more information on the differences between ZPL and ZPL II .</p>
Power-Up and Head Close Parameters		
	MEDIA POWER UP	<p>Media Power-Up  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Feed</p> <p>Selections: Feed, calibration, length, and no motion</p> <p>This parameter establishes the action of the media when the printer is turned on.</p> <ul style="list-style-type: none"> • Calibration: Recalibrates the media and ribbon sensors. • Feed: Feeds the label to the first web. • Length: Determines the length of the label. • No Motion: Media does not move.
	HEAD CLOSE	<p>Head Close  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Feed</p> <p>Selections: Feed, calibration, length, no motion</p> <p>Determines the action of the media after the printhead has been opened and then closed.</p> <ul style="list-style-type: none"> • Calibration: Recalibrates the media and ribbon sensors. • Feed: Feeds the label to the first web. • Length: Determines the length of the label. • No Motion: Media does not move.











Label Positioning Parameters		
Press	Display Shows	Action/Explanation
	BACKFEED	<p>Backfeed Sequence  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Default (90%)</p> <p>Selections: Default, after, before, 10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, off</p> <p>This parameter establishes when and how much label backfeed occurs after a label is removed or cut in the peel-off, cutter, and applicator modes. It has no effect in rewind or tear-off modes. This parameter setting can be superseded by the ~JS instruction when received as part of a label format (refer to the <i>ZPL II Programming Reference Volumes I and II</i>).</p> <p>NOTE: The difference between the value entered and 100% establishes how much backfeed occurs before the next label is printed. For example, a value of 40 means that 40% of the backfeed takes place after the label is removed or cut. The remaining 60% takes place before the next label is printed. A value of "before" means that all backfeed will take place before the next label is printed.</p>
	LABEL TOP	<p>Adjusting Label Top Position Press the RIGHT BLACK OVAL key to increase the value, press the LEFT BLACK OVAL key to decrease the value. The displayed value represents dots.</p> <p>Default: +0</p> <p>Range: -120 to +120 dot rows</p> <p>The label top position adjusts the print position vertically on the label. Positive numbers adjust the label top position further down the label (away from the printhead), negative numbers adjust the position up the label (toward the printhead).</p>
	LEFT POSITION	<p>Adjusting Left Position Press the LEFT BLACK OVAL key to move to the next position, press the RIGHT BLACK OVAL key to change between + and - and to increase the value of the digit. The displayed value represents dots.</p> <p>Default: 0000</p> <p>Range: -9999 to +9999</p> <p>NOTE: For a negative value, enter the value before changing to the minus sign.</p> <p>This parameter establishes how far from the left edge of a label the format will begin to print by adjusting horizontal positioning on the label. Positive numbers adjust the printing to the left by the number of dots selected, negative numbers shift printing to the right.</p>

Press	Display Shows	Action/Explanation
	HEAD TEST COUNT	<p>Setting the Head Test Count  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to change the value of the digit.</p> <p>Default: 0000 (disables the test)</p> <p>Range: 0000 to 9999</p> <p>The printer periodically performs a test of the printhead functionality, called a “printhead test” or “head test.” This parameter establishes how many labels are printed between these internal tests.</p>
	HEAD RESISTOR	<p>Setting the Head Resistor Value  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to increase the value of the digit.</p> <p>CAUTION: This parameter should only be changed by qualified personnel!</p> <p>Initial Value: Factory-set to match the printhead shipped with your printer.</p> <p>Default Value: 0500</p> <p>Range: 0500 to 1175</p> <p>This value has been pre-set at the factory to match the resistance value of the printhead. It will not need to be changed unless the printhead is replaced.</p> <p>CAUTION: DO NOT set the value higher than that shown on the printhead. Setting a higher value may damage the printhead!</p> <p>Before replacing a printhead, look on the bottom of the printhead element for the label that shows the resistance value (ohm value).</p>
	VERIFIER PORT	<p>Setting the Verifier Port  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Off</p> <p>Selections: Off, 1 VER-RPRNT, 2 VER-THRUPUT</p> <p>The auxiliary port is used to determine how the printer will react to the Zebra on-line verifier. There are currently three operating conditions for this port:</p> <ul style="list-style-type: none"> • Off: The verifier port is off. • 1 VER-RPRNT ERR: Label reprinted if verifier detects an error. If a bar code is near the upper edge of the label, the label will be fed out far enough to be verified and then backfed to allow the next label to be printed and verified. • 2 VER-THRUPUT: Allows greatest throughput but may not indicate a verification error immediately upon detection. May print from one to three labels before an error is recognized and printing stops. <p>For more information on the operation of the optional verifier, refer to the documentation provided with that option.</p>





Press	Display Shows	Action/Explanation
	APPLICATOR PORT	<p>Setting the Applicator Port  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Off</p> <p>Selections: Off, mode 1, mode 2, mode 3, mode 4</p> <p>Determines the action of the verifier port.</p> <ul style="list-style-type: none"> • Off: The applicator port is off. • Mode 1: Asserts the \simEND_PRINT signal low while the printer is moving the label forward. • Mode 2: Asserts the \simEND_PRINT signal high while the printer is moving the label forward. • Mode 3: Asserts the \simEND_PRINT signal low for 20 milliseconds when a label has been completed and positioned. Not asserted during continuous printing modes. • Mode 4: Asserts the \simEND_PRINT signal high for 20 milliseconds when a label has been completed and positioned. Not asserted during continuous printing modes.
	WEB S.	<p>These parameters are automatically set during the calibration procedure. They should only be changed by a qualified service technician. Refer to the maintenance manual for more information on these parameters.</p> <p>Press the NEXT/SAVE key repeatedly to skip these parameters.</p>
	MEDIA S.	
	RIBBON S.	
	MARK S.	
	MARK MED S.	
	MEDIA LED	
	RIBBON LED	
	MARK LED	




Press	Display Shows	Action/Explanation
	LCD ADJUST	<p>LCD Display Adjustment  Press the LEFT BLACK OVAL key to decrease the value (reduce brightness), press the RIGHT BLACK OVAL key to increase the value (increase brightness).</p> <p>Range: 00 to 19</p> <p>This parameter allows you to adjust the brightness of your display if your display is difficult to read.</p>
	FORMAT CONVERT	<p>Format Convert Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: None</p> <p>Selections: None, 150 → 300, 150 → 600, 200 → 600, 300 → 600</p> <p>Selects the bitmap scaling factor. The first number is the original dots per inch (d.p.i.) value; the second, the d.p.i. to which you would like to scale.</p>
	IDLE DISPLAY*	<p>Idle Display Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Firmware version</p> <p>Selections: mm/dd/yy (24 hour), mm/dd/yy (12 hour), dd/mm/yy (24 hour), dd/mm/yy (12 hour)</p> <p>This parameter selects the LCD display options for the real time clock (if installed).</p> <p>NOTE: If the default value is not selected, pressing either BLACK OVAL key will briefly display the firmware version of the printer.</p>
	RTC DATE*	<p>RTC Date  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to increase the value of the digit.</p> <p>This parameter allows you to set the date following the convention selected in "IDLE DISPLAY."</p>
	RTC TIME*	<p>RTC Time  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to increase the value of the digit.</p> <p>This parameter allows you to set the time following the convention selected in "IDLE DISPLAY."</p>

* Option required

Press	Display Shows	Action/Explanation
	IP RESOLUTION*	<p>IP Resolution  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Dynamic</p> <p>Selections: Dynamic, permanent</p> <p>Depending on the selection, allows either the user ("permanent") or the server ("dynamic") to select the IP address. For more information, refer to <i>ZebraNet Networking: PrintServer II Installation and User's Guide</i>.</p>
	IP PROTOCOLS*	<p>IP Protocols  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: All</p> <p>Selections: All, gleaning only, RARP, BOOTP, DHCP, DHCP/BOOTP</p> <p>If "dynamic" was chosen in the previous parameter, this selection determines the method(s) by which the PrinterServer will receive the IP address from the server. For more information, refer to <i>ZebraNet Networking: PrintServer II Installation and User's Guide</i>.</p>
	IP ADDRESS*	<p>IP Address  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to increase the value of the digit.</p> <p>This parameter allows you to select the IP address if "permanent" was chosen in "IP RESOLUTION." (If "dynamic" was chosen, the user cannot select the address.) For more information, refer to <i>ZebraNet Networking: PrintServer II Installation and User's Guide</i>.</p>
	SUBNET MASK*	<p>Subnet Mask  Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Permanent (user <i>must</i> set)</p> <p>Selections: Dynamic (user <i>may</i> set, but server can assign), permanent</p> <p>This parameter selects the part of the IP address that is considered to be part of the local network. It can be reached without going through the default gateway.</p>
	DEFAULT GATEWAY*	<p>Default Gateway  Press the LEFT BLACK OVAL key to move to the next digit position, press the RIGHT BLACK OVAL key to increase the value of the digit.</p> <p>This parameter allows you to select the IP address that the network traffic is routed through if the destination address is not part of the local network.</p>

* Option required

Press	Display Shows	Action/Explanation
	LANGUAGE	<p>Selecting the Display Language Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: English</p> <p>Selections: English, Spanish, French, German, Italian, Norwegian, Portuguese, Swedish, Danish, Spanish 2, Dutch, Finnish, Custom</p> <p>This parameter allows you to change the language used on the front panel display.</p>
	RFID TEST	<p>RFID Test Press the left oval key to select the QUICK test or the right oval key to select the SLOW test.</p> <p>NOTE: RFID media must be loaded and the appropriate tag type selected (or choose Autodetect) in order to run this test. Only the Texas Instruments' Tag-It® and Philips I•Code® RFID tags are supported.</p> <p>QUICK - Performs the RFID Test and displays either a PASSED! or FAILED! result for the entire test. The user is then prompted to CONTINUE.</p> <p>SLOW - Performs the same RFID Test but displays the status of each function tested. There is a one second pause between the displaying of the result of the current functions test and the beginning of the next function test. If a particular functions passes, the user will see an OK! for that function. If a particular function fails, the user will see a FAILED! for that function and then is prompted to CONTINUE.</p>
	RFID TAG TYPE	<p>Selecting the RFID Tag Type Press the right or left oval key to display other choices.</p> <p>NOTE: Only the Texas Instruments' Tag-It® and Philips Semiconductors' I•Code® RFID tags are supported.</p> <p>Default: None Choices: Autodetect, None, Tag-It, ICODE</p> <p>This parameter allows you to change the type of RFID tag being used. If the user is unsure of the type of tag being used, select Autodetect.</p>
	RFID ERR STATUS	Displays the last RFID error status message received.
<p>You have now completed the entire configuration and calibration sequence. You may either press the NEXT/SAVE key or the SETUP/EXIT key.</p>		

Press	Display Shows	Action/Explanation
	DARKNESS	<p>You are now back at the first parameter in the configuration sequence.</p> <p>NOTE: If you pressed the NEXT/SAVE key but are through programming the printer configuration, you may press the SETUP/EXIT key and continue with the "SAVE SETTINGS" function.</p>
	SAVE SETTINGS	<p>Save Settings Press the RIGHT or LEFT BLACK OVAL key to display other choices.</p> <p>Default: Permanent</p> <p>Selections: Permanent, temporary, cancel, load defaults, load last save.</p> <p>This display appears when you attempt to exit the configuration mode.</p> <ul style="list-style-type: none"> • Permanent: Permanently saves the changes, even when printer power is turned off. • Temporary: Saves the changes until changed again or until power is turned off. • Cancel: Cancels all changes since you entered the configuration mode except for darkness and tear-off position (if they were changed). • Load defaults: Loads factory defaults. <p>NOTE: Loading factory defaults will require calibration.</p> <ul style="list-style-type: none"> • Load last save: Loads the values from the last permanent save.
	PRINTER READY	<p>Press the NEXT/SAVE key to activate the displayed choice.</p> <p>You have exited the configuration and calibration sequence and are now ready for normal printer operation</p>

Routine Care and Adjustment

Cleaning

The following table provides a brief cleaning schedule. Specific cleaning procedures are provided on the following pages.

Area	Method	Interval
Printhead	Solvent*	Direct thermal print mode: After every roll of media (or 500'/152 m of fanfold media).
Platen roller	Solvent*	
Transmissive sensor	Air blow	
Black mark sensor	Air blow	
Media path	Solvent*	Thermal transfer print mode: After every roll of ribbon.
Ribbon sensor	Air blow	
Label available sensors	Air blow	Monthly
Tear-off/peel-off bar	Solvent*	As needed
Snap plate	Solvent*	
Cutter	Solvent*	
* Zebra recommends using a solvent containing 90% isopropyl alcohol.		

CAUTION: Use only the cleaning agents indicated. Zebra Technologies Corporation will not be responsible for any other fluids being used on this printer.

Cleaning the Exterior

The exterior surfaces of the printer may be cleaned with a lint-free cloth. Do not use harsh or abrasive cleaning agents or solvents. If necessary, a mild detergent solution or desktop cleaner may be used sparingly.

Cleaning the Interior

Inspect this area after every four rolls of media. Remove any dirt and lint from the interior of the printer using a soft bristle brush and/or vacuum cleaner.

Cleaning the Printhead and Platen Roller

Inconsistent print quality, such as voids in the bar code or graphics, may indicate a dirty printhead. For best results, perform the following cleaning procedure after every roll of ribbon.

NOTE: You do not need to turn off the printer before cleaning the printhead. If power is turned off, all label formats and images, as well as any temporarily saved parameter settings stored in the printer's internal memory, will be lost. When power is turned back on, you will need to reload these items.

To clean the printhead, refer to [Figure 25](#) and follow these steps:

1. Open the printhead.
2. Remove the media and ribbon (if loaded).
3. Moisten an applicator tip with Zebra-recommended solvent and wipe along the print elements from end to end. (The print elements are on the brown strip just behind the chrome strip on the printhead.) Allow a few seconds for the solvent to evaporate.

4. Rotate the platen roller and clean thoroughly with solvent and an applicator.
5. Brush/vacuum any accumulated paper lint and dust away from the rollers.
6. Reload ribbon and/or media, and close and the printhead.

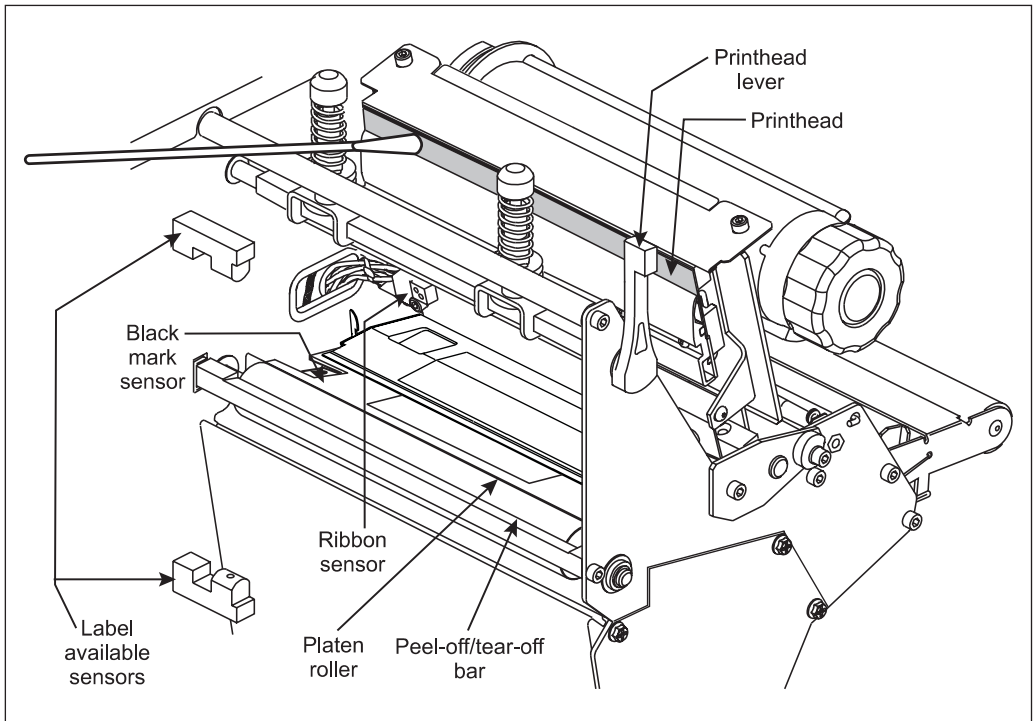


Figure 25

Cleaning the Sensors

The media, ribbon, and label available sensors should be cleaned on a regular basis to ensure proper operation of the printer. To locate these sensors, refer to Figure 25, [Figure 6 on page 15](#), and [Figure 7 on page 16](#). Brush/vacuum any accumulated paper lint and dust off of these sensors.

Cleaning the Snap Plate

Clean the snap plate to remove label adhesive or a label that has adhered to the underside of the snap plate.

Refer to [Figure 26](#).

1. Carefully push the tabs on the snap plate towards the rear of the printer and gently lift up on the snap plate.

CAUTION: Use care to not bend, twist, or otherwise deform the tabs!

2. Remove the snap plate from the printer.
3. Clean the snap plate with cleaning solvent and a soft cloth.

Refer to [Figure 27](#).

4. To reinstall the snap plate, insert the the bottom of the snap plate (with the notches) into the two slots of the media pathway.
5. Press down on the right and left end of the snap plate (near the tabs) and lock into place.

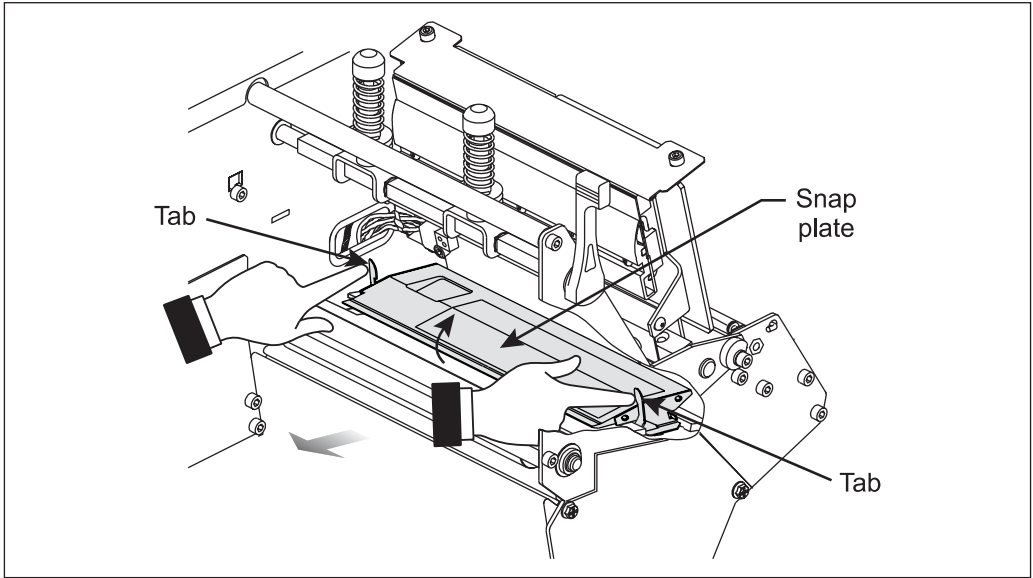


Figure 26

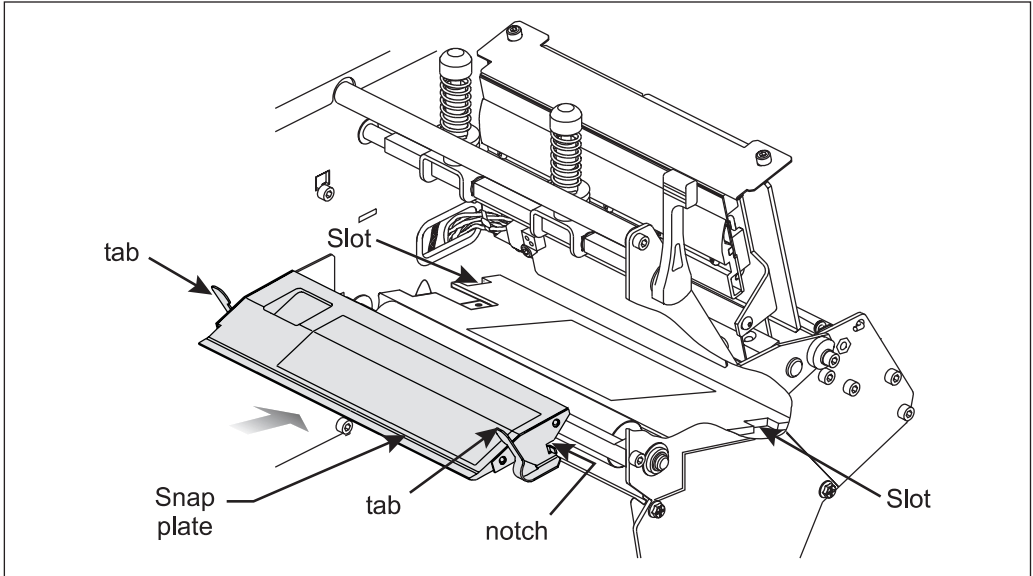


Figure 27

Cleaning the Cutter Module

(For printers equipped with the optional cutter.)

If labels are not being cut properly or if the cutter jams with labels, turn off the printer power and unplug the printer. Then, clean the stationary cutter blade with cleaning solvent. This will remove label adhesive and/or paper debris. If further cutter cleaning is necessary, or if the cutter continues to perform unsatisfactorily, contact an authorized service technician.

Lubrication

CAUTION! No lubricating agents of any kind should be used on this printer! Some commercially available lubricants will damage the finish and the mechanical parts if used.

Fuse Replacement

The printer uses a metric-style fuse (5 X 20 mm IEC) rated at F5A, 250V. The end caps of the fuse must bear the certification mark of a known international safety organization (see [Figure 36 on page 98](#)). The printer comes with two approved fuses: one in the circuit and one in the “spare fuse” holder.

1. Turn off the printer power and unplug the power cord from the back of the printer. See [Figure 28](#).
2. Using a small-blade screwdriver or similar tool, remove the fuse holder from the printer.
3. Remove the faulty fuse and install a new fuse of the correct type. Refer to [Figure 29](#). The fuse that goes into the printer first is the one that is “in-circuit.” If you use the spare fuse, be sure to order a replacement fuse (fuses can be ordered from your Zebra distributor).

4. Snap the fuse holder back into position.
5. Reconnect the power cord.

If the new fuse fails right away, the printer has an internal component failure and must be repaired.

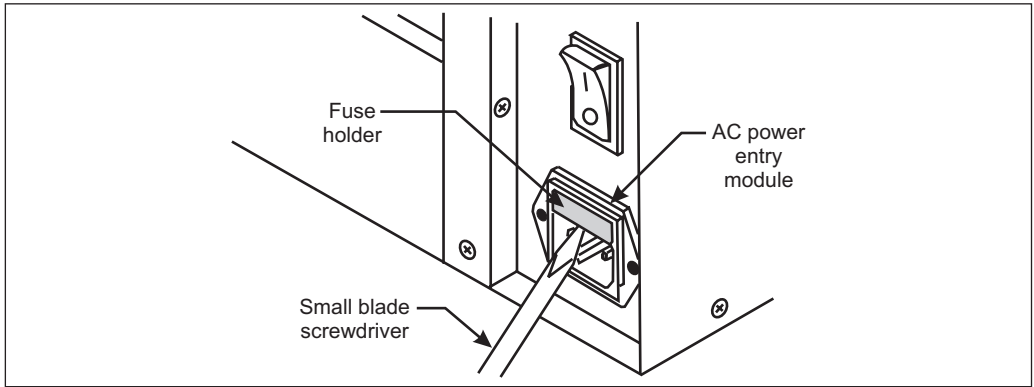


Figure 28

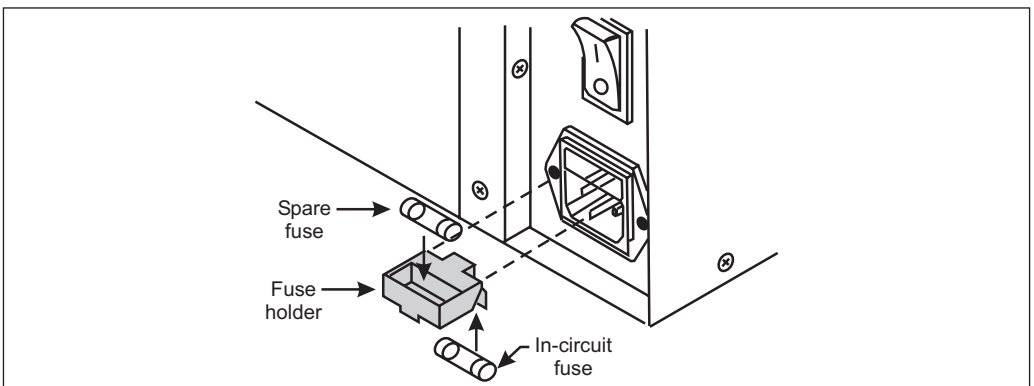


Figure 29

Adjustments

Toggle Positioning

Both toggles should be positioned so that they provide even pressure on the media. The toggles are positioned by sliding them to the desired location. On media too narrow to accommodate both toggles, position one toggle over the center of the media and decrease the pressure on the unused toggle.

NOTE: Make sure that the toggle pressure is even across the width of the media. Otherwise, the media and/or ribbon may “drift.”

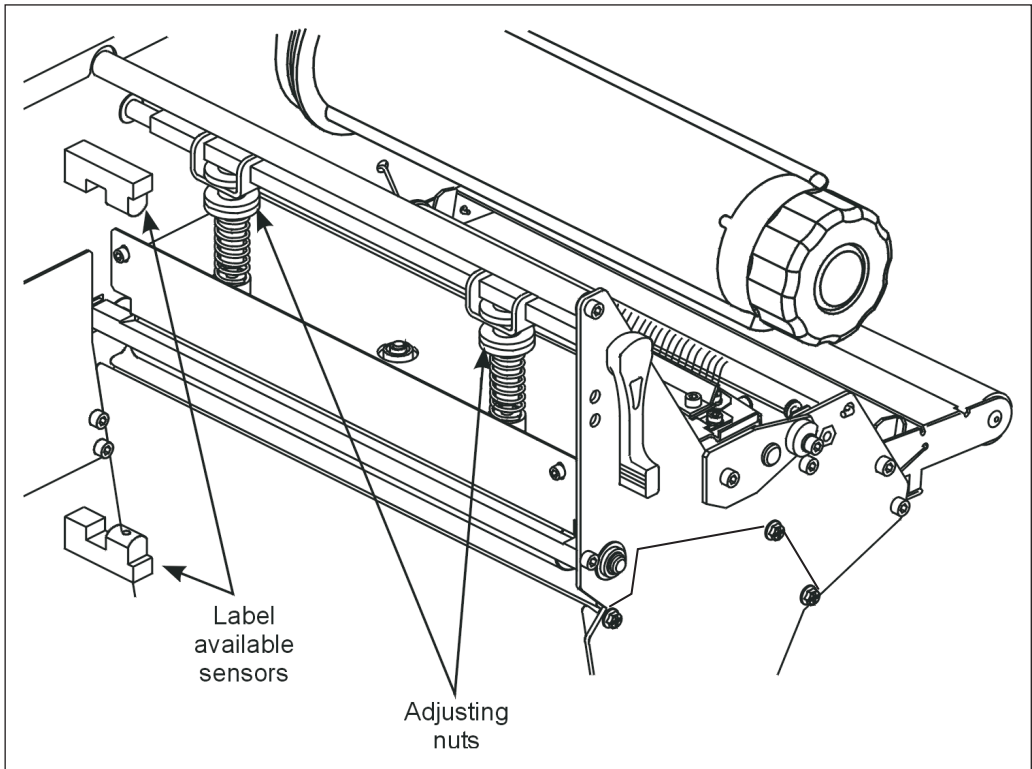


Figure 30

Printhead Pressure Adjustment

This adjustment may be necessary if printing is too light on one side or if thick media is used. Refer to [Figure 30](#).

1. Perform the toggle positioning procedure. If the problem is solved, you may stop here; otherwise, continue with the rest of this procedure.
2. Print some labels at 2.4"/61 mm per second by running the PAUSE key self test (see [page 89](#)).
3. While printing labels, lower the darkness setting until a gray level of printing is seen.
4. Loosen the knurled (upper) locking nuts at the top of the toggle assembly/assemblies.
5. Increase or decrease spring pressure using the knurled (lower) adjusting nuts on the shafts of the toggle(s) until the left and right edges of printed area are equally dark.

NOTE: Printhead life can be maximized by using the lowest pressure that produces the desired print quality.

6. Increase darkness to the optimum level for the media being used.
7. Retighten locking nuts.

Media Sensor Position Adjustment

See [“Positioning the Media Sensors” on page 14](#).



LED Error Conditions and Warnings

Error Condition Ribbon Out

Problem	Solution
In thermal transfer mode, the ribbon is not loaded <i>or</i> loaded incorrectly.	Load the ribbon correctly. See "Ribbon Loading" on page 43 .
In thermal transfer mode, the ribbon sensor is not sensing correctly loaded ribbon.	Perform the media and ribbon sensor calibration (see page 21).
In direct thermal mode, when ribbon is not used:	Put the printer in direct thermal mode via the front panel and remove ribbon (if loaded).
	Ensure that the printer driver or software settings are correctly set (if applicable).

Error Condition Paper Out

Problem	Solution
The media is not loaded <i>or</i> loaded incorrectly.	Reload the media. Refer to "Roll Media Loading" on page 31 .
The media sensor is not adjusted properly.	Check the position of the upper and lower media sensors. See "Positioning the Media Sensors" on page 14 .
The printer is set for non-continuous media, but continuous media is loaded.	Either load the correct media or set the printer for the correct media type via the front panel.
	Ensure that the printer driver or software settings are correctly set (if applicable).
	Calibrate the printer (see page 21).
The incorrect media sensor is being used.	Via the front panel, check the sensor type to ensure that the correct one is used for the media loaded. See page 20 . Calibrate the printer (see page 21).

Error Condition Head Open

Problem	Solution
The printhead is not fully closed.	Close the printhead.

Error Condition Head Element Bad

Problem	Solution
One or more of the printhead elements have failed the printhead element test.	If the failed elements impact your printing application, replace the printhead. To override this error, disable the head test count feature on the front panel by defaulting the value to "0000." See page 63 .

Warning Ribbon In

Problem	Solution
The ribbon is loaded.	Remove the ribbon and set the printer to direct thermal mode.
	Ensure that the printer driver and/or software settings are correctly set (if applicable).

Warning Head Too Hot

Problem	Solution
The printhead is over temperature.	Allow the printer to cool. Printing automatically resumes when the printhead elements cool to an acceptable operating temperature.

Warning Head Cold

Problem	Solution
The printhead is under temperature.	Continue printing while the printhead reaches the correct operating temperature. If the error remains, the environment may be too cold for proper printing. Relocate the printer to a warmer area.

Warning Cutter Jammed

Problem	Solution
Cutter blade is in the media path.	Turn off the printer power and unplug the printer. Inspect the cutter module for debris and clean as needed following the cleaning instructions on page 74 .

Out of Memory*

Problem	Solution
*There is not enough memory to perform the function shown on the second line of the error message.	Insufficient DRAM for the label length, downloaded fonts/graphics, and images.
	Ensure that the device, such as FLASH memory or PCMCIA card, is installed and not write protected or full.
	Ensure that the data is not directed to a device that is not installed or available.

Print Quality Problems

General Print Quality Issues

Problem	Solution
You are using an incorrect media and ribbon combination for your application.	Consult your authorized Zebra reseller/distributor for information and advice.
The printer is set at the incorrect print speed.	For optimal print quality, set the print speed to the lowest possible setting via ZPL II, the driver, or the software.
The printer is set at the incorrect darkness level.	For optimal print quality, set the darkness to the lowest possible setting via the front panel, the driver, or the software.
The printhead is dirty.	Clean the printhead according to the instructions on page 70 .
There is light printing (or no printing) on the left or right side of the label <i>or</i> the printed image is not sharp.	The toggle pressure needs to be adjusted. Follow the printhead pressure adjustment instructions on page 77 .

Gray lines on blank labels with no consistent pattern

Problem	Solution
The printhead is dirty.	Clean the printhead according to the instructions on page 70 .

Light, consistent vertical lines running through all of the labels

Problem	Solution
The printhead or platen roller is dirty.	Clean the printhead, platen roller, or both according to the instructions on page 70 .

Intermittent creases on the left and right edges of the labels

Problem	Solution
There is too much toggle pressure on the printhead.	Reduce the toggle pressure. Refer to the printhead pressure adjustment on page 77 .

Wrinkled Ribbon

Problem	Solution
The ribbon is not loaded correctly.	Load the ribbon correctly. See "Ribbon Loading" on page 43.
The darkness setting is incorrect.	Set the darkness to the lowest possible setting for good print quality. See "Darkness" on page 50.
Incorrect printhead pressure or balance.	Set the pressure to the minimum required for good print quality. See "Printhead Pressure Adjustment" on page 77.
The media is not feeding correctly. It is "walking" from side to side.	Make sure that the media guide and media supply guide touch the edge of the media.

Communications

A label format was sent to the printer but not recognized. The DATA light does not flash.

Problem	Solution
The communication parameters are incorrect.	Check the printer driver or software communications settings (if applicable).
	Check the printer host port setting via the front panel (see page 57). Select the port that matches the one being used by the host.
	Are you using the correct communication cable? See page 26 for the requirements.
	Via the front panel, check the protocol setting. It should be set to "none." See page 58 .
	Ensure that the correct driver is being used, if applicable.

A label format was sent to the printer. Several labels print, then the printer skips, misplaces, misses, or distorts the image on the label.

Problem	Solution
The host is set to EPP parallel communications.	Change the settings on the computer host to standard parallel communications.
The serial communication settings are incorrect.	Ensure that the flow control settings match.
	Check the communication cable length. See page 26 for requirements.
	Check the printer driver or software communications settings (if applicable).

A label format was sent to the printer but not recognized. The DATA light flashes but no printing occurs.

Problem	Solution
The prefix and delimiter characters set in the printer do not match the ones in the label format.	Verify the prefix and delimiter characters. See page 60 .
Incorrect data is being sent to the printer.	Ensure that ZPL is being used.
	Check the communication settings on the computer. Ensure that they match the printer settings.

RFID Symptoms

Problem	Diagnosis	Solution
RFID tags not programming (general).	Printer not set-up properly	Print a Configuration label (Cancel Key Self Test) to verify RFID version. Run an RFID Self Test (through the Front Panel). Make note of Error Messages and refer to that symptom in this table.
	Check if supported RFID media is loaded properly.	Reload media.
RFID VOID label is printed.	Verify tag type is properly selected in ZPLII and/or through front panel.	Use RFID media with supported tag type. Edit ZPLII to select proper tag type or set through control panel. Edit ZPL II to increase retries.
	ZPL II is attempting to write to a non-existent block.	Some tag's (e.g. Tag-It) blocks are identified as 0 - 7. If ZPL II attempts to write to block "8", it will fail. Check the ZPL II commands and make the appropriate corrections.
	Verify voided tag on external reader.	Discard bad tag (media problem)
	Error Message appears on Front Panel	Refer to that symptom in this table.
Bad RFID Labels - No VOID	Verify ZPL II for RFID commands.	Add proper RFID commands to ZPL II.
	Read/Program labels externally.	Bad tag if it fails external verify. Call service technician if it passes external verify.
NO TAG Error Message	Tag is out of reach of the antenna or too close.	Verify tag alignment
	Wrong type of tag was selected.	Verify tag type is properly selected in ZPLII and/or through front panel. Verify that the label has a transponder in it.
	Block is write protected	Ensure that the tag is not write protected .

Problem	Diagnosis	Solution
NO TAG Error Message (Continued)	Tags have metal/aluminum in them.	Confirm that the tags meet requirements (i.e. no metal/aluminum in them) Reload with proper tags.
	ZPL II giving insufficient amount of retries.	Increase the number of retries in the ZPL II commands.
	Tag is bad.	Load new tags.
PK TIMEOUT Error Message	An attempt was made to communicate to the internal hardware, but timed out.	Retry printing label.
		Cycle power and try printing label again.
		Verify internal cabling connections
		Call service technician.
Other Error Messages	Problem not correctable by User.	Call service technician.

Printer Diagnostics

Power-On Self Test

A power-on self test (POST) is performed automatically each time the printer is turned on. During this test sequence, the front panel lights and liquid crystal display monitor the progress of the POST. If the printer fails any of these tests, the word “FAILED” will be added to the display. If this occurs, notify an authorized Zebra reseller.

Additional Printer Self Tests

These self tests produce sample printouts and provide specific information that help determine the operating conditions for the printer.

Each self test is enabled by pressing a specific front panel key or combination of keys while turning the POWER switch on. Keep the key(s) depressed until the DATA light turns off. When the power-on self test is complete, the selected self test starts automatically.

NOTES: When performing self tests, avoid sending a label format to the printer. In the case of a remote host, disconnect all data interface cables from the printer.

When canceling a self test prior to its actual completion, always turn the printer power off and then back on to reset the printer.

When performing these self tests while in the peel-off mode, you must remove the labels as they become available.

If your media is not wide enough or long enough, unexpected and/or undesired results may occur. Make sure that your print width is set correctly for the media you are using before you run any self tests, otherwise the test may print out on the platen roller. See [page 52](#) for information on setting the print width.

CANCEL Key Self Test

This self test prints a listing of the configuration parameters currently stored in the printer's memory. See Figure 31 (depending on the options ordered, your label may look different).

1. Turn the printer off.
2. Press and hold the CANCEL key while turning on the power.

The configuration may be changed either temporarily (for specific label formats or ribbon and label stock) or permanently (by saving the new parameters in memory). Saving new parameters occurs whenever a calibration procedure is performed. Refer to [page 19](#) for further information about the configuration procedure.

PRINTER CONFIGURATION	
Zebra Technologies ZTC 140k1111-200dp1	
+10.....	DARKNESS
+000.....	TEAR OFF
TEAR OFF.....	PRINT MODE
NON-CONTINUOUS.....	MEDIA TYPE
WEB.....	SENSOR TYPE
THERMAL-TRANS.....	PRINT METHOD
128 0/8 MM.....	PRINT WIDTH
1722.....	LABEL LENGTH
39.0IN 980MM.....	MAXIMUM LENGTH
PARALLEL.....	PARALLEL COMM.
RS232.....	SERIAL COMM.
19200.....	BAUD
8 BITS.....	DATA BITS
NONE.....	PARITY
2 STOP BITS.....	STOP BITS
XON/XOFF.....	HOST HANDSHAKE
NONE.....	PROTOCOL
000.....	NETWORK ID
NORMAL MODE.....	COMMUNICATIONS
< > 7EH.....	CONTROL PREFIX
< > 5EH.....	FORMAT PREFIX
< > 2CH.....	DELIMITER CHAR
ZPL IIC.....	ZPL MODE
FEED.....	MEDIA POWER UP
FEED.....	HEAD CLOSE
DEFAULT.....	BACKFEED
+010.....	LABEL TOP
+0000.....	LEFT POSITION
0000.....	HEAD TEST COUNT
0500.....	HEAD RESISTOR
OFF.....	VERIFIER PORT
OFF.....	APPLICATOR PORT
PULSE MODE.....	START PRINT SIG
FEED MODE.....	RESYNCH MODE
ENABLED.....	REPRINT MODE
DISABLED.....	REPRINT MODE
057.....	WEB S.
075.....	MEDIA S.
064.....	RIBBON S.
092.....	MARK S.
092.....	MARK MED S.
013.....	MEDIA LED
046.....	RIBBON LED
000.....	MARK LED
+10.....	LCD ADJUST
DPSWFXM.....	MODES ENABLED
1024 8/MM FULL.....	MODES DISABLED
	RESOLUTION
	SOCKET 1 ID
V33.10.1P1 <-.....	FIRMWARE
	HARDWARE ID
CUSTOMIZED.....	CONFIGURATION
4096	RAM
NONE.....	MEMORY CARD
1536.....	ONBOARD FLASH
NONE.....	FORMAT CONVERT
007 POWER SUPPLY.....	J12 INTERFACE
*** CUTTER.....	J11 INTERFACE
005 DISPLAY.....	J10 INTERFACE
*** NONE.....	J9 INTERFACE
*** NONE.....	J8 INTERFACE
*** NONE.....	J7 INTERFACE
	TWINAX/COAX ID
NONE.....	ZEBRA NET II
hfDep: Version 1.....	RFID VERSION
2000-05-17 12:27:15	TIME STAMP

FIRMWARE IN THIS PRINTER IS COPYRIGHTED

Figure 31

PAUSE Key Self Test

This self test can be used to provide the test labels required when making adjustments to the printer's mechanical assemblies. See the sample printout in Figure 32.

1. Turn off the printer.
2. Press and hold the PAUSE key while turning on the power.
 - The initial self test prints 15 labels at 2.4"/61 mm per second per second, then automatically pauses the printer. Each time the PAUSE key is pressed, an additional 15 labels print.
 - While the printer is paused, pressing the CANCEL key alters the self test. Now each time the PAUSE key is pressed the printer prints 15 labels at 6"/152 mm per second.
 - While the printer is paused, pressing the CANCEL key again alters the self test again. Each time the PAUSE key is pressed the printer prints 50 labels at 2.4"/61 mm per second.
 - While the printer is paused, pressing the CANCEL key again alters the self test a third time. Now each time the PAUSE key is pressed the printer prints 50 labels at 6"/152 mm per second.
 - While the printer is paused, pressing the CANCEL key again alters the self test a fourth time. Each time the PAUSE key is pressed the printer prints 15 labels at the printer's maximum speed.
 - To exit this self test at any time, press and hold the CANCEL key.

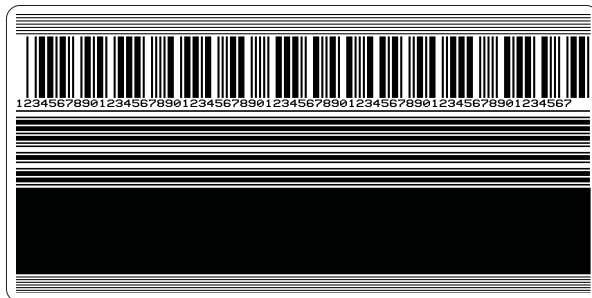


Figure 32

FEED Key Self Test

See Figure 33.

1. Turn off the printer.
2. Press and hold the FEED key while turning on the power.

The FEED key self test prints out at various darkness settings above and below that of the darkness value shown on the configuration label. Look at these labels and determine which one has the best darkness setting for your application. This value can be entered into the printer by setting the darkness during the configuration procedure. Refer to [page 50](#) for more information.

The value printed on that label is added to (plus) or subtracted from (minus) the darkness value specified on the configuration label. The resulting numeric value (0 to 30) is the best darkness value for that specific media/ribbon combination.



Figure 33

FEED Key and PAUSE Key Self Test

1. Turn off the printer.
2. Press and hold the FEED and PAUSE keys while turning on the power.

Performing this self test temporarily resets the printer configuration to the factory default values. These values will be active only until power is turned off unless you save them permanently in memory.

Communications Diagnostics Test

This test is controlled from the front panel display. Refer to [page 59](#). A typical printout from this test is shown in Figure 34. Turn off the power to exit this self test.

NOTE: This label will be inverted when printed.

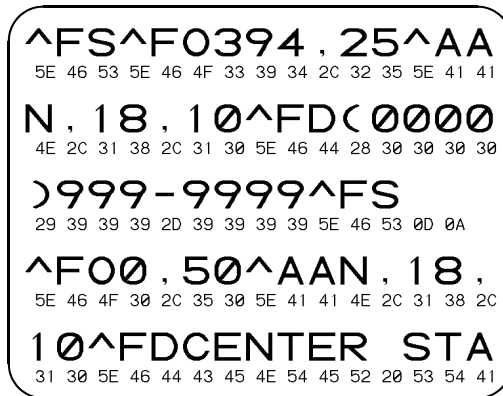


Figure 34

Additional Printer Diagnostics

Additional diagnostic tests are available for this printer, however they are beyond the scope of this user's guide. Refer to the maintenance manual for information about these additional tests.



Specifications

NOTE: Printer specifications are subject to change without notice.

Media Handling

- Tear-off mode: Labels are produced in strips.
- Peel-off mode: Labels are dispensed and peeled from the liner as needed.
- Cutter mode: Labels are printed and individually cut.
- Rewind mode: Labels are rewound internally.

Options

- Cutter
- Rewind
- Cutter-rewind
- Cutter tray
- Double-hinged media door with clear panel
- Applicator interface
- Real time clock
- Advance counter
- Bar-One[®] Windows[™]-based WYSIWYG on-screen label design and print application software
- IBM twinax interface
- IBM coax interface
- ZebraNet PrintServer II, including Ethernet interface (10Base-T), WebView graphical setup and printer control, and Alert unsolicited error notification
- RS-485 interface
- Font cards
- DRAM memory expandable to 12 MB
- Memory cards
- Programmable print speeds
- Printer drivers for Windows[™] operating systems

Zebra Programming Language (ZPL II®)

- Downloadable graphics, scalable and bitmap fonts, and label formats
- Object copying between memory areas (RAM, memory card, and internal FLASH)
- Code Page 850 character set
- Adjustable print cache
- Data compression
- Automatic virtual input buffer management
- Automatic memory allocation
- Format inversion
- Mirror image printing
- Four-position field rotation (0°, 90°, 180°, and 270°)
- Slew command
- Programmable quantity with print, pause, and cut control
- Communicates in printable ASCII characters
- Error-checking protocol
- Controlled via mainframe, mini-computer, PC, portable data terminal
- Serialized fields
- In-spec OCR-A and OCR-B
- UPC/EAN
- User-programmable password
- Status message to host upon request

Bar Codes

- Bar code ratios - 2:1, 7:3, 5:2, & 3:1
- Codabar (supports ratios of 2:1 up to 3:1)
- CODABLOCK
- Code 11
- Code 39 (supports ratios of 2:1 up to 3:1)
- Code 49 (2-dimensional bar code)
- Code 93
- Code 128 (with subsets A, B, and C and UCC case C codes)
- Data Matrix
- EAN-8, EAN-13, EAN extensions
- Industrial 2 of 5
- Interleaved 2 of 5 (supports ratios of 2:1 up to 3:1, Modulus 10 Check Digit)
- ISBT-128
- LOGMARS
- MaxiCode
- Micro PDF
- MSI
- PDF-417 (2-dimensional bar code)
- Plessey
- POSTNET
- QR-Code
- Standard 2 of 5
- UPC-A, UPC-E, UPC extensions
- Check digit calculation where applicable

General Specifications

General Specifications		R-140	
Height		15.5"	393.7 mm
Width		11.15"	283.2 mm
Depth		19.5"	495.3 mm
Weight (without options)		55 lb	25 kg
Electrical	General (auto adjusting)		90-264 VAC; 48-62 Hz
	Power consumption	Printing PAUSE test label at slowest speed	180 W
		Printer idle	19 W
	Compliance		Complies with FCC class "A" and Canadian Doc. class "A" rules. Carries the CE mark of compliance.
Temperature	Operating environment	Thermal transfer	41° to 104° F 5° to 40° C
		Direct thermal	32° to 104° F 0° to 40° C
	Storage		-40° to 140° F -40° to 60° C
Relative humidity	Operating environment		20 to 85% non-condensing
	Storage		5 to 85% non-condensing

Printing Specifications

Printing Specifications			R-140
Resolution			203 dots/inch (8 dots/mm)
Dot size (width x length)			0.0049" x 0.0049" (.125 x .125 mm)
First dot location from inside media edge			0.10" ± .035" (2.5 mm ± .89 mm)
Maximum print width			5.04" (128 mm)
Print length (max.)	Non-continuous printing	With standard memory	39" (991 mm)
		With 12 MB memory	39" (991 mm)
	Continuous printing	With standard memory	121" (3073 mm)
		With 12 MB memory	150" (3810 mm)
Bar code modulus ("X" dim.)	Ladder (rotated) orientation		4.9 mil to 49 mil
	Picket fence (non-rotated)		4.9 mil to 49 mil
Thin-film printhead with Element Energy Equalizer (E3) [®]			Yes

Ribbon Specification

Ribbon Specifications			R-140
Ribbon must be wound with the coated side out.			
Ribbon width (Zebra recommends using ribbon at least as wide as the media to protect the printhead from wear.)	Minimum	1.57" (40 mm)	
	Maximum	5.10" (130 mm)	
Standard lengths	2:1 media to ribbon roll ratio		984 ft. (300 m)
	3:1 media to ribbon roll ratio		1476 ft. (450 m)
Ribbon core inside diameter			1.0" (25.4 mm)
Maximum ribbon roll outside diameter			3.2" (81.3 mm)

Media Specifications

Media Specifications		Standard	Smart Media (RFID)	
Minimum label length*	Tear-off	0.7" (18 mm)		
	Peel-off	0.5" (13 mm)		
	Cutter	1.5" (38 mm)		
	Rewind	0.25" (6 mm)		
Total media width (label + liner, if any)	Minimum	1.57" (40 mm)	3.0" (76 mm)	
	Maximum	5.51" (140 mm)	5.51" (140 mm)	
Total thickness (includes liner, if any)	Minimum	0.003" (0.076 mm)	0.003" (0.076 mm)	
	Maximum	0.012" (0.305 mm)	0.010" (0.254 mm) excluding IC Chip	
Cutter maximum full-width media thickness		.009" (.23 mm)		
Roll media core inside diameter		3" (76 mm)	4.0" (102 mm)	
Maximum roll diameter		8.0" (203 mm)	6.0" (152 mm)	
RFID Tag Types			Phillips I-Code	
			Texas Instruments Tag-It	
Inter-label gap	Minimum	0.079" (2 mm)		
	Preferred	0.118" (3 mm)		
	Maximum	Maximum inter-label gap = 2 x (label length for which you have calibrated the printer + 1")		
Maximum internal fanfold media pack size (label + liner) L x W x H		8.0" x 5.51" x 4.5" (203x140x114 mm)		
Ticket/tag sensing notch L x W		0.12" x .25" (3 mm) x (6 mm)		
Ticket/tag sensing hole diameter		0.125" (3 mm)		
Effective leading edge registration accuracy*	Vertical	±0.070" (±1.8 mm)		
	Horizontal	±0.070" (±1.8 mm)		
Additional specs. for black mark sensing	Mark length (measuring parallel to label/tag edge)	Minimum	0.12" (3 mm)	
		Maximum	0.43" (11 mm)	
	Mark width (measuring perpendicular to label/tag edge)	Minimum	0.43" (11 mm)	
		Maximum	Full media width	
	Mark location		Marks must be located within .040" (1 mm) of the inside media edge.	
	Mark density		> 1.0 ODU (Optical Density Unit)	
	Maximum density of the back of the media on which the black mark is printed		0.5 ODU	

* Media registration and minimum label length are affected by media type and width, ribbon type, print speed, and printer mode of operation. Performance improves as these factors are optimized. Zebra recommends always qualifying any application with thorough testing.

Power Line Cord Specifications

- The overall length must be less than 9.8 feet (3.0 meters).
- It must be rated for at least 5 A, 250 V.
- The chassis ground (earth) **MUST** be connected to assure safety and reduce electromagnetic interference. The ground connection is handled by the third wire (earth) in the power line cord. See Figure 35.
- The AC power plug and IEC 320 connector must bear the certification mark of at least one of the known international safety organizations shown in Figure 36.

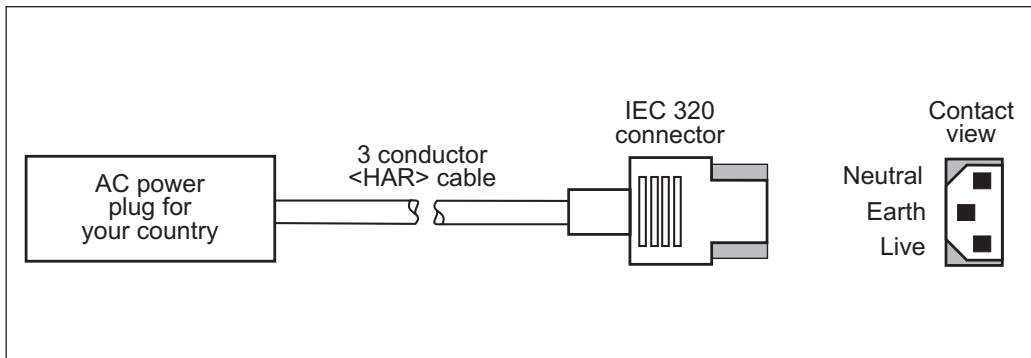


Figure 35

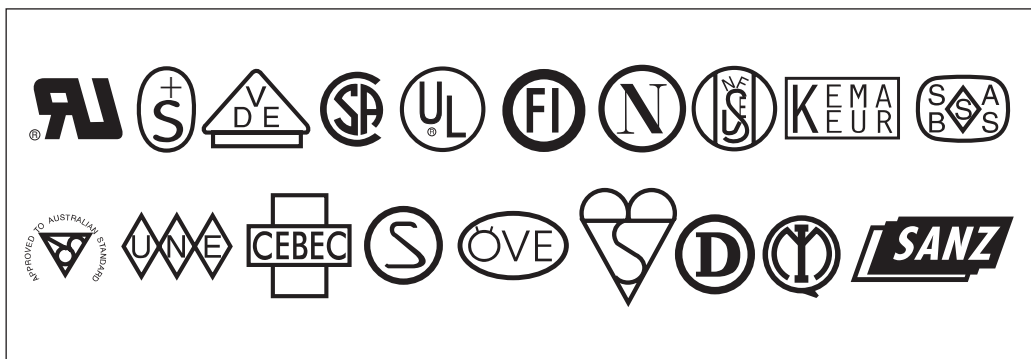


Figure 36

Printer Interface Technical Information

RS-232/RS-422/RS-485 Serial Data Port

The connections for these standard interfaces are made through the DB25S connector on the rear panel. For all RS-232 input and output signals, the printer follows both the Electronics Industries Association's (EIA) RS-232 specifications and the Consultative Committee for International Telegraph and Telephone (CCITT) V.24 standard signal level specifications.

The following table shows the pin configuration and function of the rear panel serial data connector on the printer.

Pin No.	Description
1	FG (frame ground) for cable shield
2	TXD (RS-232 transmit data) output from printer
3	RXD (RS-232 receive data) input to printer
4	RTS (RS-232 request to send) output from printer
6	DSR (data set ready) input to printer
7	SG (signal ground) for RS-232
9	+5 VDC source output (1 Amp maximum)
11	SGR (signal ground reference) for RS-422/RS-485
13	Data input B(-); RS-422/RS-485
14	Data output B(-); RS-422/RS-485
16	Data input A(+); RS-422/RS-485
19	Data output A(+); RS-422/RS-485
20	DTR (RS-232 data terminal ready) output from printer
NOTE: Pins 5, 8, 10, 12, 15, 17-18, 21-25 are not used and are unterminated.	

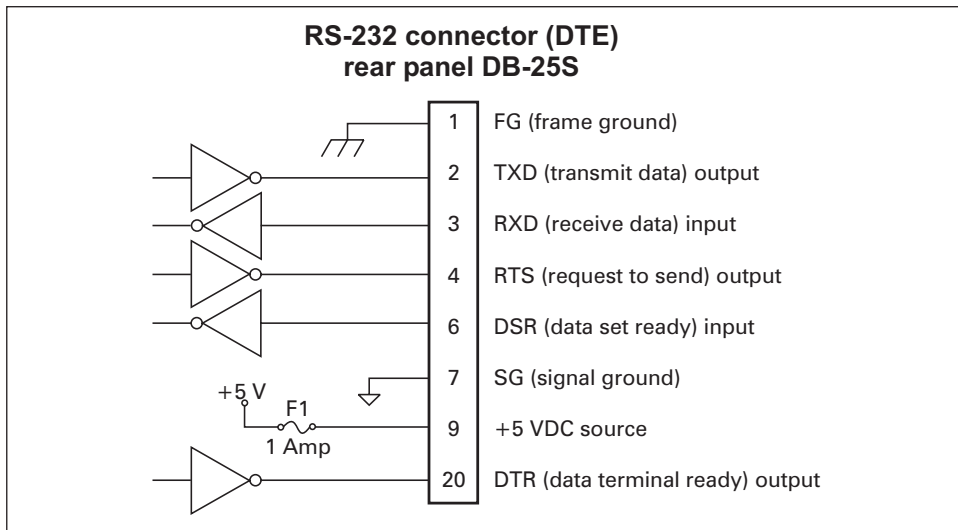


Figure 37

RS-232 Interconnections

The printer is configured as Data Terminal Equipment (DTE). Figure 37 illustrates the internal connections of the printer's RS-232 connector.

Figure 38 illustrates the connections required to interconnect the printer with the standard 9-pin serial port connector on a computer.

NOTES: If using a 9-pin to 25-pin adapter plug attached to the computer, use a null modem cable between the adapter plug and the printer.

To connect the printer to other DTE devices with DB-25 connectors (such as the serial port of a PC), an RS-232 null modem (crossover) cable should be used.

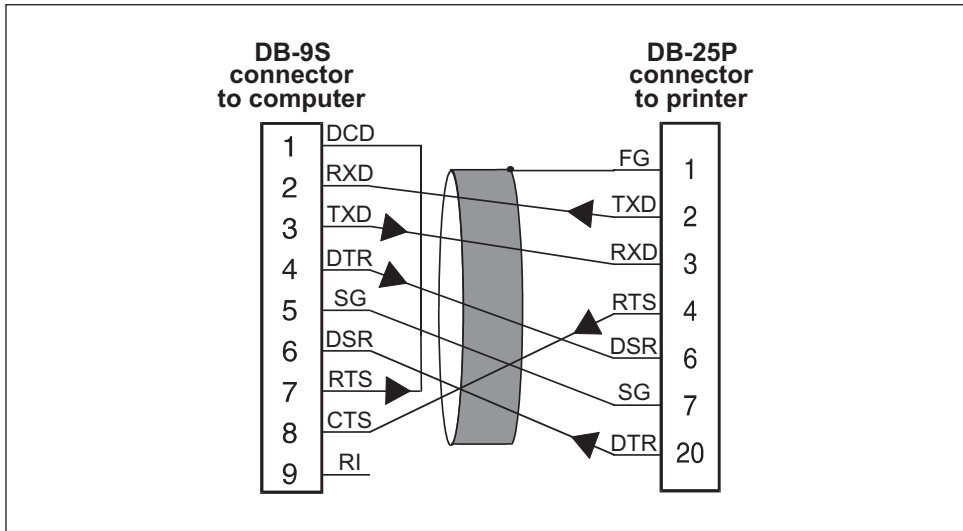


Figure 38

When the printer is connected via its RS-232 interface to Data Communication Equipment (DCE) such as a modem, use a standard RS-232 (straight-through) interface cable. Figure 39 illustrates the connections required for this cable.

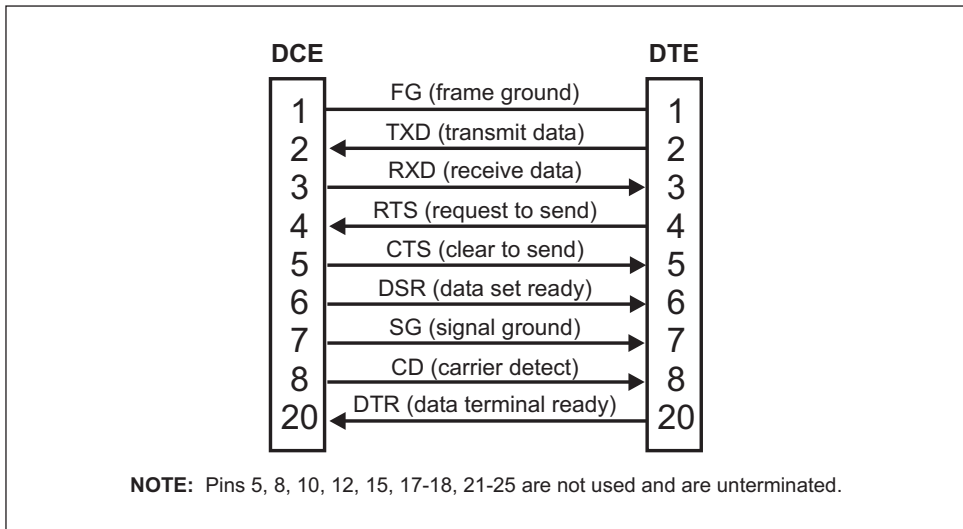


Figure 39

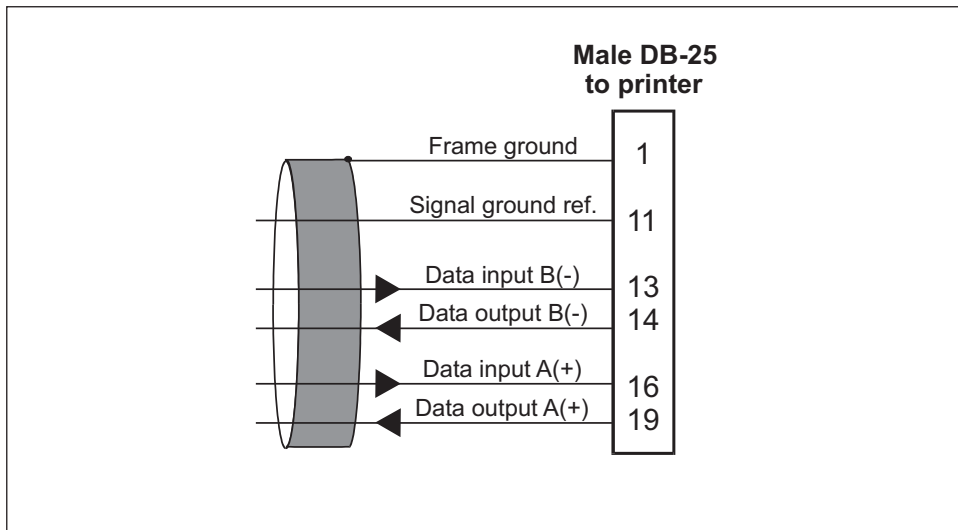


Figure 40

RS-422/RS-485 Interconnections

The printer may be connected to a host by either an RS-422 or an RS-485 interface. The DB-25 connector on the rear of the printer uses specific pins for this purpose. Figure 40 illustrates the required cable wiring for interconnecting to the printer's DB-25 connector. Figure 41 illustrates the internal connections of the printer's RS-422 or RS-485 connector.

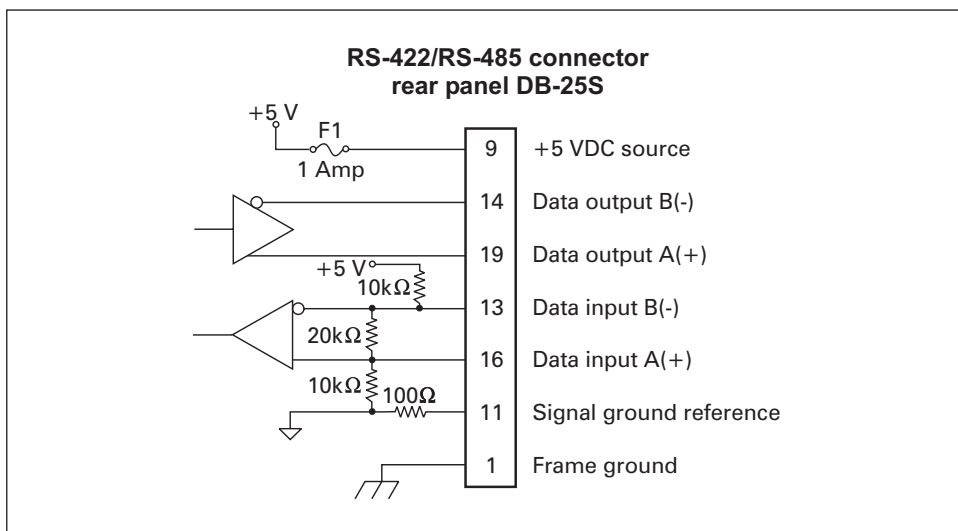


Figure 41

Parallel Data Port

A standard 36-pin parallel connector is available at the rear of the printer for connection to the data source. Under normal circumstances, data sent from the printer to the host in response to a “Printer Status Request” command is sent through the RS-232 serial port. However, if the host has a properly configured IEEE-1284 parallel port that is recognized by the printer, status information will be returned through the parallel port. Port selection for status information is determined each time the printer is turned on.

Parallel Port Interconnections

The following table shows the pin configuration and function of a standard computer-to-printer parallel cable.

36-pin Connector	Description
1	nStrobe/HostClk
2-9	Data Bits 1-8
10	nACK/PtrClk
11	Busy/PtrBusy
12	PError/ACKDataReq
13	Select/Xflag
14	nAutoFd/HostBusy
15	Not Used
16 & 17	Ground
18	+5V @ 1A
19-30	Ground
31	ninit
32	nFault/NDataAvail
33 & 34	Not Used
35	+5V through a 4.7 K Ω Resistor
36	NSelectIn/1284 active

ZPL II Commands for RFID

^WT – Write Tag

The format for the ^WT instruction is:

`^WTb,r,m,w,s`

where

`^WT` = Write Tag command

`b` = Block Number

Default value: 0

Other values: 1 to n, where n is the maximum number of blocks for the tag

NOTE: This is the starting block number. If the user sends more than a block of data it will overflow into the next block. If the user overflows the block and subsequent blocks cause errors (write protects, beyond range, etc.), the write will be aborted, but blocks already written will not revert to original contents. It's up to the caller to ensure blocks aren't accidentally overwritten.

`r` = Retries

Default value: 0

Other values: 1 to 10, number of retries

`m` = motion

Default value: 0 (Feed label after writing)

Other value: 1 (No Feed after writing, other ZPL may cause a feed)

w = Write protect

Default value: 0 (NOT write protected)

Other value: 1 (Write protect)

s = Special mode

Reserved

^RT – Read Tag

The format for the ^RT instruction is:

^RT#*b,n,f,r,m,s*

where

^RT = Read Tag command

= Number to be assigned to the Field

Default value: 0

Other Values: 1 to 9999

b = Starting Block Number

Default value: 0

Other values: 1 to n, where n is the maximum number of blocks for the tag

n = Number of blocks to read

Default value: 1

Other values: 2 to n, where n is maximum number of blocks minus starting block number. In other words, if the tag has 8 blocks (starting with block 0) and you're starting with block 6, n can be 2. This would give you block 6 and block 7 information.

f = Format

Default value: 0 ASCII

Other values: 1 Hexadecimal

r = Retries

Default value: 0

Other values: 1 to 10, number of retries

m = motion

Default value: 0 (Feed label after writing)

Other value: 1 (No Feed after writing, other ZPL may cause a feed)

s = Reserved

Default value: 0

Example:

This example reads a block from a tag, and prints it on a label:

^XA

^FO20,120^A0N,60^FN1^FS

^FO20,100^A0N,20^FN2^FS

^RT1,7,3,0,5,0,0^FS

^RT2,2,2,0,5,0,0^FS

^XZ

The tag type is set by the front panel or by the ^RS command. The first ^RT command, starting at block 7, reads three blocks of data in ASCII format. It will retry the command 5 times if necessary. A “void” label will be generated if the read is unsuccessful after ‘r’ retries. The data read will go into the ^FN1 location of the format.

The second ^RT command string at block 2, reads two blocks of data in ASCII format. It retries up to 5 times. The data read will go into the ^FN2 location of the format.

NOTE: The data can be sent back to the host via the ^HV command.

^RS – RFID Setup

The format for the ^RS instruction is:

^RSt

where

t = tag type

Default value: 0 –NONE (No tags available)

Other values:

- 1- Auto detect (automatically determine the tag type, by querying the tag)
- 2- Tag-it (Texas Instruments Tag-it tags)
- 3- I •Code (Philips I •Code tags)

^RI - RFID Get Tag Unique ID

The format for the ^RI instruction is:

^RI n

where

n = Field number to store the unique ID

The unique ID will be read from the tag and available to print or return to the host computer.

Example:

^XA

^FO100,100^A0N, 60^FN0^FS

^RI0^FS

^XZ

Sample ZPL II Label Formats

ZPL II[®] is Zebra Technologies Corporation's Zebra Programming Language II label design language. ZPL II lets you create a wide variety of labels from the simple to the very complex, including text, bar codes, and graphics.

This section contains four sample label formats for you to begin experimenting with. It is not intended as an introduction to ZPL II. It is strongly suggested that new ZPL II users order a copy of the *ZPL II Programming Guide* (part# 46530L) or download it at <http://support.zebra.com> and select the Documentation Button.


For each format, do the following:

1. Set up the printer and turn the power on.
2. Use any word processor or text editor capable of creating ASCII-only files (ex: Microsoft Word[®] and save as a .txt file) and type in the label format exactly as shown in the sample label format that follow.
3. Save the file in a directory for future use. Use the extension “.zpl”.
4. Copy the file to the Zebra R-140 printer.

NOTE: Typically, computers running DOS use the “COPY” command to send a file to the Zebra printer. For example, if your file name is “format1.zpl” then type, “COPY FORMAT 1.ZPL XXXX”, where “XXXX” is the port to which your Zebra printer is connected, for example, “COM1” or ”LPT1”.

5. Compare your results with those shown. If your printout does not look like the one shown, confirm that the file you created is identical to the format shown, then repeat the printing procedure. If nothing prints, refer to the “Getting Started” section to make sure your system is set up correctly, otherwise refer to the “Troubleshooting and Diagnostics” section.



Format 1: Simple Text and a Barcode

Line #	Type this label format	You'll get this printout
1.	^XA	
2.	^LH30,30	
3.	^FO20,10^AD^FDZEBRA^FS	
4.	^FO20,60^B3N,Y,20,N^FDAAA001	
5.	^XZ	
<p>Line #1: Indicates start of label format. Line #2: Sets label home position (in dots) from the upper left-hand corner of the label. Line #3: Sets field origin, selects font "D", defines field data as "ZEBRA". Line #4: Sets field origin, selects bar code Code 39, sets barcode height at 20 dot rows, defines field data for bar code as "AAA001". Line #5: End of label format.</p>		

Format 2: Saving a Label Format As a Graphic Image

Line #	Type this label format	You'll get this printout
1.	^XA	<p>Same as Format 1, but this format was also saved in the printer's memory as a graphic image named "FORMAT2.GRF".</p>
2.	^LH30,30	
3.	^FO20,10^AD^FDZEBRA^FS	
4.	^FO20,60^B3N,Y,20,N^FDAAA001^FS	
5.	^ISR:FORMAT2.GRF,N	
6.	^XZ	
7.	^XA	
8.	^ILR:FORMAT2.GRF	
9.	^XZ	
<p>Line #1: Indicates start of label format. Line #2: Sets label home position (in dots) from the upper left-hand corner of the label. Line #3: Sets field origin, selects font "D", defines field data as "ZEBRA". Line #4: Sets field origin, selects bar code Code 39, sets barcode height at 20 dot rows, defines field data for bar code as "AAA001". Line #5: Saves the format in the printer's memory as a graphic image named "FORMAT2", the "N" indicates "do not print after saving." Line #6-7: (See Format 1) Line #8: Load and print the graphic image saved as "FORMAT2". Line #9: (See Format 1)</p>		

Format 3: Using a Serialized Data Field

Line #	Type this label format	You'll get this printout
1.	^ XA	
2.	^ LH30,30	
3.	^ FO20,10 ^ AD ^ FDZEBRA ^ FS	
4.	^ FO20,60 ^ B3,,40, ^ FDAAA001 ^ FS	Ten labels will print. The first (top) and last (bottom) are shown here.
5.	^ FO20,180 ^ AF ^ SNSERIAL NUMBER 00000000111,1,Y ^ FS	
6.	^ PQ10	
7.	^ XZ	
<p>Line #1-3: (See Format 1) Line #4: Defines field data for bar code as "AAA001". Line #5: Defines serialized field, starting value of 111, increment by 1, insert leading zeros. Line #6: Sets print quantity to 10 (total number of labels to print). Line #7: (See Format 1)</p>		

Format 4: RFID Sample

Line #	Type this label format	You'll get this printout
1.	^ XA	<p>Zebra</p> <p>5A65627261000000</p>
2.	^ WT6 ^ FDZebra ^ FS	
3.	^ FO100,100 ^ A0N,60 ^ FN0 ^ FS	
4.	^ FO100,200 ^ A0N,40 ^ FN1 ^ FS	
5.	^ RT0,6,2 ^ FS	
6.	^ RT1,6,2,1	
7.	^ XZ	
<p>Line #1: Indicates start of label format. Line #2: Writes the data "Zebra" to block 6 for the tag (one byte will spill into block 7, since we have 4 bytes/block). Line #3: Prints field number '0' at locaton 100,100. ^ FN0 is replaced by what we read on line #5. Line #4: Prints field number '1' at locaton 100,200. ^ FN1 is replaced by what we read on line #6. Line #5: Read Tag into field number 0, starting at block 6, lasting for 2 blocks in ASCII format (default). Line #6: Read Tag into field number 1, starting at block 6, lasting for 2 blocks in hexadecimal format. Line #7: End of label format.</p>		



A

Adjustments

- Media sensor position 77
- Printhead pressure 77
- Toggle positioning 76

B

- Bar codes 94
- Black mark media sensor 16

C

- Cabling requirements 26
- Calibration
 - Media and ribbon 21
- CANCEL key self test 88

Cleaning

- Cutter 74
- Exterior 70
- Interior 70
- Platen roller 70
- Printhead 70
- Sensors 71
- Snap plate 72

- Cleaning schedule 69

- Communications diagnostics test 91

- Configuration 19

- Changing password-protected parameters 48
- Configuration and calibration sequence 50
- Entering the setup mode 47
- Leaving the setup mode 49

Configuring the printer

- Basic 19
- Complete 50

- Continuous media 11

D

- Damage, reporting 3
- Data specifications 25

F

- FEED key and PAUSE key self test. . . . 91
- FEED key self test 90
- Front panel display 28
- Front panel keys 29
- Front panel lights 30
- Fuse replacement 74

G

- General specifications 95

I

- Inspection 3
- Interfaces 25
- IP network 1, 47

L

- Label backing, removing 42
- LED error conditions and warnings . . . 79
- Loading the media
 - Fanfold 40
 - Roll 31

Loading the ribbon	43
Lower media sensor adjustment	16
Lubrication	74

M

Media handling	93
Media loading	
Cutter	36
Peel-off	32
Rewind (with cutter)	38
Rewind (without cutter)	34
Tear-off	31
Media loading, fanfold	40
Media loading, roll	31
Media requirements	4
Media sensors	
Black mark	16
Transmissive	14
Media sensors, positioning	14
Media specifications	97
Media types	
Continuous	11
Non-continuous black mark	11
Non-continuous web	10

N

Network, IP.	1, 47
Non-continuous black mark media	11
Non-continuous web media	10

O

Operator controls	
-------------------	--

Front panel display	28
Front panel keys	29
Front panel lights	30
POWER switch	27

Options	93
Overview, printer	5

P

Parallel port technical information	103
Passwords	48
PAUSE key self test	89
Power cord	4
Power line cord specifications	98
POWER switch	27
Power-on self test (POST)	87
Print mode, choosing	12
Print quality problems	82
Printer configuration	
Basic	19
Complete	50
Printer diagnostics	87
Printer driver configuration	20
Printer overview	5
Printing specifications	96

R

Removing the ribbon	45
Reporting damage	3
Requirements	
Media and ribbon	4
Ribbon loading	43
Ribbon removal	45

Ribbon requirements	4
Ribbon specifications	96

S

Self tests

CANCEL key	88
Communications diagnostics	91
FEED key	90
FEED key and PAUSE key	91
PAUSE key	89
Power-on.	87

Serial port technical information	99
---	----

Software configuration	20
----------------------------------	----

Specifications

Bar codes	94
General.	95
Media	97
Media handling	93
Options.	93
Power line cord	98
Printing	96
Ribbon	96
ZPL II	94

Storage	3
-------------------	---

System considerations	25
---------------------------------	----

T

Test label, printing.	23
-------------------------------	----

Transmissive media sensor	14
-------------------------------------	----

Troubleshooting	79
---------------------------	----

Types of media	10
--------------------------	----

U

Unpacking and inspection	3
------------------------------------	---

Upper media sensor adjustment	15
---	----

W

Wrinkled ribbon	83
---------------------------	----

Z

ZebraNet Networking: PrintServer II Installation and User's Guide	47
---	----

ZebraNet PrintServer II	1, 25,
	47

ZPL II	94
------------------	----

ZPL II Programming Reference Volumes I and II	1
---	---





Zebra Technologies Corporation

333 Corporate Woods Parkway
Vernon Hills, Illinois 60061.3109
Telephone 847.634.6700
Facsimile 847.913.8766

Zebra Technologies Europe Limited

Zebra House
The Valley Centre, Gordon Road
High Wycombe
Buckinghamshire HP13 6EQ, UK
Telephone +44 (0) 1494 472872
Facsimile +44 (0) 1494 450103

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>