


SBC83675

Socket 370 Embedded SBC with 4 COM and Audio

5

Embedded Computing Platforms

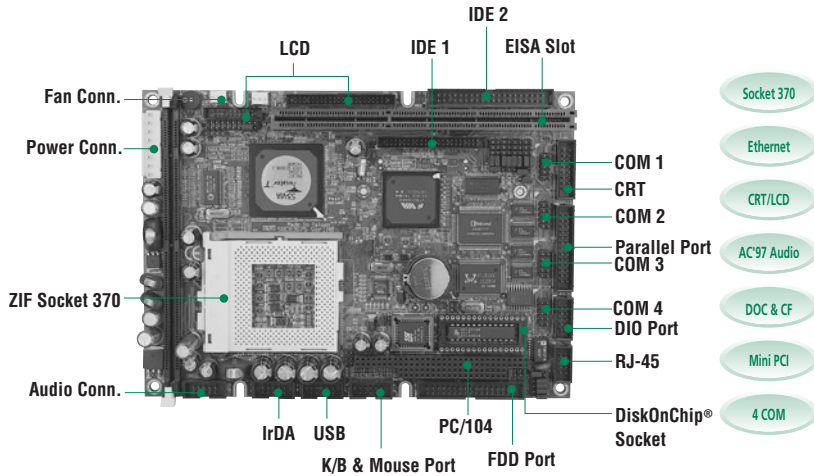

- Socket 370
- Ethernet
- CRT/LCD
- AC'97 Audio
- DOC & CF
- Mini PCI
- 4 COM

Features



- ▶ Socket 370 for Intel® Celeron®/ Pentium® III and VIA C3 processor
- ▶ Supports CRT and LCD
- ▶ Supports 10/100Base-T Fast Ethernet
- ▶ AC'97 Audio
- ▶ 4 COM ports
- ▶ DiskOnChip® and CompactFlash™

Packing List

- Quick installation guide
- Manual, driver & utility CD
- 1 x 8-pin power input adapter cable

System

CPU	Socket 370 for Intel® Celeron®/ Pentium® III and VIA C3 processor; 533~1.4GHz
System Memory	1 x 168-pin SDRAM, max. up to 512MB
Chipset	VIA VT8606 (Twist-T) + VT82C686B
BIOS	Phoenix-Award 4Mbit with RPL/PXE LAN boot ROM, SmartView and customer CMOS backup
SSD	DiskOnChip® and CompactFlash™
Watchdog Timer	System rest and NMI; 64 Levels, 0.5~8 / 5~80 / 50~800 / 100~1600 Seconds
Expansion Interface	PC/104 and EISA
Battery	Lithium 3V/196 MAH
Size/Weight	203mm x 146mm / 0.32 kg
Temperature	0~60°C, operation
Operation Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	2 x ATA-100 IDE, 1 x FDD, 1 x K/B + M/S, 3 x RS-232, 1 x RS-232/422/485, 1 x LPT, 1 x IrDA
Ethernet	RTL8100C, 10/100Base-T with WOL
Audio	AC'97 Audio Codec with amplify
USB	2 x USB port; USB 1.1 compliant
DIO	4-channel input and output


Display

Chipset	VIA Twister chip with integrated S3 Pro Savage4 2D/3D/Vedio accelerator
Memory Size	8/16/32MB frame buffer sharing system memory
Resolution	CRT mode: 1280 x 1024 @ 16bpp (60Hz), 1024 x 768 @ 16bpp (85Hz) LCD/Simultaneous mode: 1280 x 1024 @ 16bpp (60Hz), 1024 x 768 @ 16bpp (60Hz), 1080 x 1024 @ 16bpp (60Hz)
LCD Interface	AGP-4X CRT/LCD interface, supports for 9, 12, 18, 24, 36-bit TFT

Ordering Information

Standard	
SBC83675VEA	With integrated VGA for CRT/LCD output, Fast Ethernet and AC'97 Audio
Optional	
CK8967	I/O wiring kit
CK8968	I/O wiring kit
CK8969	I/O wiring kit
PK8980	LCD kit for 18-bit TTL LCD with Hirose DF9-41P-1V connector
PK95000-24	LCD kit for 24-bit single channel LVDS
PK95000-48	LCD kit for 48-bit dual channel LVDS
P3091	2 x PCI and 1 x ISA riser card
AX8501	1 x PCI and 1 x ISA riser card
AX8910	2 x PCI riser card
04310016900E	CPU cooler for PIII
Enclosure Options	
EM1610S	Embedded MicroBox with 70W AC P/S
EM1610SA	Embedded MicroBox with 70W AC P/S and Audio output
EM60320C	Embedded MicroBox with 180W AC P/S

Dimensions

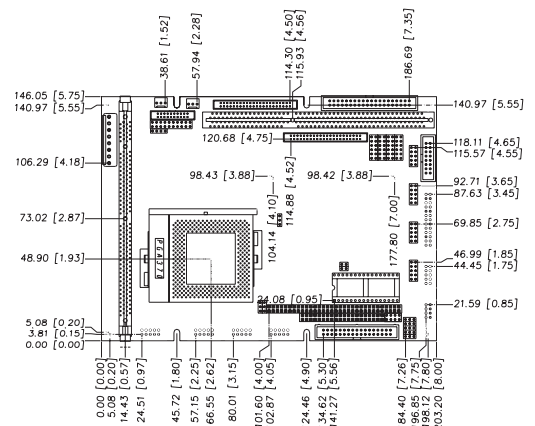

* All the specifications and photos are subjected to be changed without notice.

ECP Services and Solutions

STX SoM & Baseboards

Mini ITX and LPX SBCs

3.5" Capa Boards

EPIC Boards

5.25" Petit Boards & Accessories

Half-size CPU Cards, Backplanes

PCI/104 & Mini PCI Modules

Embedded eBOX System & MicroBox

Power Supply

Appendix

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>