

TIME LAPSE VCR

SERVICE MANUAL

CAUTION

BEFORE SERVICING THE UNIT, READ THE "SAFETY PRECAUTIONS" IN THIS MANUAL.



TABLE OF CONTENTS

SECTION 1 SUMMARY

- SPECIFICATIONS1-1
- LOCATION OF CUSTOMER CONTROLS1-2
- CRITICAL PARTS REPLACING TIME TABLE1-5
- CRITICAL PARTS DESCRIPTION1-5

SECTION 2 CABINET & MAIN FRAME

- EXPLODED VIEWS2-1
 - 1. Cabinet and Main Frame Section2-1
 - 2. Packing & Accessory Section2-3

SECTION 3 ELECTRICAL

- ELECTRICAL ADJUSTMENT PROCEDURES3-1
 - 1. PG ADJUSTMENT3-1
- ELECTRICAL TROUBLESHOOTING GUIDE3-2
 - 1. POWER(SMPS) CIRCUIT3-2
 - 2. SERVO CIRCUIT3-4
 - 3. Y/C CIRCUIT3-6
 - 4. AUDIO CIRCUIT3-9
 - 5. SYSTEM/KEY CIRCUIT3-11
 - 6. OSD CIRCUIT3-12

- BLOCK & CIRCUIT DIAGRAMS.....3-13
 - 1. OVERALL WIRING DIAGRAM3-13
 - 2. POWER BLOCK DIAGRAM3-15
 - 3. POWER CIRCUIT DIAGRAM3-17
 - 4. AUDIO BLOCK DIAGRAM.....3-19
 - 5. Y/C BLOCK DIAGRAM3-20
 - 6. A/V CIRCUIT DIAGRAM.....3-21
 - 7. SYSTEM BLOCK DIAGRAM3-24
 - 8. SYSTEM CIRCUIT DIAGRAM.....3-27
 - 9. JACK CIRCUIT DIAGRAM3-29
 - 10. KEY-BOARD CIRCUIT DIAGRAM.....3-31

- PRINTED CIRCUIT DIAGRAMS3-33
 - 1. MAIN P.C.BOARD3-33
 - 2. KEY 1 P.C.BOARD3-35
 - 3. KEY 2 P.C.BOARD3-35
 - 4. JACK P.C.BOARD3-35

SECTION 4 MECHANISM

NOTE) The table of contents for this section is edited separately.

SECTION 5 REPLACEMENT PARTS LIST

- Mechanical Section.....5-1
 - Electrical Section5-3
-

SECTION 1 SUMMARY SPECIFICATIONS

GENERAL

| | |
|---------------------------|--|
| Head System | Four head helical scan azimuth system |
| Power Source | AC 100-240V, 50/60Hz |
| Power Consumption | Approx. 15 Watts |
| Back up time (clock) | 30 days |
| Dimensions (WxHxD) | 14.2" x 3.7" x 10.7" (360 x 94 x 273 mm) |
| Operating Temperature | 41 °F~105 °F (5 °C~40 °C) |
| Operating Humidity | Less than 80% RH |
| Timer | 24-hour display type |
| Weight | Approx. 8.4 lb (3.8 kg) |
| Tape Speed (NTSC) | 11.12 mm/sec (6H) , 3.70 mm/sec (18H), 2.22 mm/sec (30H), 72H ~ 960H |
| Tape Speed (PAL) | 11.695 mm/sec (6H) , 3.89 mm/sec (18H), 2.33 mm/sec (30H), 72H ~ 960H |
| Maximum Recording Time | 6 hours (NT:T-120/PAL:E-180, 6H), 18 hours (NT:T-120/PAL:E-180, 18H), 30 hours (NT:T-120/PAL:E-180, 30H), 72H ~ 960H |
| Tape Width | 0.5 in. (12.7 mm) |
| Rewind Time | About 65 seconds (NT:T-120)(PAL:E-180) |
| Video Signal System(PAL) | CCIR Standard (625 lines, 50 fields) PAL type color signal |
| Video Signal System(NTSC) | EIA Standard (525 lines, 60 fields) NTSC type color signal |
| Video Input | 1.0 Vp-p 75 ohms unbalanced |
| Video Output | 1.0 Vp-p 75 ohms unbalanced |
| Signal to Noise Ratio | More than 43 dB (6H mode) |
| Conventional audio | |
| Input (LINE) | -6.0 dBm more than 47 kohms |
| Output (LINE) | -6.0 dBm less than 1.5 kohms |
| S/N Ratio | More than 43 dB (6H mode) |
| Frequency Range | 200 Hz to 10kHz (6H mode) |


* Designs and specifications are subject to change without notice.

* Weight and dimensions shown are approximate.

SECTION 1 SUMMARY

LOCATION OF CUSTOMER CONTROLS


FRONT

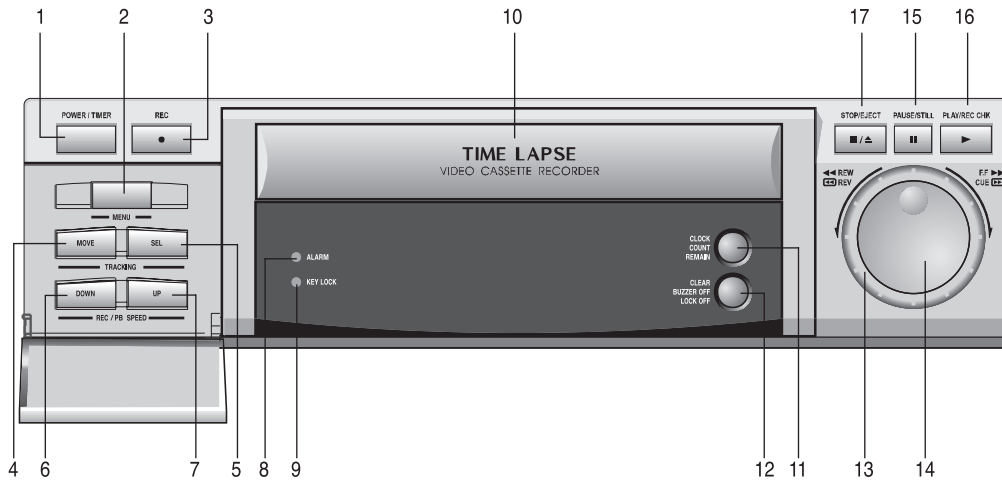

- 1 POWER/TIMER BUTTON
- 2 MENU BUTTON
- 3 REC (RECORD) BUTTON
- 4 MOVE BUTTON
- 5 SEL (SELECT) BUTTON
- 6 DOWN BUTTON
- 7 UP BUTTON
- 8 ALARM INDICATOR
- 9 KEY LOCK INDICATOR

- 10 CASSETTE LOADING SLOT
- 11 CLEAR, KEY LOCK OFF, BUZZER OFF
- 12 CLOCK, COUNT, REMAIN
- 13 SHUTTLE RING
- 14 JOG RING
- 15 PAUSE/STILL BUTTON
- 16 PLAY/REC CHECK BUTTON
- 17 STOP/EJECT BUTTON

REAR

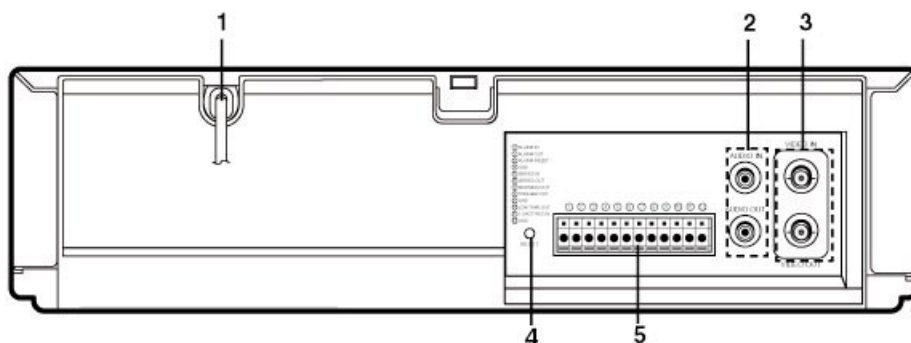


- 1 POWER CORD
- 2 AUDIO IN/OUT JACK
- 3 VIDEO IN/OUT JACK

- 4 RESET BUTTON
- 5 12-PIN TERMINAL BLOCK

SECTION 1 SUMMARY

LOCATION OF CUSTOMER CONTROLS

INDICATOR PANEL

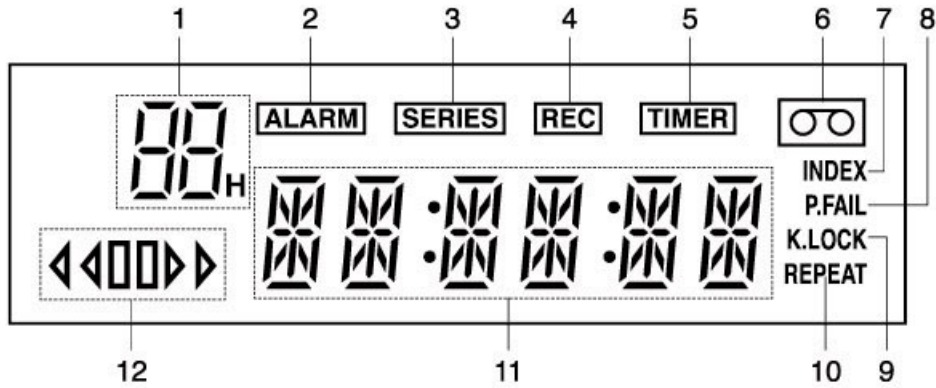

- 1 TIME LAPSE VCR TIME INDICATION
- 2 ALARM INDICATION
- 3 SERIES INDICATION
- 4 RECORD INDICATION
- 5 TIMER INDICATION
- 6 CASSETTE INDICATION

- 7 INDEX INDICATION
- 8 POWER FAILURE INDICATION
- 9 KEY LOCK INDICATION
- 10 REPEAT INDICATION
- 11 FUNCTION INDICATION
- 12 VCR FUNCTION INDICATION










VCR FUNCTION INDICATION

| PLAYBACK INDICATION | | RECORDING INDICATION | |
|--|-----|----------------------|---|
| PLAYBACK | ▶ | RECORDING | ▶ REC |
| PAUSE STILL | □□ | TIMER RECORDING | ▶ REC TIMER |
| FAST FORWARD | ▶▶ | ALARM INDEX | ☀ INDEX |
| REWIND | ◀◀ | ALARM RECORDING | ☀ ALARM |
| FORWARD SLOW PICTURE/ FORWARD FIELD ADVANCE | ◻▶ | SERIES RECORDING | SERIES |
| REVERSE SLOW PICTURE/ REVERSE FIELD ADVANCE | ◀◻ | | |
| CUE | ▶▶☀ | | |
| REVIEW | ☀◀◀ | | |

SECTION 1 SUMMARY

LOCATION OF CUSTOMER CONTROLS

TERMINAL SIGNAL LEVELS

| TERMINAL | SIGNAL LEVEL | | IN/OUT | DESCRIPTION |
|-------------------|---|--|--------|--|
| 1. ALARM IN |  | VIH : 4 ~ 5V VIL : 0 ~ 0.6V T : above 250 msec | INPUT | The input signal that makes 'Alarm Record' work |
| 2. ALARM OUT |  | VIH : 4 ~ 5V VIL : 0 ~ 0.6V T : ALARM REC STATE | OUTPUT | Outputs whether 'Alarm Recording' is working |
| 3. ALARM RESET |  | VIH : 4 ~ 5V VIL : 0 ~ 0.6V T : above 250 msec | INPUT | The terminal that stops 'Alarm Record' in Auto mode |
| 5. SERIES IN |  | VIH : 4 ~ 5V VIL : 0 ~ 0.6V T : above 250 msec | INPUT | The input terminal to make 'Series Record' work |
| 6. SERIES OUT |  | VIH : 4 ~ 5V VIL : 0 ~ 0.6V T : above 250 msec | OUTPUT | Output signal appears when the tape reaches to end or deck is error in recording. |
| 7. WARNING OUT |  | VIH : 4 ~ 5V VIL : 0 ~ 0.6V T : until any-key is pressed | OUTPUT | Outputs whether VCR deck is error. |
| 8. TRIGGER OUT |  | VIH : 4 ~ 5V, VIL : 0 ~ 0.6V 8 msec : NTSC 10 msec : PAL | OUTPUT | The signal is output which is used by switching several cameras in general space with using camera multi-plexer. |
| 10. LOW TAPE OUT |  | VIH : 4 ~ 5V VIL : 0 ~ 0.6V T : below 5 min, end of tape | OUTPUT | As the terminal that outputs that tape remains less than 5 minutes in recording, it isn't output in '1-shot Record'. |
| 11. 1-SHOT REC IN |  | VIH : 4 ~ 5V VIL : 0 ~ 0.6V T : above 250 msec | INPUT | The terminal that makes '1-short Record' work in Auto mode |
| 4, 9, 12. GND | - | 0V | COMMON | |

SECTION 1 SUMMARY

CRITICAL PARTS REPLACING TIME TABLE

| No. | DESCRIPTION | 1500 | 3000 | 5000 | 6000 | 7500 | 9000 | 10000 | 12000 | Test freatures | Specification |
|-----|----------------------|------|------|------|------|------|------|-------|-------|----------------------------------|--|
| 1 | DRUM ASSY | ● | ● | ● | ● | ◆ | ● | ● | ● | RF out level | -4dB and below |
| 2 | ARM ASSY CLEANER | ▲ | ▲ | ▲ | ▲ | ◆ | ▲ | ▲ | ▲ | Wear status | Whether extraneous matters come out |
| 3 | MOTOR CAPSTAN (D-35) | ● | ● | ● | ● | ◆ | ● | ● | ● | W/F(WTD) | 0.4% and below |
| 4 | BELT CAPSTAN | | | | | | | | ◆ | Belt tension | Variation amount : within 40% |
| 5 | BASE ASSY A/C | ● | ● | ● | ● | ● | ● | ● | ◆ | Audio and CTL out level | -6dB and below |
| 6 | HEAD F/E | ● | ● | ● | ● | ● | ● | ● | ◆ | The rate of erasing (1KHz) | 45dB min |
| 7 | ARM ASSY IDLER | | | | | | | | ◆ | The capacity of Idler for moving | 4-12 g |
| 8 | HOLDER ASSY PINCH | | | | ◆ | | | | ◆ | Surrace solidity of Roller | 60~90 ° |
| 9 | BAND ASSY TENSION | | | | | | | | ◆ | Back Torque | 40~70 g |
| 10 | HOUSING ASSY | ▲ | ▲ | ▲ | ▲ | ▲ | ▲ | ▲ | ◆ | CST loading status | there shouldn't be any space between CST and compartment |
| 11 | CAPSTAN SOFT BRAKE | | | | ◆ | | | | ◆ | Felt wear | whether there is touch noise |
| 12 | CLUTCHAY | | | | ◆ | | | | ◆ | Torque(Play, Rev) | 40~140gcm, 100~210gcm |

Reference :

◆ : Changing ● : Cleaning ▲ : Checking

Notes :


- Check the running path adjustment when you change the itens 1, 3, 5, 6 and 10.
- Check the back tension when you change Band Assy Tension.

CRITICAL PARTS DESCRIPTION

| | | |
|-----|---------------------|--|
| 1. | Drum Ass'y | Consists of video head, rotary trans and motor. records video and audio information on the tape, and play the tape back.(Audio information is recorded only on the Hi-Fi models) |
| 2. | Arm Ass'y Cleaner | Cleans video head and rotation head automatically. |
| 4. | Motor Capstan | Moves the tape with regular speed. |
| 5. | Belt Capstan | Transfers rotative energy of capstan motor to the driving system. |
| 6. | Brake Ass'y Capstan | Brakes rotative energy of capstan motor. |
| 7. | Base Ass'y A/C | Consists of three head. Audio erase head in the left upper erases audio signal in dubbing. Audio head in the right upper records and plays the audio signal. CTL head in the right lower records and detects CTL pulse to control tape speed. |
| 8. | Head F/E | Is abbreviation of Full Erased Head. erases the signal recorded on a tape clearly and absorb vibration of tape. |
| 12. | Arm Ass'y Idler | Is located between T/UP reel and supply reel. Transfers ratative energy of capstan motor to T/UP reel or supply reel. |
| 13. | Holder Ass'y Pinch | Sticks a video tape to capstan motor and has the tape played without being slipped from capstan motor axle. |
| 14. | Band Ass'y Tension | Has supply reel loosened properly with giving it some tensile force. |
| 15. | Arm Ass'y | Makes the cassette tape inserted be loaded and ejected precisly and safely. |
| 16. | Clutch Ass'y | Plays the tape with trasfering rotative energy of capstan motor to idler reel. |

SECTION2 CABINET & MAIN FRAME EXPLODED VIEWS

1. Cabinet and Main Frame Section

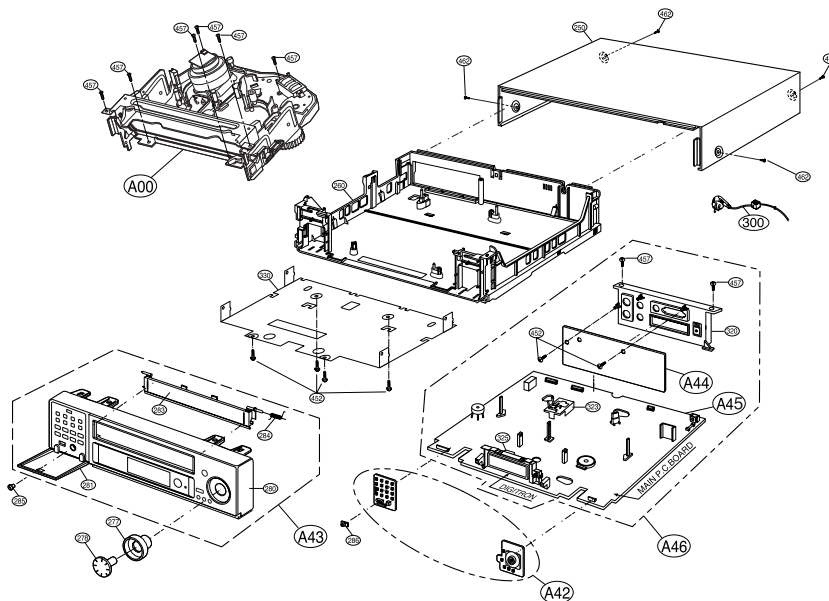

Cabinet & Main Frame Section Parts list


MODEL : TL-AT130M

RUN DATE : 2004.03.12

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARKS |
|------------------|----|----------|-------------|------------------------------------|--------------------------------|---------|
| ASSEMBLY SECTION | | | | | | |
| | | A00 | 6721R-0771U | DECK ASSEMBLY,VIDEO | DECK/MECHA D35 LG T/L (4HD(ALL | |
| | | A42 | 6871R-8283A | PWB(PCB) ASSEMBLY,TOTAL | T/L VCR KEY2 JOG/SHUTTLE | |
| | | A43 | 3721R-F826D | PANEL ASSEMBLY,FRONT | CCD TIME LAPSE PANEL FRONT ASS | |
| | | A44 | 6871R-4462A | PWB(PCB) ASSY,TOTAL | TL-AR30 (SERIES) - W. RS232C - | |
| | | A45 | 6871R-7050B | PWB(PCB) ASSEMBLY,TOTAL | T/L VCR TL-AT130M MAIN | |
| | | A46 | 3501R-7050B | BOARD ASSEMBLY | VCR TL-AT130M MAIN | |
| PARTS SECTION | | | | | | |
| | | 250 | 3110R-S040F | CASE | LV-TL1960 2960 MOLD AIRHALL BA | |
| | | 260 | 3210R-0023A | FRAME | VCR - MAIN | |
| | | 277 | 4940R-Z075A | KNOB | SHUTTLE(TL-AR30M) | |
| | | 278 | 4940R-Z076B | KNOB | CCD TL-AT130 MOLD | |
| | | 280 | 3720R-F721D | PANEL,VIDEO | CCD LV-TL1960 S MOLD HIPS 40AF | |
| | | 281 | 524-013A | MAGNET | VCR - ASSY DOOR | |
| | | 283 | 3580R-V090A | DOOR | CCD TIME LAPSE MOLD DOOR CST | |
| | | 284 | 442-681A | SPRING | DOOR | |
| | | 285 | 4940R-Z086A | KNOB | CCD LV-TL124 MOLD | |
| | | 286 | 4940R-S017A | KNOB | SLIDE (LV-TL24) | |
| | | 300 | 6410RZHV01A | POWER CORD | IT10S2(6A/250V) VOLEX IMMETRO | |
| | | 320 | 3721R-D031N | PANEL ASSEMBLY, DISTRIBUTOR[NOR | LV-TL1960S 2960S NEW ASSY (RS- | |
| | | 323 | 3111R-0089B | CASE ASSY | PRE-AMP (PBSB-SH) | |
| | | 325 | 4931R-0024D | HOLDER ASSEMBLY | DIGI(MONO-ENABLE) | |
| | | 330 | 3550R-0210A | COVER | BOTTOM(LARGE) | |
| SCREW | | | | | | |
| | | 452 | 353-051A | SCREW,DRAWING | SPECIAL | |
| | | 457 | 353-051E | SCREW,DRAWING | SPECIAL (3X12) | |
| | | 462 | 353-136A | SCREW,DRAWING | SPECIAL(FBK) (353S353A) | |

SECTION2 CABINET & MAIN FRAME EXPLODED VIEWS

1-1. Cabinet and Main Frame Section

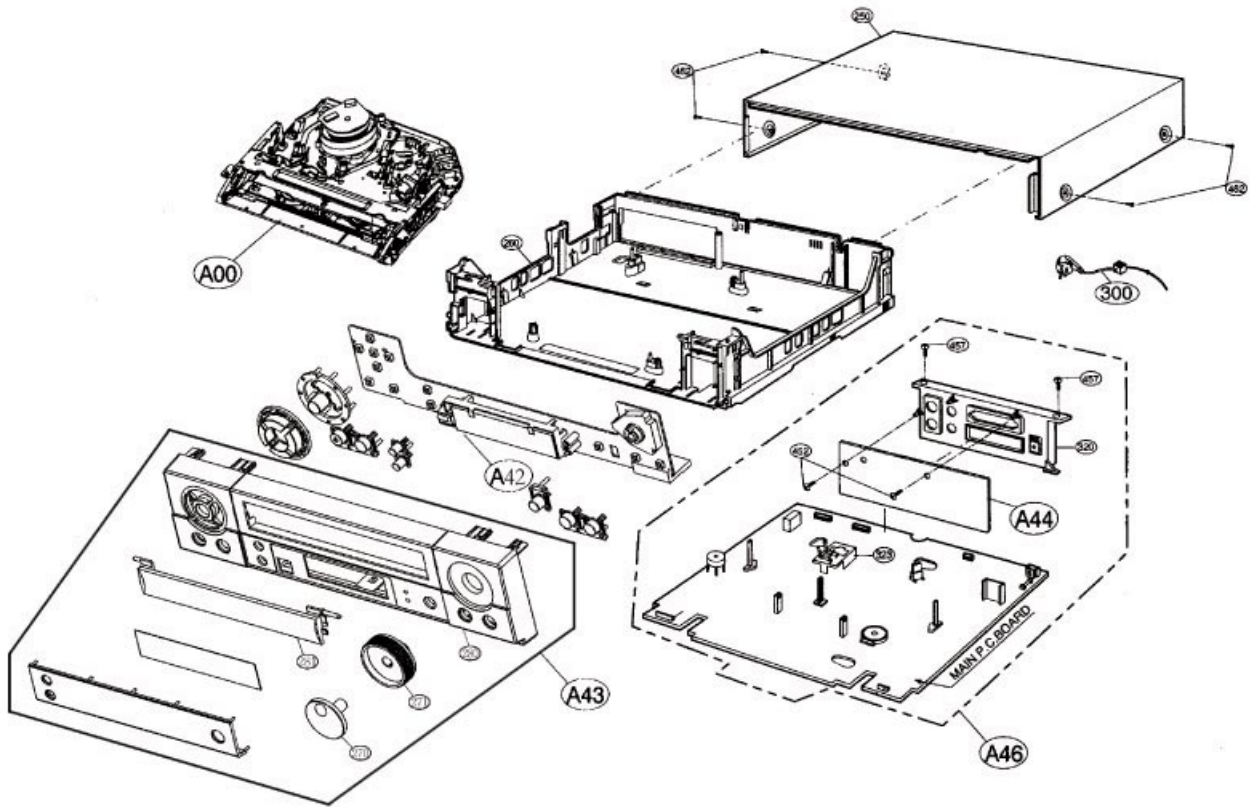

Cabinet & Main Frame Section Parts list ASSEMBLY PARTS SECTION

| | | | |
|-----|-------------|---------------------|-----------------|
| A42 | 6871RK5700K | Ass'y Front PCB | SNILN4T3526 |
| A43 | 05503805 | ASS'Y FRONT CAVINET | NTH960 C-TYPE |
| A44 | 6871R-4462A | Ass'y Ant. PCB | TL-AR30(SERIES) |
| A46 | 3501RK3200B | Ass'y Main PCB | CCD LV-TL1960 |
| | | | |
| | | | |


| | | | |
|--|--|--|--|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |

SECTION 2 CABINET & MAIN FRAME EXPLODED VIEWS

2. Packing & Accessory Section

NOTE

Refer to "REPLACEMENT PARTSLIST" in order to look for the part number of each part.

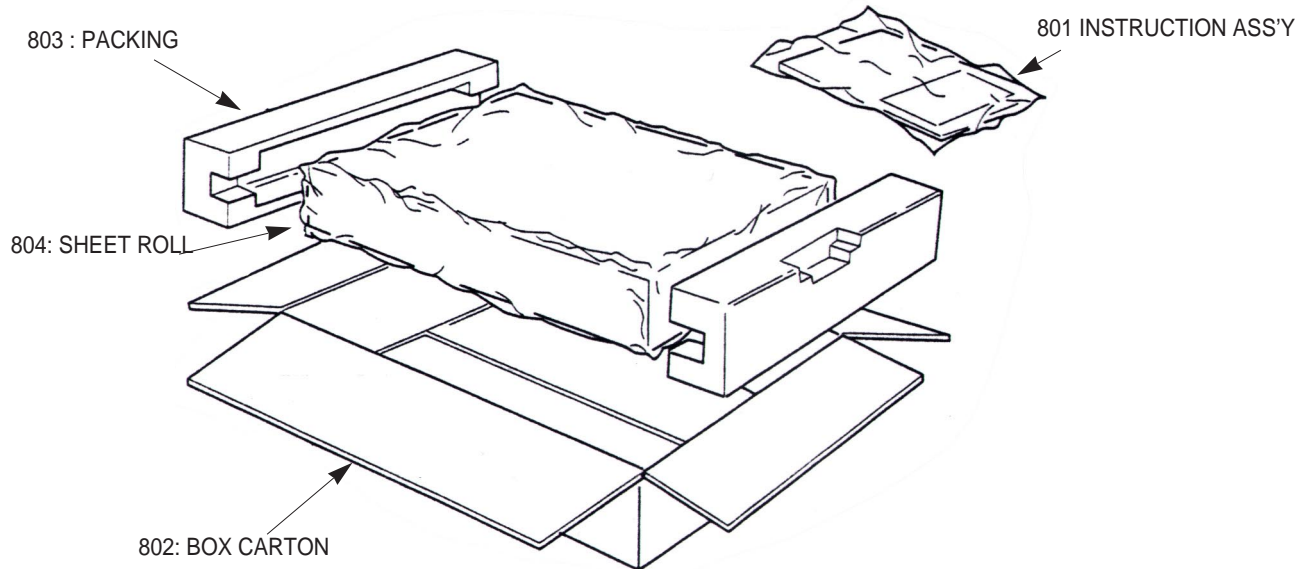

• Packing Accessory Section Parts list

MODEL : TL-AT130M

RUN DATE : 2004.03.12

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARKS |
|---|----|----------|-------------|----------------------------|--------------------------------|---------|
| | | 801 | 3835RS0069N | INSTRUCTION ASSEMBLY | CCD TL-AT330M-AABBDL1_ENG_POR_ | |
| | | 802 | 3890R-C065K | BOX,MASTER | TL-AT330M AABBDL . 1 | |
| | | 803 | 3920R-E016A | PACKING | Packing LV-TL24I 0.02 0 EPS 10 | |
| | | 804 | 3858R-S001A | SHEET (MECH) | Packing LDPE 600M 630MM 0.5 VC | |
| | | 808 | 534-008C | BATTERY,MANGANESE | AAAM(R03) SEOTONG 1-5 V - 1PA | |
| | | 900 | 6711R1P041H | REMOTE CONTROLLER ASSEMBLY | P9 LV-TL1960 | |


SECTION 3 ELECTRICAL ELECTRICAL ADJUSTMENT PROCEDURES

1. PG ADJUSTMENT

| MODE | SPECIFICATION | OBJECT MEASURED | OBJECT ADJUSTED |
|----------------|---------------------------------|-----------------|-----------------|
| PLAYBACK IN SP | PG : $416 \pm 20 \mu\text{sec}$ | V.OUT JACK | VR501 |

1. Connect CH-1 of the oscilloscope to W357 and W362, and adjust it to 1Vp-p as TRIGGER.
(In case of 10:1 Probe, adjust it 50m Vp-p)
2. Connect CH-2 of the oscilloscope to V.OUT JACK and adjust it to 0.5Vp-p.
(In case of 10:1 Probe, adjust it 50 Vp-p)
3. Adjust time of the oscilloscope to 0.1 msec.
4. Adjust the range between FALLING EDGE part of video vertical trigger signal and video vertical trigger signal to the specification($416 \pm 20 \mu\text{sec}$) with changing VR501.

WAVEFORM

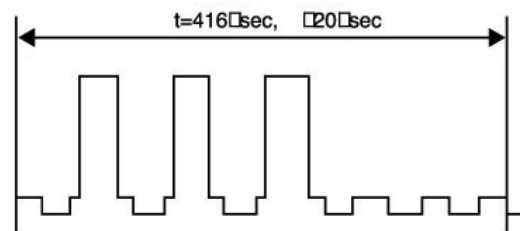

• CONNECTION CHART OF MAIN PWB

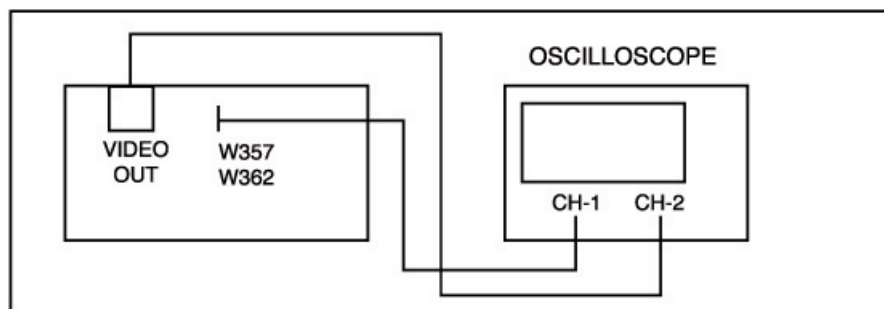


Fig 3-1. Connection chart of PG adjustment

⚡ Caution


When repairing the power part just after pulling out the power code, there is hazard of electrical shock caused by the charged electricity at the peripheral circuit component(primary power) such as condenser C807(150 μ F). So begin repairing after doing procedure below.

1. Set the volt meter up to resistance measurement.(In case of digital volt meter, set it up to over 20M Ω .)
2. Discharge electricity with putting the measuring terminal lines(+, 1 probe) of volt meter at the ends of condenser C103.(You don't have to put the polarity of the measuring terminal lines on the same polarity of the condenser.)


SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE

1. Power Circuit(SMPS)


(1) No 5.3 A

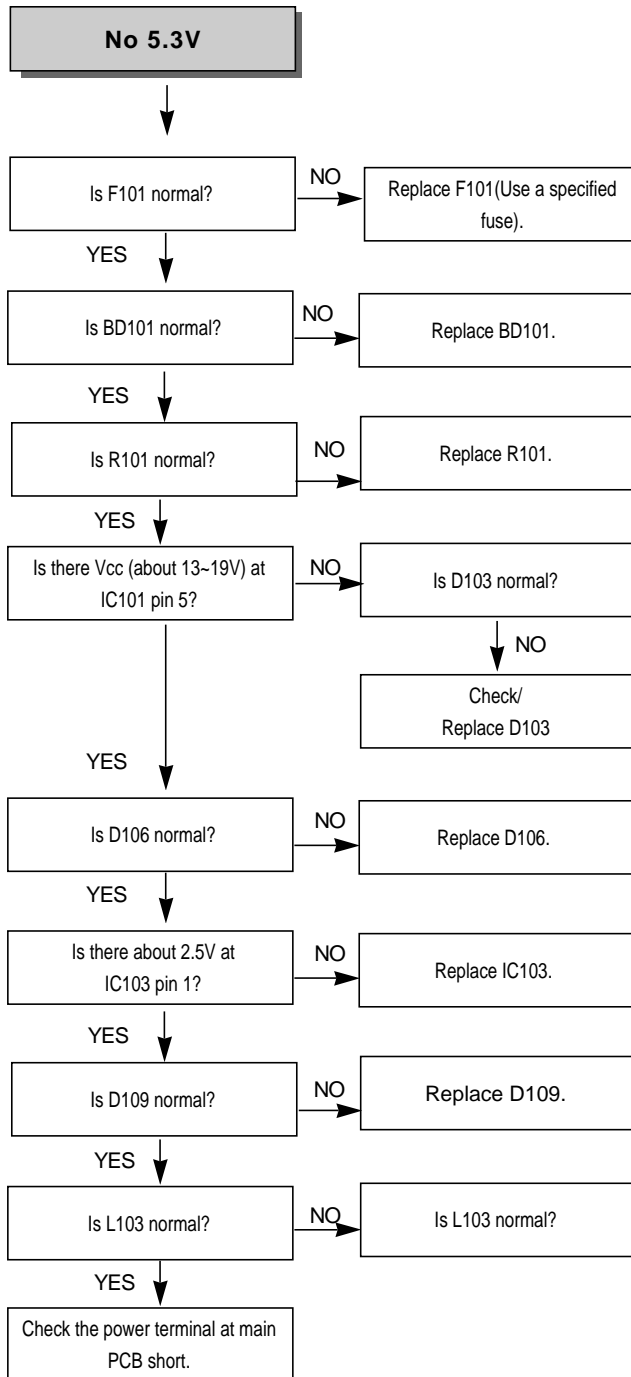

(2) No 9V

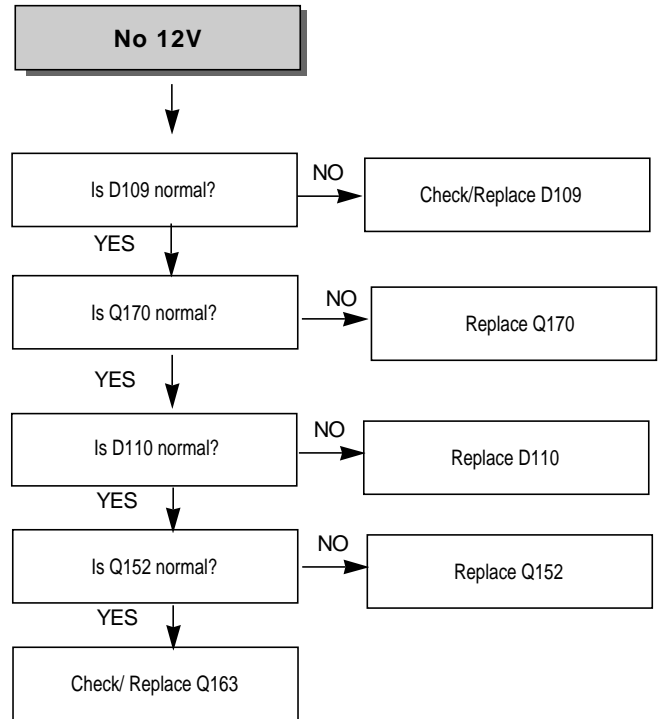


(3) No 24 V

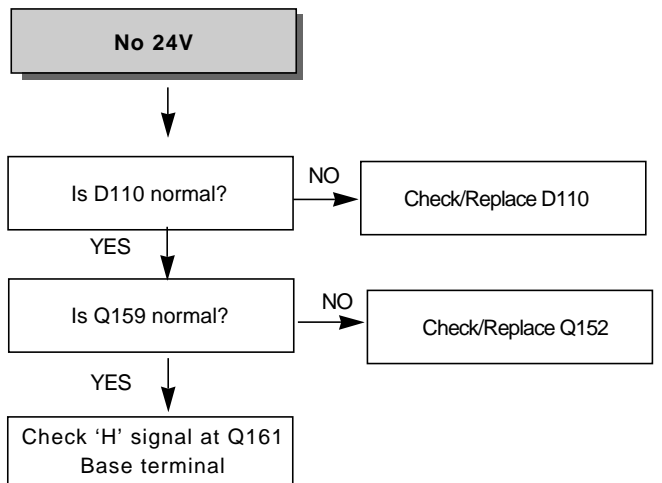


SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE

(4) No 5.2 A (TO AVCP, BIAS)

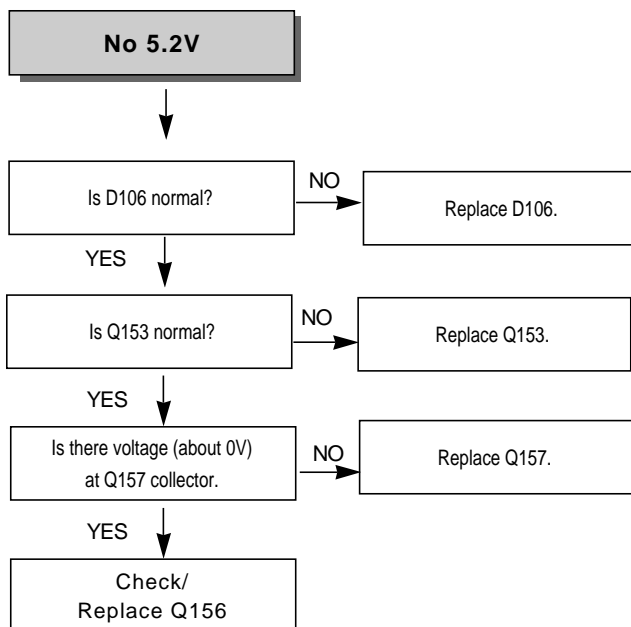


(5) No 10V

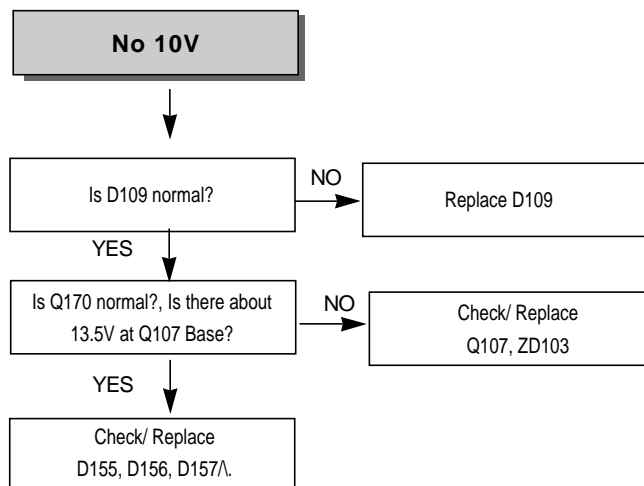


SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE

2. SERVO CIRCUIT

(1) Video is unstable in PB mode

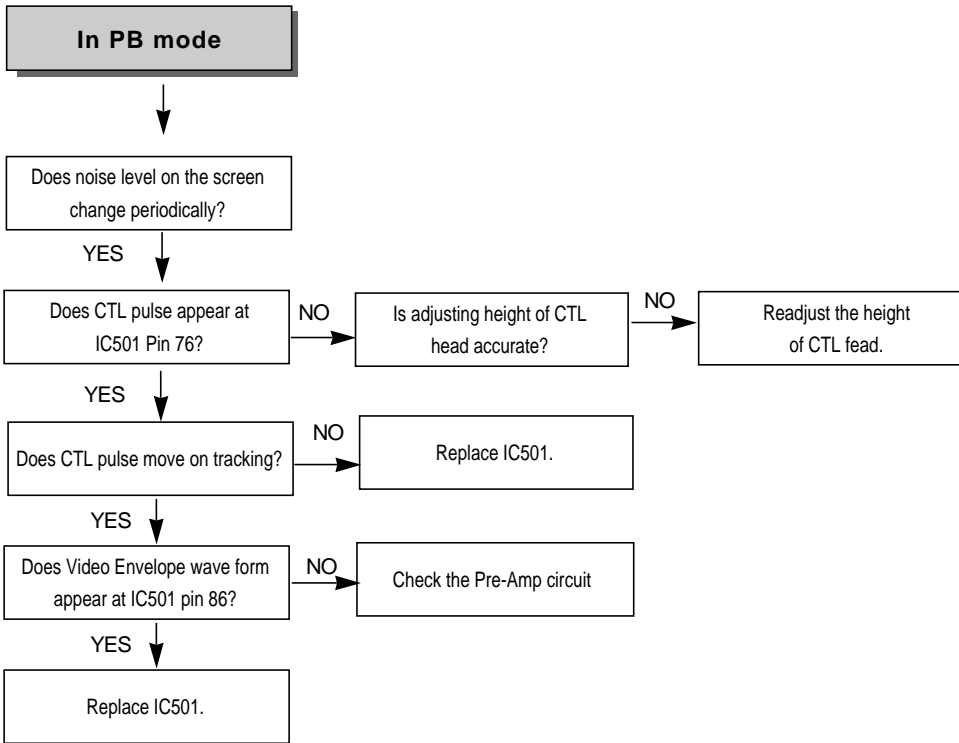


(2) Drum motor stops

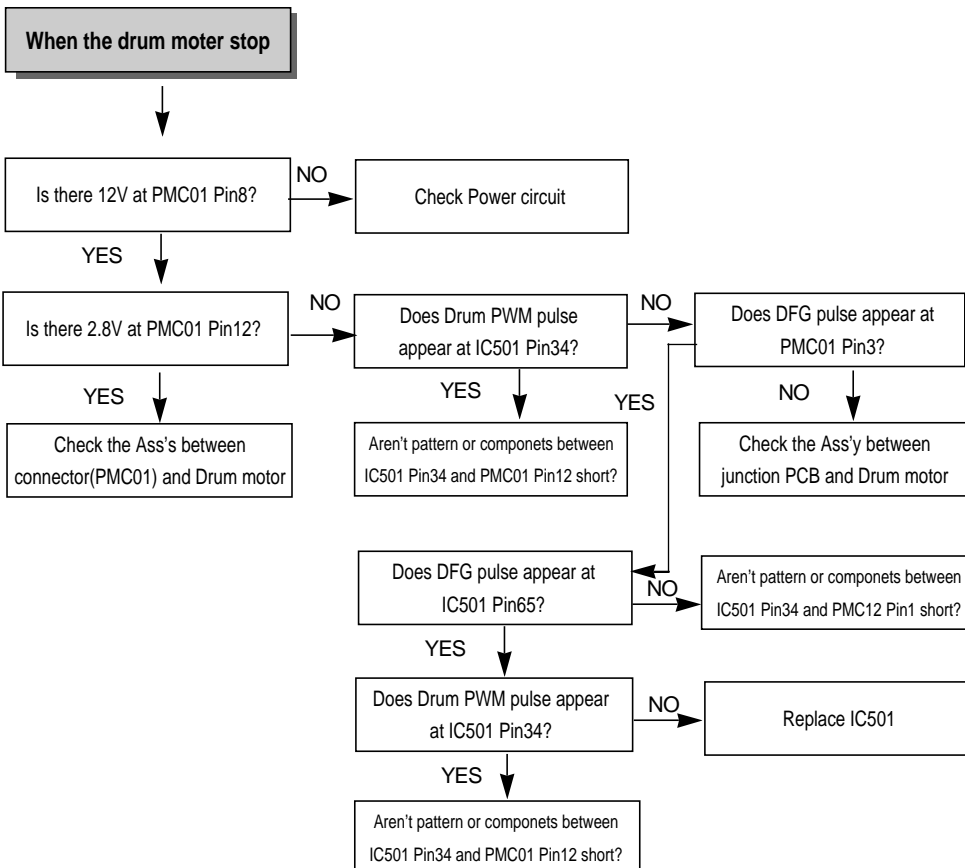

SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE


(3) Capstan motor stops

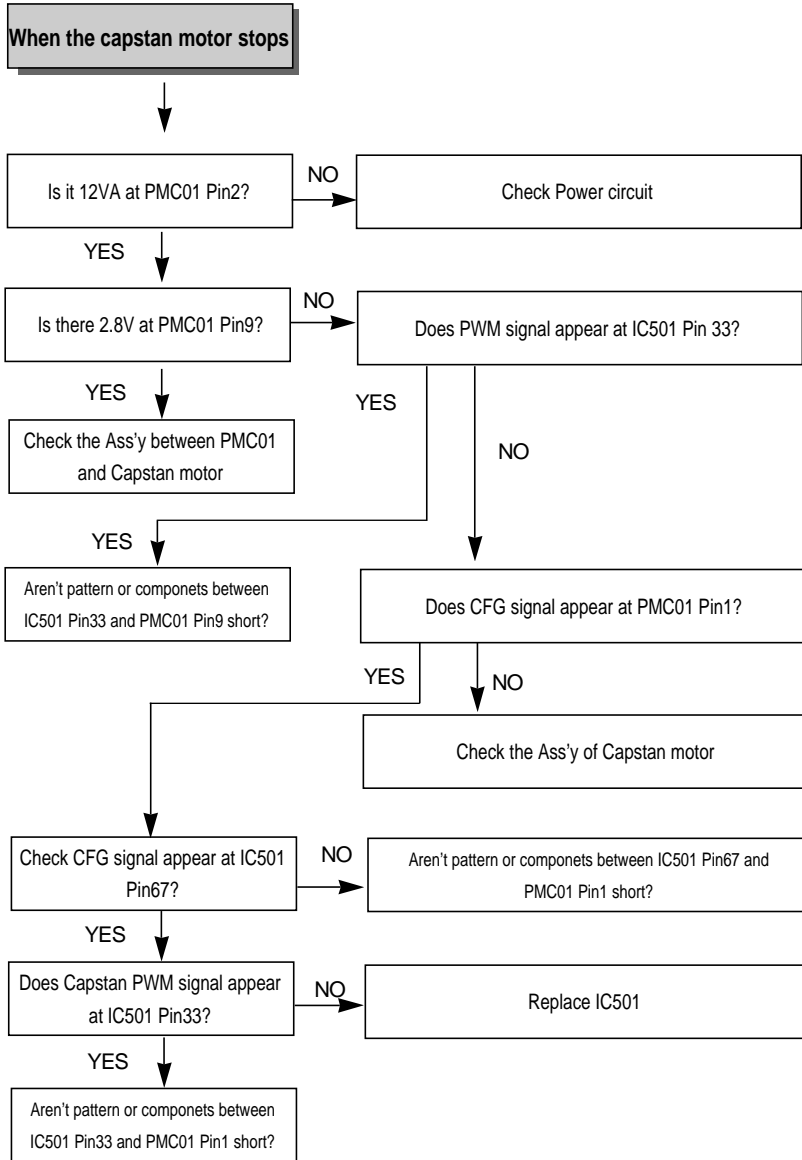

SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE


3. Y/C CIRCUIT

(1) No Video in EE Mode

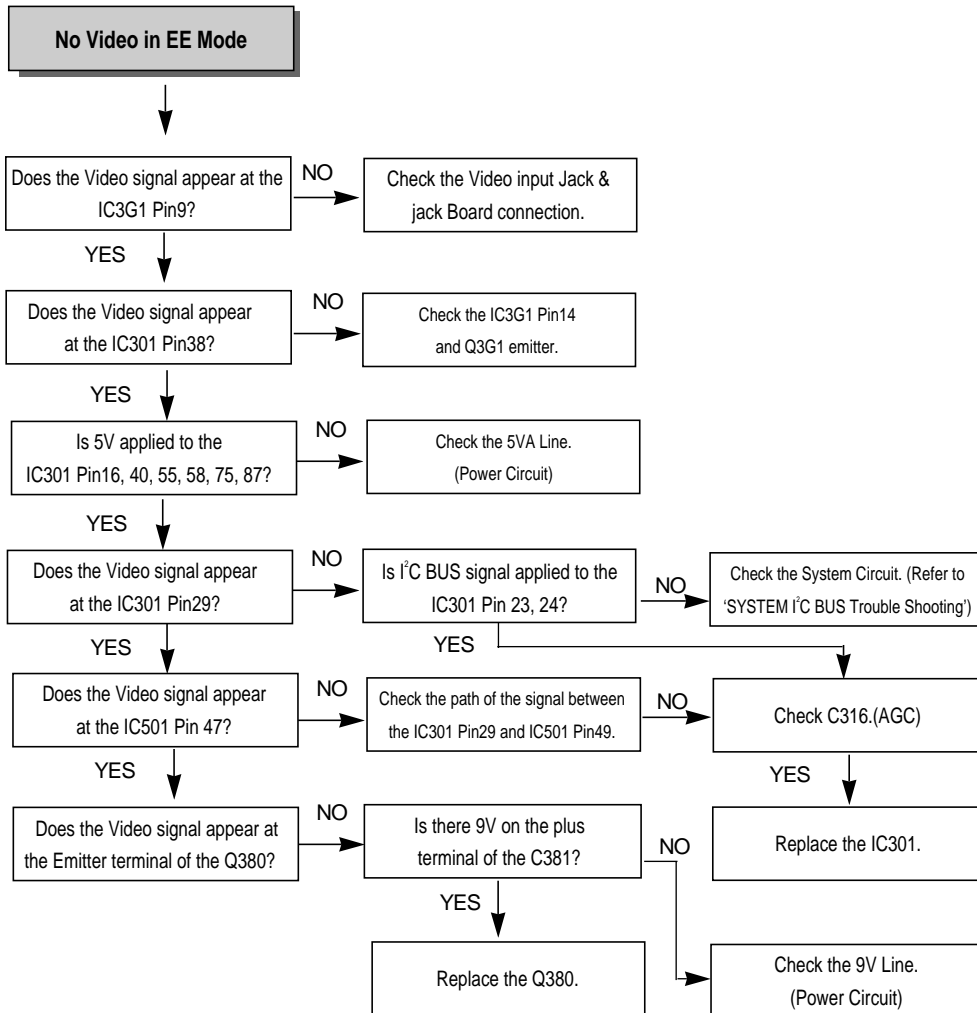


SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE

(2) When the Y(Luminance)signal doesn't appear on the screen in PB Mode.

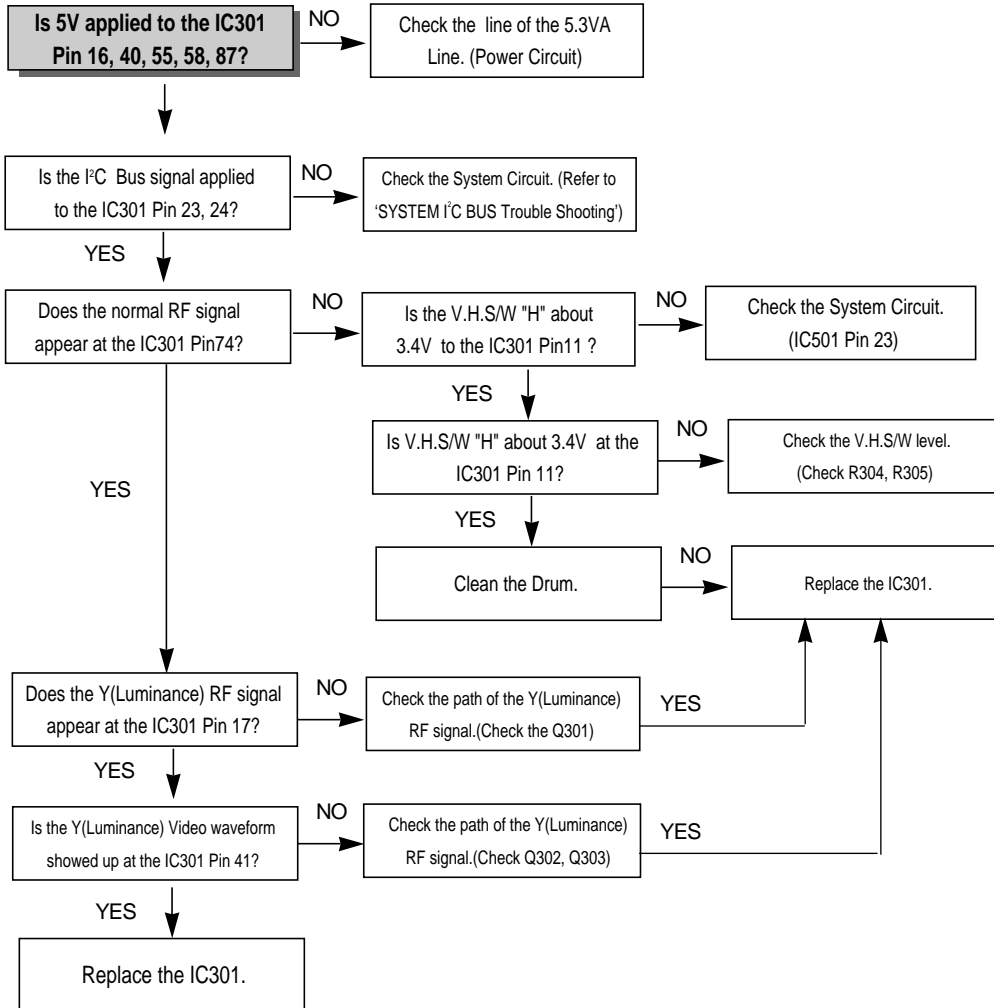


SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE

(3) When the C(Color) signal doesn't appear on the screen in PB Mode

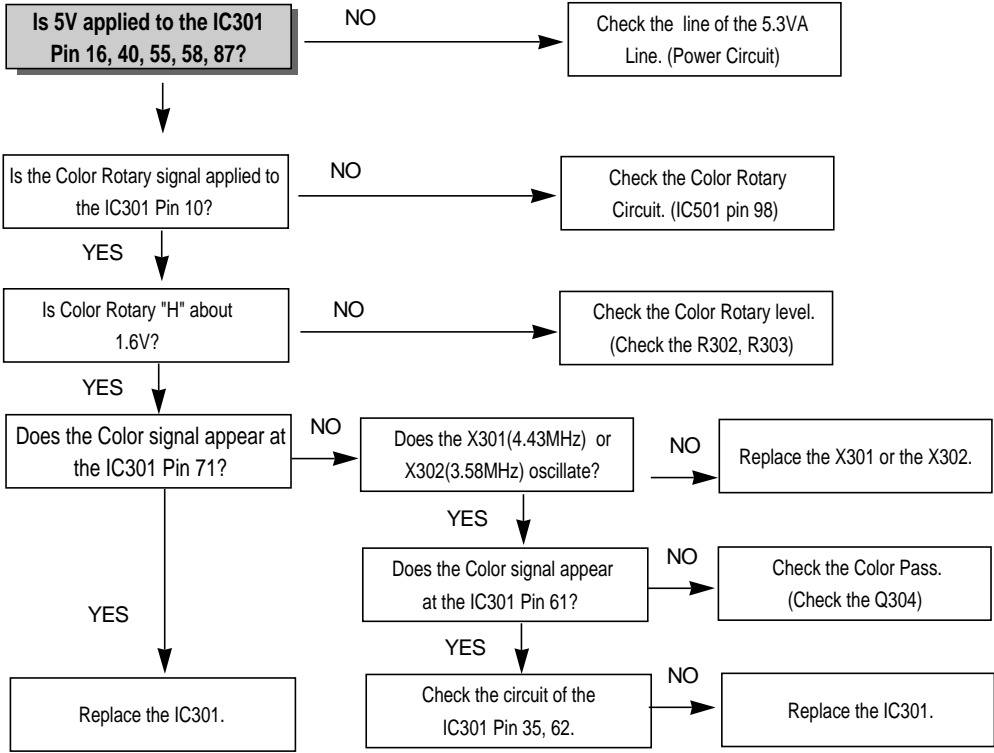


(4) When the Video signal doesn't appear on the screen in REC Mode.

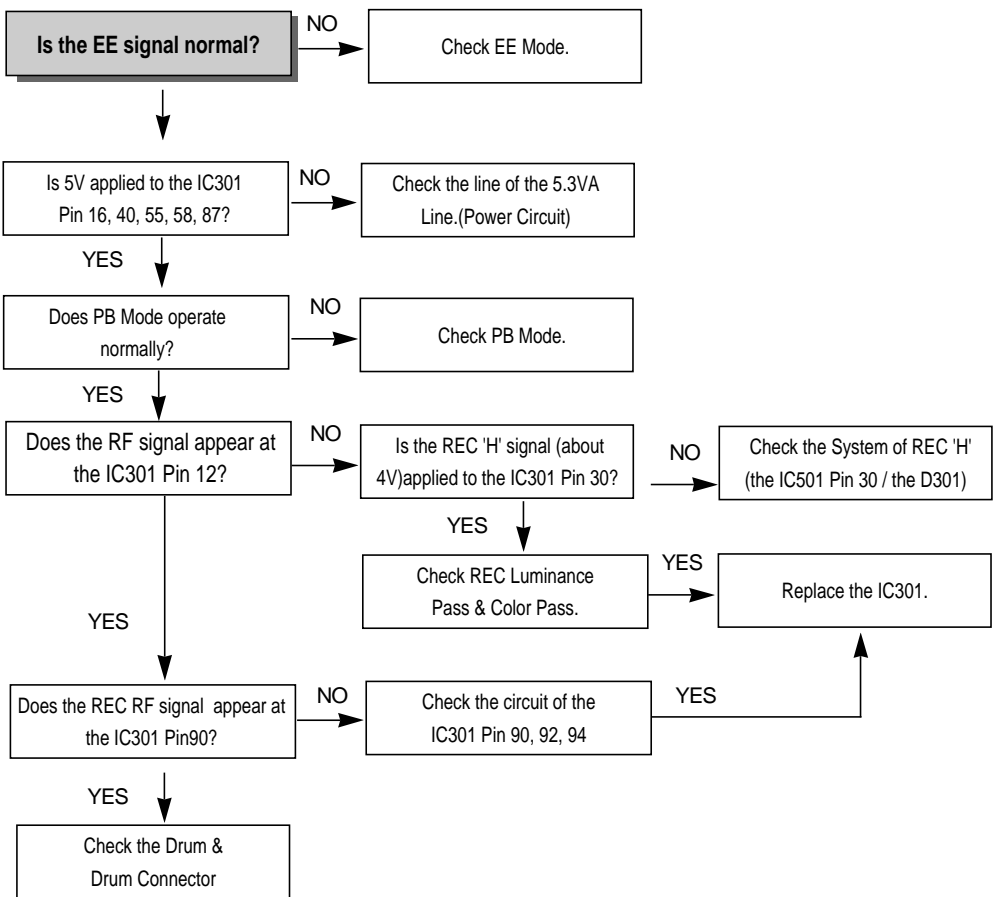


SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE

4. AUDIO CIRCUIT

(1) No sound in EE Mode

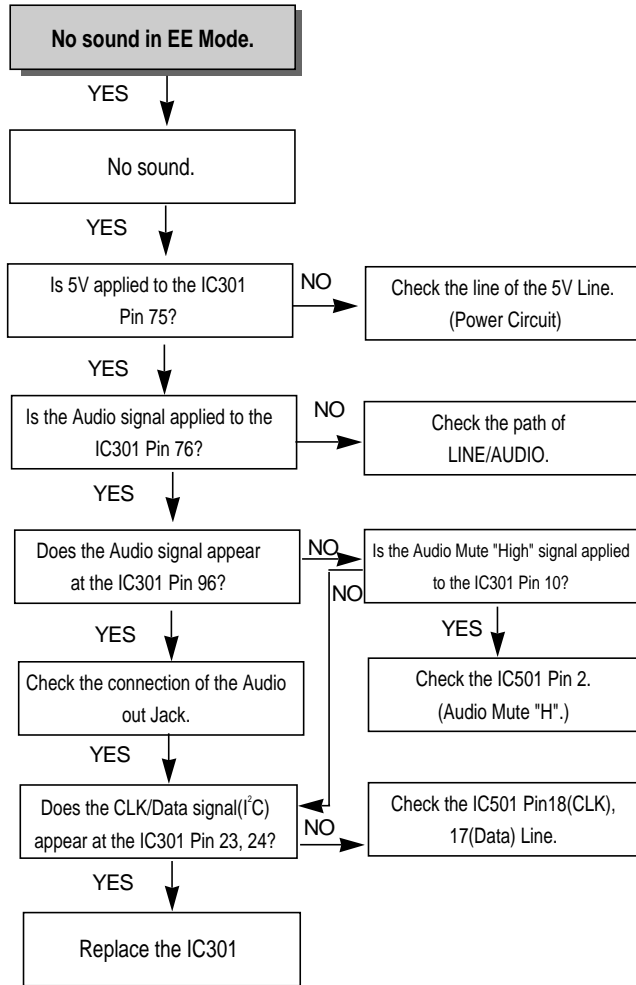


(2) No sound in PB MODE

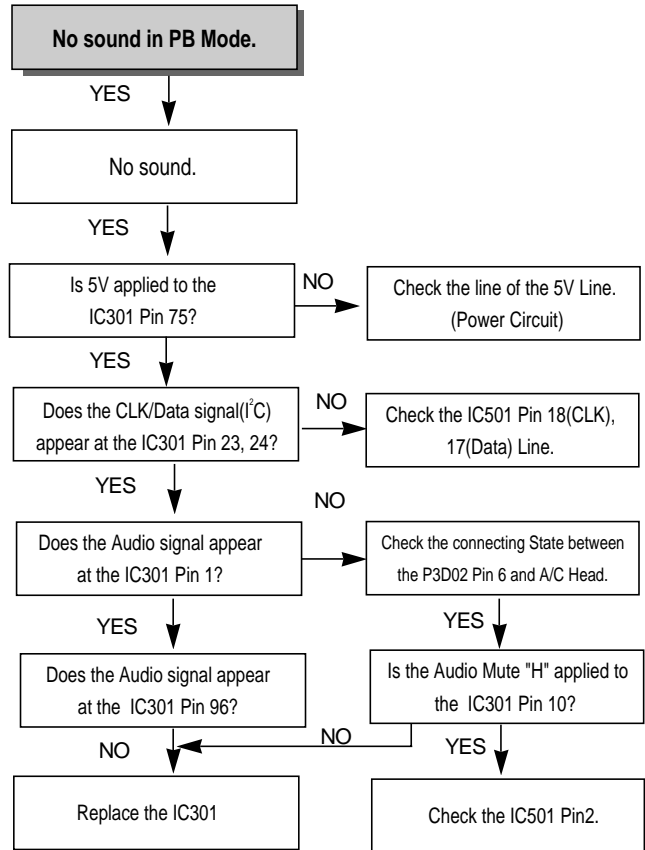

SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE


(3) No sound in REC Mode.

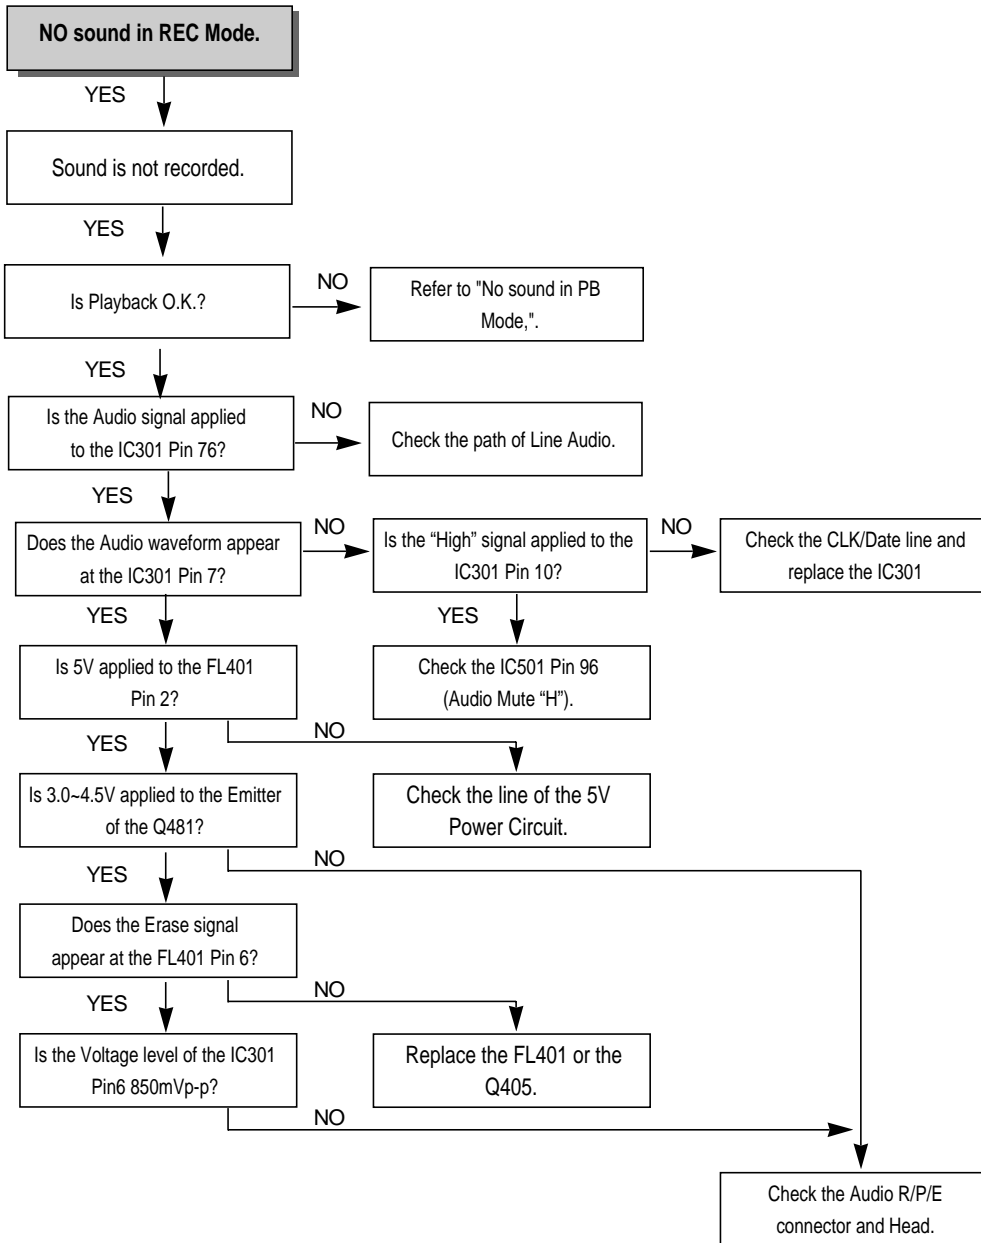


SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE

5. SYSTEM/KEY CIRCUIT

(1) AUTO STOP

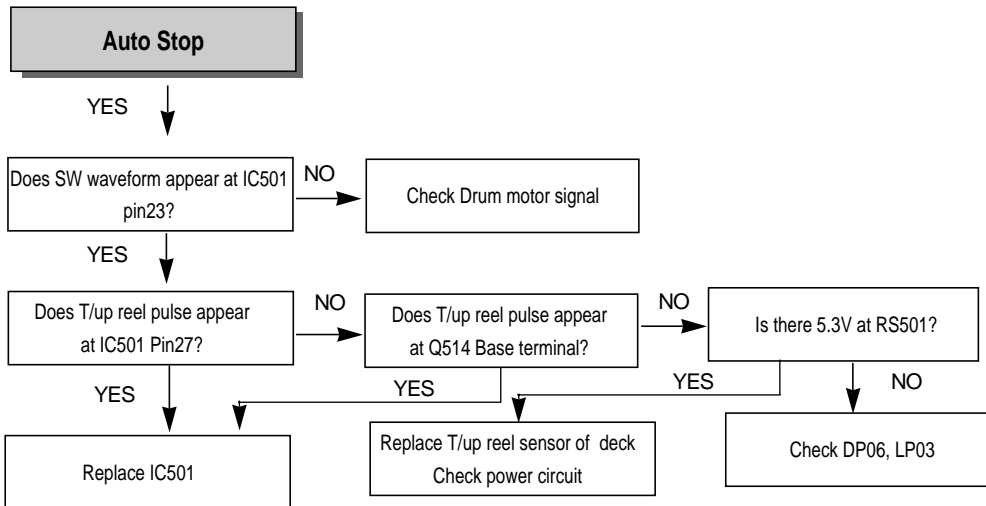


(2) No cassette tape loading

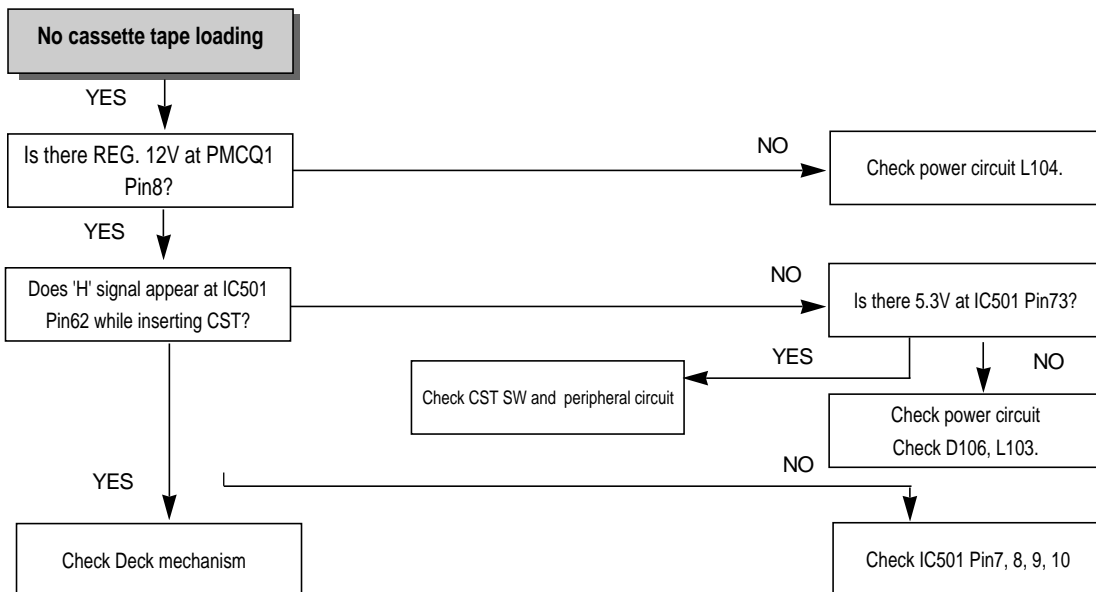

*Caution : Auto stop can occur because Grease or Oil is dried up


SECTION 3 ELECTRICAL ELECTRICAL TROUBLESHOOTING GUIDE

(3) No Key display

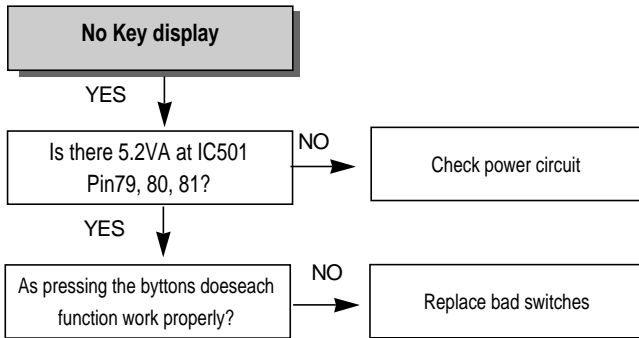


6. OSD CIRCUIT

(1) No OSD display.

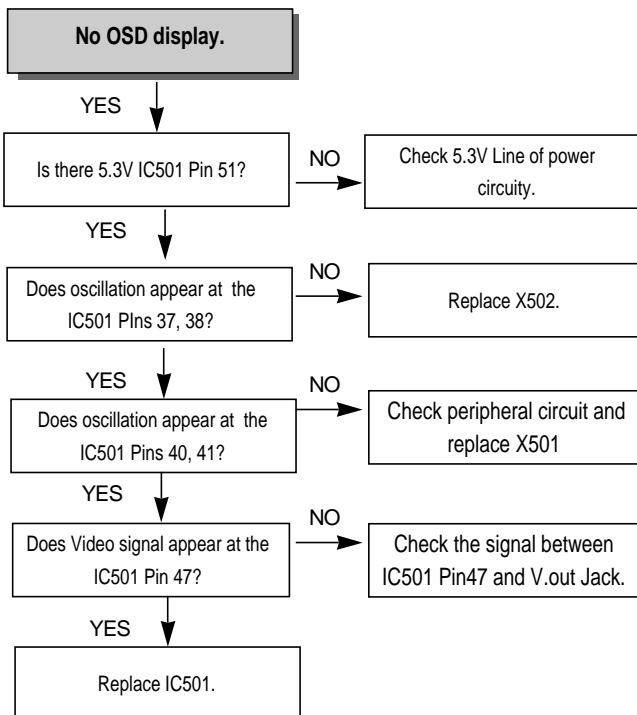


(2) No F.OSD display.

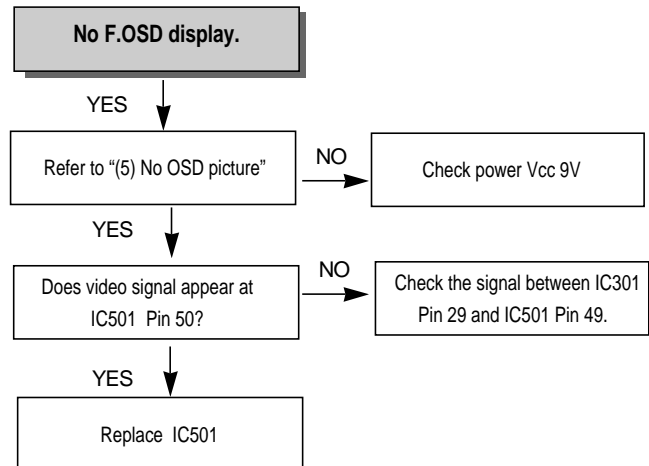


SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS

1. OVERALL WIRING DIAGRAM

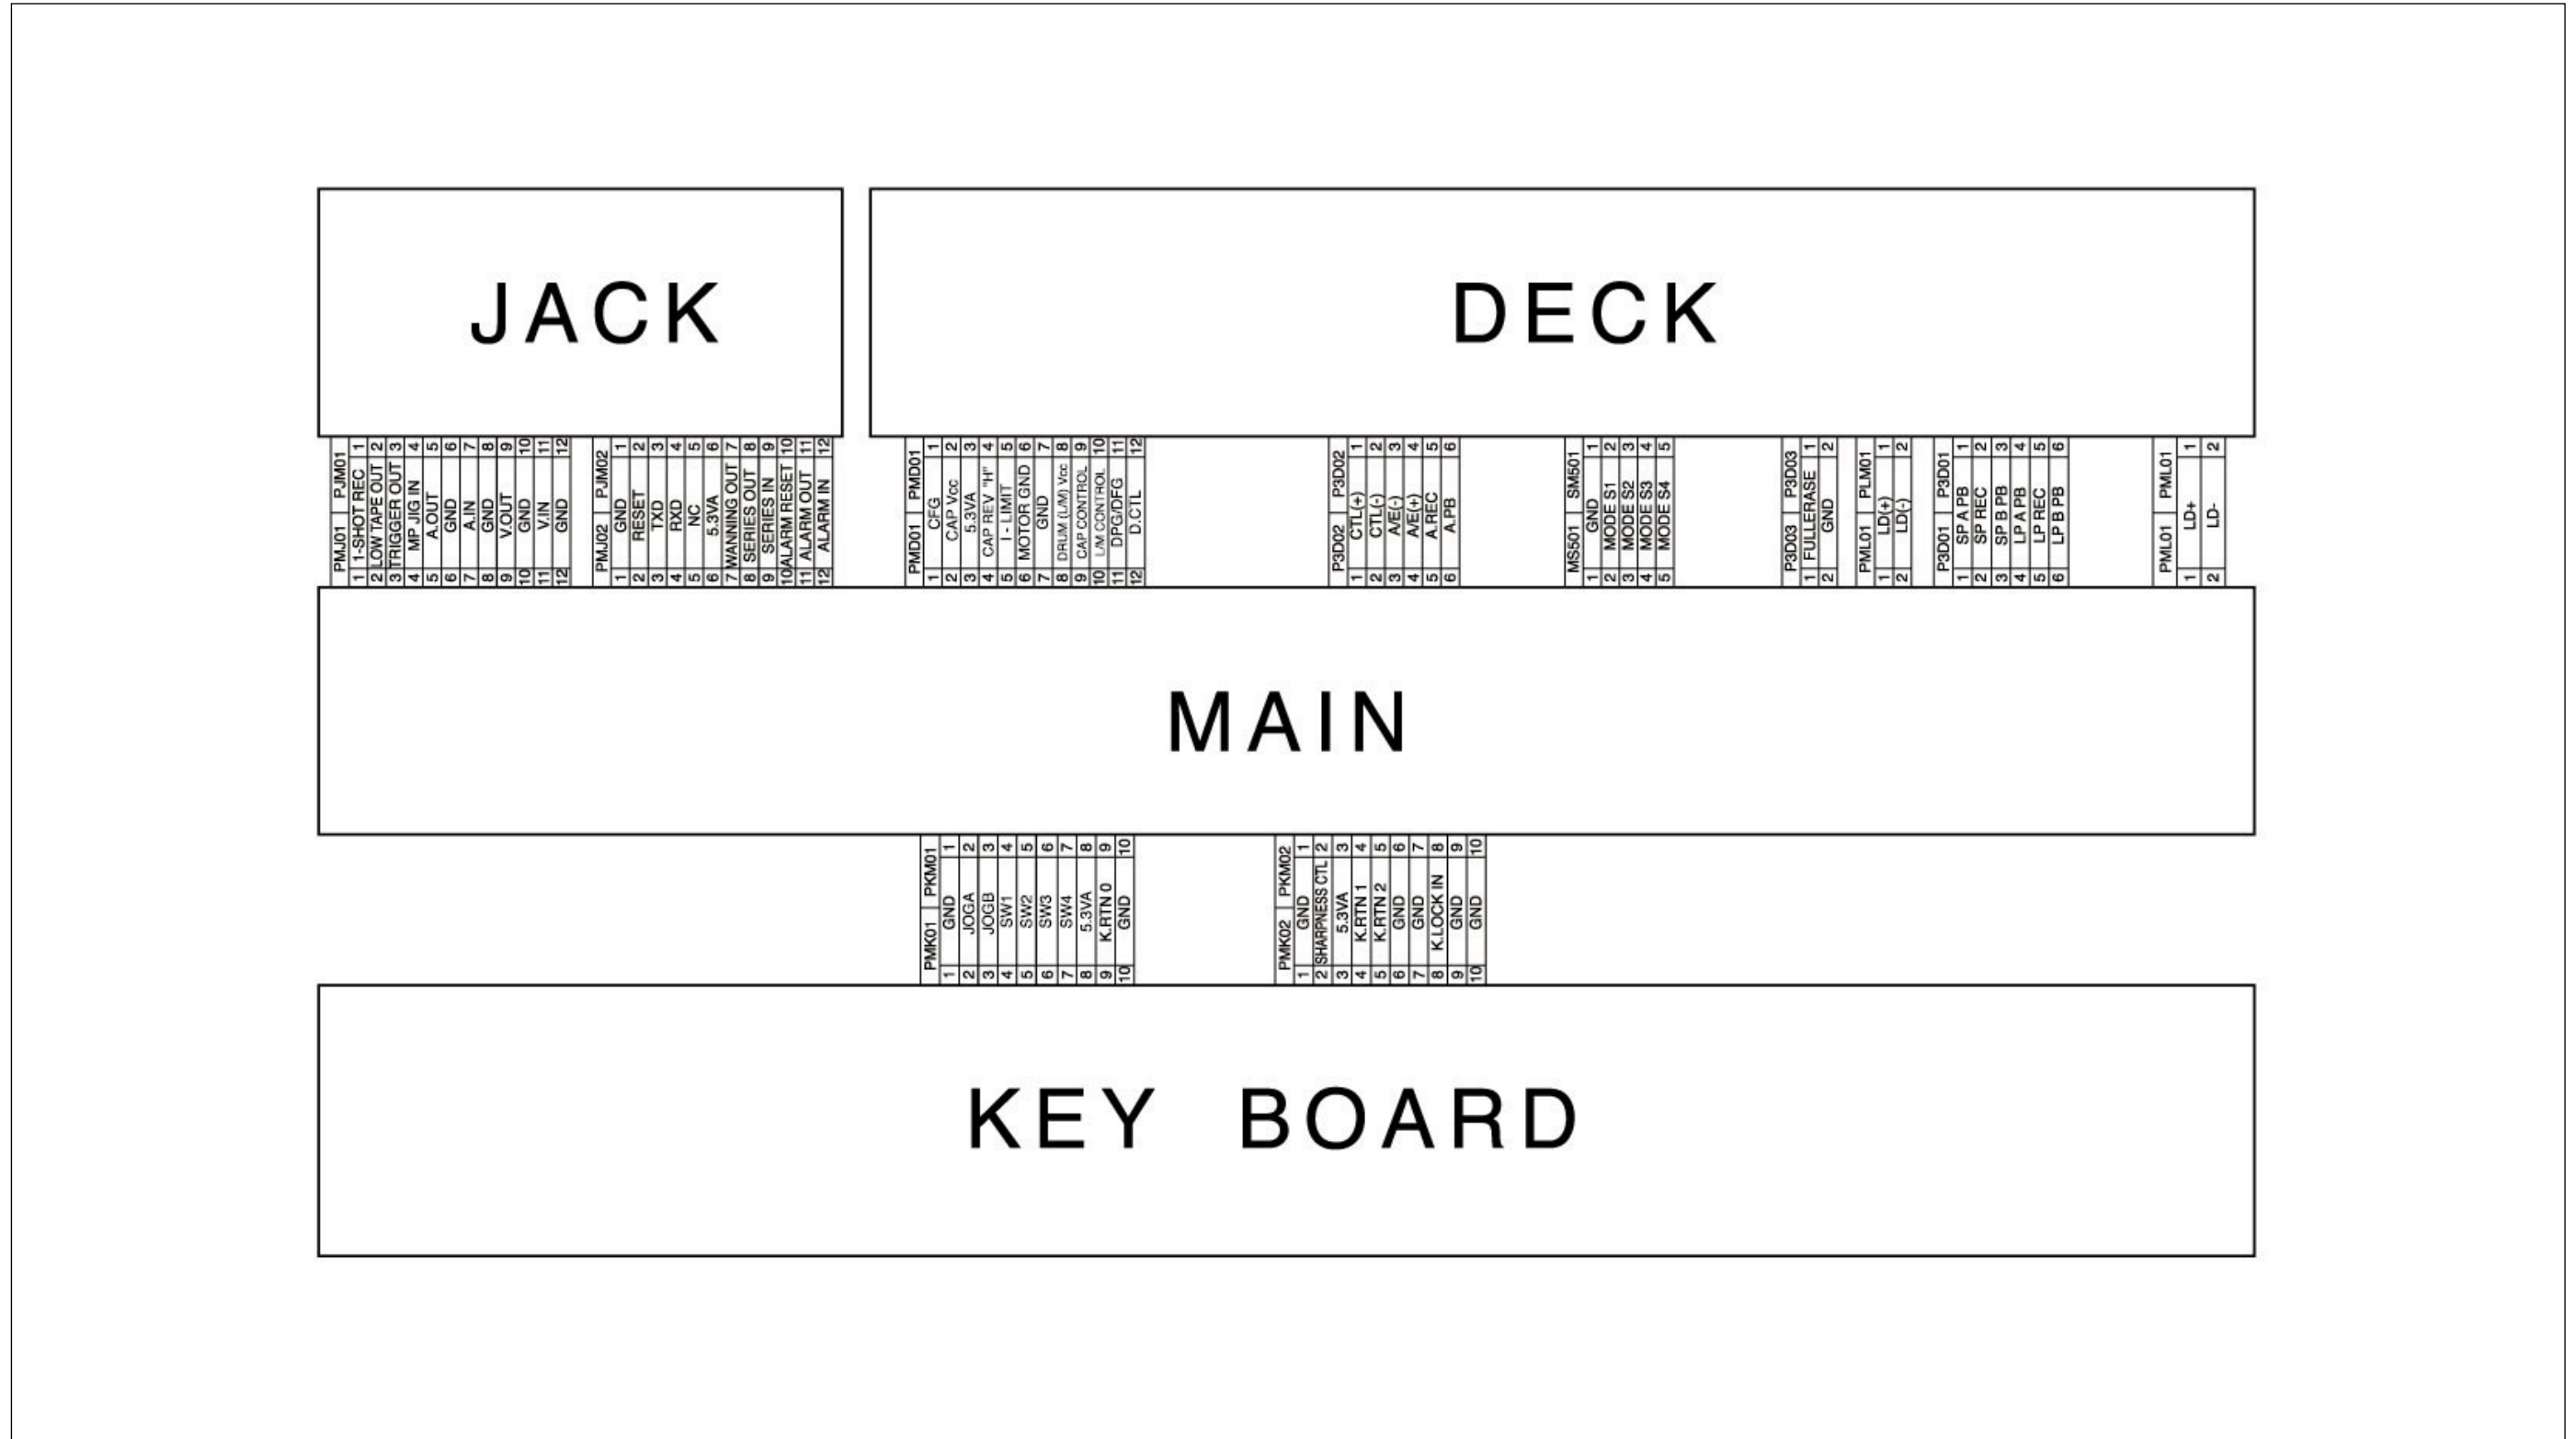


SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS

2. POWER BLOCK DIAGRAM

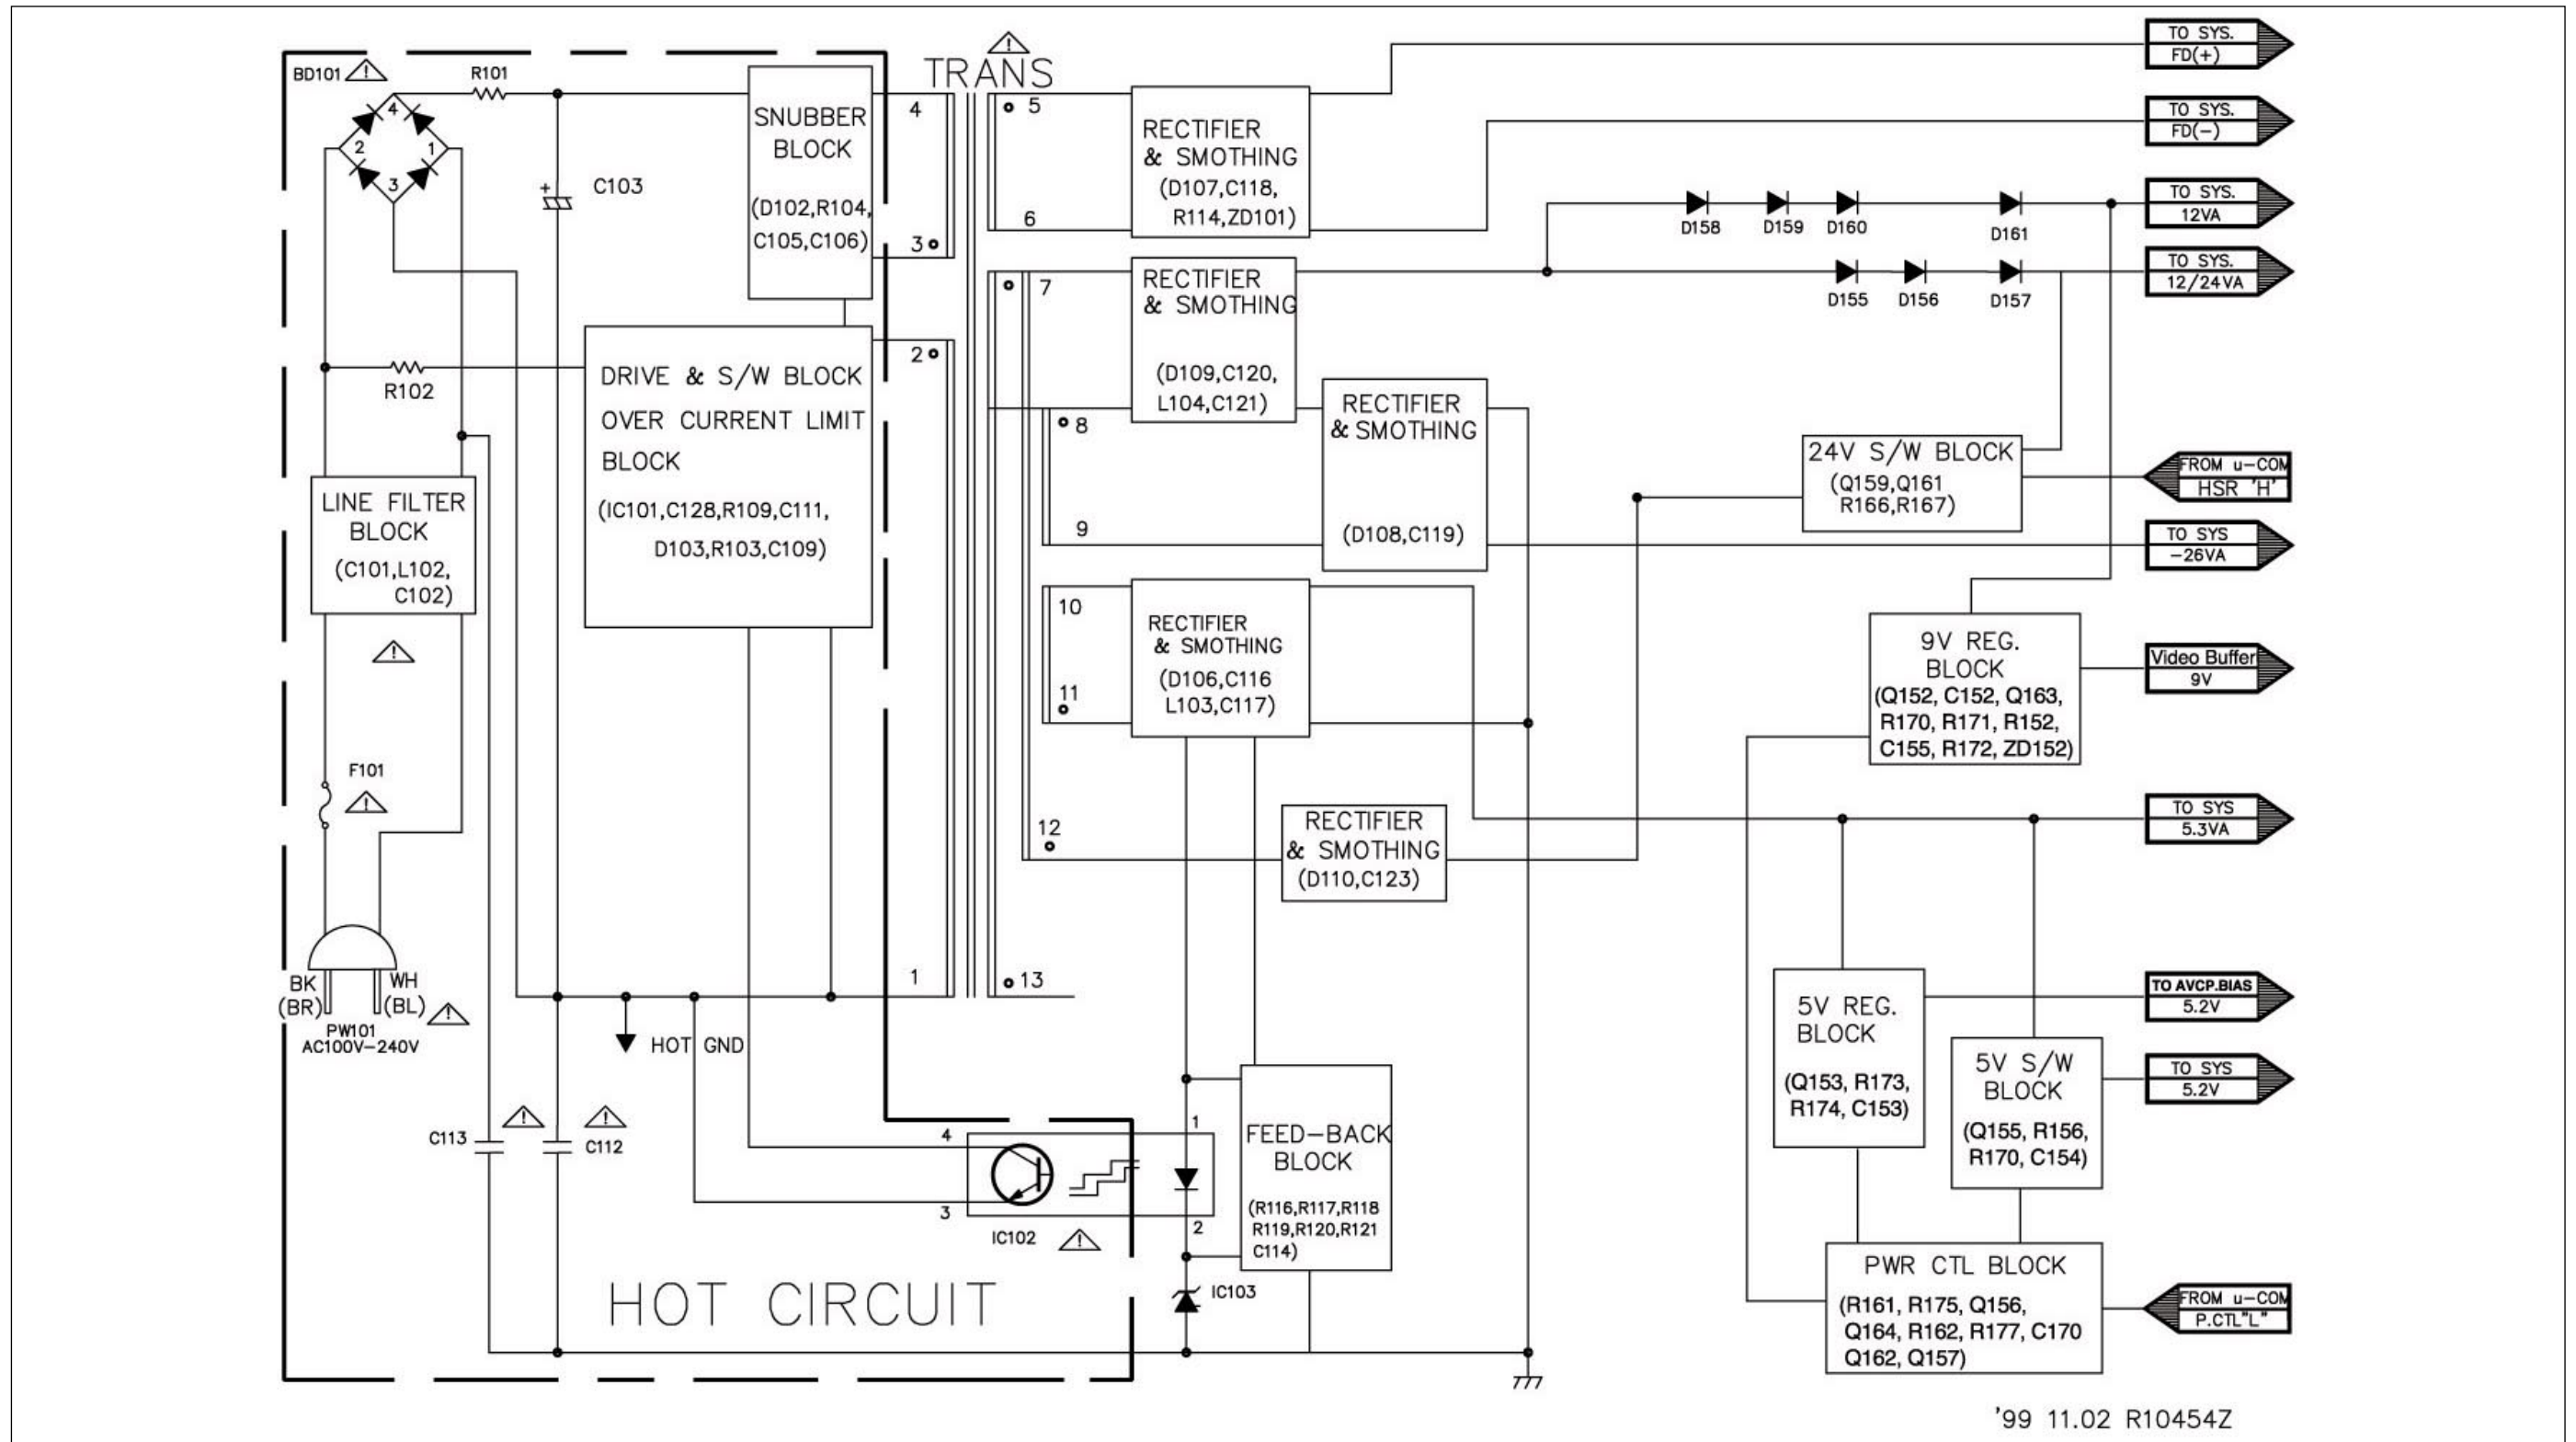

SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS

3. POWER CLRCUIT DIAGRAM

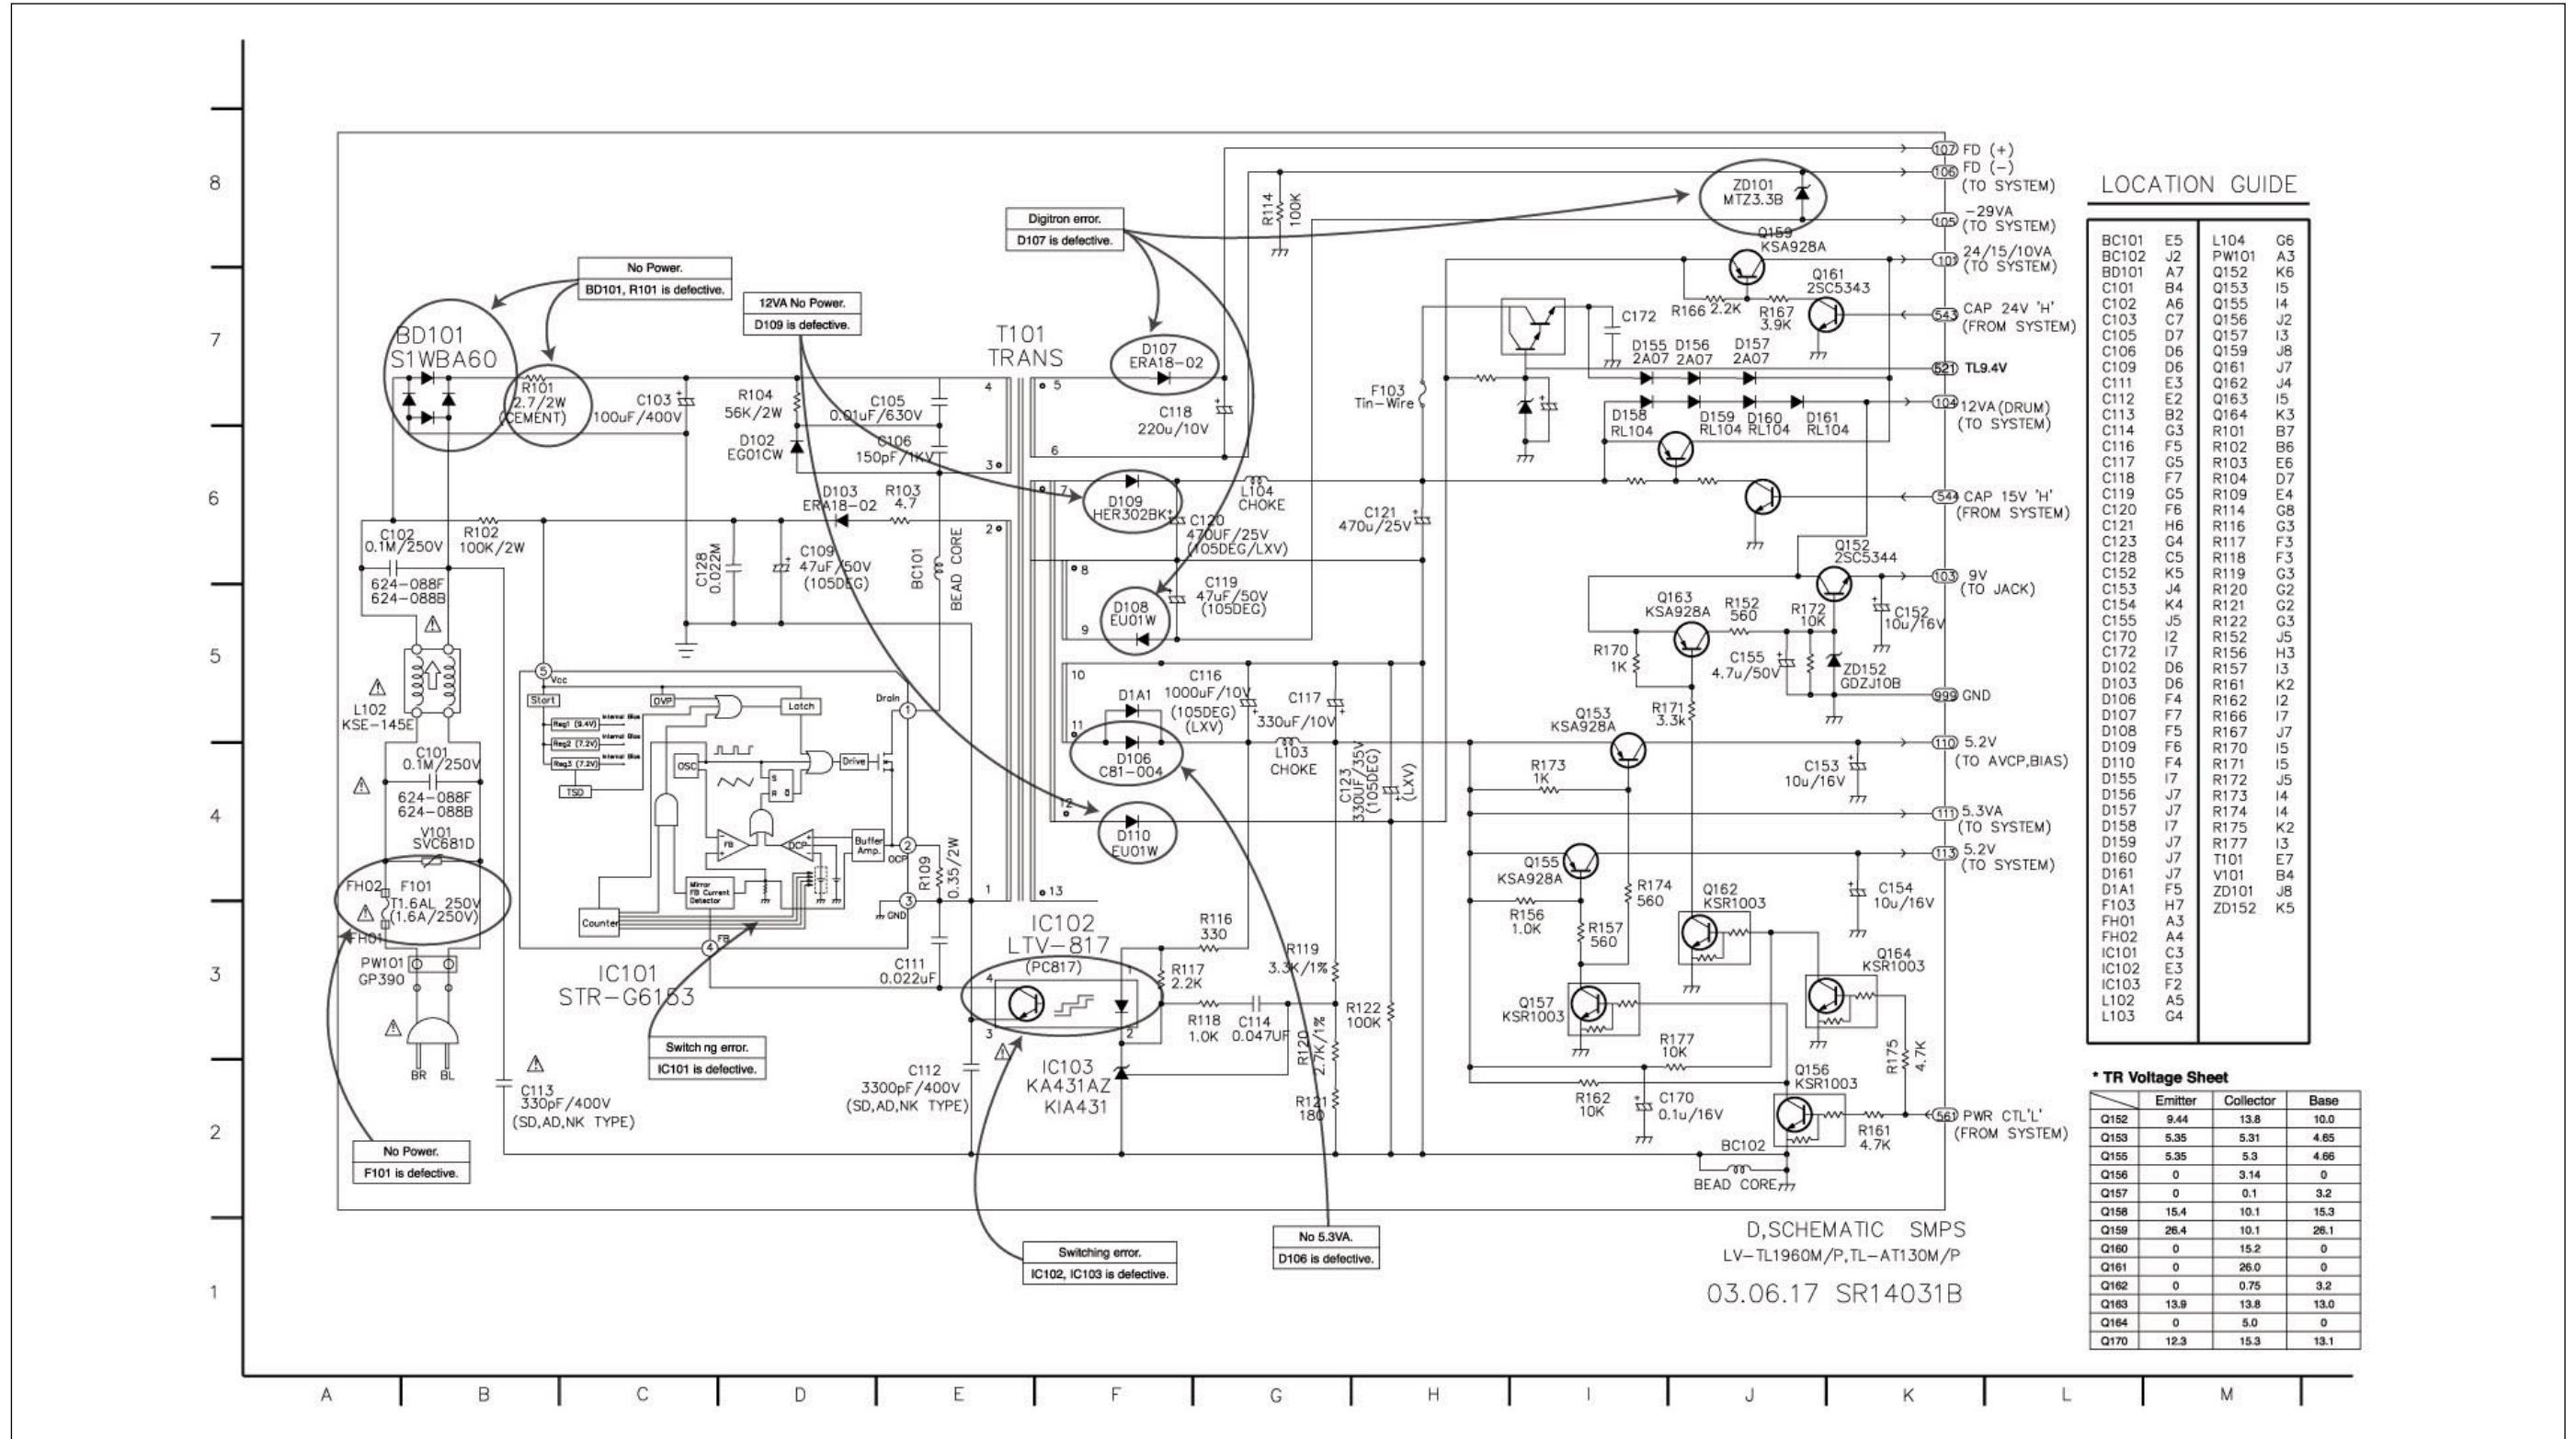

LOCATION GUIDE



| | | | |
|-------|----|-------|----|
| BC101 | E5 | L104 | G6 |
| BC102 | J2 | PW101 | A3 |
| BD101 | A7 | Q152 | K6 |
| C101 | B4 | Q153 | I5 |
| C102 | A6 | Q155 | I4 |
| C103 | C7 | Q156 | J2 |
| C105 | D7 | Q157 | I3 |
| C106 | D6 | Q159 | J8 |
| C109 | D6 | Q161 | J7 |
| C111 | E3 | Q162 | J4 |
| C112 | E2 | Q163 | I5 |
| C113 | B2 | Q164 | K3 |
| C114 | G3 | R101 | B7 |
| C116 | F5 | R102 | B6 |
| C117 | G5 | R103 | E6 |
| C118 | F7 | R104 | D7 |
| C119 | G5 | R109 | E4 |
| C120 | F6 | R114 | G8 |
| C121 | H6 | R116 | G3 |
| C123 | G4 | R117 | F3 |
| C128 | C5 | R118 | F3 |
| C152 | K5 | R119 | G3 |
| C153 | J4 | R120 | G2 |
| C154 | K4 | R121 | G2 |
| C155 | J5 | R122 | G3 |
| C170 | I2 | R152 | J5 |
| C172 | I7 | R156 | H3 |
| D102 | D6 | R157 | I3 |
| D103 | D6 | R161 | K2 |
| D106 | F4 | R162 | I2 |
| D107 | F7 | R166 | I7 |
| D108 | F5 | R167 | J7 |
| D109 | F6 | R170 | I5 |
| D110 | F4 | R171 | I5 |
| D155 | I7 | R172 | J5 |
| D156 | J7 | R173 | I4 |
| D157 | J7 | R174 | I4 |
| D158 | I7 | R175 | K2 |
| D159 | J7 | R177 | I3 |
| D160 | J7 | T101 | E7 |
| D161 | J7 | V101 | B4 |
| D1A1 | F5 | ZD101 | J8 |
| FH01 | A3 | ZD152 | K5 |
| FH02 | A4 | | |
| IC101 | C3 | | |
| IC102 | E3 | | |
| IC103 | F2 | | |
| L102 | A5 | | |
| L103 | G4 | | |

* TR Voltage Sheet

| | Emitter | Collector | Base |
|------|---------|-----------|------|
| Q152 | 9.44 | 13.8 | 10.0 |
| Q153 | 5.35 | 5.31 | 4.65 |
| Q155 | 5.35 | 5.3 | 4.66 |
| Q156 | 0 | 3.14 | 0 |
| Q157 | 0 | 0.1 | 3.2 |
| Q158 | 15.4 | 10.1 | 15.3 |
| Q159 | 26.4 | 10.1 | 26.1 |
| Q160 | 0 | 15.2 | 0 |
| Q161 | 0 | 26.0 | 0 |
| Q162 | 0 | 0.75 | 3.2 |
| Q163 | 13.9 | 13.8 | 13.0 |
| Q164 | 0 | 5.0 | 0 |
| Q170 | 12.3 | 15.3 | 13.1 |

SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS


4. AUDIO BLOCK DIAGRAM

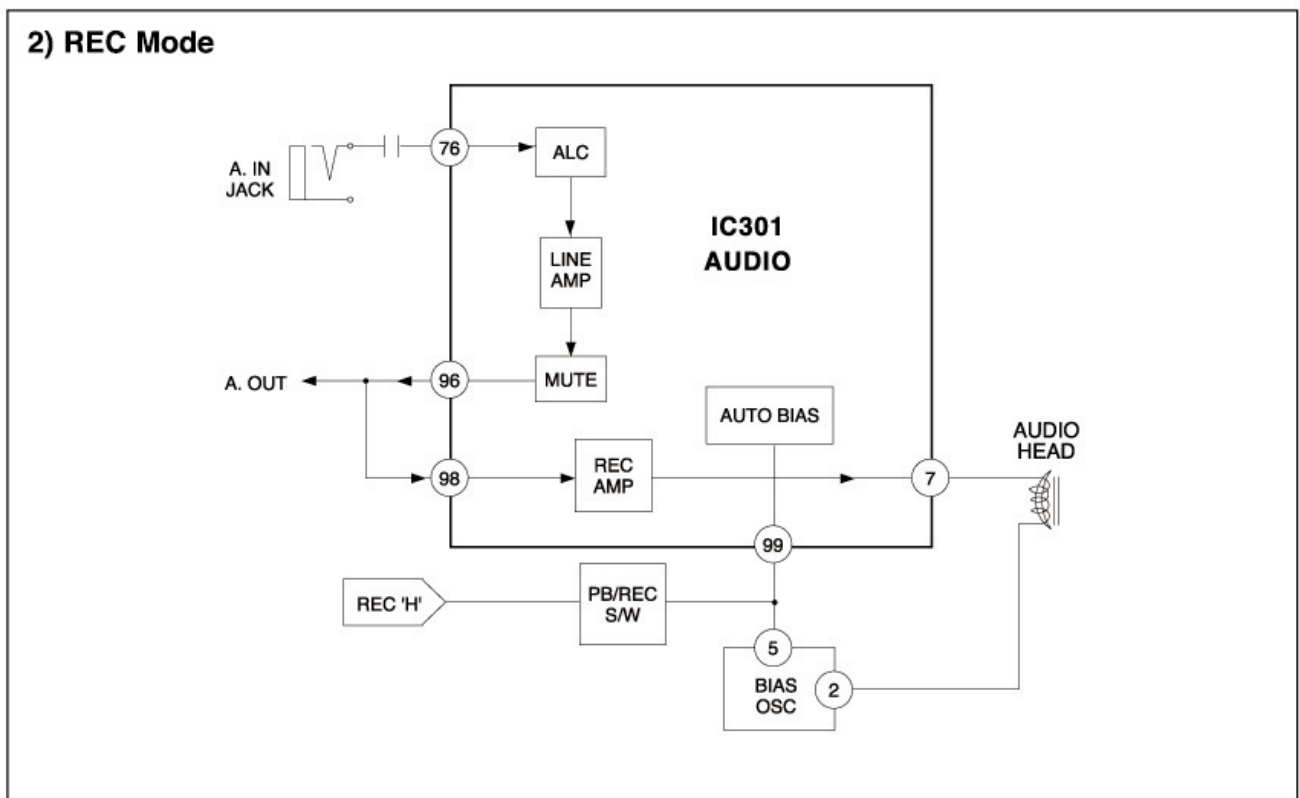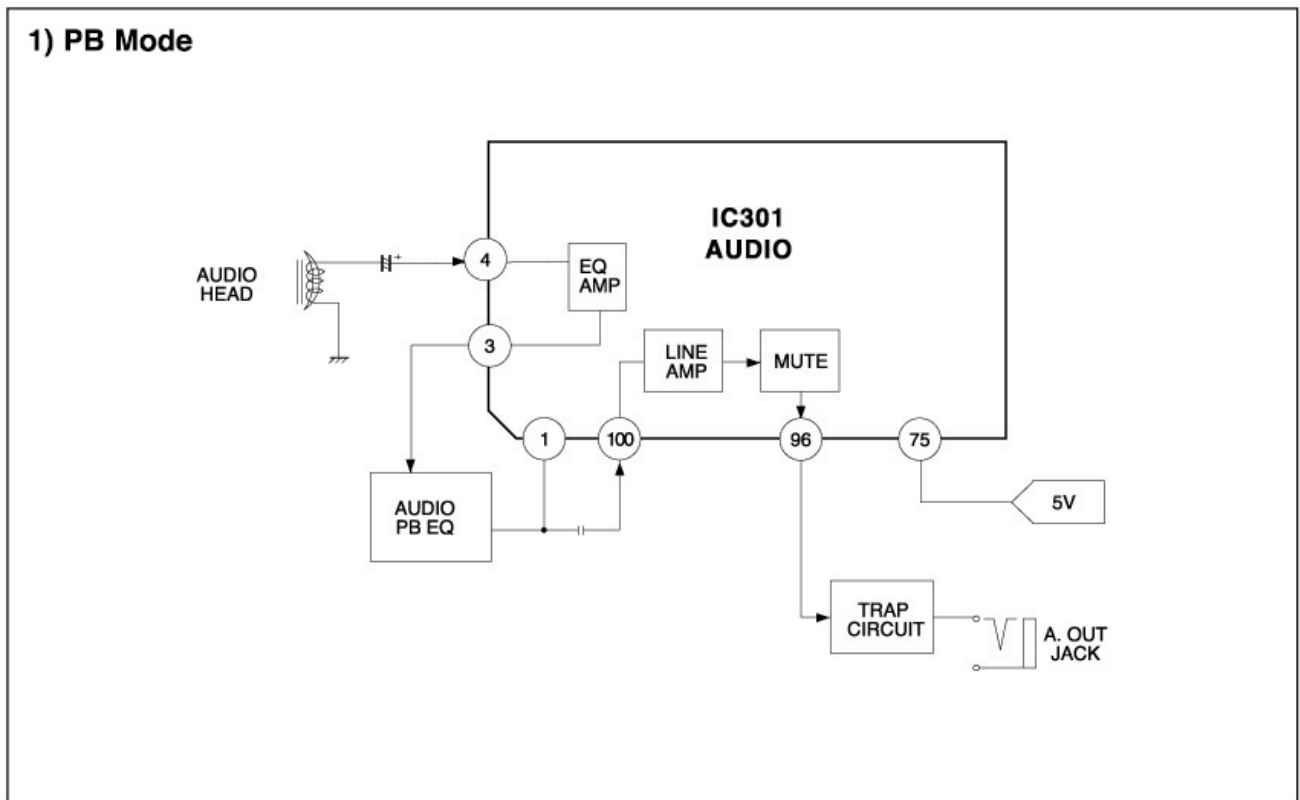


SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS

5. Y/C BLOCK DIAGRAM

1) PB Mode

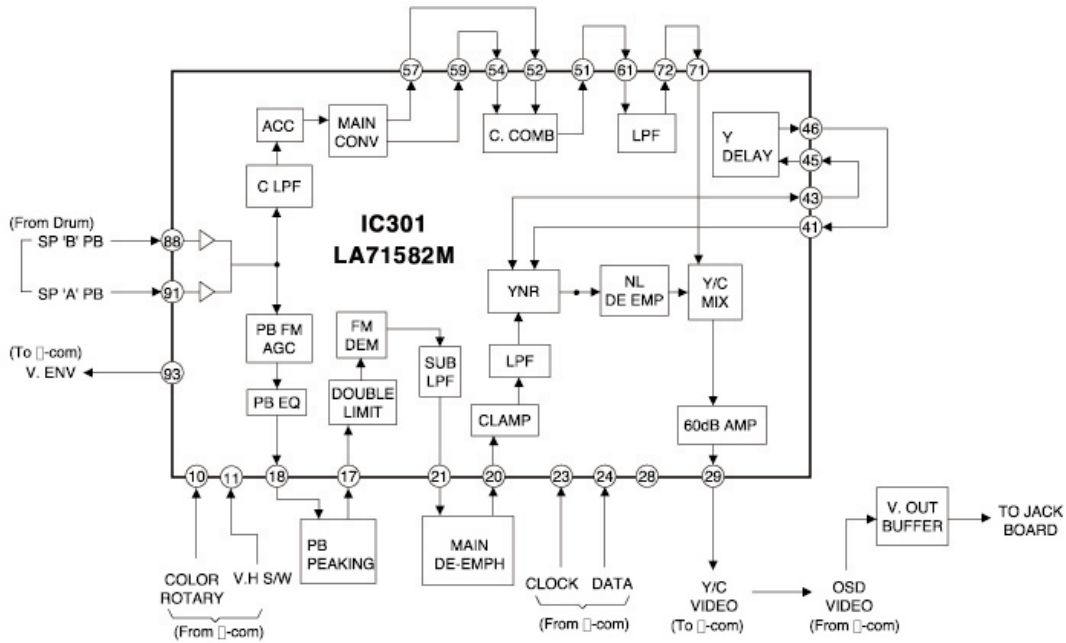


2) REC Mode

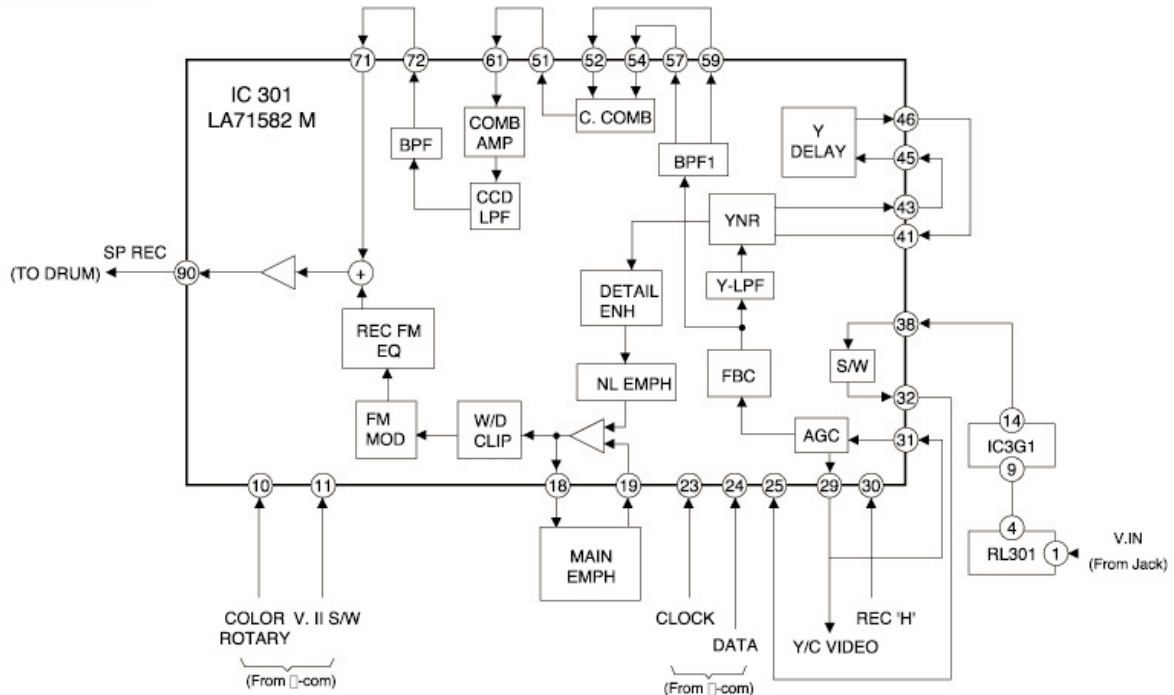

SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS


6. A/V CIRCUIT DIAGRAM

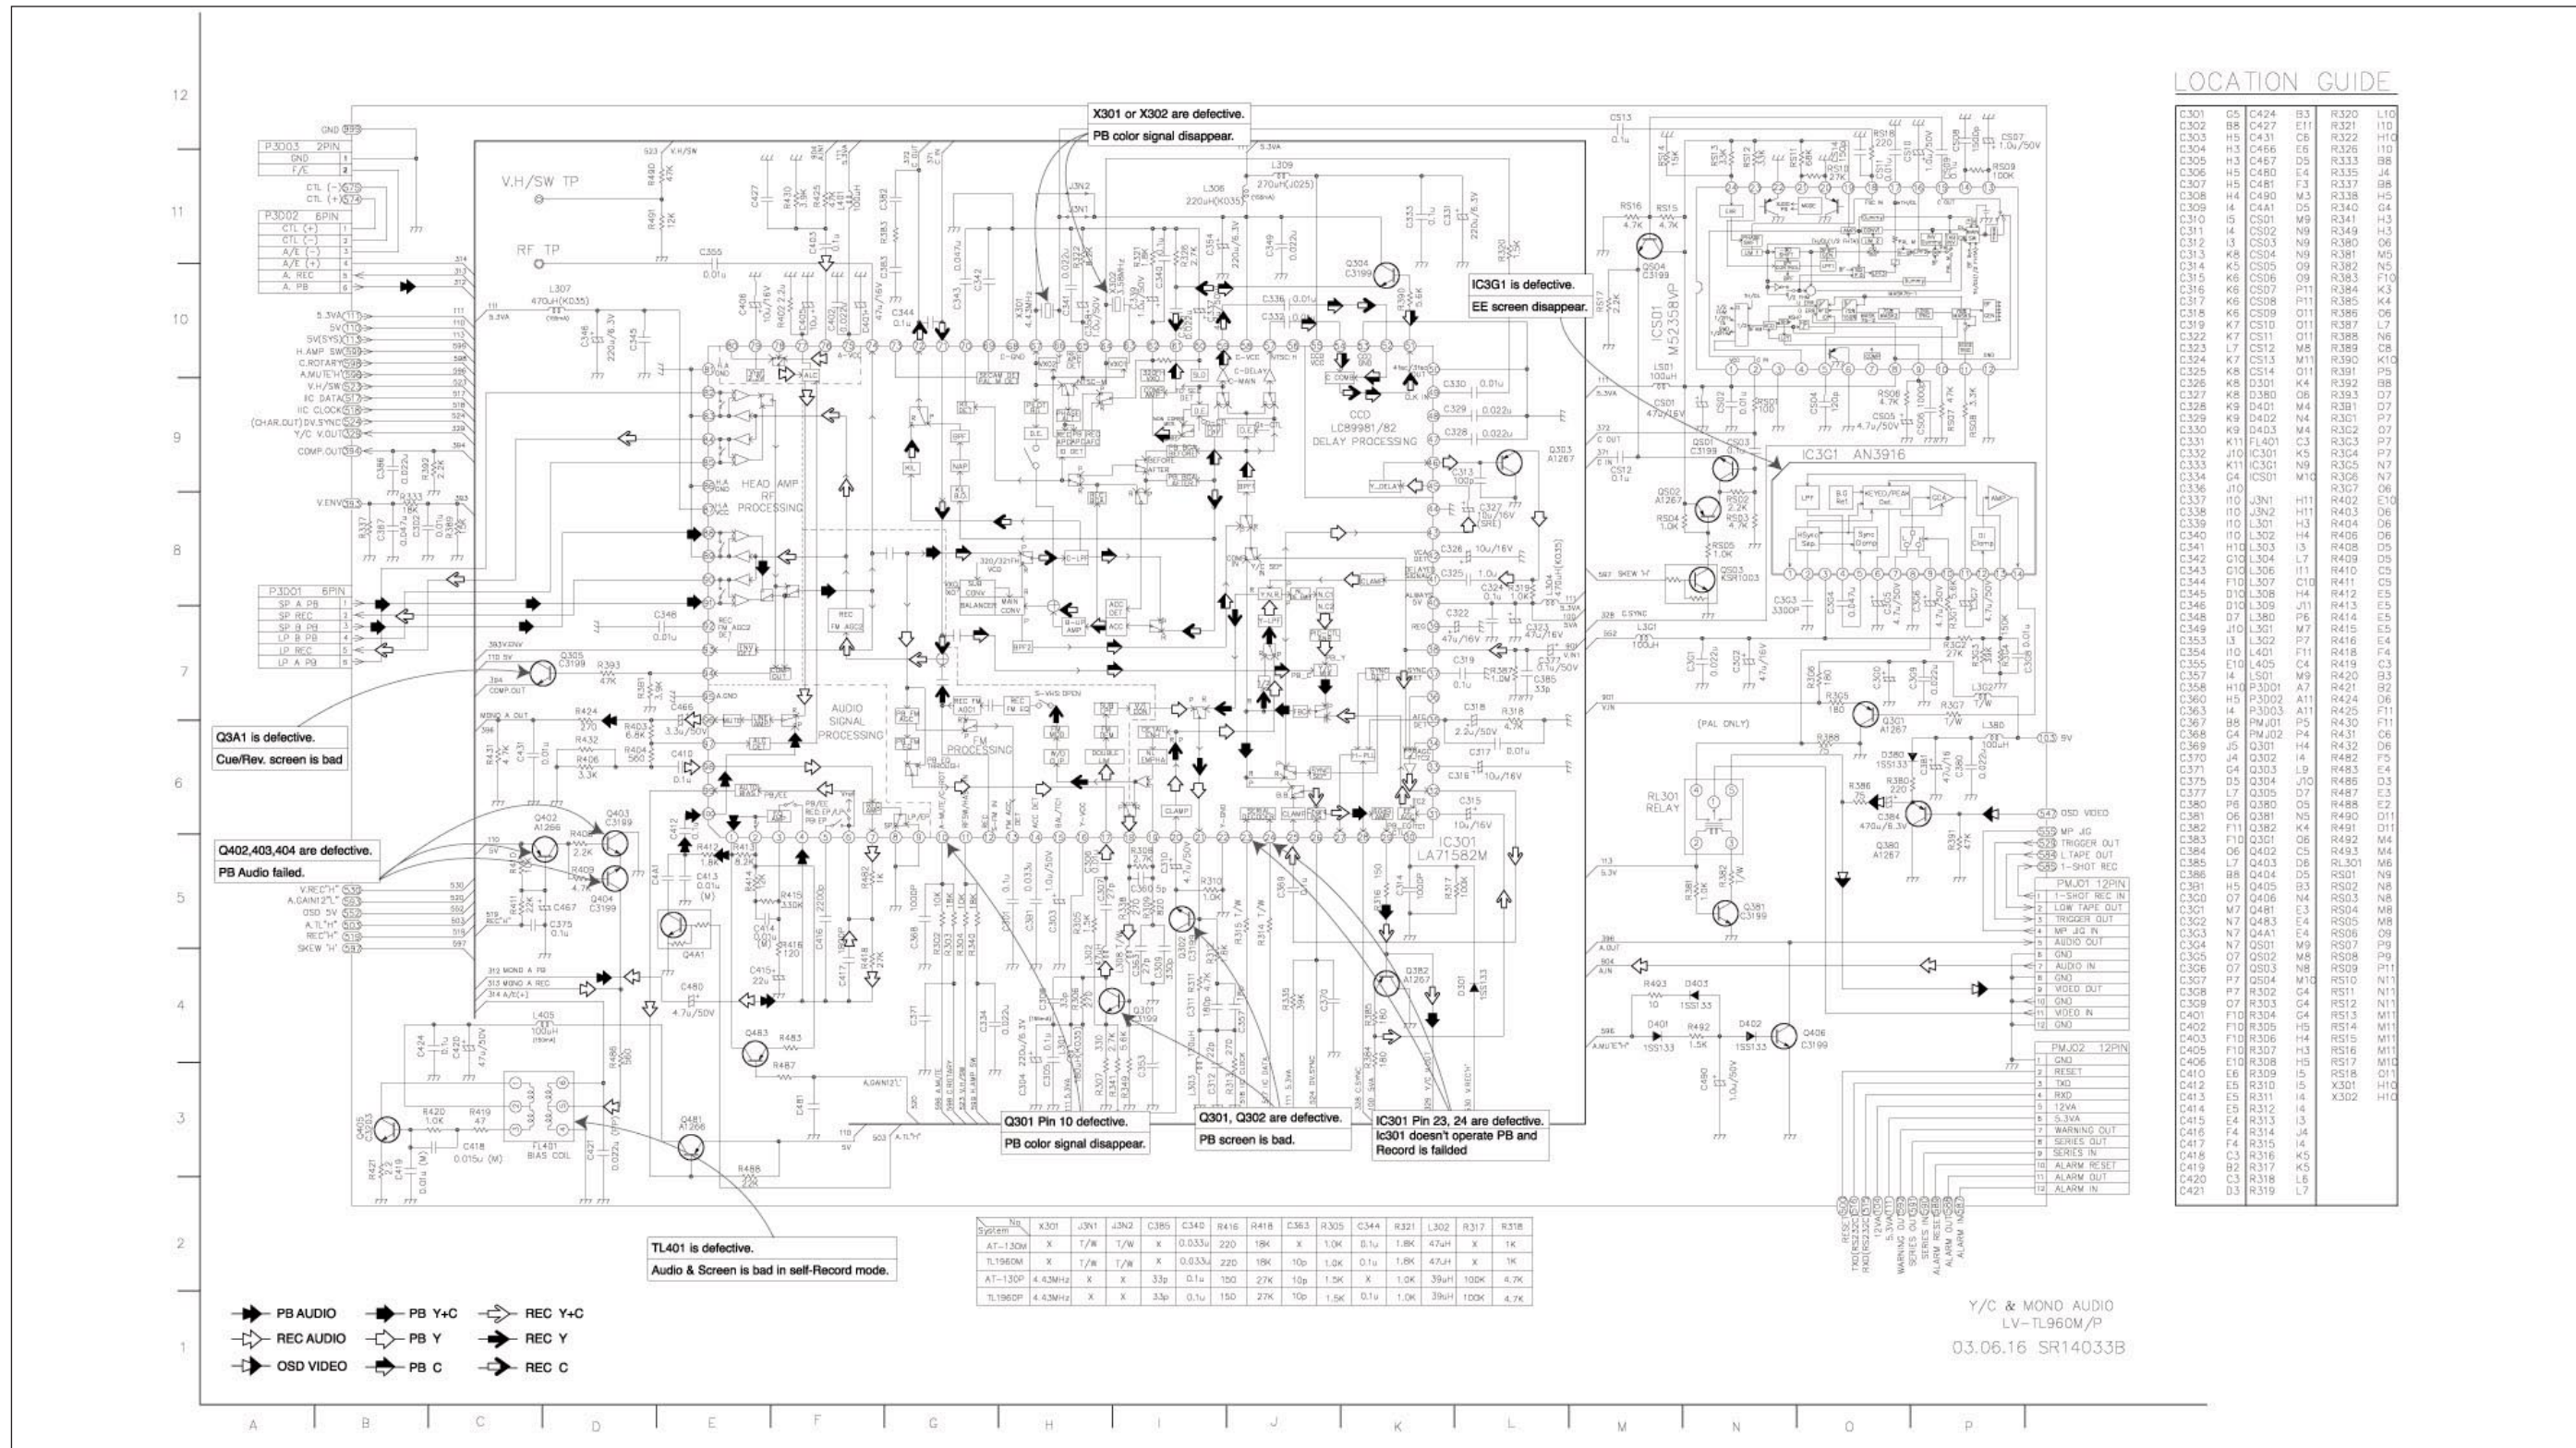

SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS

• WAVEFORM & VOLTAGE SHEET

* IC301 Oscilloscope Waveform

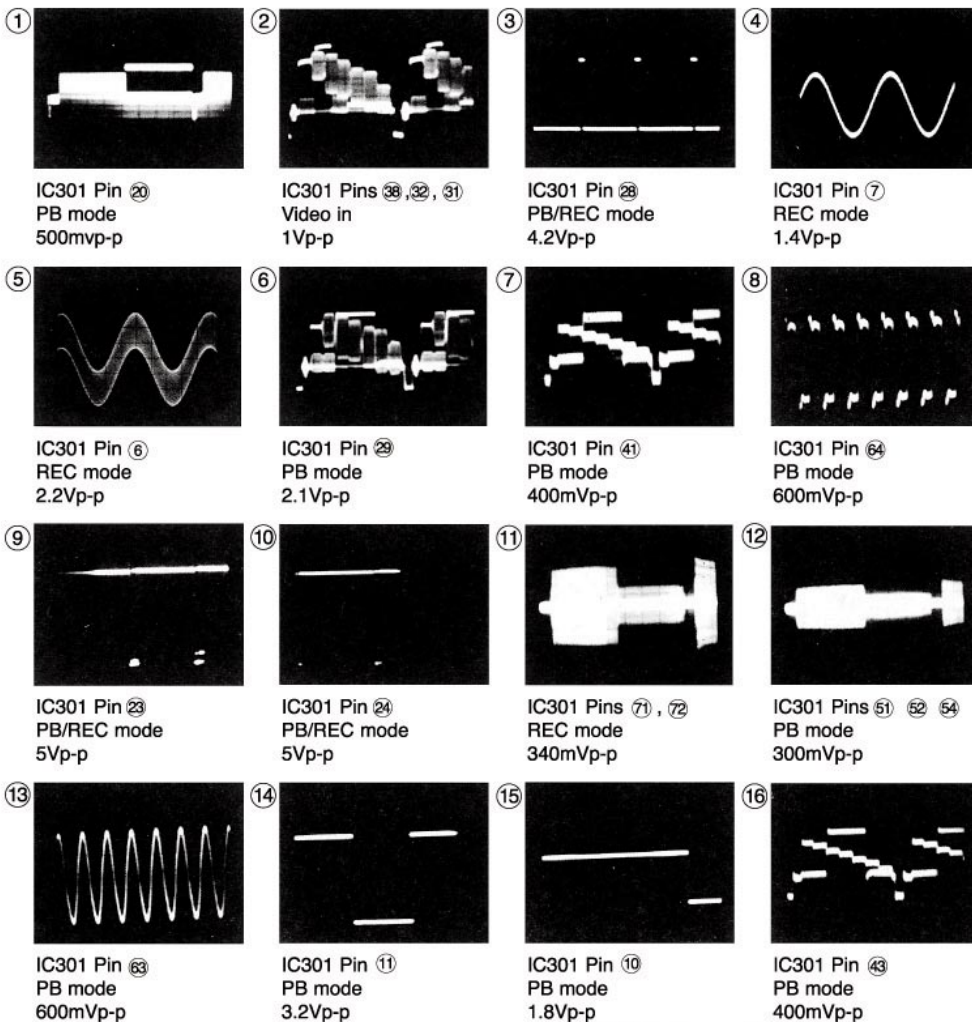

* TR Voltage Sheet

| | Emitter | Collector | Base |
|------|---------|-----------|-------|
| Q301 | 1.54 | 4.15 | 2.18 |
| Q302 | 1.8 | 5.07 | 2.42 |
| Q303 | 1.95 | 0 | 1.34 |
| Q304 | 1.2 | 5.0 | 1.7 |
| Q382 | 1.6 | 0 | 0.93 |
| Q3A1 | 0.7 | 5.2 | 1.25 |
| Q3A2 | 0 | 0 | 5.04 |
| Q380 | 2.59 | 0 | 1.89 |
| Q381 | 0 | 0.1 | 0.8 |
| Q3G1 | 2.29 | 0 | 1.6 |
| Q402 | 5.2 | 27.9 | 5.3 |
| Q403 | -21.1 | 0 | -28.3 |
| Q404 | -21.1 | 0 | -28.8 |
| Q405 | 0.2 | 3.48 | 0.48 |
| Q406 | 0 | 0 | 0.13 |
| Q4A1 | 0 | 0 | 0 |
| Q481 | 5.23 | 3.76 | 4.40 |
| Q483 | 2.4 | 2.5 | 5.2 |

IC301 Voltage Sheet


| PIN | PB | REC | PIN | PB | REC | PIN | PB | REC | PIN | PB | REC | PIN | PB | REC |
|-----|------|------|-----|------|------|-----|------|------|-----|------|------|-----|------|------|
| 1 | 2.44 | 2.41 | 21 | 2.15 | 2.54 | 41 | 3.02 | 2.9 | 61 | 3.36 | 3.43 | 81 | 0.0 | 0.0 |
| 2 | 2.44 | 2.41 | 22 | 0.0 | 0.0 | 42 | 2.79 | 3.1 | 62 | 3.47 | 3.45 | 82 | 0.01 | 0.01 |
| 3 | 2.47 | 2.52 | 23 | 4.85 | 4.85 | 43 | 1.96 | 2.11 | 63 | 3.83 | 3.72 | 83 | 0.01 | 0.01 |
| 4 | 2.45 | 2.39 | 24 | 4.85 | 4.85 | 44 | 0.17 | 0.17 | 64 | 2.63 | 2.72 | 84 | 0.76 | 0.69 |
| 5 | 0.05 | 2.4 | 25 | 0.0 | 0.0 | 45 | 1.53 | 2.26 | 65 | 2.06 | 1.35 | 85 | 0.76 | 0.69 |
| 6 | 2.47 | 2.42 | 26 | 0.07 | 0.07 | 46 | 1.64 | 1.5 | 66 | 2.63 | 2.75 | 86 | 0.0 | 0.0 |
| 7 | 2.47 | 2.42 | 27 | 0.34 | 0.34 | 47 | 9.59 | 9.53 | 67 | 3.9 | 3.72 | 87 | 4.97 | 4.99 |
| 8 | 0.0 | 0.0 | 28 | 0.34 | 0.34 | 48 | 2.21 | 2.33 | 68 | 0.0 | 0.0 | 88 | 1.89 | 4.84 |
| 9 | 0.0 | 0.0 | 29 | 1.73 | 1.94 | 49 | 0.88 | 0.89 | 69 | 0.63 | 0.6 | 89 | 0.0 | 0.0 |
| 10 | 0.97 | 0.97 | 30 | 1.09 | 4.35 | 50 | 0.0 | 0.0 | 70 | 1.98 | 2.83 | 90 | 1.89 | 0.0 |
| 11 | 1.7 | 1.7 | 31 | 2.88 | 2.88 | 51 | 1.94 | 1.9 | 71 | 2.5 | 2.43 | 91 | 1.89 | 4.84 |
| 12 | 5.05 | 2.69 | 32 | 1.5 | 2.27 | 52 | 2.59 | 2.59 | 72 | 3.26 | 3.02 | 92 | 0.21 | 0.23 |
| 13 | 1.5 | 1.42 | 33 | 1.87 | 1.31 | 53 | 0.0 | 0.0 | 73 | 3.4 | 3.36 | 93 | 4.23 | 0.02 |
| 14 | 1.9 | 1.53 | 34 | 1.82 | 3.31 | 54 | 2.62 | 2.58 | 74 | 1.8 | 0.01 | 94 | 0.01 | 0.25 |
| 15 | 2.3 | 2.31 | 35 | 1.26 | 3.36 | 55 | 5.07 | 5.01 | 75 | 4.99 | 4.95 | 95 | 0.0 | 0.0 |
| 16 | 5.07 | 5.02 | 36 | 1.82 | 3.31 | 56 | 0.22 | 0.53 | 76 | 2.44 | 2.44 | 96 | 2.26 | 2.26 |
| 17 | 3.03 | 0.17 | 37 | 1.61 | 4.73 | 57 | 3.36 | 3.43 | 77 | 0.01 | 0.01 | 97 | 0.0 | 0.0 |
| 18 | 1.87 | 2.47 | 38 | 2.14 | 2.24 | 58 | 5.01 | 4.98 | 78 | 2.44 | 2.44 | 98 | 2.44 | 1.62 |
| 19 | 1.12 | 2.47 | 39 | 4.05 | 4.06 | 59 | 3.3 | 3.36 | 79 | 2.47 | 2.44 | 99 | 4.97 | 4.11 |
| 20 | 2.98 | 3.04 | 40 | 5.08 | 5.02 | 60 | 3.46 | 3.43 | 80 | 2.38 | 1.92 | 100 | 2.44 | 3.26 |

* IC3G1 Voltage Sheet

| PIN No. | PB | REC |
|---------|-----|-----|
| 1 | 0.0 | 0.0 |
| 2 | 3.7 | 3.2 |
| 3 | 5.1 | 5.1 |
| 4 | 2.0 | 2.0 |
| 5 | 1.4 | 1.4 |
| 6 | 1.2 | 1.1 |
| 7 | 2.9 | 2.9 |
| 8 | 0 | 0.0 |
| 9 | 2.9 | 2.9 |
| 10 | 5.0 | 5.0 |
| 11 | 2.7 | 2.7 |
| 12 | 3.0 | 3.0 |
| 13 | 3.0 | 3.0 |
| 14 | 1.6 | 1.6 |

SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS


7. SYSTEM BLOCK DIAGRAM

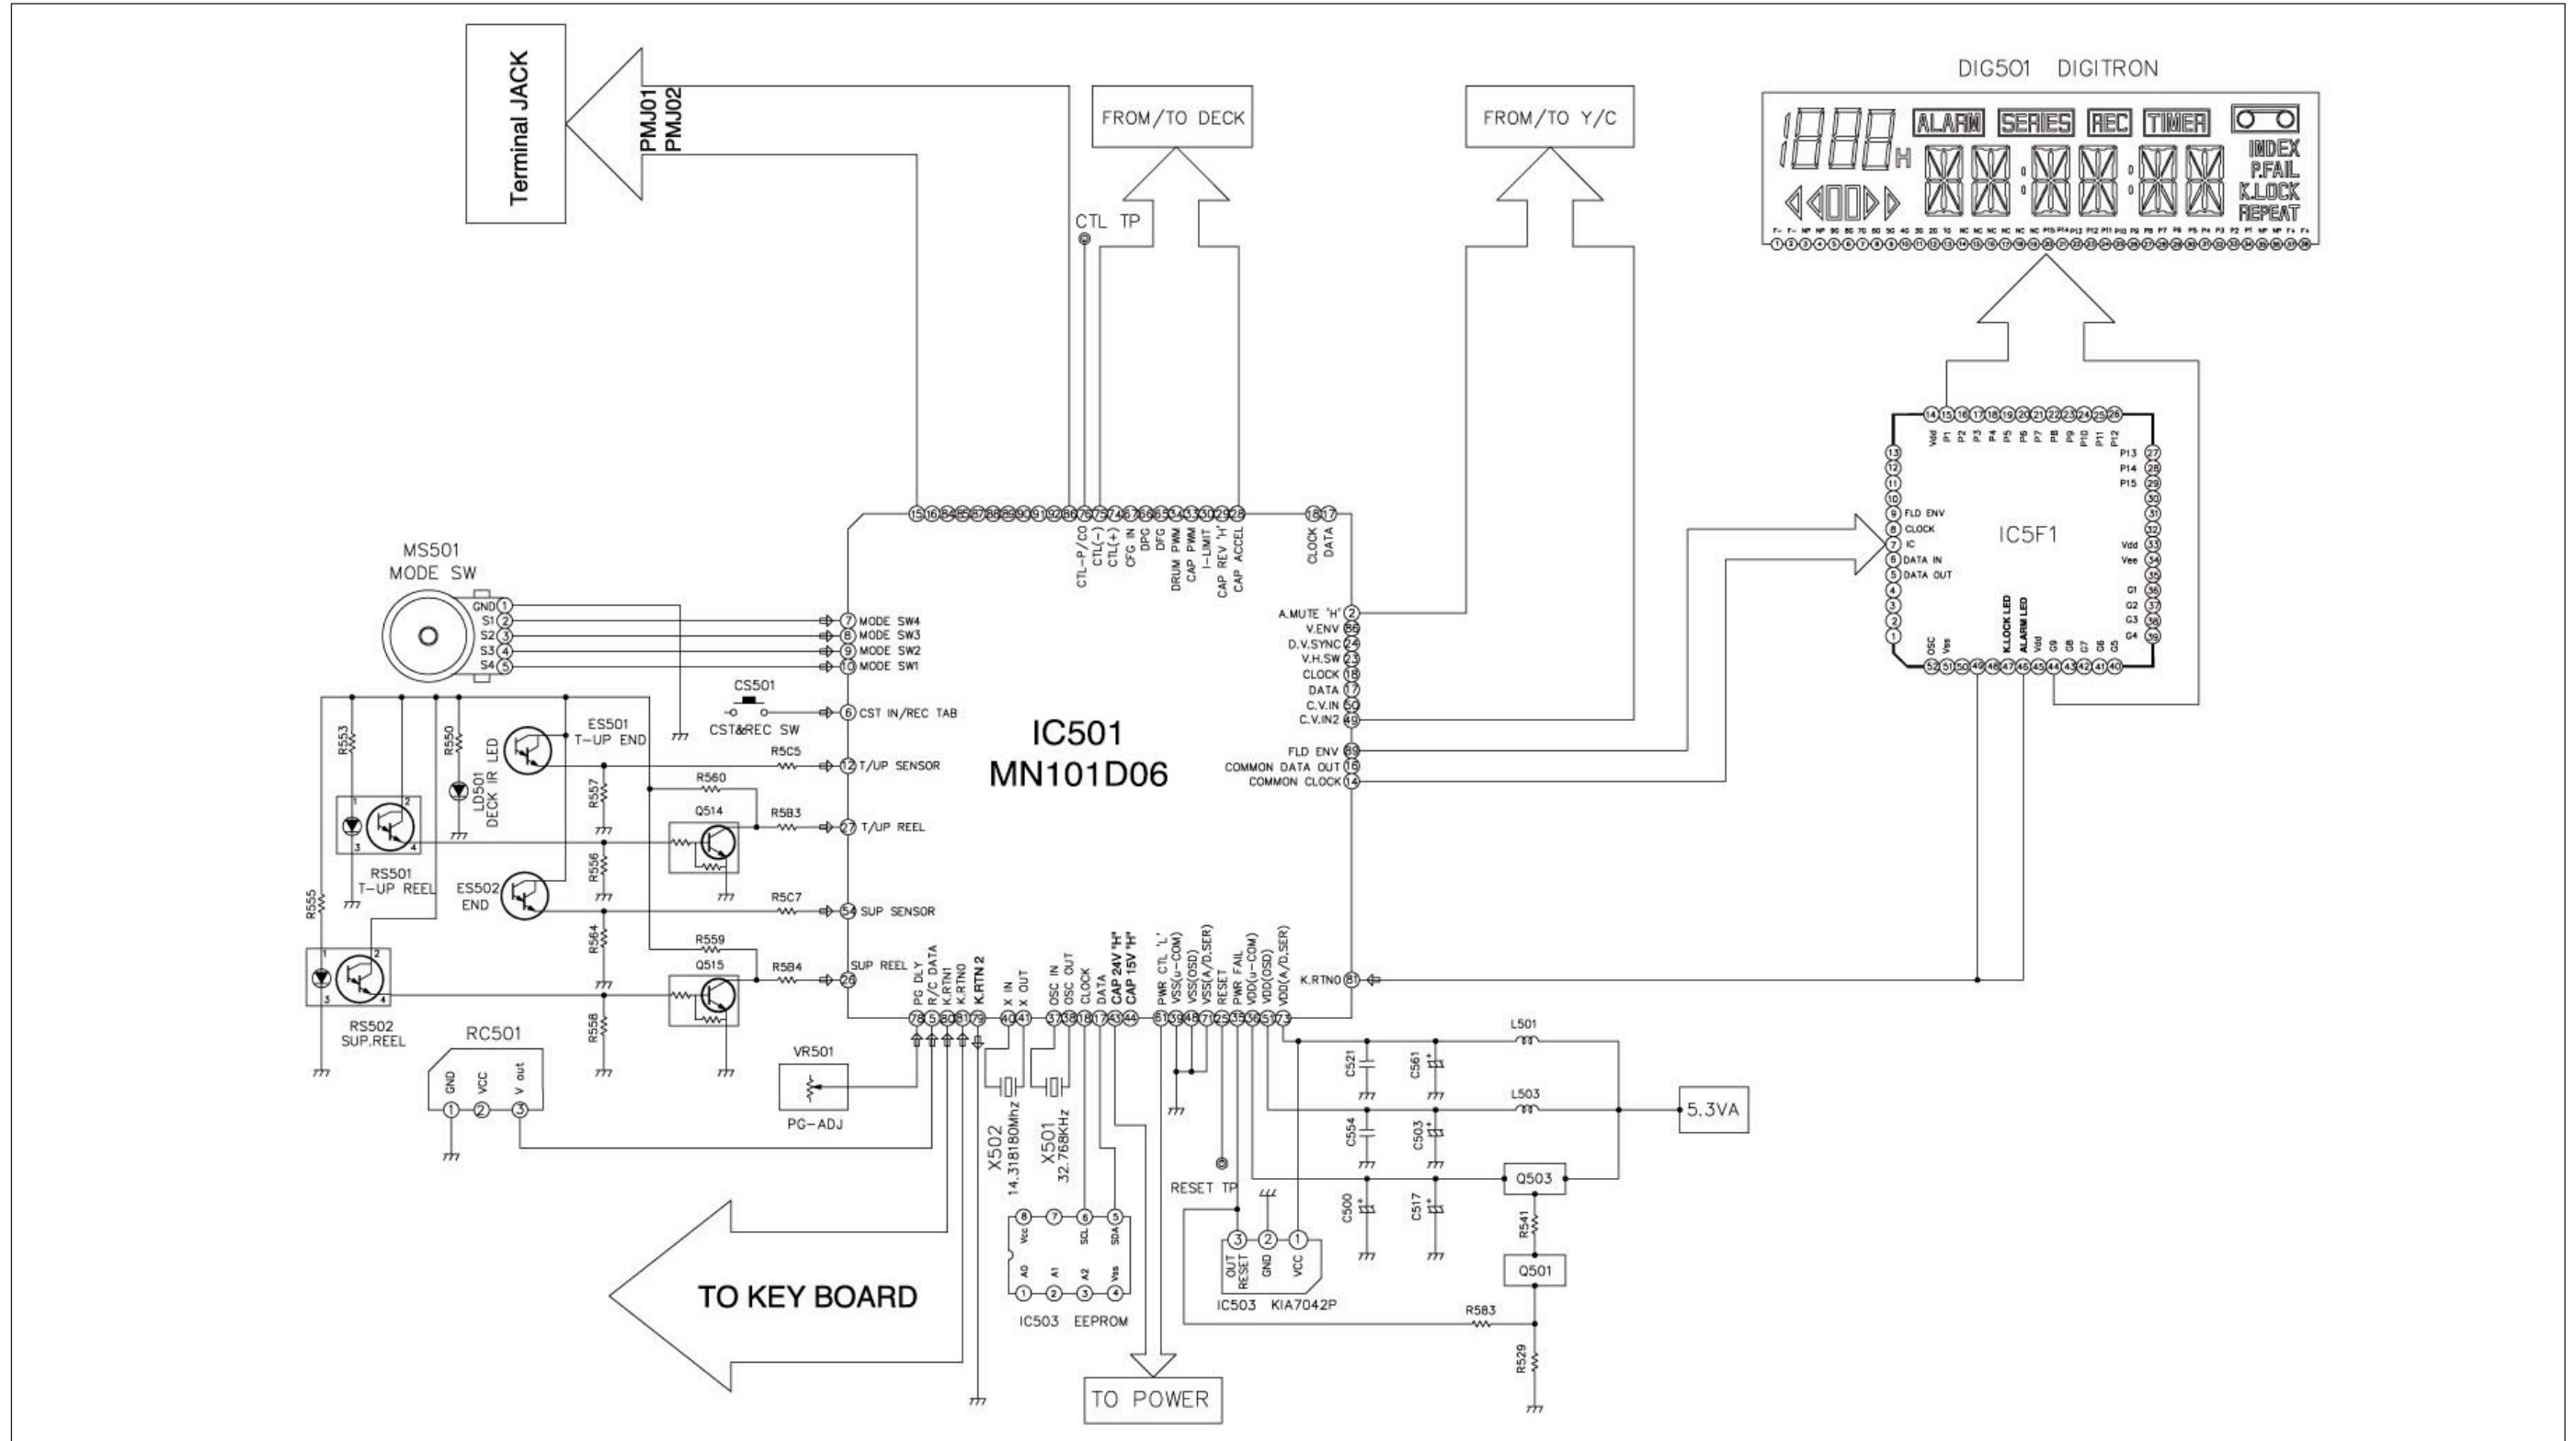

SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS

• WAVEFORM & VOLTAGE SHEET

* IC501 Oscilloscope Waveform

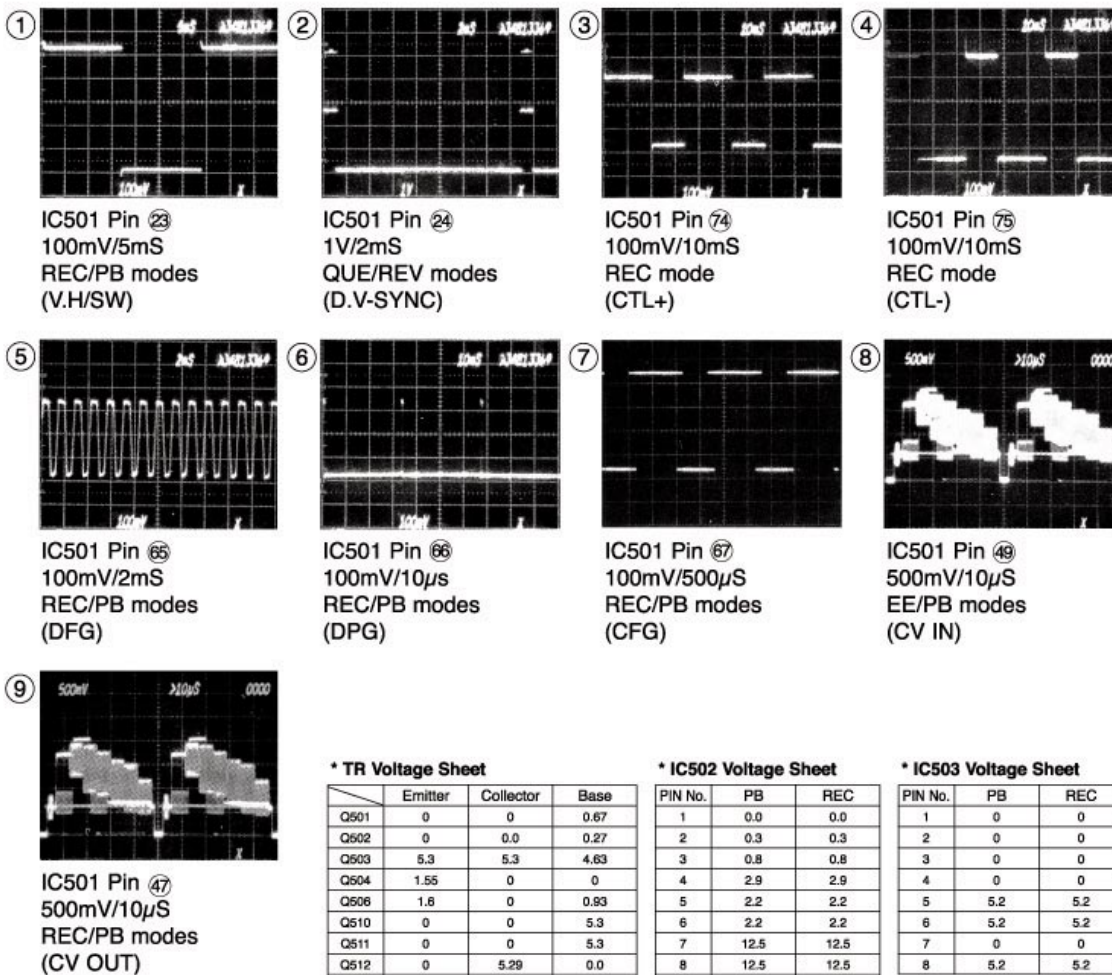

* TR Voltage Sheet

| | Emitter | Collector | Base |
|------|---------|-----------|-------|
| Q501 | 0 | 0 | 0.67 |
| Q502 | 0 | 0.0 | 0.27 |
| Q503 | 5.3 | 5.3 | 4.63 |
| Q504 | 1.55 | 0 | 0 |
| Q506 | 1.6 | 0 | 0.93 |
| Q510 | 0 | 0 | 5.3 |
| Q511 | 0 | 0 | 5.3 |
| Q512 | 0 | 5.29 | 0.0 |
| Q513 | 5.32 | 0.30 | 5.29 |
| Q514 | 0.3 | Pulse | Pulse |
| Q515 | 0.3 | Pulse | Pulse |
| Q521 | 5.0 | 5.3 | 8.7 |
| Q522 | 0 | 5 | 0 |

* IC502 Voltage Sheet

| PIN No. | PB | REC |
|---------|------|------|
| 1 | 0.0 | 0.0 |
| 2 | 0.3 | 0.3 |
| 3 | 0.8 | 0.8 |
| 4 | 2.9 | 2.9 |
| 5 | 2.2 | 2.2 |
| 6 | 2.2 | 2.2 |
| 7 | 12.5 | 12.5 |
| 8 | 12.5 | 12.5 |
| 9 | 0.8 | 0.8 |
| 10 | 0.3 | 0.3 |

* IC503 Voltage Sheet

| PIN No. | PB | REC |
|---------|-----|-----|
| 1 | 0 | 0 |
| 2 | 0 | 0 |
| 3 | 0 | 0 |
| 4 | 0 | 0 |
| 5 | 5.2 | 5.2 |
| 6 | 5.2 | 5.2 |
| 7 | 0 | 0 |
| 8 | 5.2 | 5.2 |

* IC505 Voltage Sheet


| PIN No. | PB | REC |
|---------|-----|-----|
| 1 | 5.2 | 5.2 |
| 2 | 0 | 0 |
| 3 | 4.8 | 4.8 |

IC5F1 Voltage Sheet

| PIN | PB | REC | PIN | PB | REC | PIN | PB | REC | PIN | PB | REC | PIN | PB | REC |
|-----|-----|------|-----|-------|-------|-----|-------|-------|-----|-------|-------|-----|-----|-----|
| 1 | 2.3 | 3.04 | 12 | 3.1 | 3.14 | 23 | -28.8 | -29.2 | 34 | -29.4 | 0.0 | 45 | 5.3 | 5.3 |
| 2 | 1.9 | 2.5 | 13 | 3.1 | 3.15 | 24 | 15.8 | -29.3 | 35 | -9.9 | 0.0 | 46 | 5.2 | 5.3 |
| 3 | 3.0 | 0.0 | 14 | 5.3 | 5.35 | 25 | 15.8 | -19.4 | 36 | -26.0 | -26.6 | 47 | 0.0 | 0.0 |
| 4 | 3.1 | 1.15 | 15 | -21.8 | -22.3 | 26 | 22.9 | -12.9 | 37 | -25.6 | -26.6 | 48 | 0.0 | 0.0 |
| 5 | 3.1 | 3.14 | 16 | 0.0 | -29.3 | 27 | 0.0 | -26.3 | 38 | -25.2 | -26.6 | 49 | 0.0 | 0.0 |
| 6 | 6.0 | 0.0 | 17 | -19.1 | 0.0 | 28 | 0.0 | -29.6 | 39 | 0.0 | -26.6 | 50 | 0.0 | 0.0 |
| 7 | 7.3 | 5.34 | 18 | -19.0 | 0.0 | 29 | -29.1 | -29.7 | 40 | -26.6 | -26.6 | 51 | 0.0 | 0.0 |
| 8 | 5.2 | 5.26 | 19 | 0.0 | 0.0 | 30 | -29.1 | -29.7 | 41 | -26.6 | -26.6 | 52 | 3.1 | 3.4 |
| 9 | 5.0 | 5.03 | 20 | 0.0 | 0.0 | 31 | -16.3 | -17.7 | 42 | -26.6 | -26.6 | | | |
| 10 | 3.1 | 3.15 | 21 | 0.0 | 0.0 | 32 | -16.4 | -17.0 | 43 | -26.6 | -26.6 | | | |
| 11 | 3.1 | 3.7 | 22 | 0.0 | -26.0 | 33 | 5.3 | 0.0 | 44 | -26.6 | -26.6 | | | |


SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS

8. SYSTEM CLRCUIT DIAGRAM

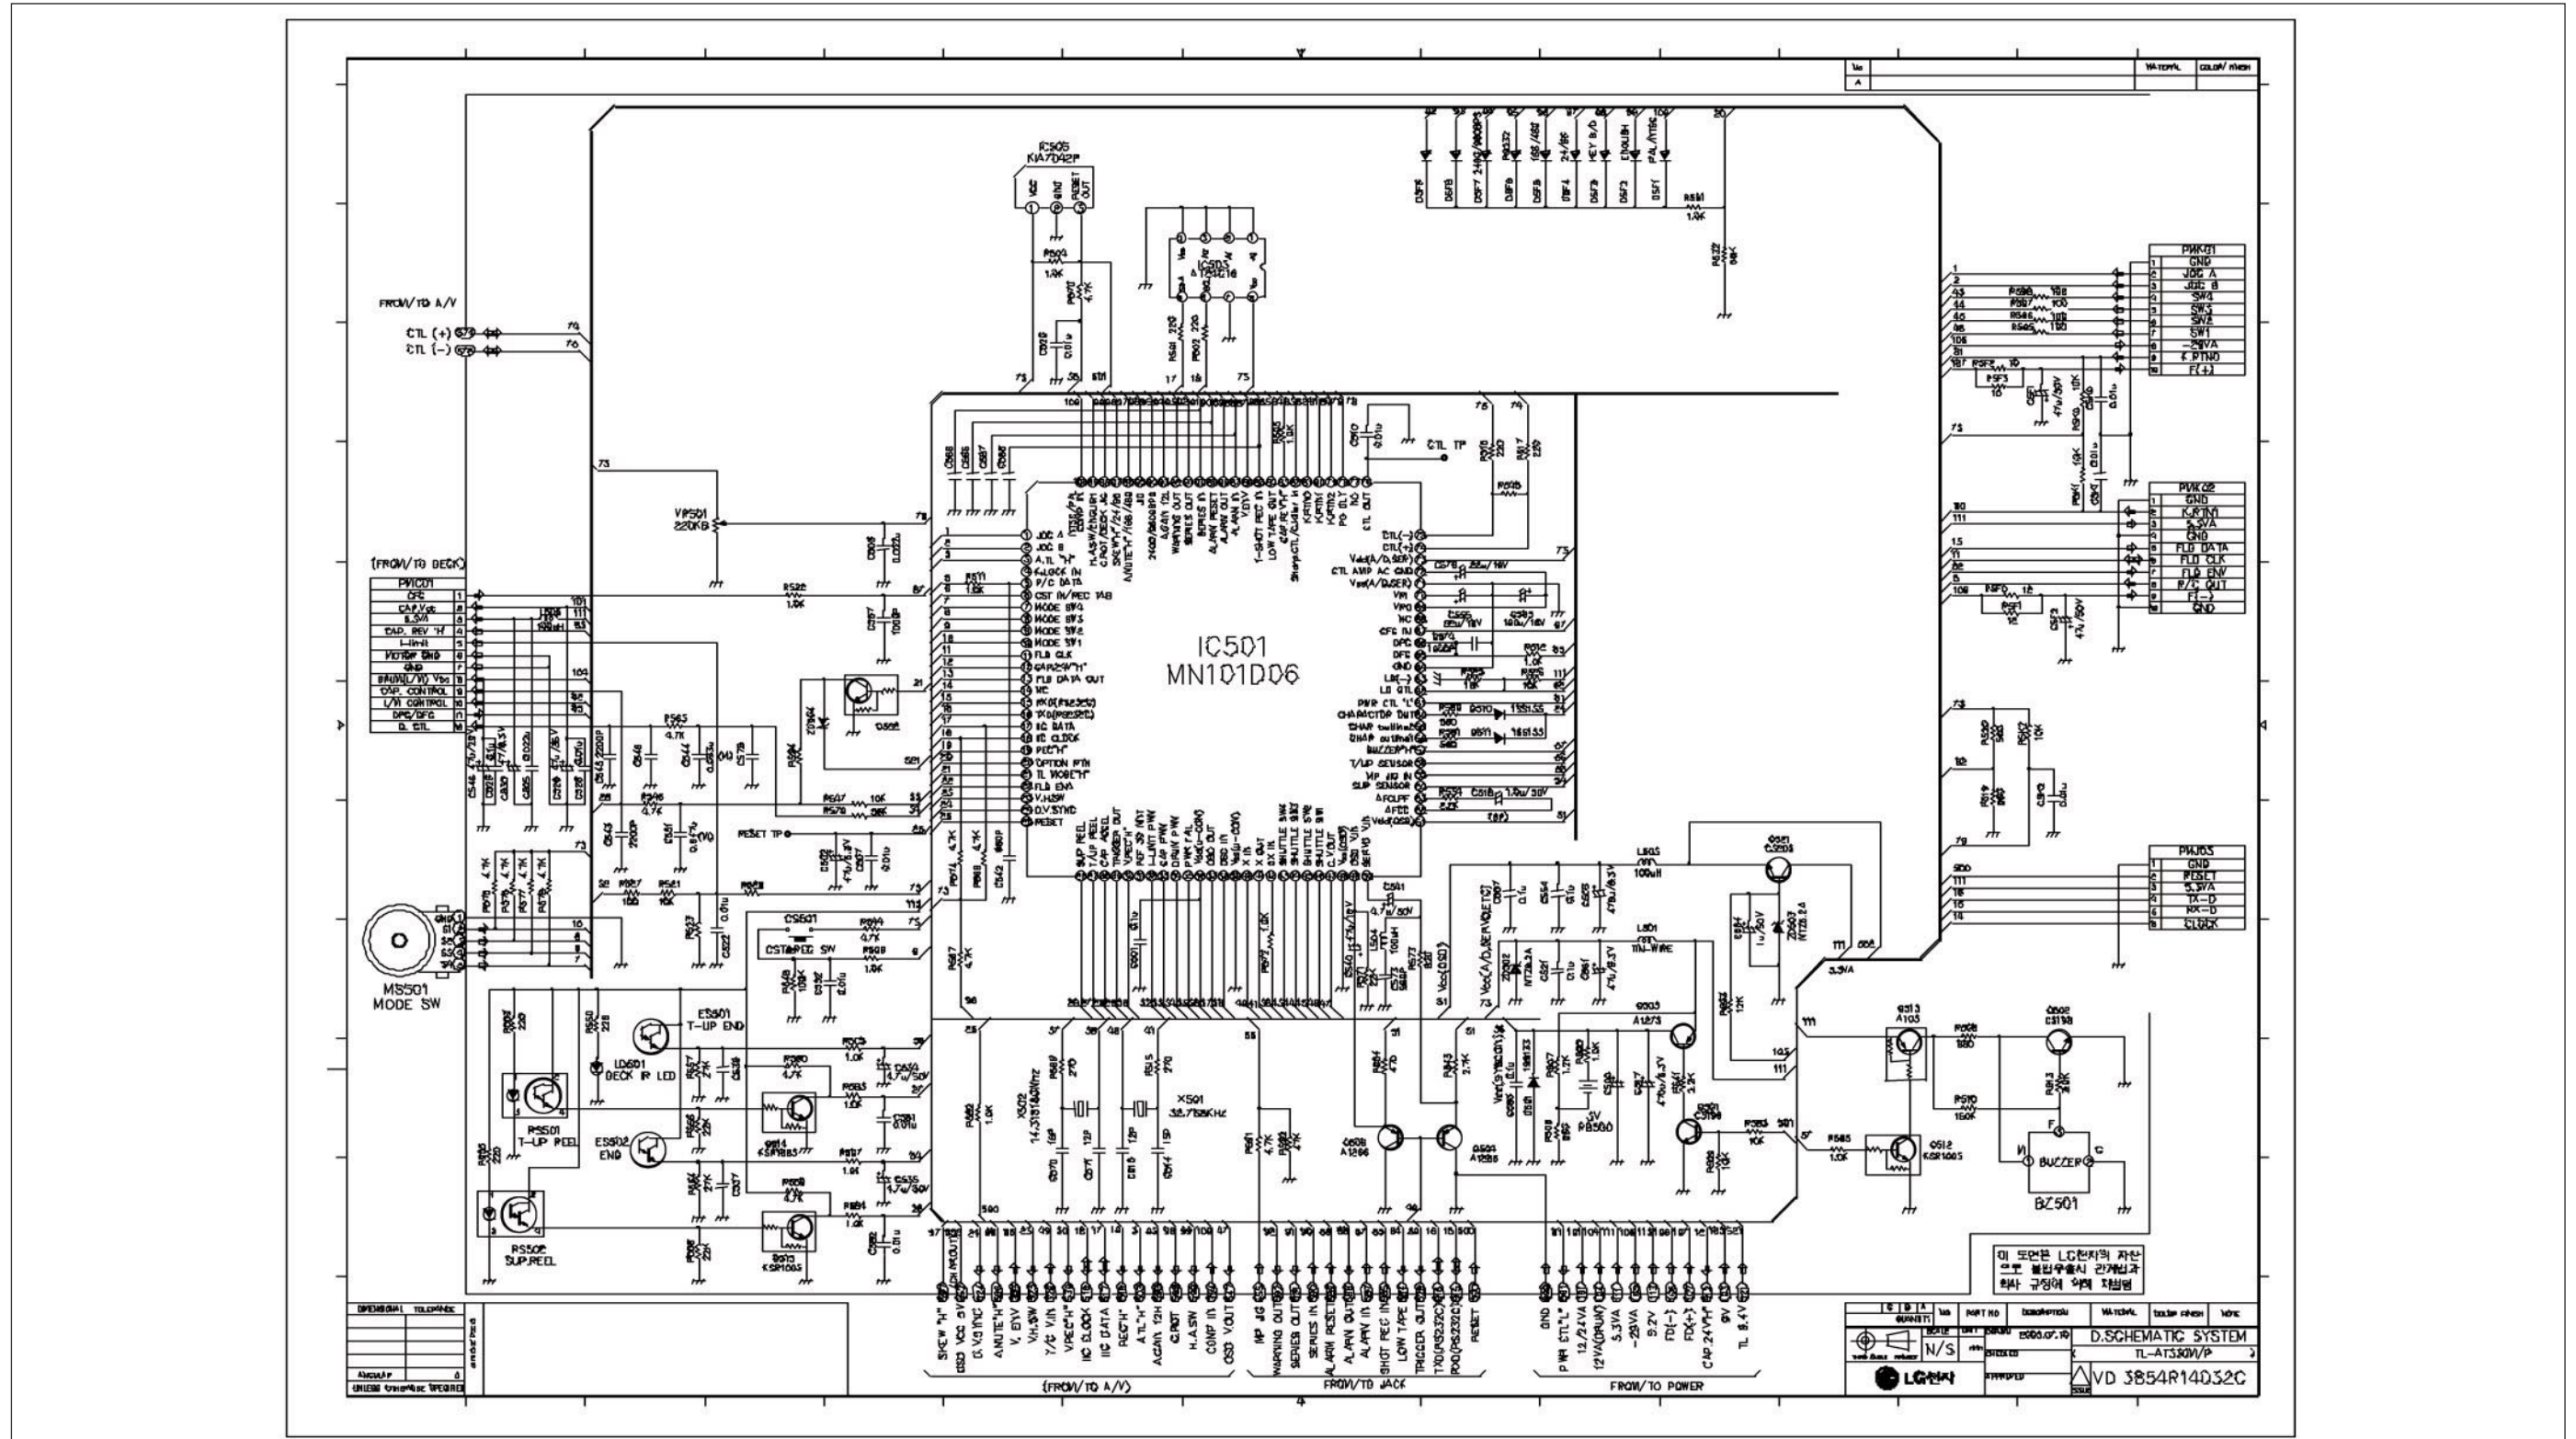

SECTION 3 ELECTRICAL BLOCK & CIRCUIT DIAGRAMS


10. KEY-BOARD CLRCUIT DIAGRAM

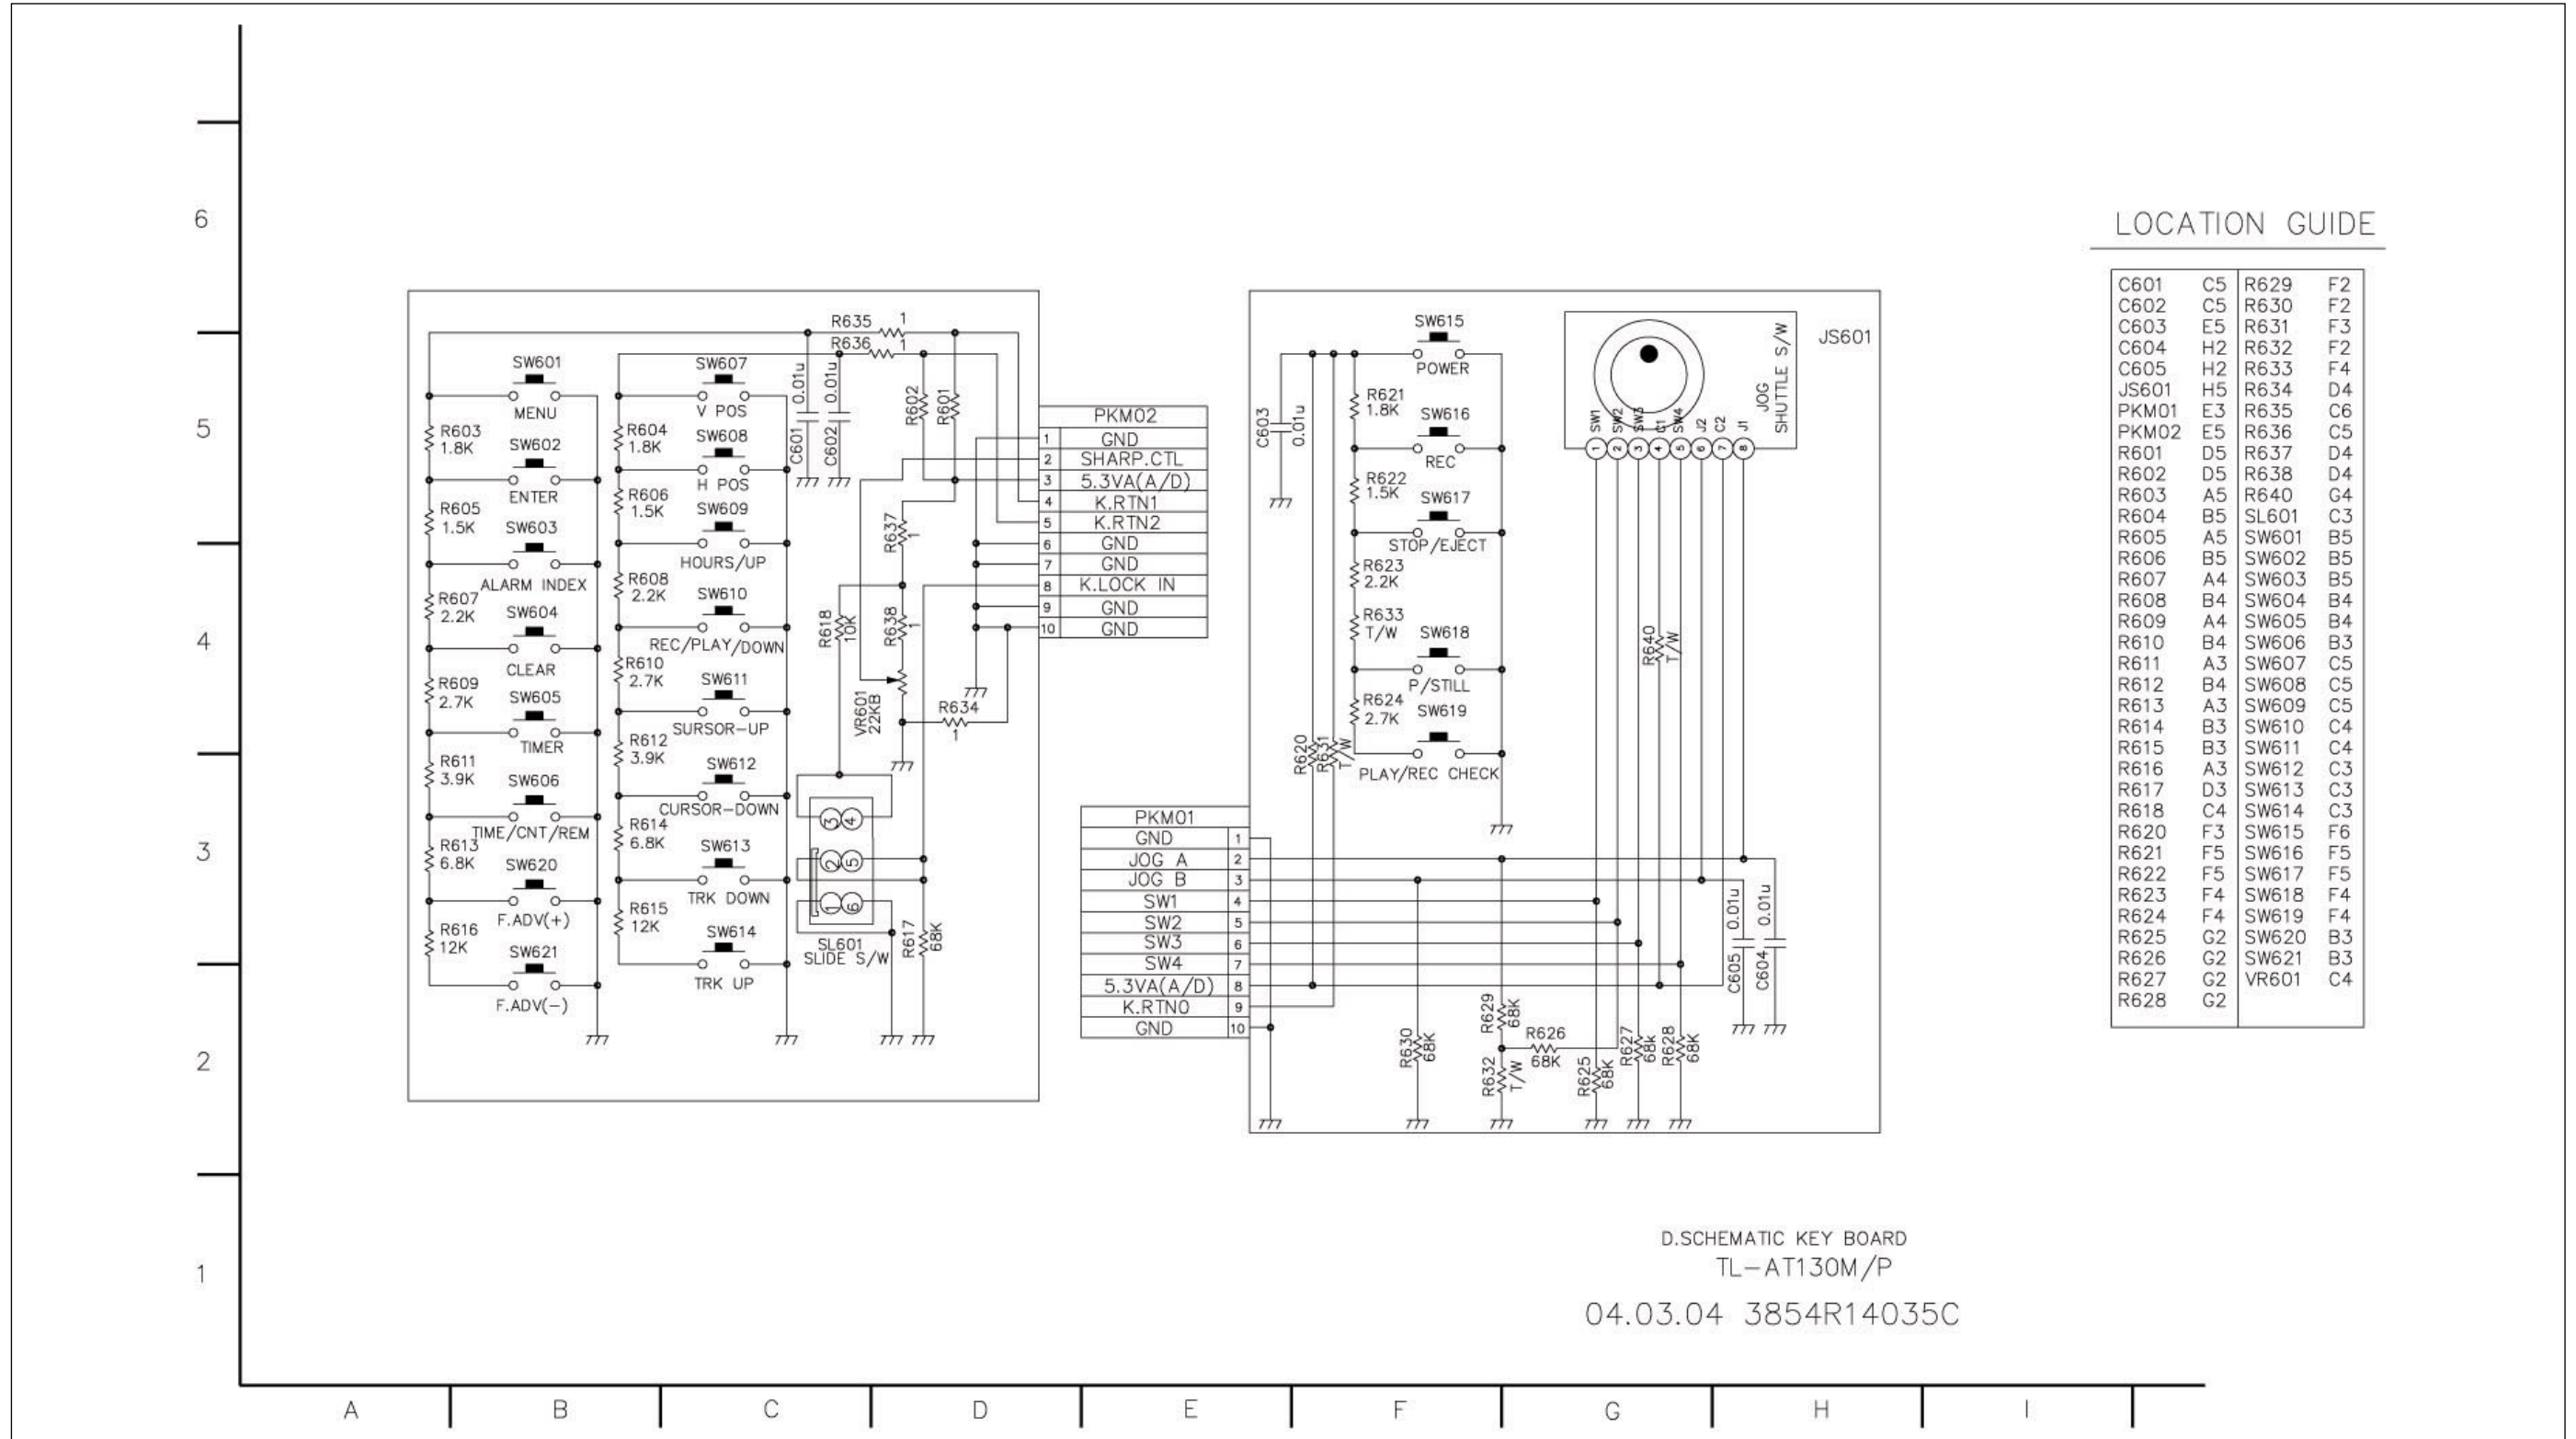

SECTION 3 ELECTRICAL PRINTED CIRCUIT DIAGRAMS


2. KEY 1 P.C.BOARD

3. KEY 2 P.C.BOARD

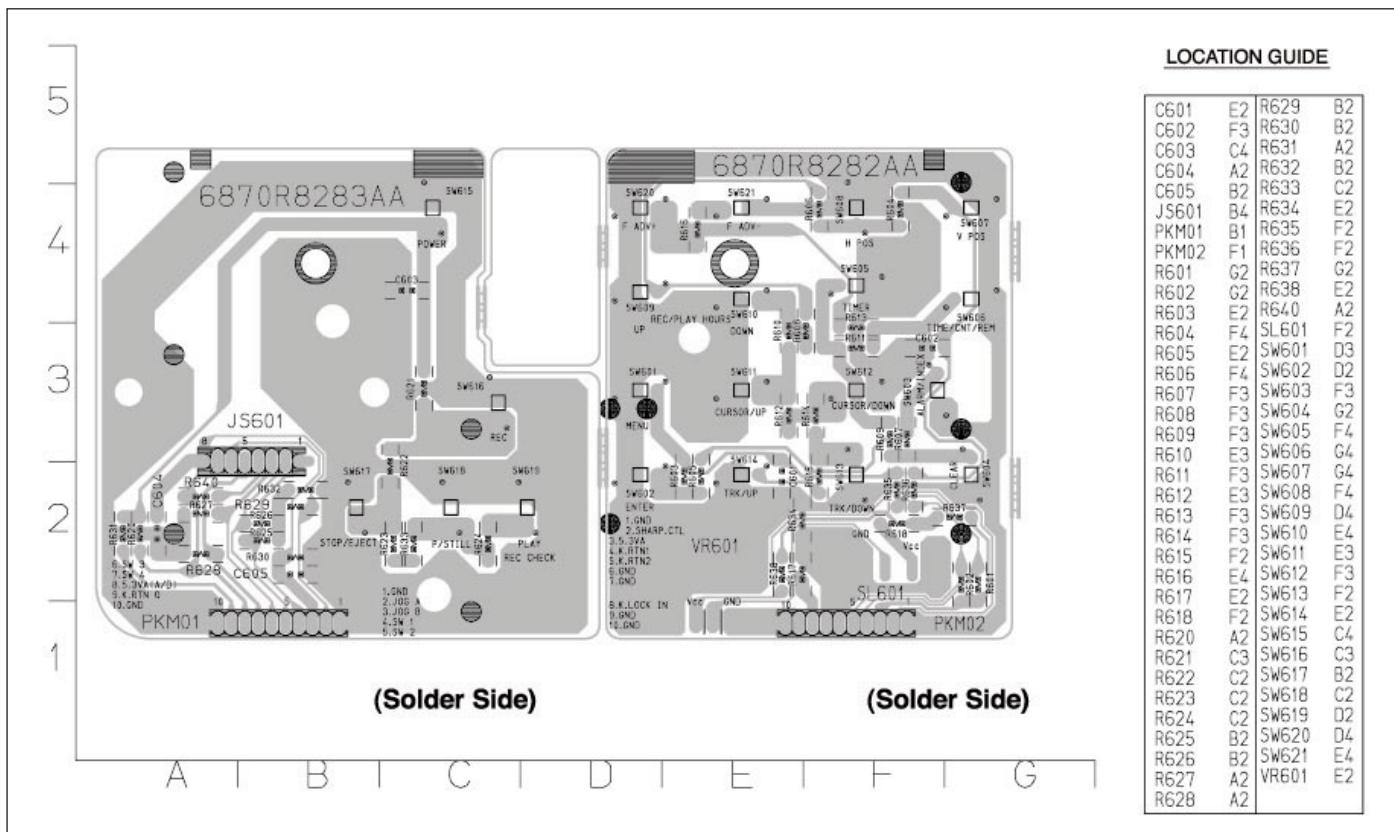

PRINTED CIRCUIT BOARD DIAGRAMS

4. JACK P.C.BOARD

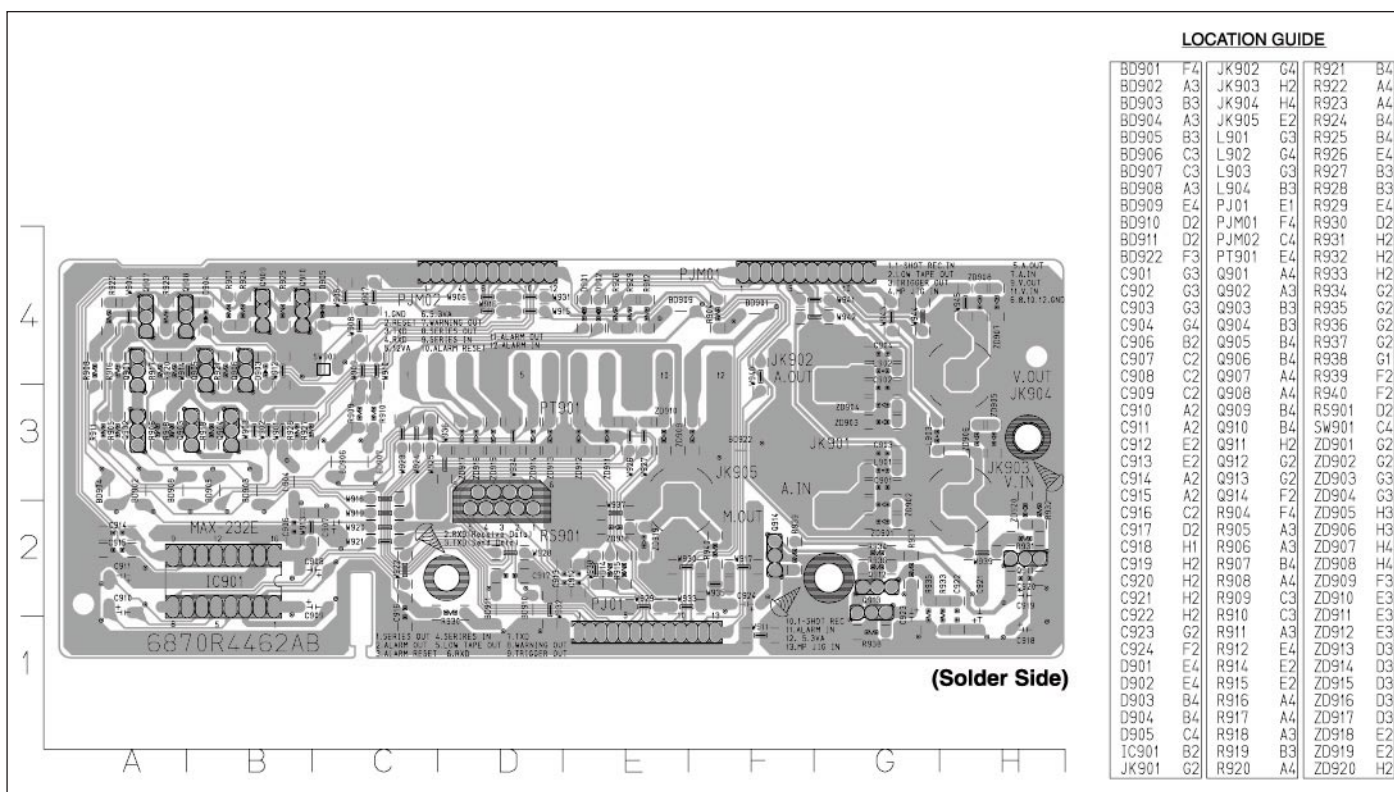

SECTION 4 MECHANISM

CONTENTS

DECK MECHANISM PARTS LOCATIONS

- Top View4-1
- Bottom View4-1

DECK MECHANISM DISASSEMBLY

1. Drum Assembly4-2
2. Plate Top4-4
3. Holder Assembly CST4-4
4. Opener Door4-4
5. Bracket Assembly L/D Motor.....4-4
6. Gear Assembly Rack F/L4-4
7. Arm Assembly F/L.....4-4
8. Lever Assembly S/W4-4
9. Arm Assembly Cleaner.....4-5
10. Head F/E4-5
11. Base Assembly A/C Head4-5
12. Brake Assembly T4-6
13. Brake Assembly RS4-6
14. Arm Assembly Tension.....4-6
15. Reel S / Reel T.....4-6
16. Base Assembly P44-7
17. Opener Lid4-7
18. Arm Assembly Pinch4-7
19. Lever T/up / Arm T/up4-7
20. Belt Capstan/Motor Capstan.....4-8
21. Lever F/R4-8
22. Clutch Assembly D35.....4-8
23. Brake Assembly Capstan4-8
24. Gear Drive/Gear Cam4-9
25. Gear Sector4-9
26. Plate Slider4-9
27. Lever Tension4-9
28. Lever Spring4-9
29. Gear Assembly P2/
Gear Assembly P34-10
30. Base Assembly P2/
Base Assembly P34-10
31. Base Loading4-11
32. Base Tension4-11
33. Arm Assembly Idler4-11

DECK MECHANISM ADJUSTMENT

- Tools and Fixtures for Service4-12
1. Mechanism Alignment Position Check....4-13
 2. Preparation for Adjustment.....4-14
 3. Checking Torque4-14
 4. Guide Roller Height Adjustment.....4-15
 - 4-1. Preliminary Adjustment4-15
 - 4-2. Precise Adjustment4-15
 5. Audio/Control (A/C) Head Adjustment4-16
 - 5-1. Preliminary Adjustment4-16
 - 5-2. Confirmation of Tape Path between
Pinch Roller and Take-up Guide4-17
 - 5-3. Precise Adjustment(Azimuth Adjustment)
.....4-17
 6. X-Value Adjustment.....4-17
 7. Adjustment after Replacing Drum Assembly
(Video Heads)4-18
 8. Check the Tape Travel after Reassembling
Deck Mechanism.....4-18
 - 8-1. Checking Audio and RF Locking Time
during Playback after CUE or REV
.....4-18
 - 8-2. Checking for Tape Curling or
Jamming4-18

MAINTENANCE/INSPECTION PROCEDURE

1. Check before starting Repairs4-19
2. Required Maintenance4-20
3. Scheduled Maintenance.....4-20
4. Supplies Required for Inspection and
Maintenance.....4-20
5. Maintenance Procedure4-20
 - 5-1. Cleaning.....4-20
 - 5-2. Greasing4-21

MECHANISM TROUBLESHOOTING GUIDE


1. Deck Mechanism.....4-23
2. Front Loading Mechanism.....4-26

EXPLODED VIEWS


1. Front Loading Mechanism Section4-28
 2. Moving Mechanism Section (1).....4-29
 3. Moving Mechanism Section (2).....4-30
-

DECK MECHANISM PARTS LOCATIONS

• Top View

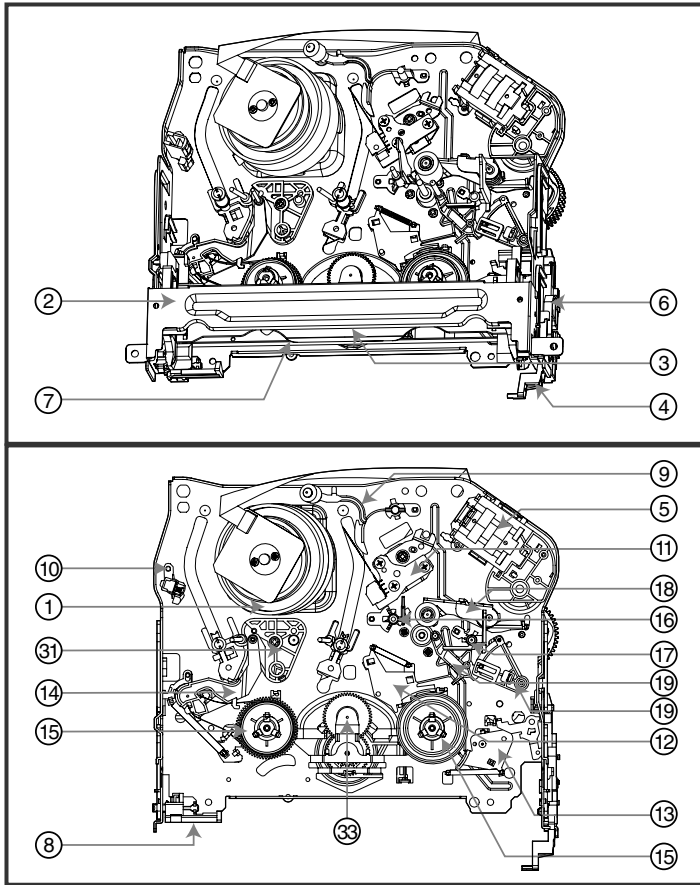

• Bottom View

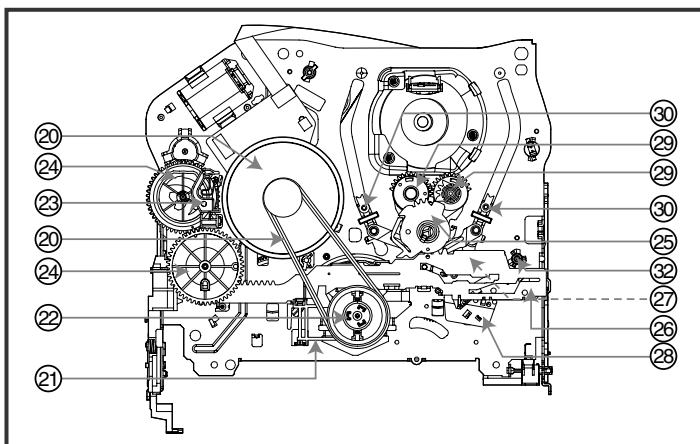

NOTE : When reassembly perform the procedure in the reverse order.

- 1) When reassembling, confirm Mechanism and Mode Switch Alignment Position (Refer to Page 4-13)
- 2) When disassembling, the Parts for Starting No. Should be removed first.

| Starting No. | Procedure | Part | Fixing Type | Figure | View |
|--------------------------|-----------|-----------------------------------|----------------------|--------|------|
| | 1 | Drum Assembly | 3 Screw | A-1 | T |
| | 2 | Plate Top | 2 Hook | A-2 | T |
| 2 | 3 | Holder Assembly CST | Chassis Hole | A-2 | T |
| 2 | 4 | Opener Door | Chassis Hole | A-2 | T |
| | 5 | Bracket Assembly L/D Motor | 3 Hook | A-2 | T |
| 2,3,4 | 6 | Gear Assembly Rack F/L | 1 Hook, Chassis Hole | A-2 | T |
| 2,3,4,6 | 7 | Arm Assembly F/L | Chassis Hole | A-2 | T |
| | 8 | Lever Assembly S/W | 1 Hook | A-2 | T |
| | 9 | Arm Assembly Cleaner | Chassis Embossing | A-3 | T |
| | 10 | Head F/E | Chassis Embossing | A-3 | T |
| | 11 | Base Assembly A/C Head | 1 Screw | A-3 | T |
| 2,3 | 12 | Brake Assembly T | 1 Hook | A-4 | T |
| 2,3 | 13 | Brake Assembly RS | 1 Hook | A-4 | T |
| 2,3 | 14 | Arm Assembly Tension | 2 Hook | A-4 | T |
| 2,3,12,13,14 | 15 | Reel S/Reel T | | A-4 | T |
| | 16 | Base Assembly P4 | Chassis Embossing | A-5 | T |
| | 17 | Opener Lid | Chassis Embossing | A-5 | T |
| 17 | 18 | Arm Assembly Pinch | Shaft | A-5 | T |
| 17 | 19 | Lever T/Up / Arm T/Up | 1 Hook | A-5 | T |
| 17,18 | 20 | Belt Capstan/Motor Capstan | 3 Screw | A-6 | B |
| | 21 | Lever F/R | Locking Tab | A-6 | B |
| 20, 21 | 22 | Clutch Assembly D35 | Washer | A-6 | B |
| | 23 | Brake Assembly Capstan | Locking Tab | A-6 | B |
| | 24 | Gear Drive/Gear Cam | Washer/Hook | A-7 | B |
| | 25 | Gear Sector | 1 Hook | A-7 | B |
| 20,21,23,24,25 | 26 | Plate Slider | Shaft Guide | A-7 | B |
| 20,21,23,24,25,26 | 27 | Lever Tension | 1 Hook | A-7 | B |
| 2,3,14,20,21,25,23,24,26 | 28 | Lever Spring | Locking Tab | A-7 | B |
| 25 | 29 | Gear Assembly P2/Gear Assembly P3 | Boss | A-8 | B |
| 2,3,14,25,29 | 30 | Base Assembly P2/Base Assembly P3 | Chassis Slot | A-8 | B |
| 2,3,14,25,29 | 31 | Base Loading | 1 Screw | A-9 | T |
| 2,3,14 | 32 | Base Tension | Chassis Embossing | A-9 | B |
| 2,3,20,21,22 | 33 | Arm Assembly Idler | Locking Tab | A-9 | T |

T:Top, B:Bottom

DECK MECHANISM DISASSEMBLY

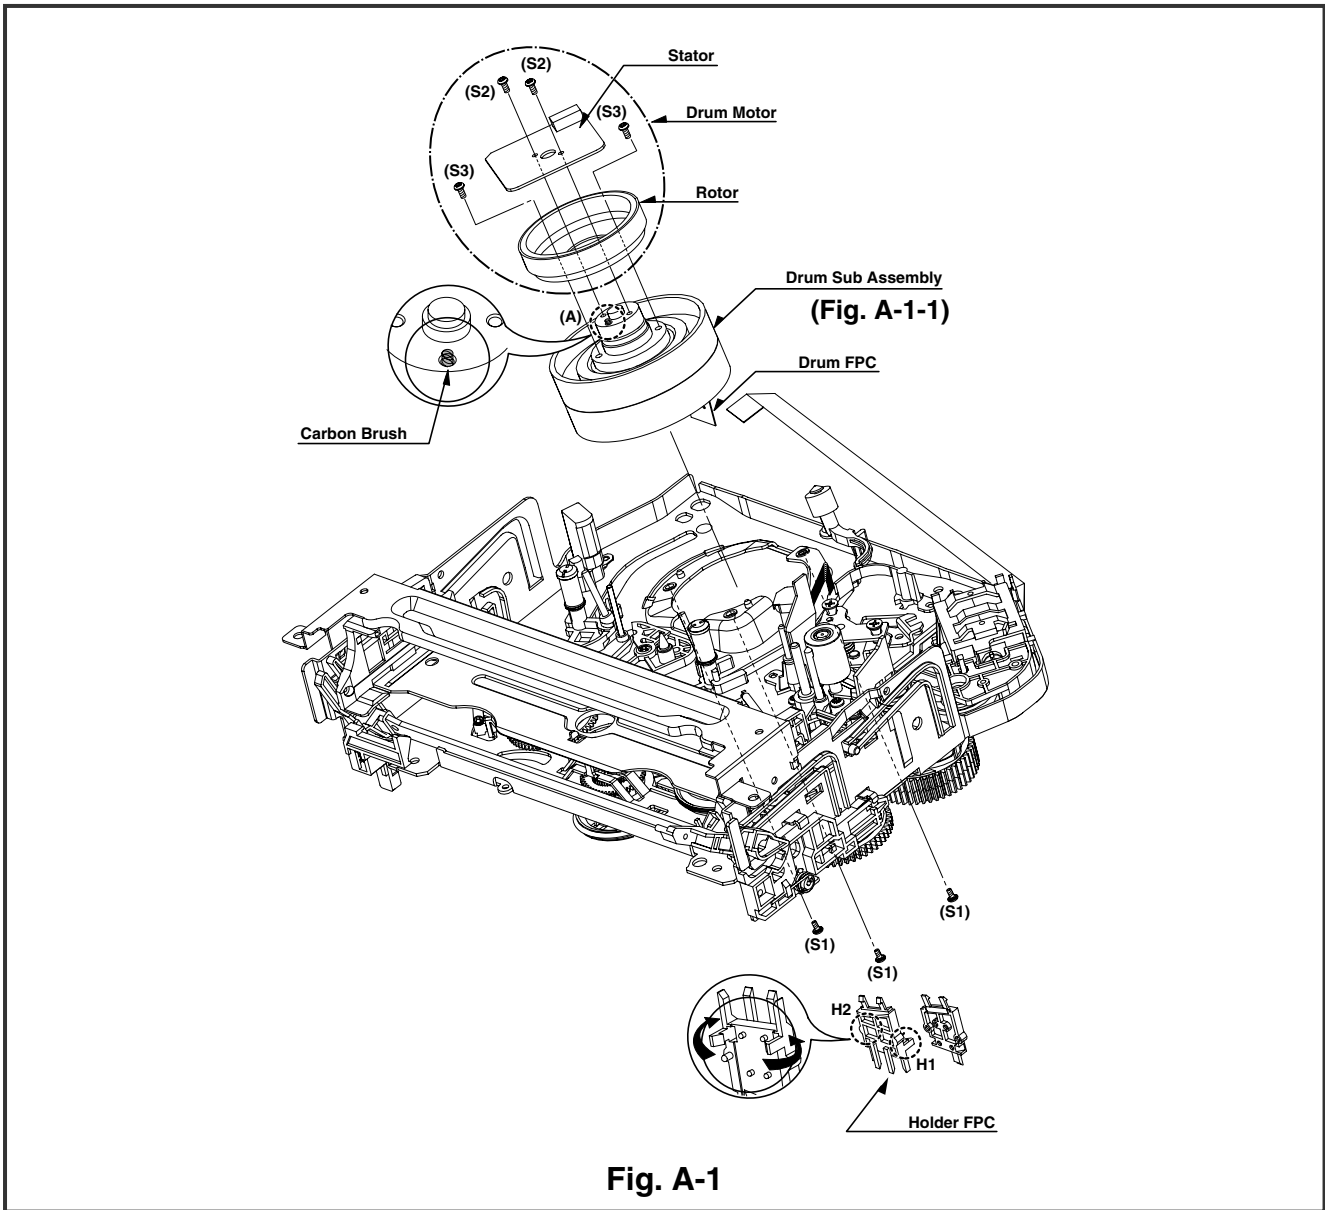


Fig. A-1

1. Drum Assembly (Fig. A-1-1)

- 1) Unplug the Drum FPC Connector.
- 2) Remove three Screws(S1) on bottom side and separate the Drum assembly.
- 3) Unhook (H1), (H2) and separate the Holder FPC and Cap FPC.

1-1. Drum Motor

- 1) Remove two Screws(S2) and disassemble the Stator of the Drum Motor.
- 2) Remove two Screws(S3) and separate the Rotor of the Drum Motor from the Drum Sub assembly.

NOTE

When reassembling, confirm (A) portion of the Drum Sub assembly whether the Carbon Brush is in there or not.

(Fig. B-1)

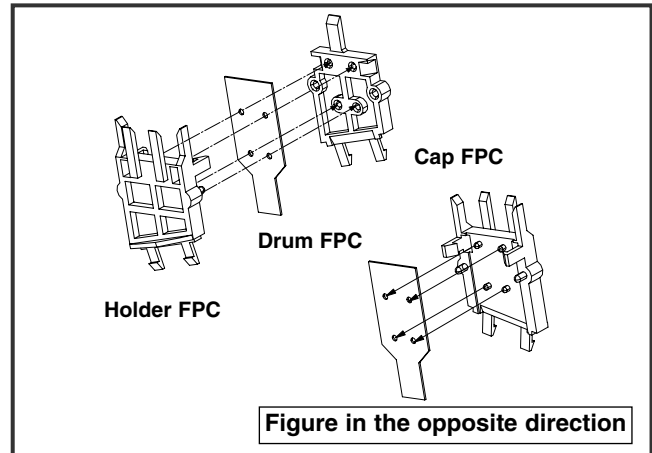


Figure in the opposite direction

DECK MECHANISM DISASSEMBLY

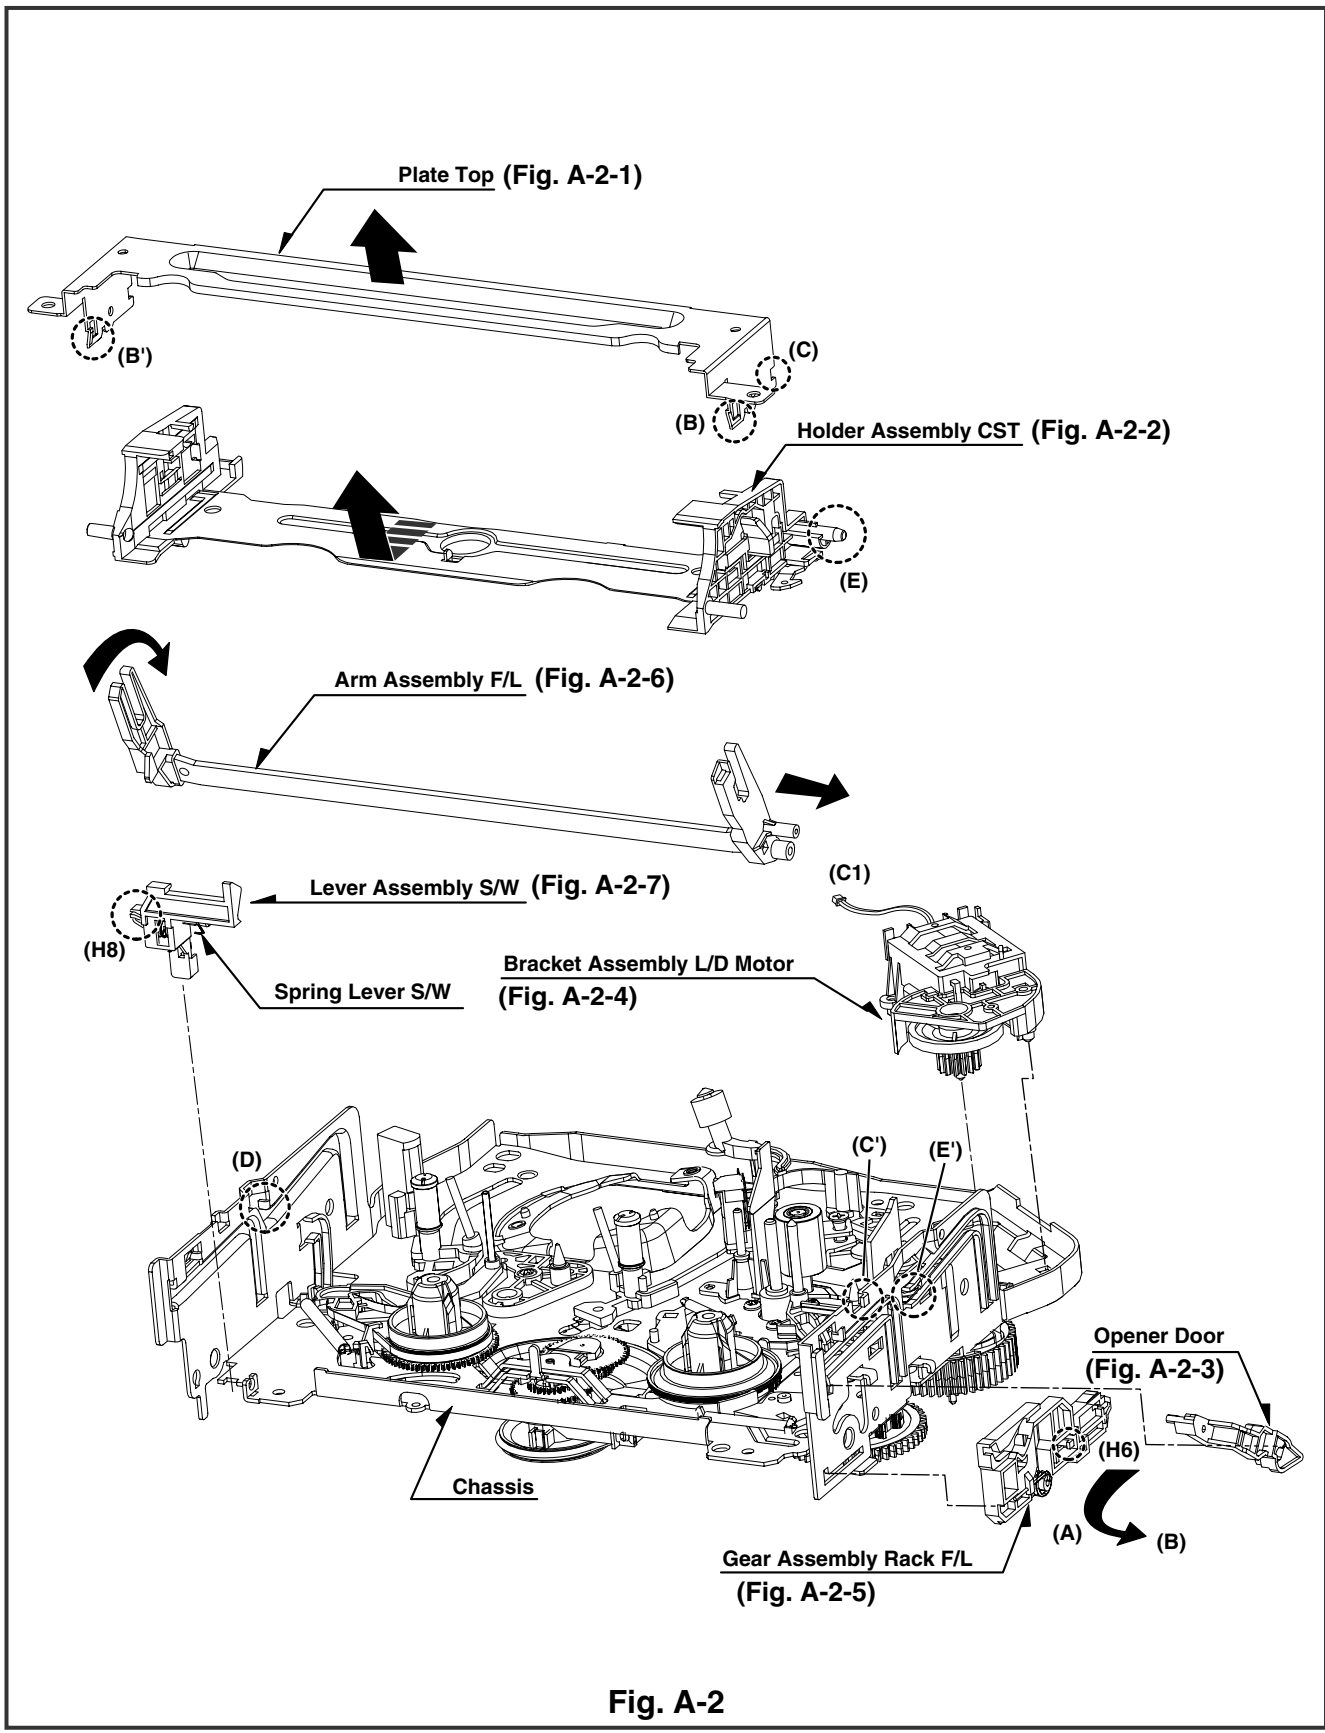


Fig. A-2


DECK MECHANISM DISASSEMBLY

2. Plate Top (Fig. A-2-1)

- 1) Pull the (B) portion of the Plate Top back in direction of arrow and separate the right side of it.
- 2) pull the (B') portion of the Plate Top back in direction of arrow and separate the left side of it.
(Used tools : (-) type driver, anything tool with sharp point or flat point.)


NOTE

- (1) When reassembling, push the Plate Top after alignment the two position(C), (C') as below Fig.

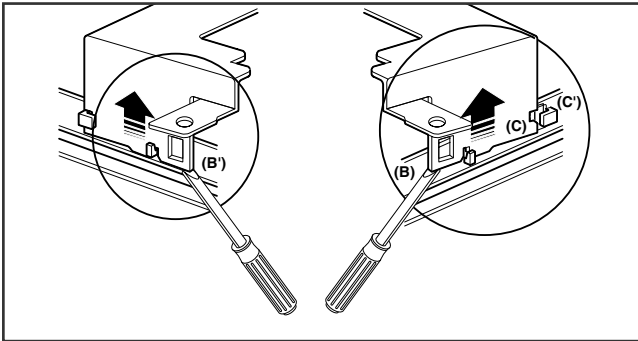

3. Holder Assembly CST (Fig.A-2-2)

- 1) Move the Holder Assembly CST in direction of arrow and separate the left side of it first through the (D) position of the Chassis.

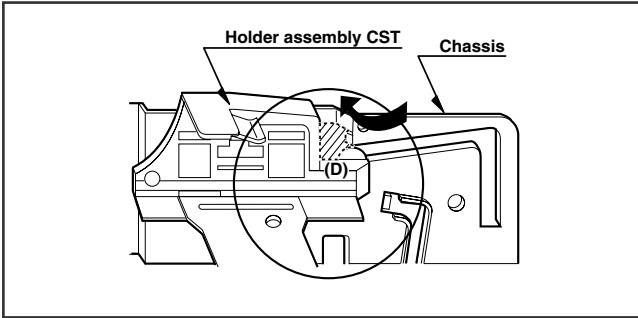

- 2) Disassemble the right side of the Holder Assembly CST from each guided hole of the Chassis.

NOTE

When reassembling, insert the (E) part of the Holder Assembly CST in the (E') hole of the Chassis first and assemble the left side of it.


4. Opener Door (Figure. A-2-3)

- 1) Turn the Opener Door clockwise and remove it through the guide hole of the Chassis.

5. Bracket Assembly L/D Motor (Fig. A-2-4)

- 1) Unplug the Connector(C1).

- 2) Unhook three Hooks(H3, H4, H5) on bottom side of the Chassis, lift up the Bracket Assembly L/M and disassemble the Bracket Assembly L/D Motor.

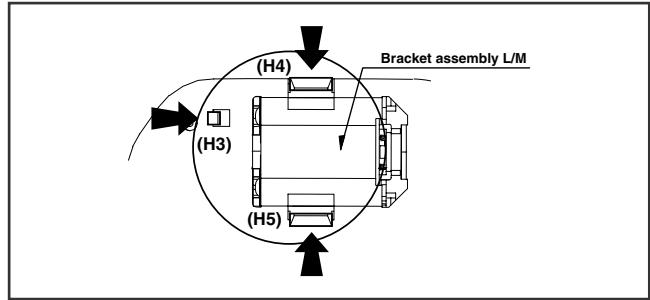


6. Gear Assembly Rack F/L (Fig. A-2-5)

- 1) Move the Gear Assembly Rack F/L in direction of arrow(A) and unhook the Hook(H6) pulling back in front.
- 2) Separate the Gear Rack F/L in direction of arrow(B).

NOTE

When reassembling, align the gear part of the Gear Assembly Rack F/L with the Gear Drive as below Fig.

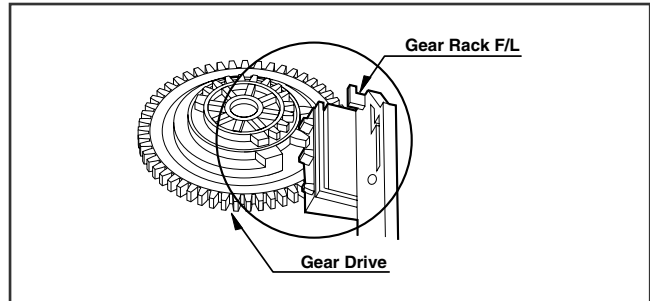


7. Arm Assembly F/L (Fig. A-2-6)

- 1) Move the Arm Assembly F/L in direction of arrow and separate the left side of it first.
- 2) Disassemble the Arm Assembly F/L from each guided hole of the Chassis.

8. Lever Assembly S/W(Fig. A-2-7)

- 1) Unhook the Hook(H8) in the left side of the Chassis and remove the Lever Assembly S/W.

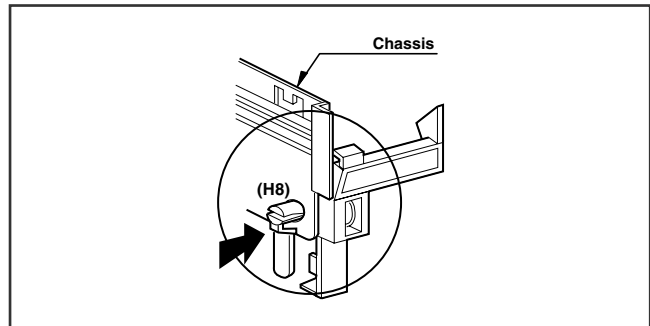

DECK MECHANISM DISASSEMBLY

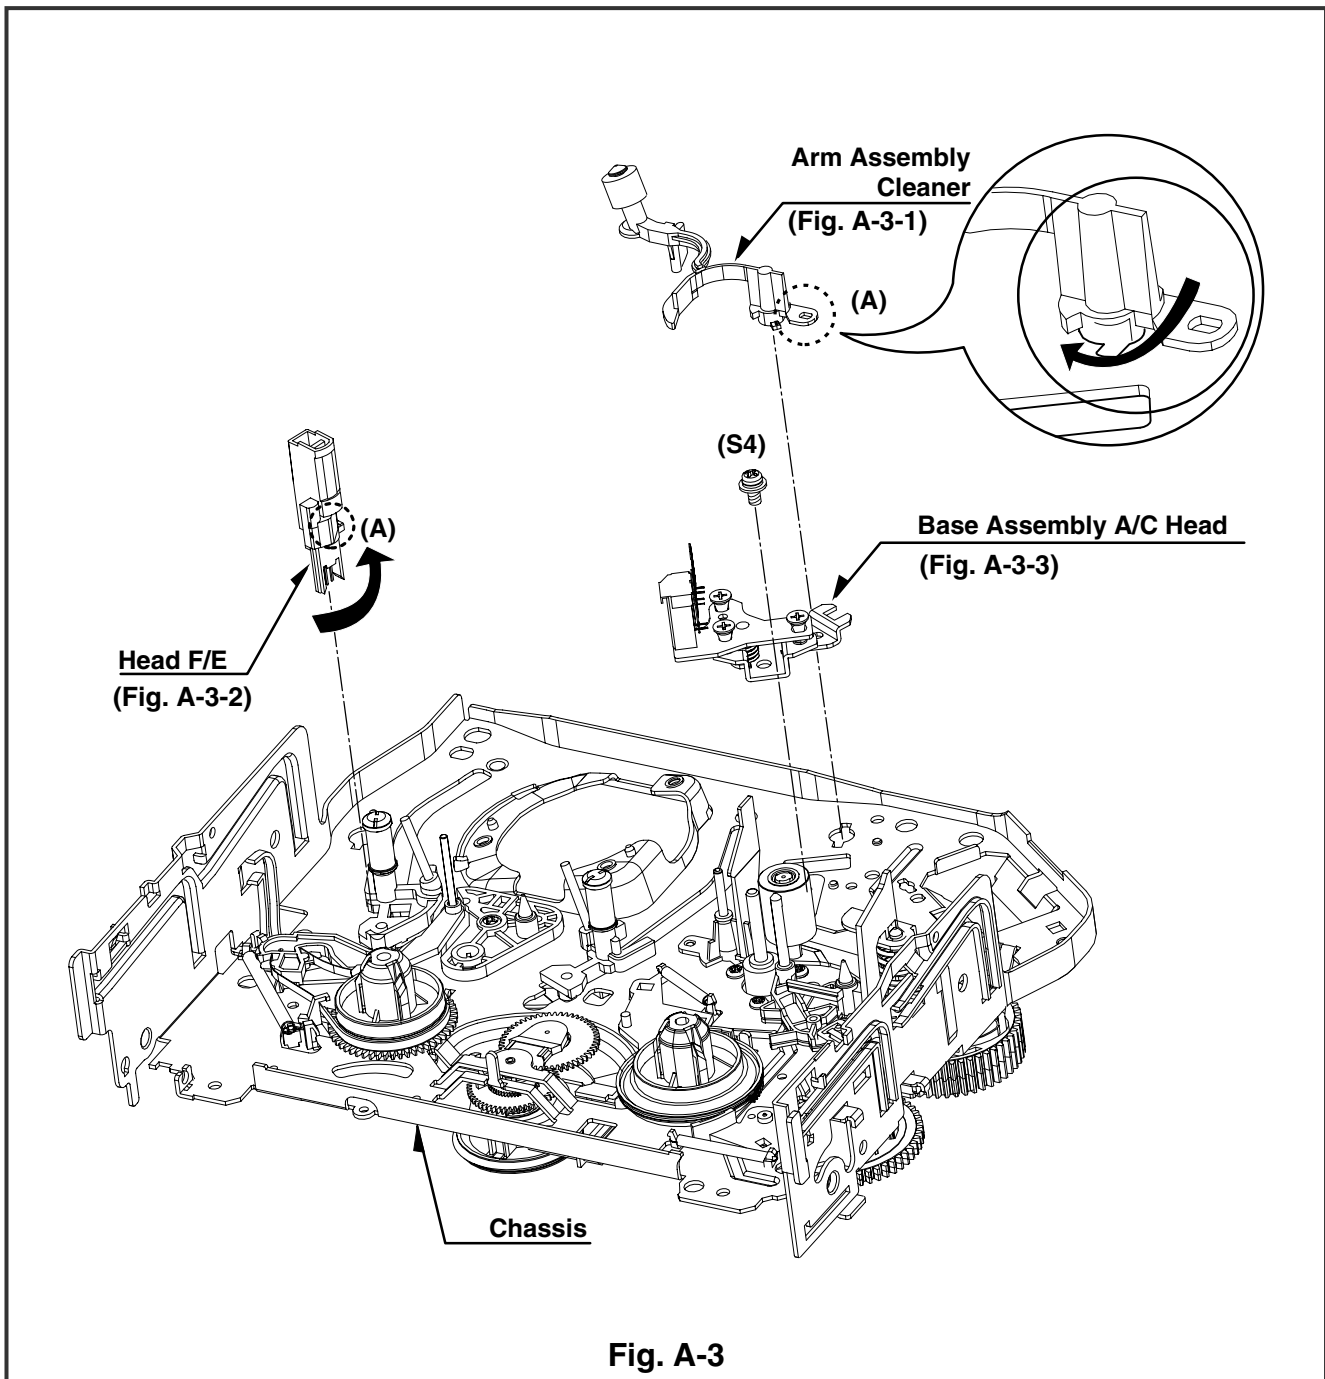


Fig. A-3

9. Arm Assembly Cleaner (Fig. A-3-1)

- 1) Breakaway the (A) portion as Fig. A-3-1 from the embossing of the Chassis, turn the Arm assembly Cleaner to clockwise direction and lift it up.

10. Head F/E (Fig. A-3-2)

- 1) Breakaway the (A) portion of the Head F/E from the embossing of the Chassis, turn it to counterclockwise direction and lift it up.

11. Base Assembly A/C Head (Fig. A-3-3)

- 1) Remove the Screw(S4) and lift the Base Assembly A/C Head up.

DECK MECHANISM DISASSEMBLY

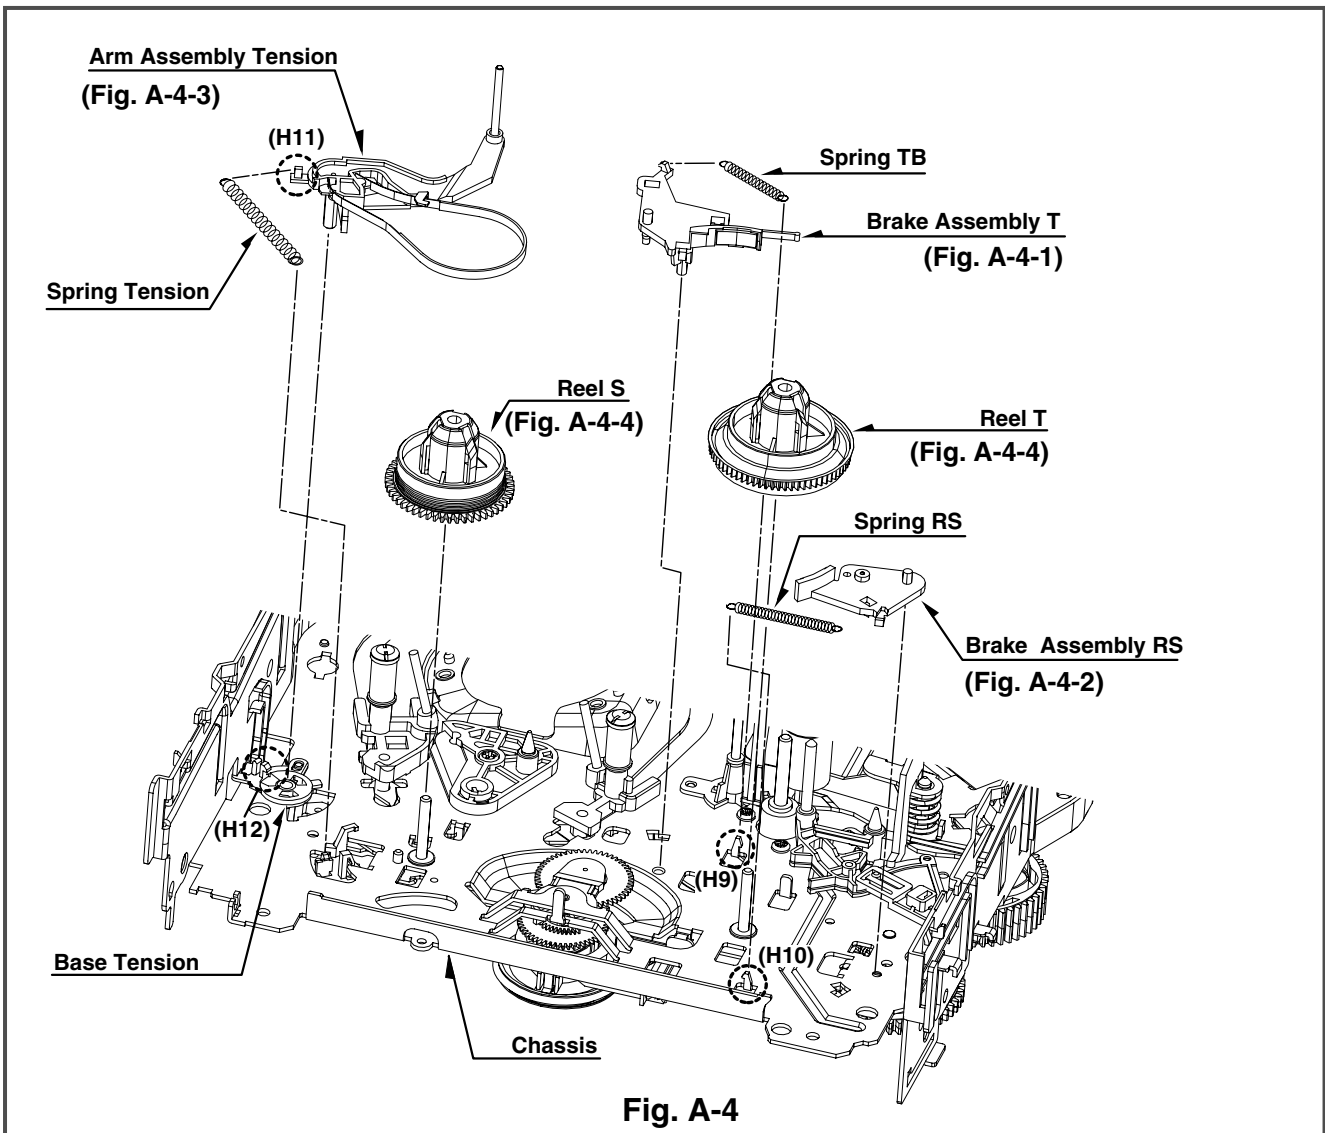


Fig. A-4

12. Brake Assembly T (Fig. A-4-1)

- 1) Unhook the Spring TB from the Hook(H9) of the Chassis.
- 2) Lift the Brake Assembly T up.

13. Brake Assembly RS (Fig. A-4-2)




- 1) Unhook the Spring RS from the Hook(H10) of the Chassis.
- 2) Lift the Brake Assembly T up.

14. Arm Assembly Tension (Fig. A-4-3)

- 1) Unhook the Spring Tension from the Hook(H11) of the Arm Assembly Tension.
- 2) Unhook the Hook(H12) of the Base Tension and lift the Arm Assembly Tension up.


NOTE

Difference for Springs


| | | |
|--|-----------------------|---------------|
|  | Spring TB | |
|  | Spring RS | Color (Black) |
|  | Spring Tension | |

15. Reel S / Reel T (Fig. A-4-4)

- 1) Difference for Reel S / Reel T

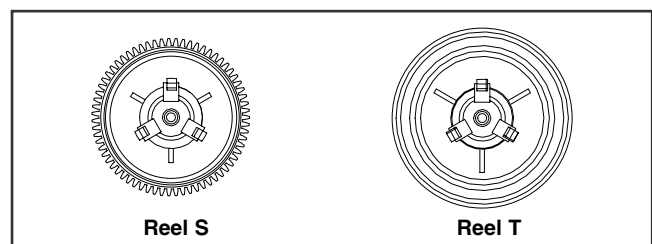

DECK MECHANISM DISASSEMBLY

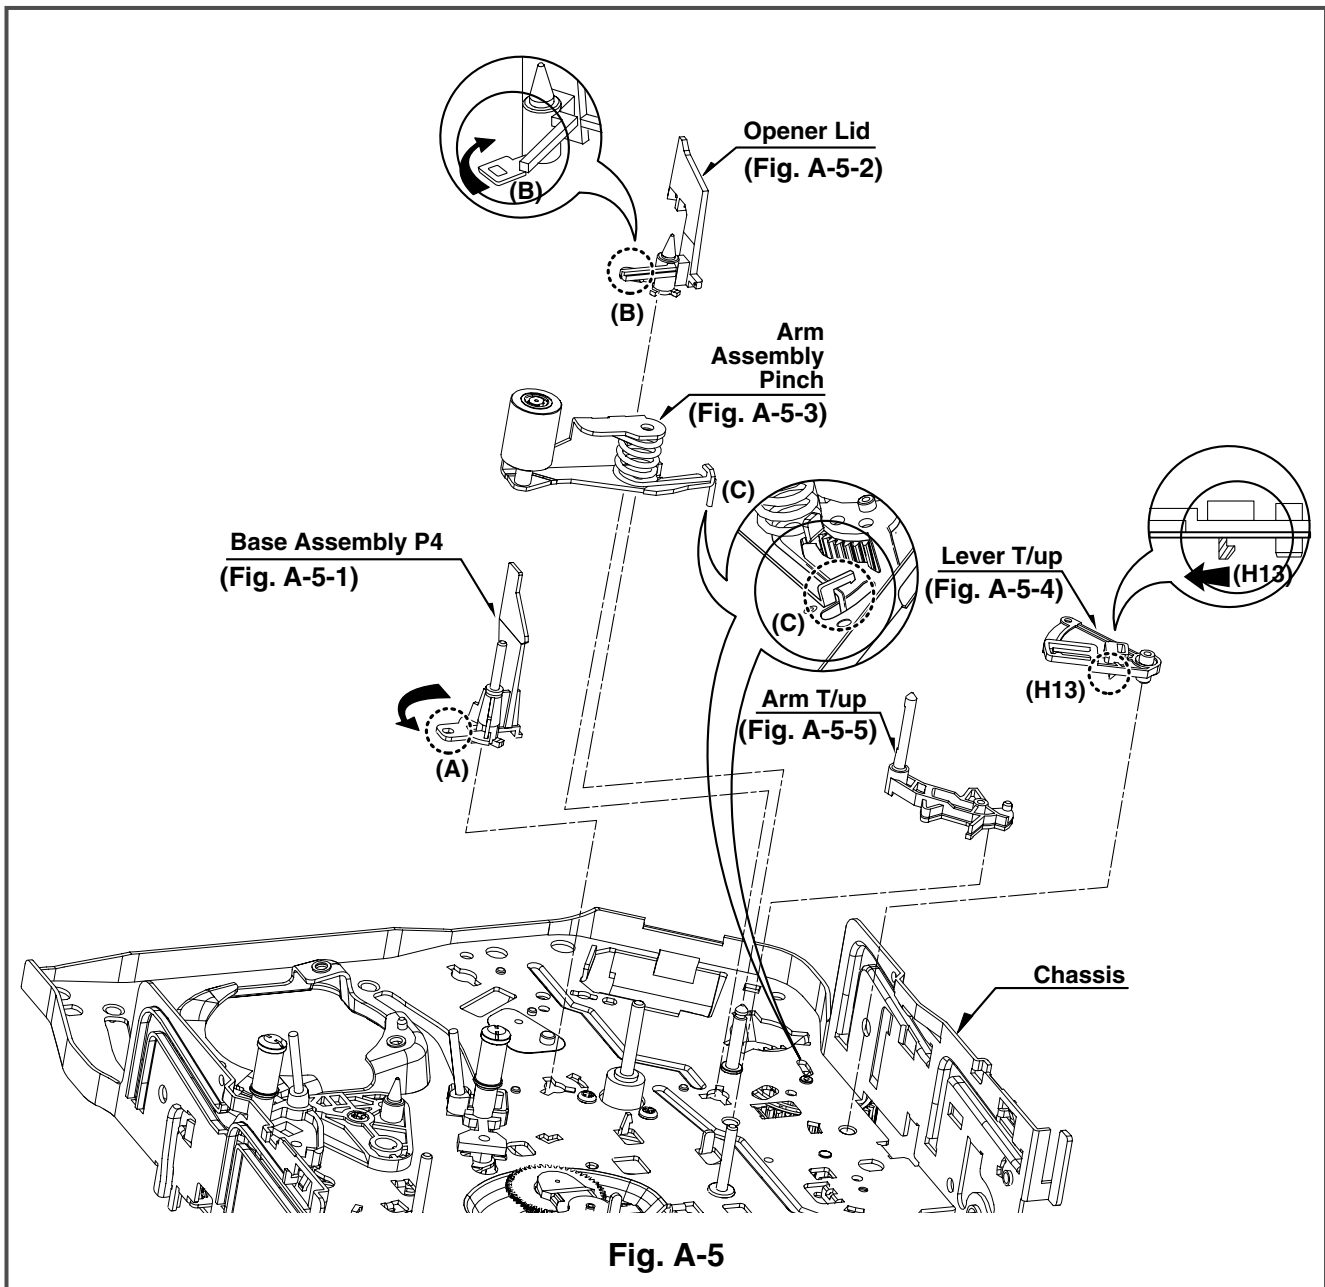

16. Base Assembly P4 (Fig. A-5-1)

- 1) Breakaway the (A) portion of the Base Assembly P4 from the embossing of the Chassis.
- 2) Turn the Base Assembly P4 to counterclockwise direction and lift it up.

17. Opener Lid (Fig. A-5-2)

- 1) Breakaway the (B) portion of the Opener Lid from the embossing of the Chassis.
- 2) Turn the Opener Lid to clockwise direction and lift it up.

18. Arm Assembly Pinch (Fig. A-5-3)

- 1) Lift the Arm Assembly Pinch up.

NOTE

When reassembling, confirm the (C) portion of the Arm Assembly Pinch is inserted to the Chassis hole correctly as Fig.

19. Lever T/up (Fig. A-5-4)/ Arm T/up (Fig. A-5-5)

- 1) Unhook the Hook(H13) of the bottom Chassis and lift the Lever T/up up.
- 2) Lift the Arm T/up up.

DECK MECHANISM DISASSEMBLY

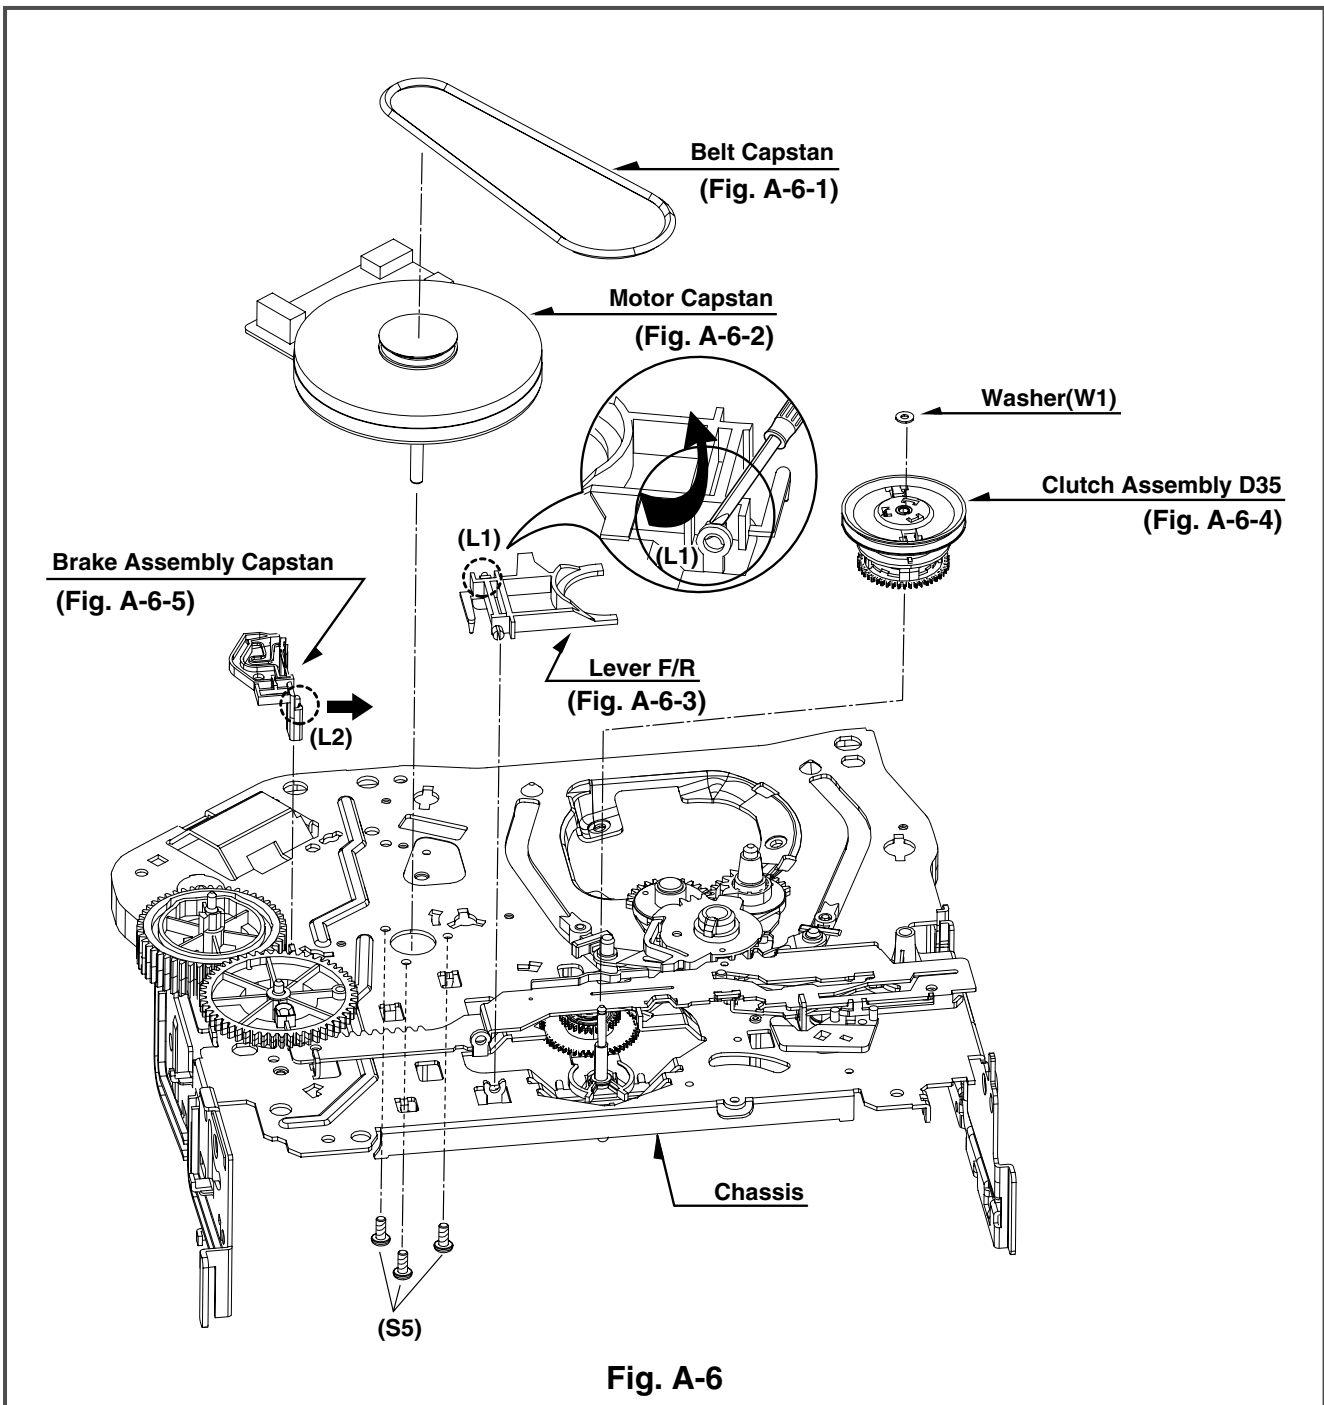


Fig. A-6

20. Belt Capstan (Fig. A-6-1)/ Motor Capstan (Fig. A-6-2)

- 1) Remove the Belt Capstan.
- 2) Remove the three Screws(S5) on bottom Chassis and lift the Motor Capstan up.

21. Lever F/R (Fig. A-6-3)

- 1) Unlock the Locking Tab(L1) as Fig. A-6-3 and lift the Lever F/R up.

22. Clutch Assembly D35 (Fig. A-6-4)

- 1) Remove the Washer(W1) and lift the Clutch Assembly D35 up.

23. Brake Assembly Capstan (Fig. A-6-5)

- 1) Pull the Locking Tab(L2) back in direction of arrow and lift it up.

DECK MECHANISM DISASSEMBLY

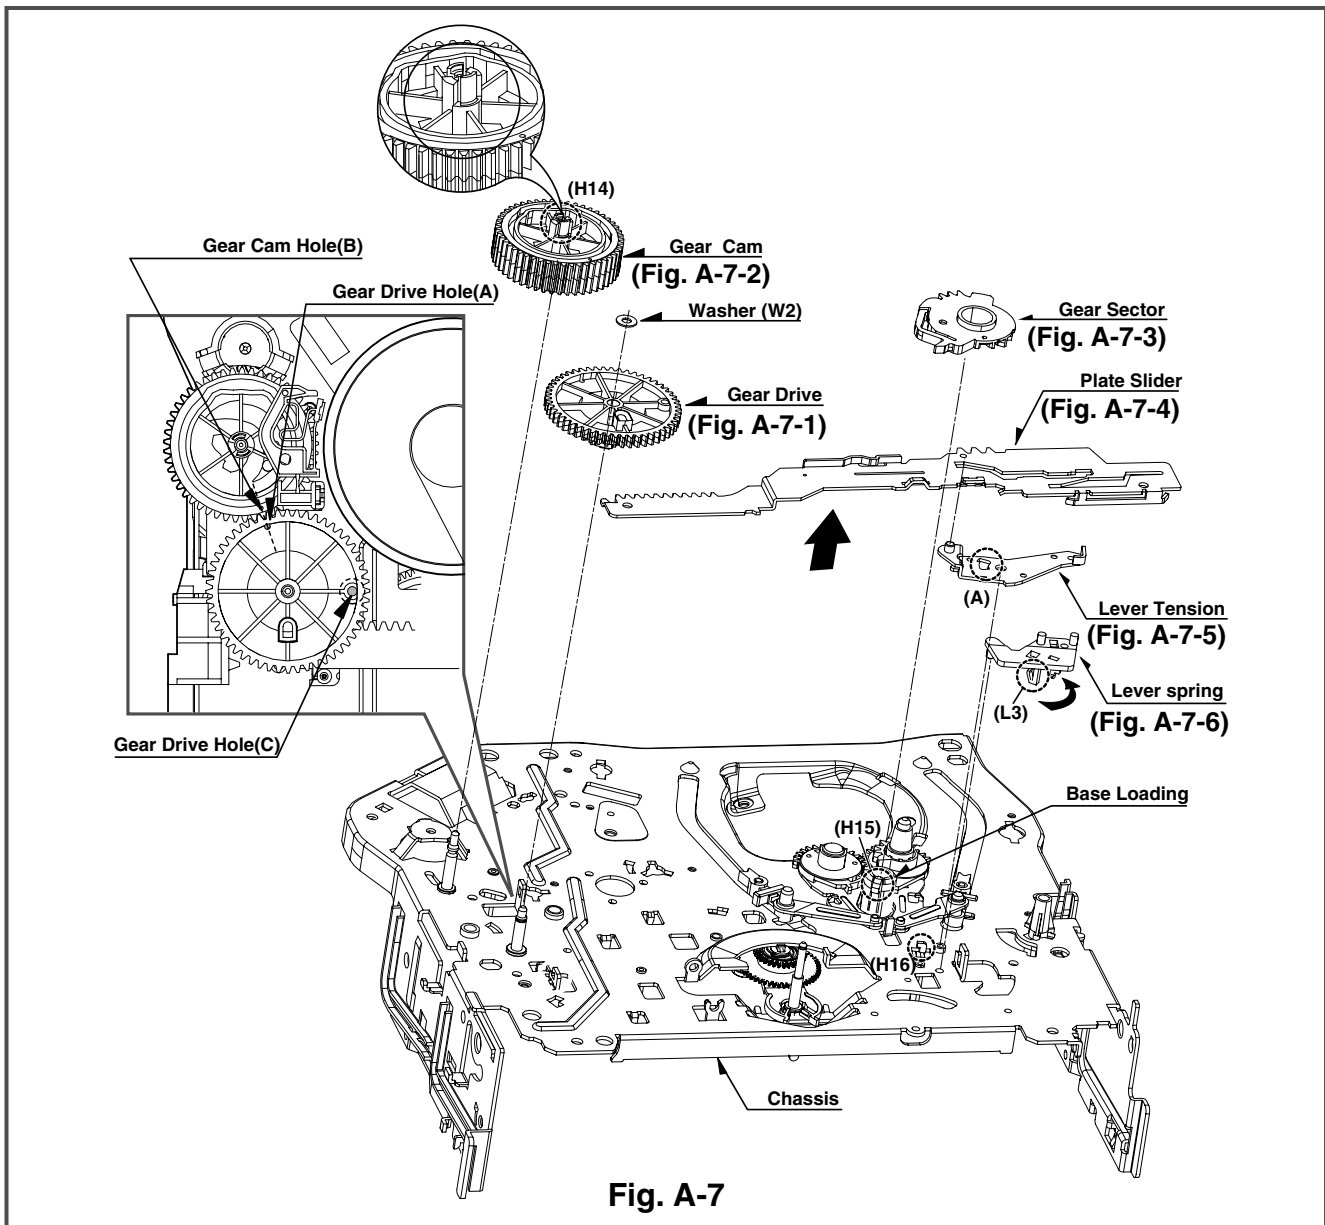


Fig. A-7

24. Gear Drive (Fig. A-7-1)/ Gear Cam (Fig. A-7-2)

- 1) Remove the Washer(W2) and lift the Gear Drive up.
- 2) Unhook the Hook(H14) of the Gear Cam and lift the Gear Cam up.

NOTE

When reassembling, align the Gear Drive Hole(A) and the Gear Cam Hole(B) in a straight line after the Gear Drive Hole(C) is aligned with the Chassis Hole as Fig.

25. Gear Sector (Fig. A-7-3)

- 1) Unhook the Hook(H15) of the Base Loading on bottom Chassis and lift the Gear Sector up.

26. Plate Slider (Fig. A-7-4)

- 1) Just lift the Plate Slider up.

27. Lever Tension (Fig. A-7-5)

- 1) Unhook the (A) portion of the Lever Tension from the Hook(H16) of the Chassis.
- 2) Turn the Lever Tension to counterclockwise direction and lift it up.

28. Lever Spring (Fig. A-7-6)

- 1) Unlock the Locking Tab(L3) of the bottom Chassis and lift the Lever Spring up.

DECK MECHANISM DISASSEMBLY

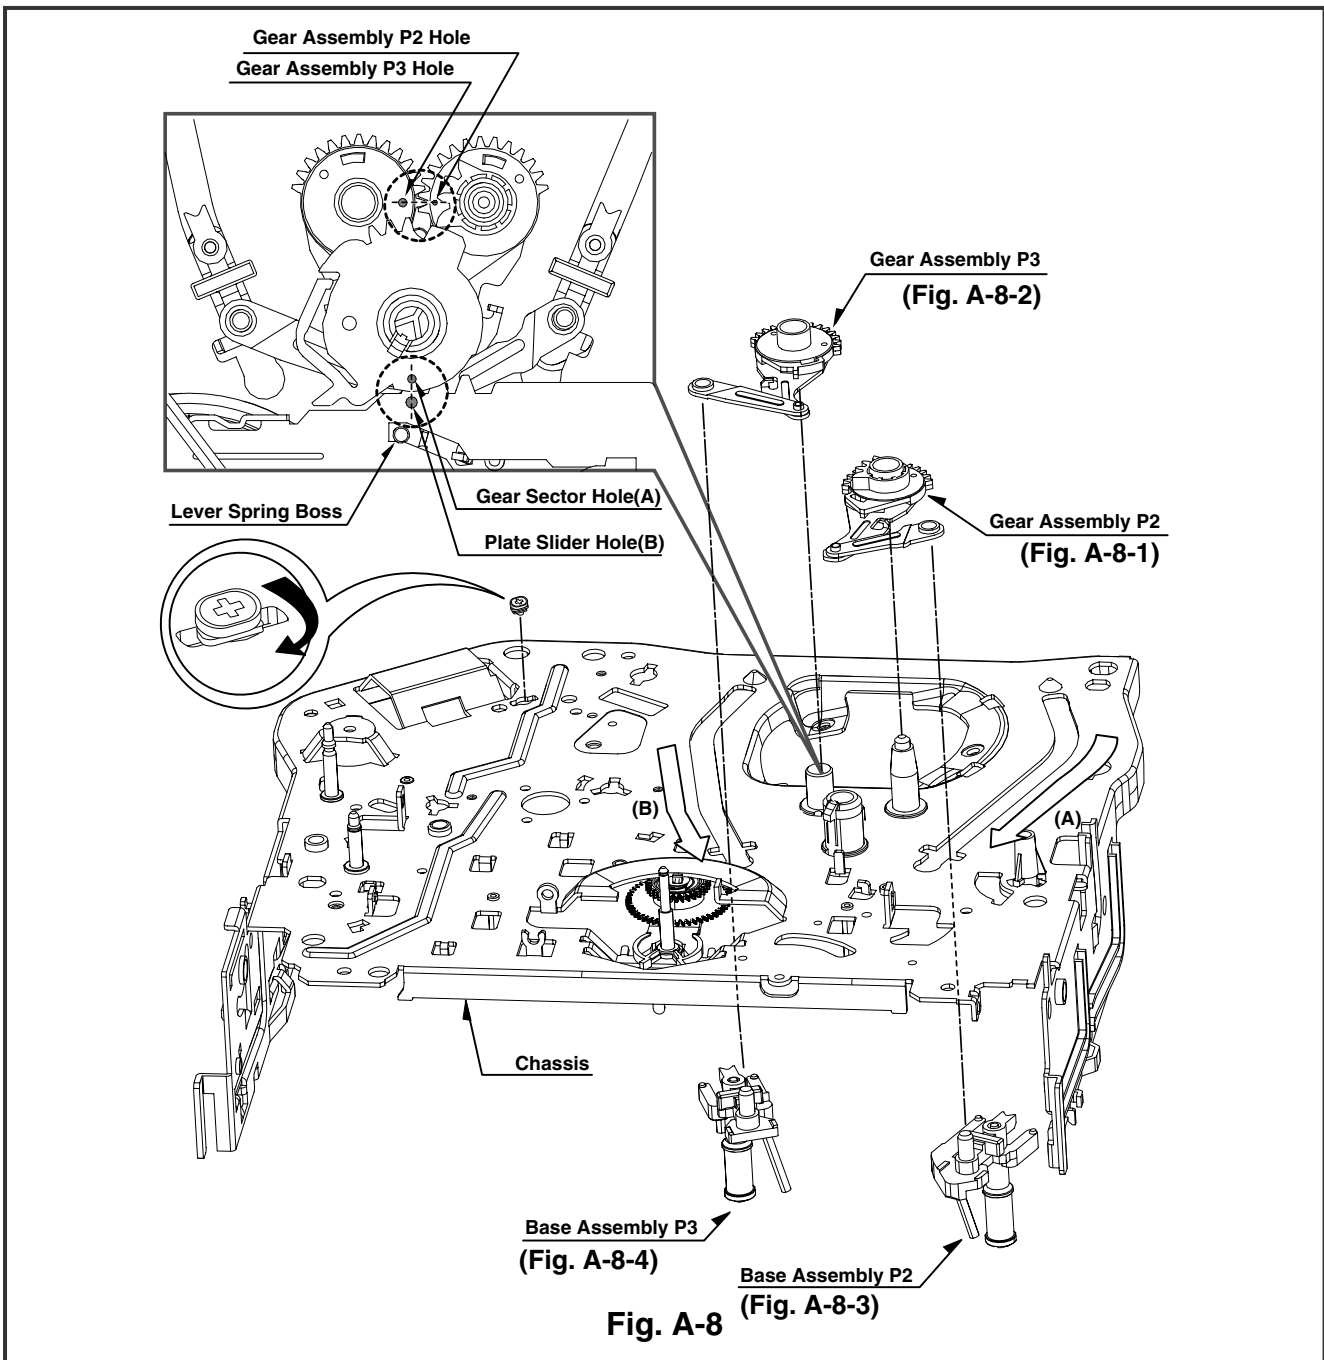


Fig. A-8

29. Gear Assembly P2 (Fig. A-8-1)/ Gear Assembly P3 (Fig. A-8-2)

- 1) Just lift the Gear Assembly P2 up.
- 2) Just lift the Gear Assembly P3 up.

NOTE

When reassembling, align the two holes of the Gear Assembly P2 and P3 in a straight line after confirmation whether the Gear Sector Hole(A) and the Plate Slider Hole(B) are aligned or not as Fig.

30. Base Assembly P2 (Fig. A-8-3)/ Base Assembly P3 (Fig. A-8-4)

- 1) Move the Base Assembly P2 in direction of arrow(A) along the guide hole of the Chassis and disassemble it on bottom side.
- 2) Move the Base Assembly P3 in direction of arrow(B) along the guide hole of the Chassis and disassemble it on bottom side.

DECK MECHANISM DISASSEMBLY

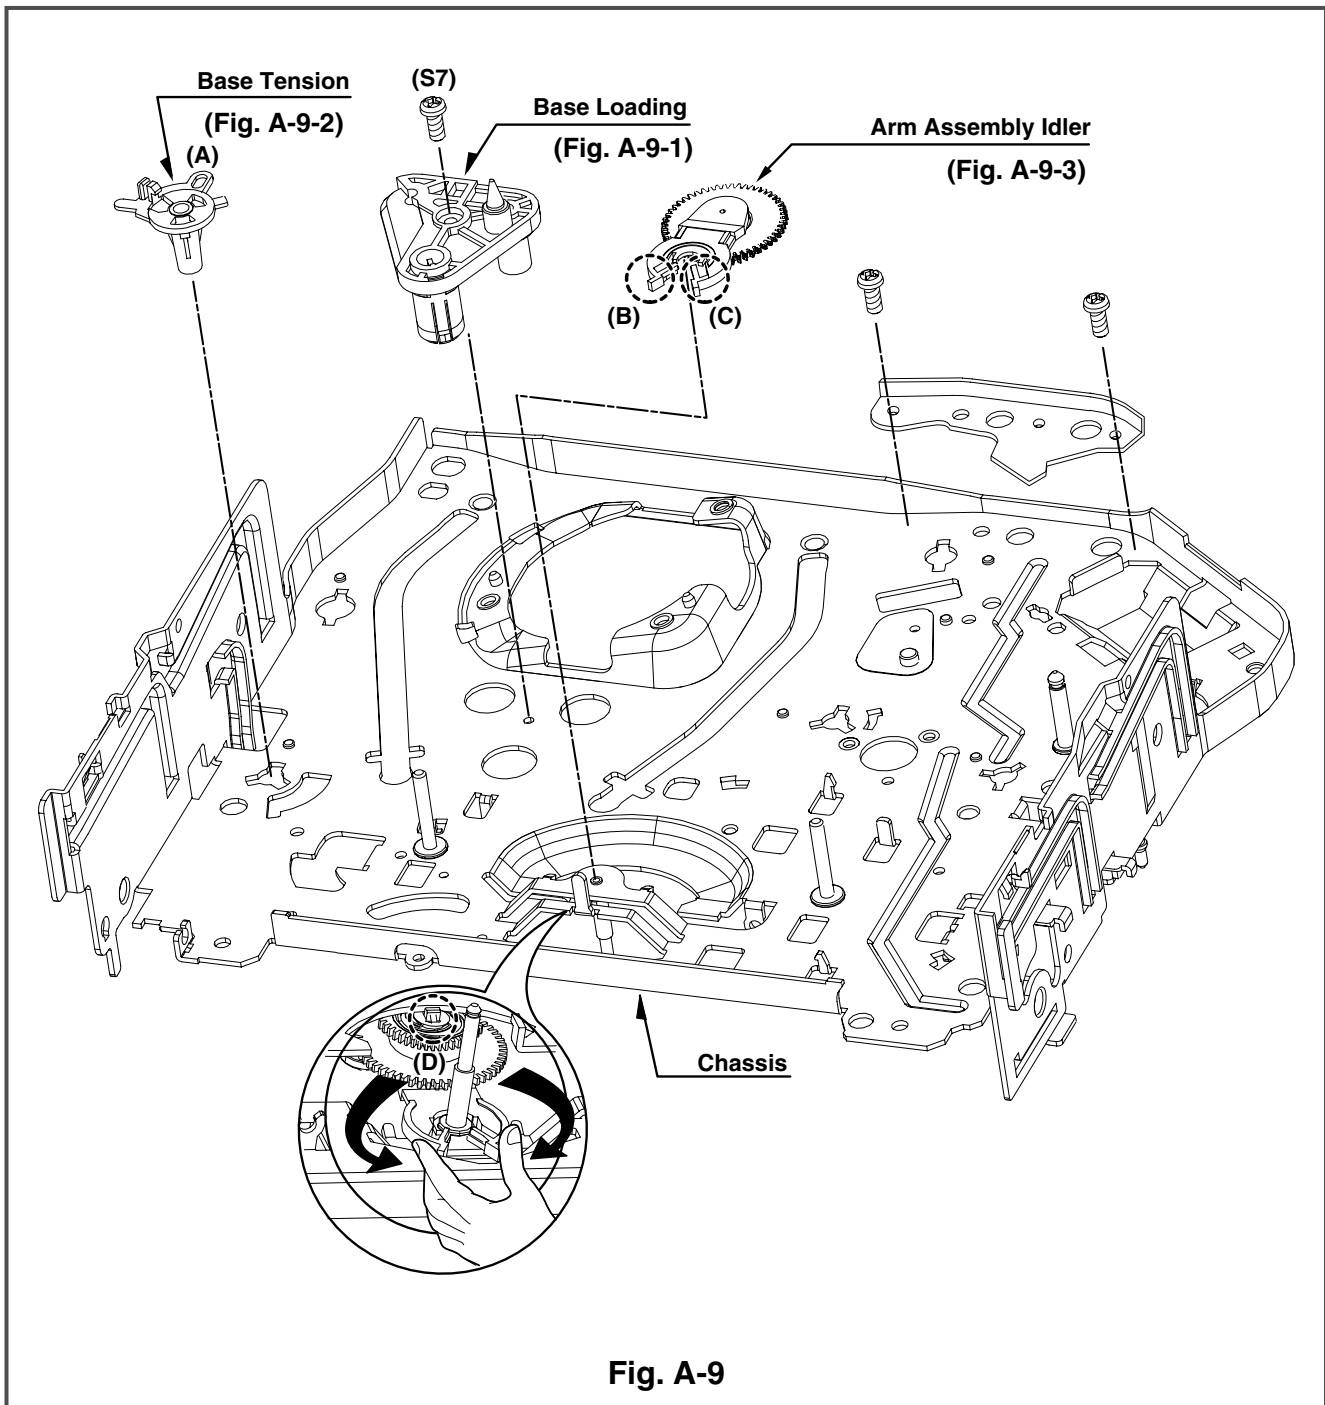


Fig. A-9

31. Base Loading (Fig. A-9-1)

- 1) Remove the Screw(S7).
- 2) Lift the Base Loading up.

32. Base Tension (Fig. A-9-2)

- 1) Breakaway the (A) portion of the Base Tension from the embossing of the Chassis.
- 2) Turn the Base Tension to counterclockwise direction and lift it up.

33. Arm Assembly Idler (Fig. A-9-3)







- 1) Make narrower the two parts, (B) and (C), as Fig. A-9-3.
- 2) Lift the Arm assembly Idler up.

NOTE

When disassembling, be careful not to be caught the (D) part by the Chassis as Fig.

DECK MECHANISM ADJUSTMENT

• Tools and Fixfures for Service
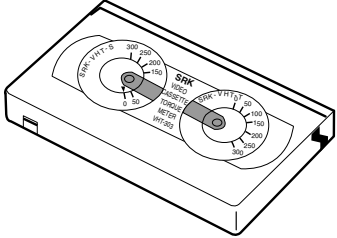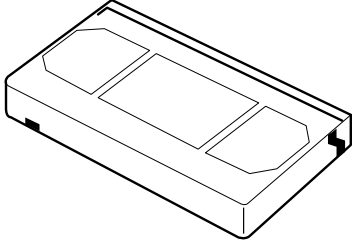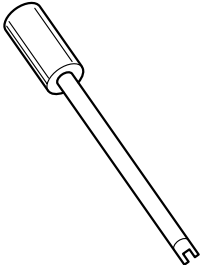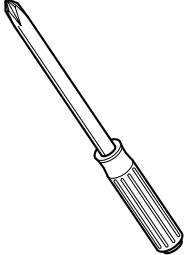
| | | |
|--|--|--|
| <p>1. Cassette Torque Meter SRK-VHT-303(Not SVC part) Parts No: D00-D006</p>  | <p>2. Alignment Tape Parts No NTSC: DTN-001 PAL:DTN-0002</p>  | <p>3. Torque Gauge 600g.Cm ATG Parts No:D00-D002</p>  |
| <p>4. Torque Gauge Adaptor Parts No:D09-R001</p>  | <p>5. Post Height Adjusting Driver Parts No:DTL-0005</p>  | <p>6. + Type Driver (ø 5)</p>  |

DECK MECHANISM ADJUSTMENT

1. Mechanism Alignment Position Check

Purpose: To determine if the Mechanism is in the correct position, when a Tape is ejected.

| Test Equipment/ Fixture | Test Conditions (Mechanism Condition) | Check Point |
|--|---------------------------------------|--------------------------------------|
| • Blank tape | • Eject Mode (with Cassette ejected) | • Mechanism and Mode Switch Position |
| 1) Turn the Power S/W on and eject the Cassette by pressing the Eject Button. 2) Remove the Top Cover and Plate Assembly Top, visually check if the Gear Cam Hole is aligned with the Chassis Hole as below Fig. C-2. 3) IF not, rotate the Shaft of the Loading Motor to either clockwise or counterclockwise until the alignment is as below Fig. C-2. 4) Remove the Screw which fixes the Deck Mechanism and Main Frame and confirm if the Gear Cam is aligned with the Gear Drive as below Fig. C-1(A). 5) Confirm if the Mode S/W on the Main P.C.Board is aligned as below Fig. C-1(B). 6) Remount the Deck Mechanism on the Main P.C.Board and check each operation. | | |

CHECK DIAGRAM

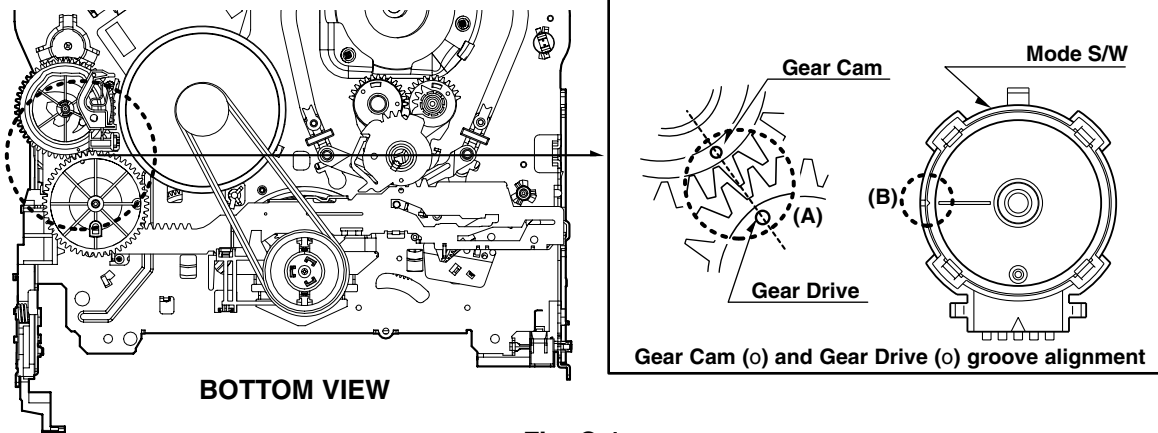


Fig. C-1

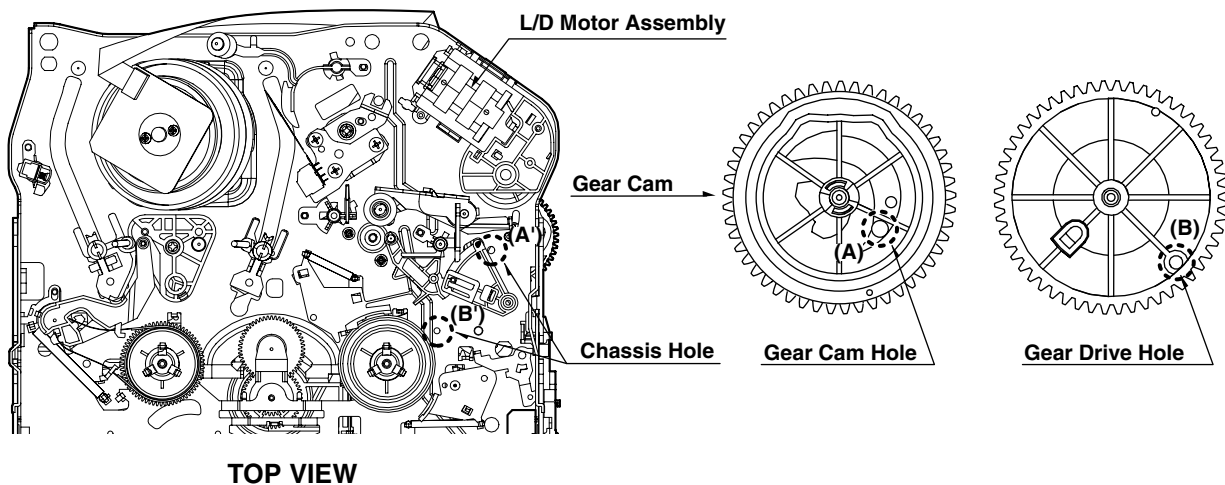


Fig. C-2

DECK MECHANISM ADJUSTMENT

2. Preparation for Adjustment (To set the Deck Mechanism of the loading state without inserting a cassette tape).

- 1) Unplug the power cord from the AC outlet.
- 2) Disassemble the Top Cover and Plate Assembly Top.
- 3) Plug the power cord into the AC outlet.
- 4) Turn the power S/W on and push the Lever Stopper of the Holder Assembly CST to the back for loading the

cassette without tape.

Cover the holes of the End Sensors at the both sides of the Chassis to prevent a light leak.

Then the Deck Mechanism drives to the Stop Mode. In this case, the Deck Mechanism can accept inputs of each mode, however the Rewind and Review operation can not be performed for more than a few seconds because the Take-up Reel Table is in the Stop State and can not be detected the Reel Pulses.

3. Checking Torque

Purpose: To insure smooth transport of the tape during each mode of operation.


If the tape transport is abnormal, then check the torque as indicated by the chart below.

| Test Equipment/ Fixture | Test Conditions (Mechanism Condition) | Checking Method | | |
|--|--|--|------------------|--------------------|
| <ul style="list-style-type: none"> • Torque Gauge(600g/cm ATG) • Torque Gauge Adaptor • Cassette Torque Meter SRK-VHT-303 | <ul style="list-style-type: none"> • Play (FF) or Review (REW) Mode | <ul style="list-style-type: none"> • Perform each Deck Mechanism mode without inserting a cassette tape(Refer to above No.2 Preparation for Adjustment). • Read the measurement of the Take-up or Supply Reels on the Cassette Torque Meter(Fig. C-3-2). • Attach the Torque Gauge Adaptor to the Torque Gauge and then read the value of it(Fig. C-3-1). | | |
| Item | Mode | Test Equipment | Measurement Reel | Measurement Values |
| Fast Forward Torque | Fast Forward | Cassette Torque Gauge | Take-Up Reel | More than 400g/cm |
| Rewind Torque | Rewind | Cassette Torque Gauge | Supply Reel | More than 400g/cm |
| Play Take-Up Torque | Play | Cassette Torque Meter | Take-Up Reel | 40~100g/cm |
| Review Torque | Review | Cassette Torque Meter | Supply Reel | 120~210g/cm |

NOTE:

The values are measured by using a Torque Gauge and Torque Gauge Adaptor with the Torque Gauge affixed.


• Torque Gauge (600g.cm ATG)

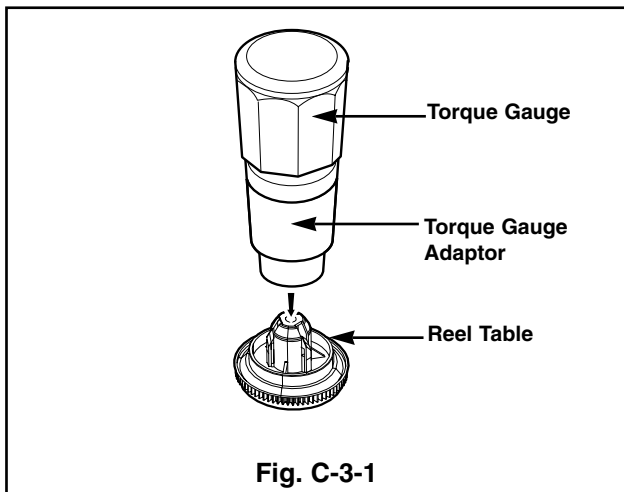

NOTE:

The torque reading to measure occurs when the tape abruptly changes direction from Fast Forward to Rewind Mode, when quick braking is applied to both Reels.

• Cassette Torque Meter (SRK-VHT-303)

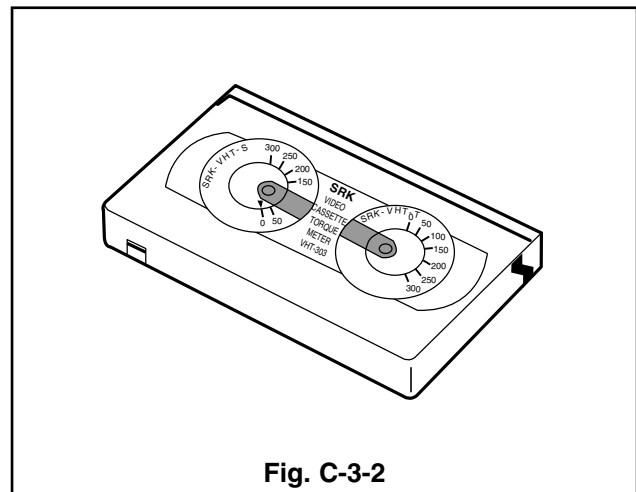


DECK MECHANISM ADJUSTMENT



4. Guide Roller Height Adjustment

Purpose: To regulate the height of the tape so that the bottom of the tape runs along the tape guide line on the Lower Drum.

4-1. Preliminary Adjustment
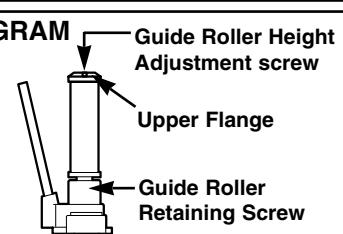
| Test Equipment/ Fixture | Test Conditions (Mechanism Condition) | Adjustment Point |
|--|---|--|
| <ul style="list-style-type: none"> • Post Height Adjusting Driver | <ul style="list-style-type: none"> • Play or Review Mode | <ul style="list-style-type: none"> • Guide Roller Height Adjustment screws on the Supply and Take-Up Guide Rollers. |
| Adjustment Procedure <ol style="list-style-type: none"> 1) Confirm if the tape runs along the tape guide line of the Lower Drum. 2) If the tape runs the bottom of the guide line, turn the Guide Roller Height Adjustment Screw to clockwise direction. 3) If it runs the top, turn to counterclockwise direction. 4) Adjust the height of the Guide Roller to be guided to the guide line of the Lower Drum from the starting and ending point of the Drum. | | ADJUSTMENT DIAGRAM  <p>Fig. C-4-1</p> |

4-2. Precise Adjustment
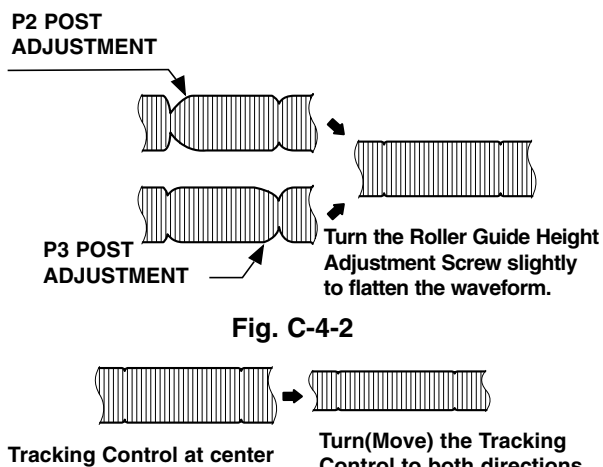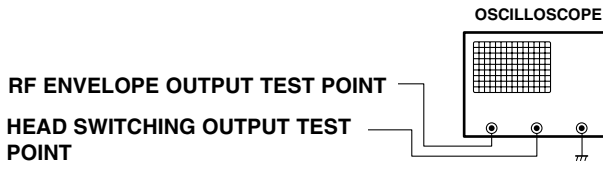
| Test Equipment/Fixture | Test Equipment Connection Points | Test Conditions VCR(VCP) State | Adjustment Point |
|---|---|---|---|
| <ul style="list-style-type: none"> • Oscilloscope • Alignment Tape • Post Height Adjusting Driver | <ul style="list-style-type: none"> • CH-1:PB RF Envelope • CH-2:NTSC: SW 30Hz PAL: SW 25Hz • Head Switching Output Point • RF Envelope Output Point | <ul style="list-style-type: none"> • Play an Alignment Tape | <ul style="list-style-type: none"> • Guide Roller Height Adjustment Screws |
| Adjustment Procedure <ol style="list-style-type: none"> 1) Play an Alignment Tape after connecting the probe of the Oscilloscope to the RF Envelope Output Test Point and Head Switching Output Test Point. 2) Tracking Control(in PB Mode) : Center Position(When this adjustment is performed after the Drum Assembly has been replaced, set the Tracking Control so that the RF Output is Maximum). 3) Height Adjustment Screw : Flatten the RF waveform. (Fig. C-4-2) 4) Turn(Move) the Tracking Control(in PB Mode) clockwise and counterclockwise.(Fig. C-4-3) 5) Check that any drop of RF Output is uniform at the start and end of the waveform. | | Waveform Diagrams  <p>Fig. C-4-2</p> <p>Fig. C-4-3</p> | |
| NOTE If the adjustment is excessive or insufficient the tape will jam or fold. | | Connection Diagram  | |

DECK MECHANISM ADJUSTMENT

5. Audio/Control (A/C) Head Adjustment

Purpose: To insure that the tape passes accurately over the Audio and Control Tracks in exact alignment of the both Record and Playback Modes.

5-1. Preliminary Adjustment (Height and Tilt Adjustment)

Perform the Preliminary Adjustment, when there is no Audio Output Signal with the Alignment Tape.

| Test Equipment/ Fixture | Test Conditions (Mechanism Condition) | Adjustment Point |
|--|---|---|
| <ul style="list-style-type: none"> • Blank Tape • Screw Driver(+) Type 5mm | <ul style="list-style-type: none"> • Play the blank tape | <ul style="list-style-type: none"> • Tilt Adjustment Screw(C) • Height Adjustment Screw(B) • Azimuth Adjustment Screw(A) |




Adjustment Procedure/Diagrams

- 1) Initially adjust the Base Assembly A/C Head as shown Fig. C-5-1 by using the Height Adjustment Screw(B).
- 2) Play a blank tape and observe if the tape passes accurately over the A/C Head without tape curling or folding.
- 3) If folding or curling is occurred then adjust the Tilt Adjustment Screw(C) while the tape is running to resemble Fig. C-5-3.

- 4) Reconfirm the tape path after Playback about 4~5 seconds.

NOTE

Ideal A/C head height occurs when the tape runs between 0.2~0.25mm above the bottom edge of the A/C Head core.

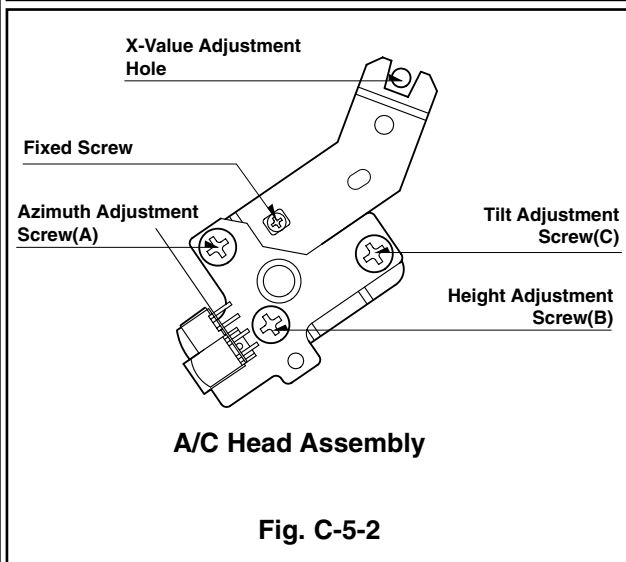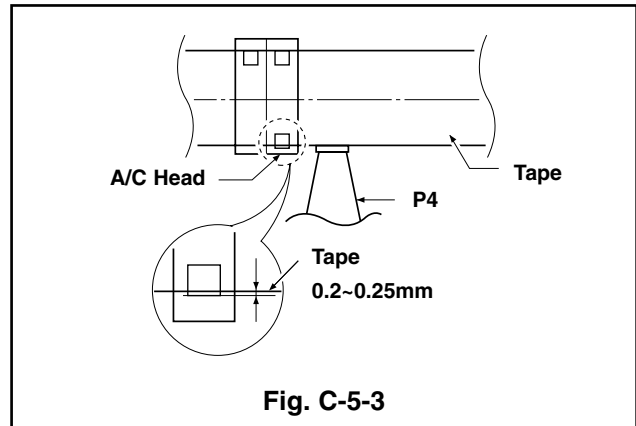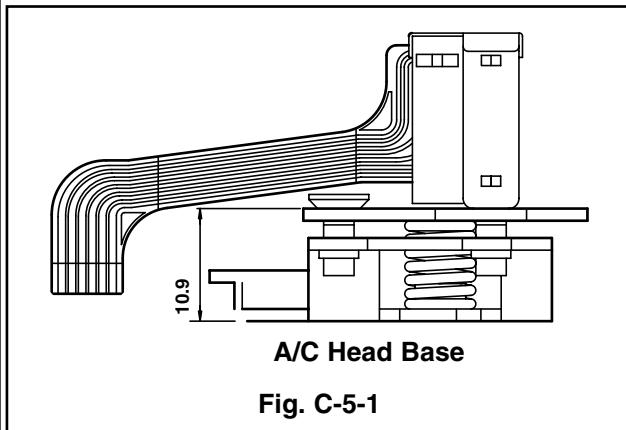

DECK MECHANISM ADJUSTMENT

5-2. Confirm that the tape passes smoothly between the Take-up Guide and Pinch Roller(using a mirror or the naked eye).



- After completing Step 5-1.(Preliminary Adjustment), check that the tape passes around the Take-up Guide and Pinch Roller without folding or curling at the top or bottom.
 - If folding or curling is observed at the bottom of the Take-up Guide then slowly turn the Tilt Adjustment Screw(C) in the clockwise direction.

- If folding or curling is observed at the top of it then slowly turn the Tilt Adjustment Screw(C) in the counterclockwise direction.




NOTE:

Check the RF envelope after adjusting the A/C Head, if the RF waveform differs from Fig. C-5-4, performs Precise Adjustment to flat the RF waveform.

5-3. Precise Adjustment (Azimuth adjustment)

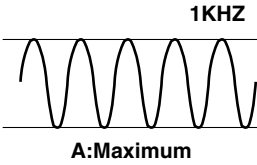
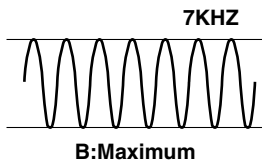
| Test Equipment/ Fixture | Connection Point | Test Conditions (Mechanism Condition) | Adjustment Point |
|--|---|--|---|
| <ul style="list-style-type: none"> Oscilloscope Alignment Tape(SP) Screw Driver(+) Type 5mm | <ul style="list-style-type: none"> Audio output jack | <ul style="list-style-type: none"> Play an Alignment Tape 1KHz, 7KHz Sections | <ul style="list-style-type: none"> Azimuth Adjustment Screw(A) Height Adjustment Screw(B) |
| Adjustment Procedure <ol style="list-style-type: none"> Connect the probe of the oscilloscope to Audio Output Jack. Alternately adjust the Azimuth Adjustment Screw(A) and the Tilt Adjustment Screw(C) for maximum output of the 1KHz and 7KHz segments, while maintaining the flattest envelope differential between the two frequencies. | | | |
| | |  |  |
| Fig. C-5-4 | | | |

6. X-Value Adjustment
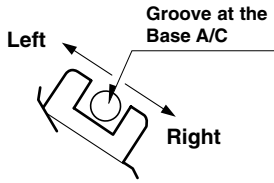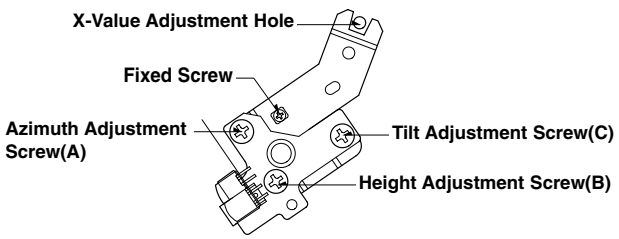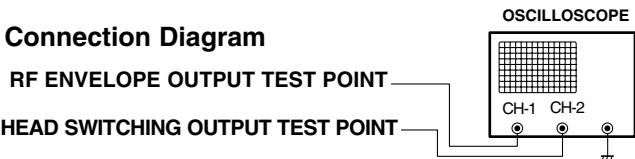
| Purpose: To obtain compatibility with the other VCR(VCP) Models. | | | |
|---|---|--|---|
| Test Equipment/ Fixture | Connection Point | Test Conditions (Mechanism Condition) | Adjustment Point |
| <ul style="list-style-type: none"> Oscilloscope Alignment Tape(SP only) Screw Driver(+) Type 5mm | <ul style="list-style-type: none"> CH-1: PB RF Envelope CH-2: NTSC: SW 30Hz PAL: SW 25Hz Head Switching Output Test Point RF Envelope Output Test Point | <ul style="list-style-type: none"> Play an Alignment Tape |  |
| Adjustment Procedure <ol style="list-style-type: none"> Release the Automatic Tracking to run long enough for tracking to complete it's cycle. Loosen the Fixed Mounting Screw and move the Base Assembly A/C Head in the direction as shown in the diagram to find the center of the peak that allows for the maximum waveform envelope. This method should allow the 31µm Head to be centrally located over the 58µm tape track. Tighten the Base Assembly A/C Head mounting Screw. | | Adjustment Diagram  | |
| | | Connection Diagram  | |

DECK MECHANISM ADJUSTMENT

7. Adjustment after Replacing Drum Assembly (Video Heads)
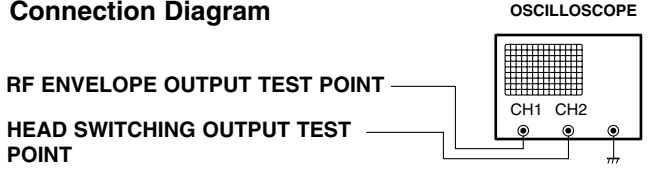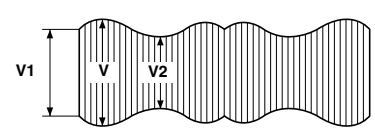
| Purpose: To correct for shift in the Roller Guide and X value after replacing the Drum. | | | |
|---|---|---|--|
| Test Equipment/ Fixture | Connection Point | Test Conditions (Mechanism Condition) | Adjustment Points |
| <ul style="list-style-type: none"> Oscilloscope Alignment Tapes Blank Tape Post Height Adjusting Driver Screw Driver(+) Type 5mm | <ul style="list-style-type: none"> CH-1: PB RF Envelope CH-2: NTSC: SW 30Hz PAL: SW 25Hz Head Switching Output Test Point RF Envelope Output Test Point | <ul style="list-style-type: none"> Play the Blank Tape Play an Alignment Tape | <ul style="list-style-type: none"> Guide Roller Precise Adjustment Switching Point Tracking Preset X-Value |
| Checking/Adjustment Procedure Play a blank tape and check for tape curling or creasing around the Roller Guide. If there is a problem then follow the procedure 4. "Guide Roller Height" and 5. "Audio Control(A/C) Head Adjustment". | | Connection Diagram  Waveform $V1/V \text{ MAX} \leq 0.7$ $V2/V \text{ MAX} \leq 0.8$ RF ENVELOPE OUTPUT  | |
| Fig. C-7 | | | |

8. Check the Tape Travel after Reassembling Deck Assembly.

8-1. Checking Audio and RF Locking Time during playback and after CUE or REV (FF/REW)

| Test Equipment/ Fixture | Specification | Connection Points | Test Conditions (Mechanism Condition) |
|---|--|---|--|
| <ul style="list-style-type: none"> Oscilloscope Alignment Tapes(with 6H 3KHz Color Bar Signal) Stop Watch | <ul style="list-style-type: none"> RF Locking Time: Less than 5 sec. Audio Locking Time: Less than 10sec | <ul style="list-style-type: none"> CH-1: PB RF Envelope CH-2: Audio Output RF Envelope Output Point Audio Output Jack | <ul style="list-style-type: none"> Play an Alignment Tape (with 6H 3kHz Color Bar Signal) |
| Checking Procedure Play an Alignment Tape then change the operating mode to CUE or REV and confirm if the unit meets the above listed specifications. | | NOTES: 1) CUE is the forward search mode 2) REV is the backward search mode 3) Refer to the Play mode | |

8-2. Checking for tape curling or jamming

| Test Equipment/ Fixture | Specification | Test Conditions (Mechanism Condition) |
|---|--|---|
| <ul style="list-style-type: none"> T-160 Tape T-120 Tape | <ul style="list-style-type: none"> Be sure there is no tape jamming or curling at the beginning, middle or end of the tape. | <ul style="list-style-type: none"> Run the CUE, REV, Play mode at the beginning and the end of the tape. |
| Checking Procedure 1) Confirm that the tape runs smoothly around the roller guides, Drum and A/C Head Assemblies while abruptly changing operating modes from Play to CUE or REV. This is to be checked at the beginning, middle and end sections of the tape. 2) Confirm that the tape passes over the A/C Head Assembly as indicated by proper audio reproduction and proper tape counter performance. | | |

MAINTENANCE/INSPECTION PROCEDURE

1. Check before starting repairs

The following faults can be remedied by cleaning and oiling. Check the needed lubrication and the conditions of cleanliness in the unit.

Check with the customer to find out how often the unit is used, and then determine that the unit is ready for inspection and maintenance. Check the following parts.

| Phenomenon | Inspection | Replacement | |
|--|---|-------------|------------------------------|
| Color beats | Dirt on Full-Erase Head | o | F/E Head |
| Poor S/N, no color | Dirt on Video Head | o | Video Head |
| Vertical or Horizontal jitter | Dirt on Video Head Dirt on tape transport system | o | |
| Low volume, Sound distorted | Dirt on Audio/Control Head | o | A/C Head |
| Tape does not run. Tape is slack | Dirt on Pinch Roller | o | Pinch Roller Belt Capstan |
| In Review and Unloading (off mode), the tape is rolled up loosely. | Clutch Assembly D35 torque reduced | o | Clutch Assembly D35 |
| | Cleaning Drum and transport system | Fig. C-9-3 | |

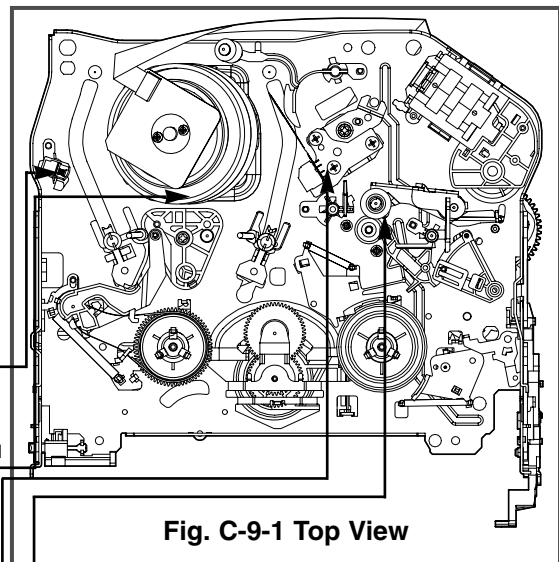


Fig. C-9-1 Top View

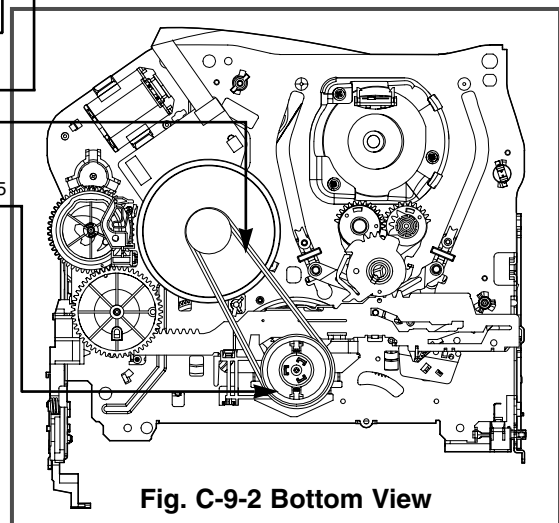


Fig. C-9-2 Bottom View

NOTE

If locations marked with **o** do not operate normally after cleaning, check for wear and replace.

See the EXPLODED VIEWS at the end of this manual as well as the above illustrations and see the Greasing (Page 4-21, 22) for the sections to be lubricated and greased.

* No. (1)~(12) Indicates the Tape Path to be traveled from Supply Reel to Take-up Reel.

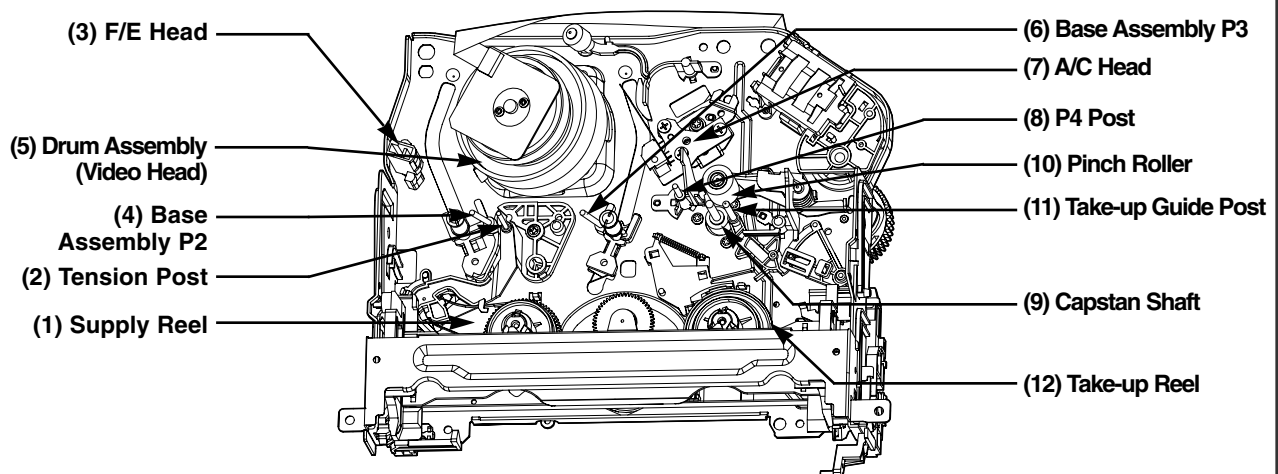


Fig. C-9-3 Tape Transport System

MAINTENANCE/INSPECTION PROCEDURE

2. Required Maintenance

The recording density of a VCR(VCP) is much higher than that of an audio tape recorder. VCR(VCP) components must be very precise, at tolerances of 1/1000mm, to ensure compatibility with the other VCRs. If any of these components are worn or dirty, the symptoms will be the same as if the part is defective. To ensure a good picture, periodic inspection and maintenance, including replacement of worn out parts and lubrication, is necessary.

3. Scheduled Maintenance

Schedules for maintenance and inspection are not fixed because they vary greatly according to the way in which the customer uses the VCR(VCP), and the environment in which the VCR(VCP) is used.

But, in general home use, a good picture will be maintained if inspection and maintenance is made every 1,000 hours. The table below shows the relation between time used and inspection period.

Table 1

| When inspection is necessary | About 1 year | About 18 months | About 3 years |
|------------------------------|---------------------------------------|-----------------|---------------|
| Average hours used per day | ▲ | ▲ | ▲ |
| One hour | [Bar chart showing inspection period] | | |
| Two hours | [Bar chart showing inspection period] | | |
| Three hours | [Bar chart showing inspection period] | | |

4. Supplies Required for Inspection and Maintenance

- (1) Grease : Kanto G-311G (Blue) or equivalent
- (2) Isopropyl Alcohol or equivalent
- (3) Cleaning Patches
- (4) Grease : Kanto G-381 (Yellow)

5. Maintenance Procedure

5-1) Cleaning

- (1) Cleaning video head

First use a cleaning tape. If the dirt on the head is too stubborn to remove by tape, use the cleaning patch. Coat the cleaning patch with Isopropyl Alcohol. Touch the cleaning patch to the head tip and gently turn the head (rotating cylinder) right and left.


(Do not move the cleaning patch vertically. Make sure that only the buckskin on the cleaning patch comes into contact with the head. Otherwise, the head may be damaged.)

Thoroughly dry the head. Then run the test tape. If Isopropyl Alcohol remains on the video head, the tape may be damaged when it comes into contact with the head surface.

- (2) Clean the tape transport system and drive system, etc, by wiping with a cleaning patch wetted with Isopropyl Alcohol.

NOTES:

- ① It is the tape transport system which comes into contact with the running tape. The drive system consists of those parts which moves the tape.
- ② Make sure that during cleaning you do not touch the tape transport system with excessive force that would cause deformation or damage to the system.

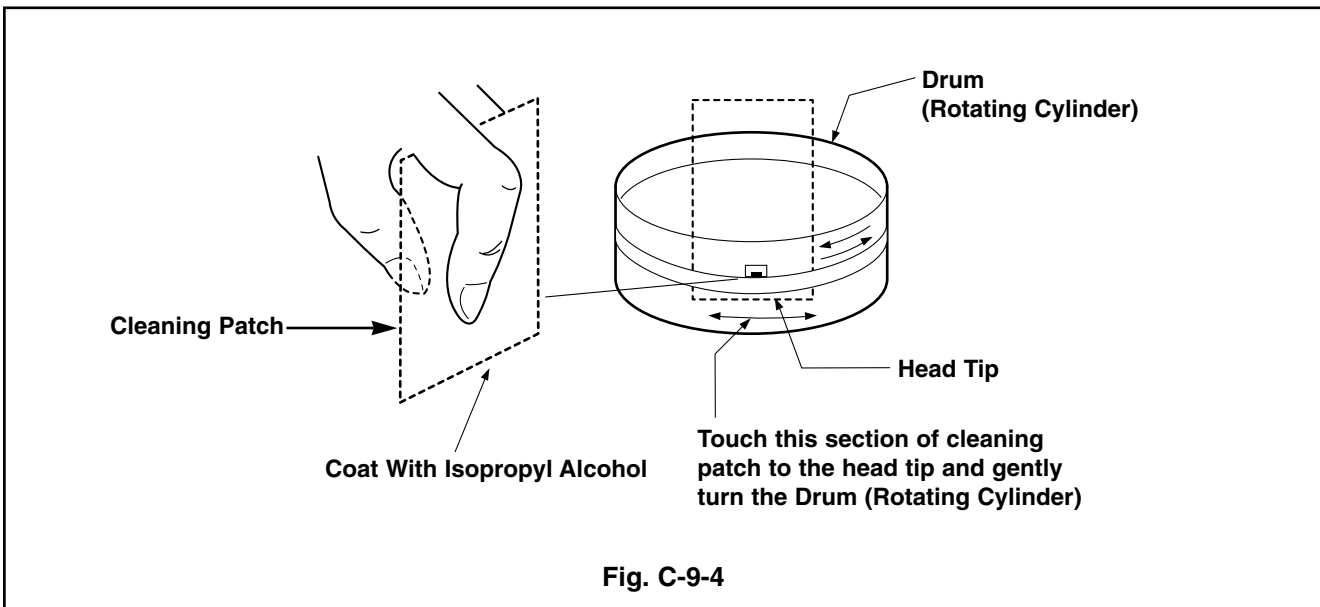

MAINTENANCE/INSPECTION PROCEDURE


5-2) Greasing

(1) Greasing guidelines

Apply grease, with a cleaning patch. Do not use excessive grease. It may come into contact with the tape transport or drive system. Wipe excessive grease and clean with cleaning patch wetted in Isopropyl Alcohol.


NOTE:Greasing Points

- | | |
|-----------------------------------|---------------------------------------|
| 1) Loading Path Inside & Top side | 5) Arm Take-up Rubbing Sections |
| 2) Base Assembly P2, P3 stopper | 6) Reel S,T shaft(G381:Yellow) |
| 3) Shaft | 7) Arm Assembly F/L Rotating Sections |
| 4) L/D Motor Gear Wheel Part | |

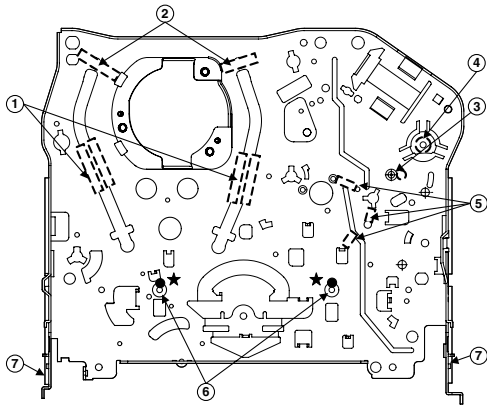

Chassis (Top)

Gear Part

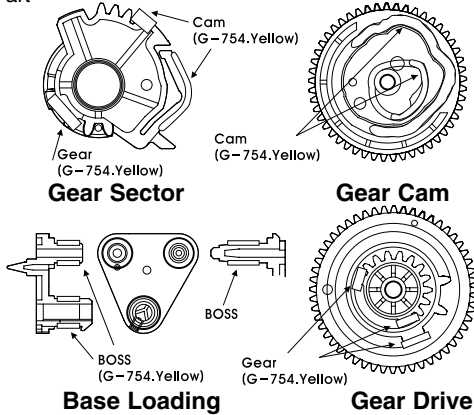


Chassis (Left Side)

Chassis (Right Side)


(2) Periodic greasing

Grease specified locations every 5,000 hours.

- | | |
|-----------------------------------|--|
| 1) Loading Path Inside & Top side | 6) Plate Slider Guide Sections |
| 2) Base Assembly P2,P3 stopper | 7) Plate Slider Guide Sections |
| 3) Shaft | 8) Gear Assembly P2, P2 Rubbing Sections |
| 4) Shaft | |
| 5) Clutch Assembly D35 Shaft | |

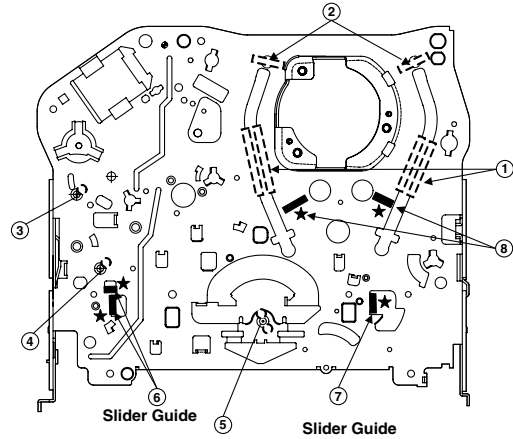

Chassis (Bottom)

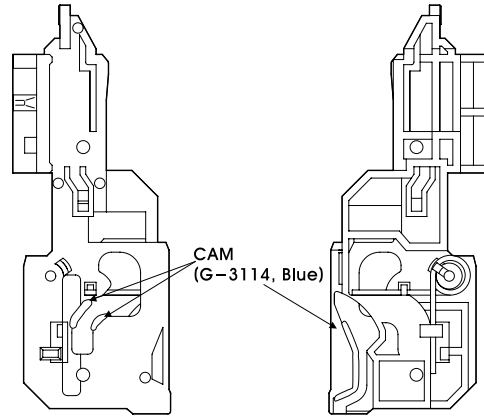

Gear Rack F/L


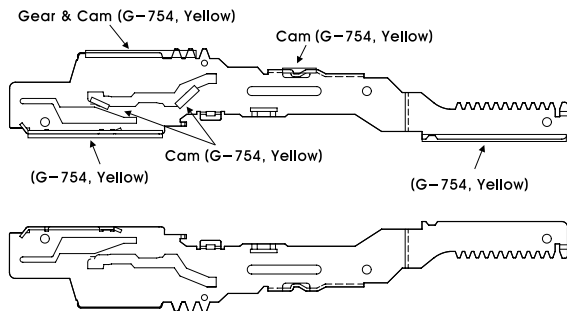



Plate Slider

MAINTENANCE/INSPECTION PROCEDURE

Lever, F/R, Base, Tension

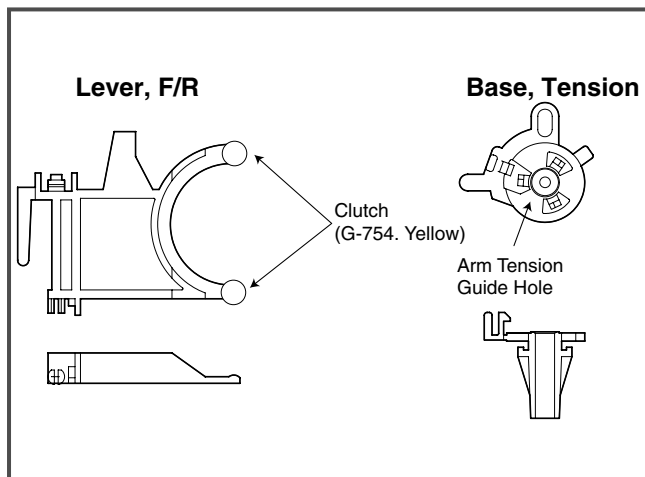


GEAR AY, P2 & P3

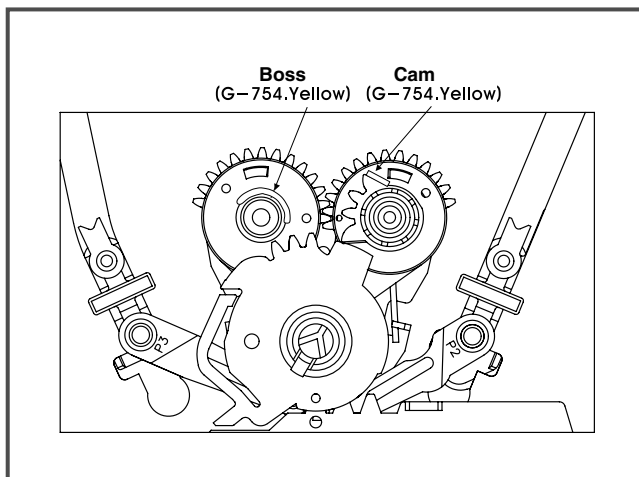


MECHANISM TROUBLESHOOTING GUIDE

1. Deck Mechanism

A.

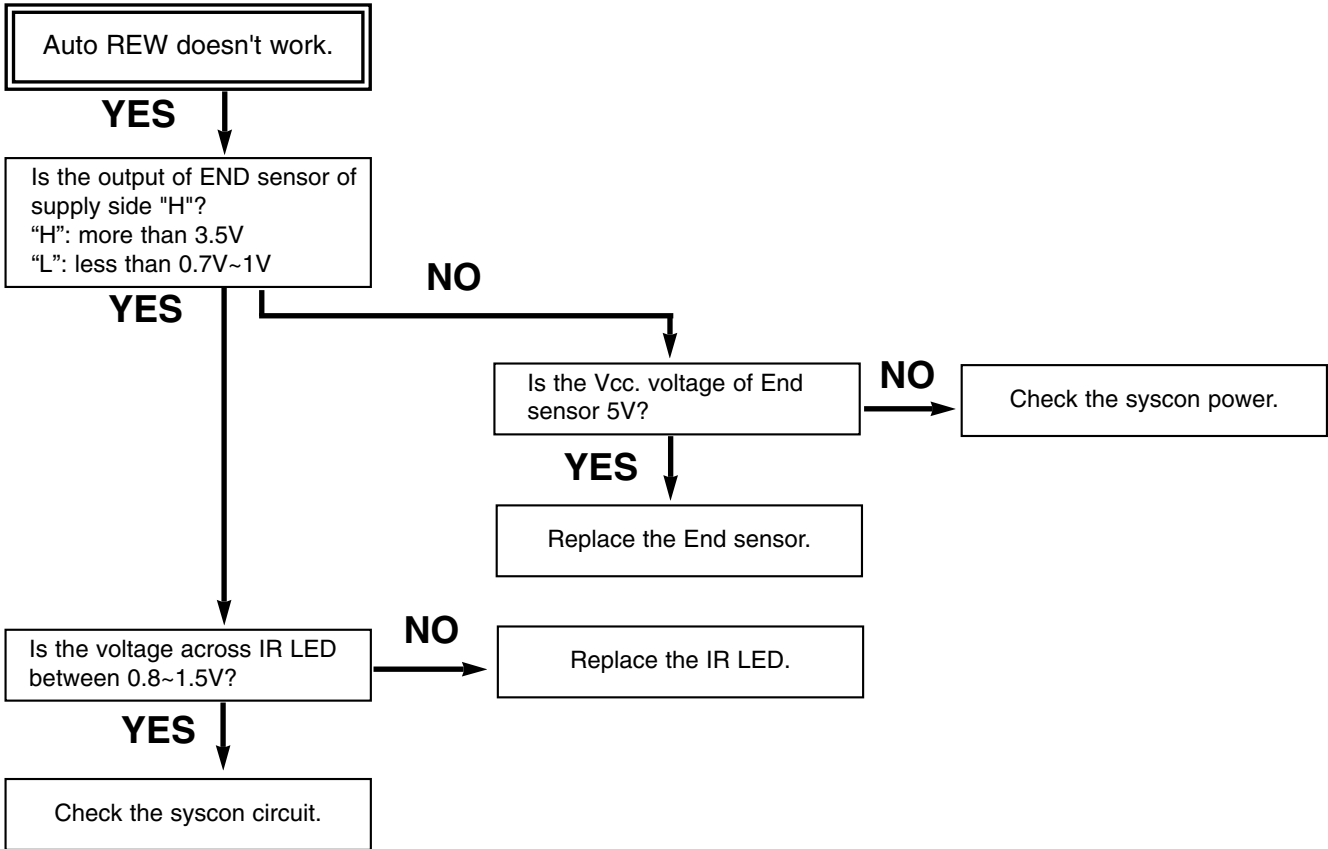


B.

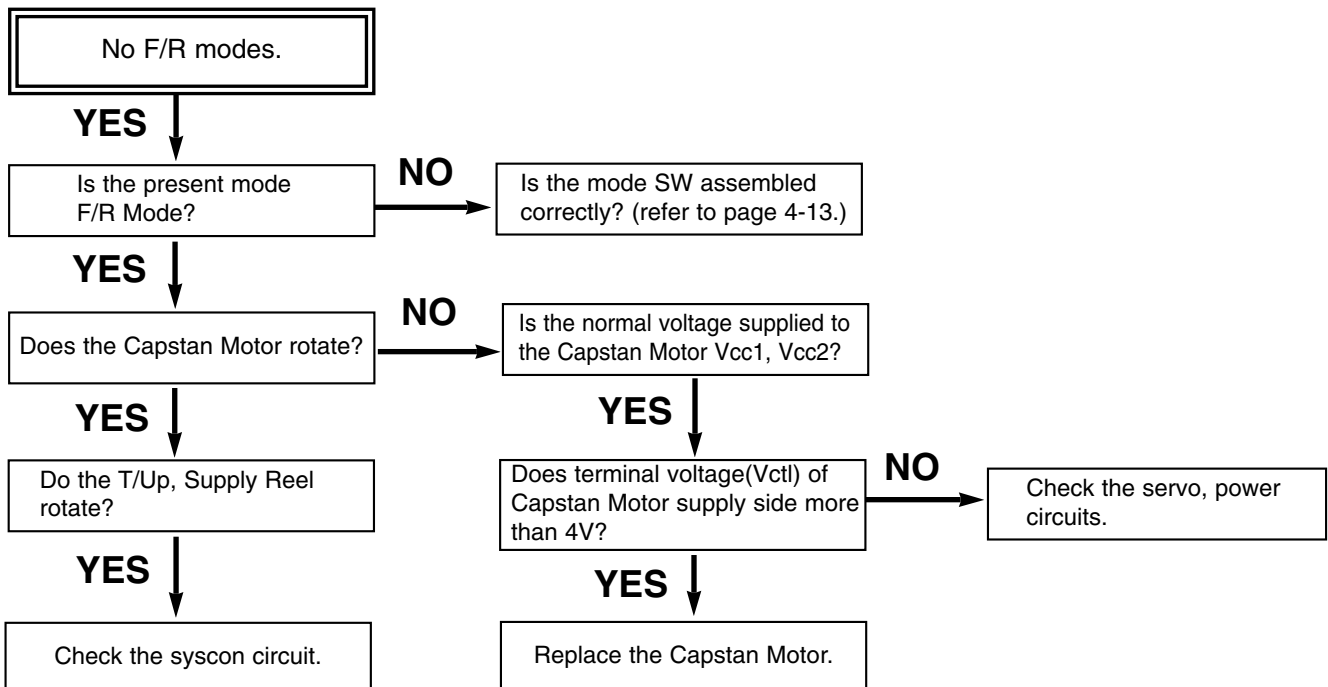


MECHANISM TROUBLESHOOTING GUIDE

C.

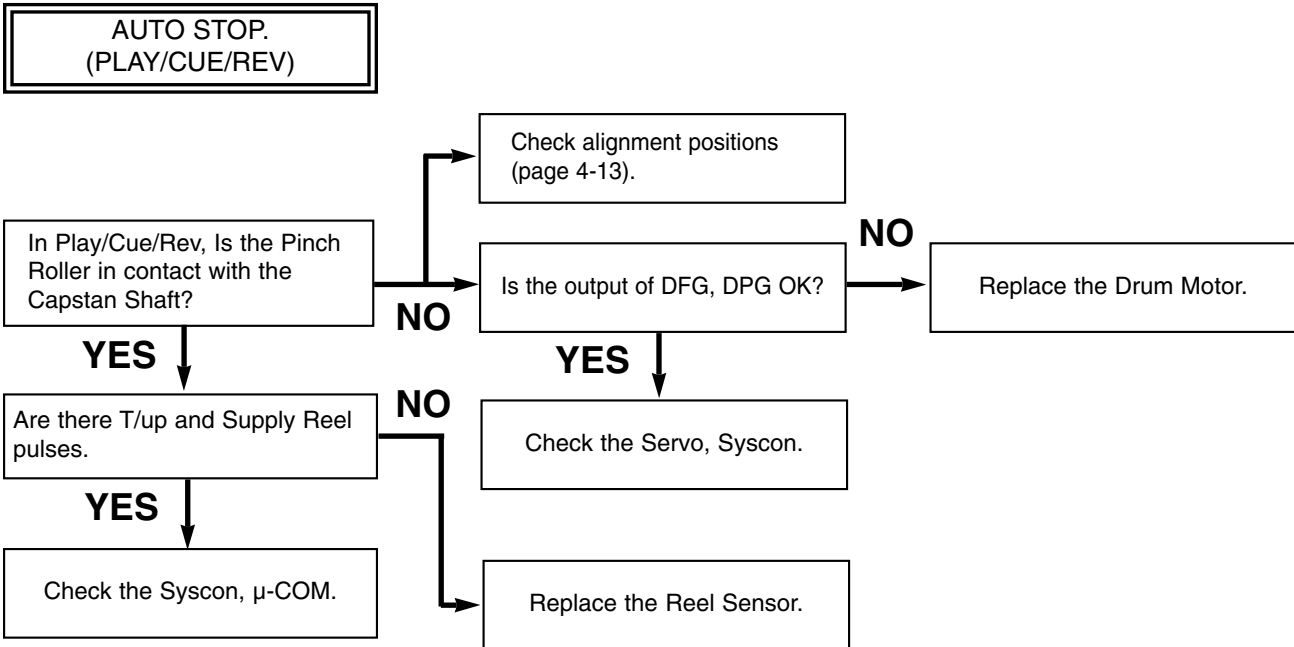


D.

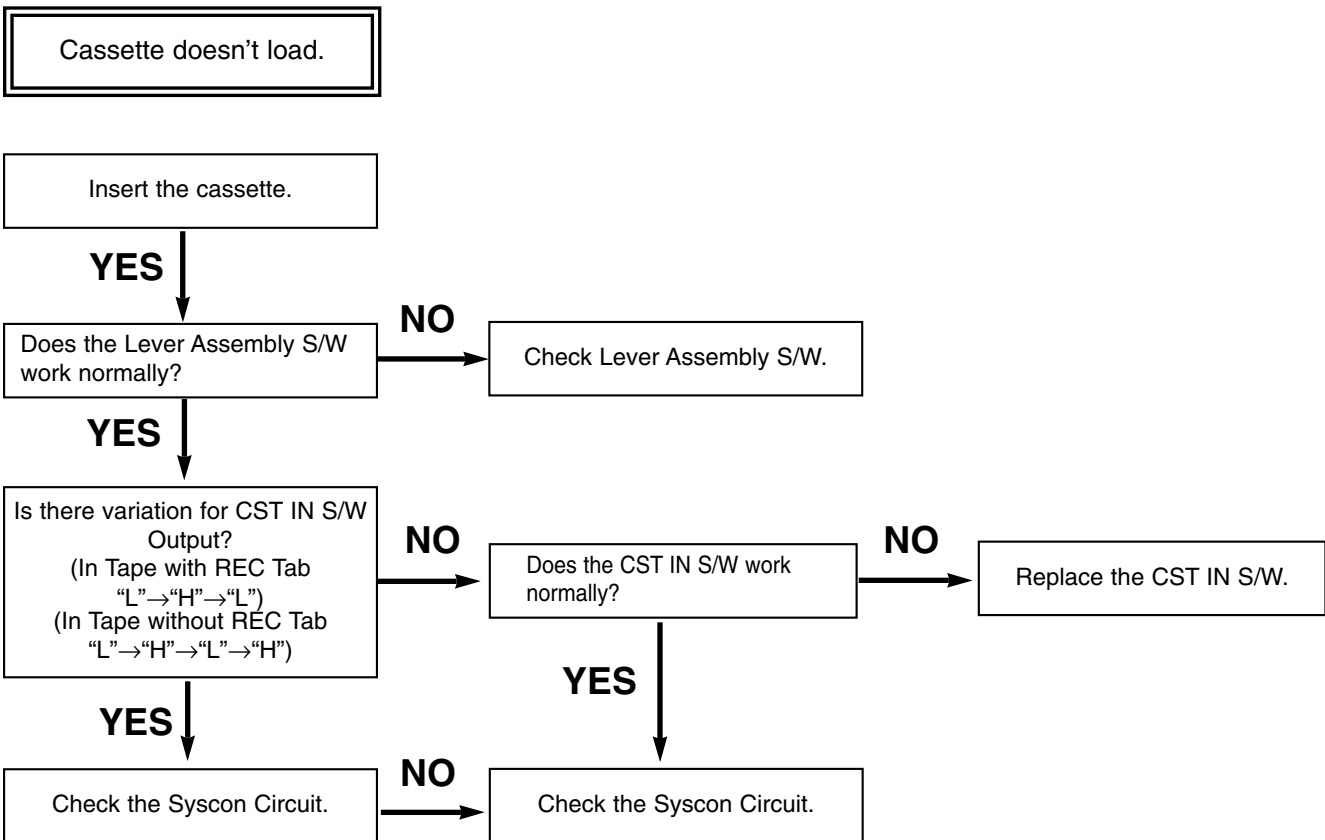

MECHANISM TROUBLESHOOTING GUIDE


E.

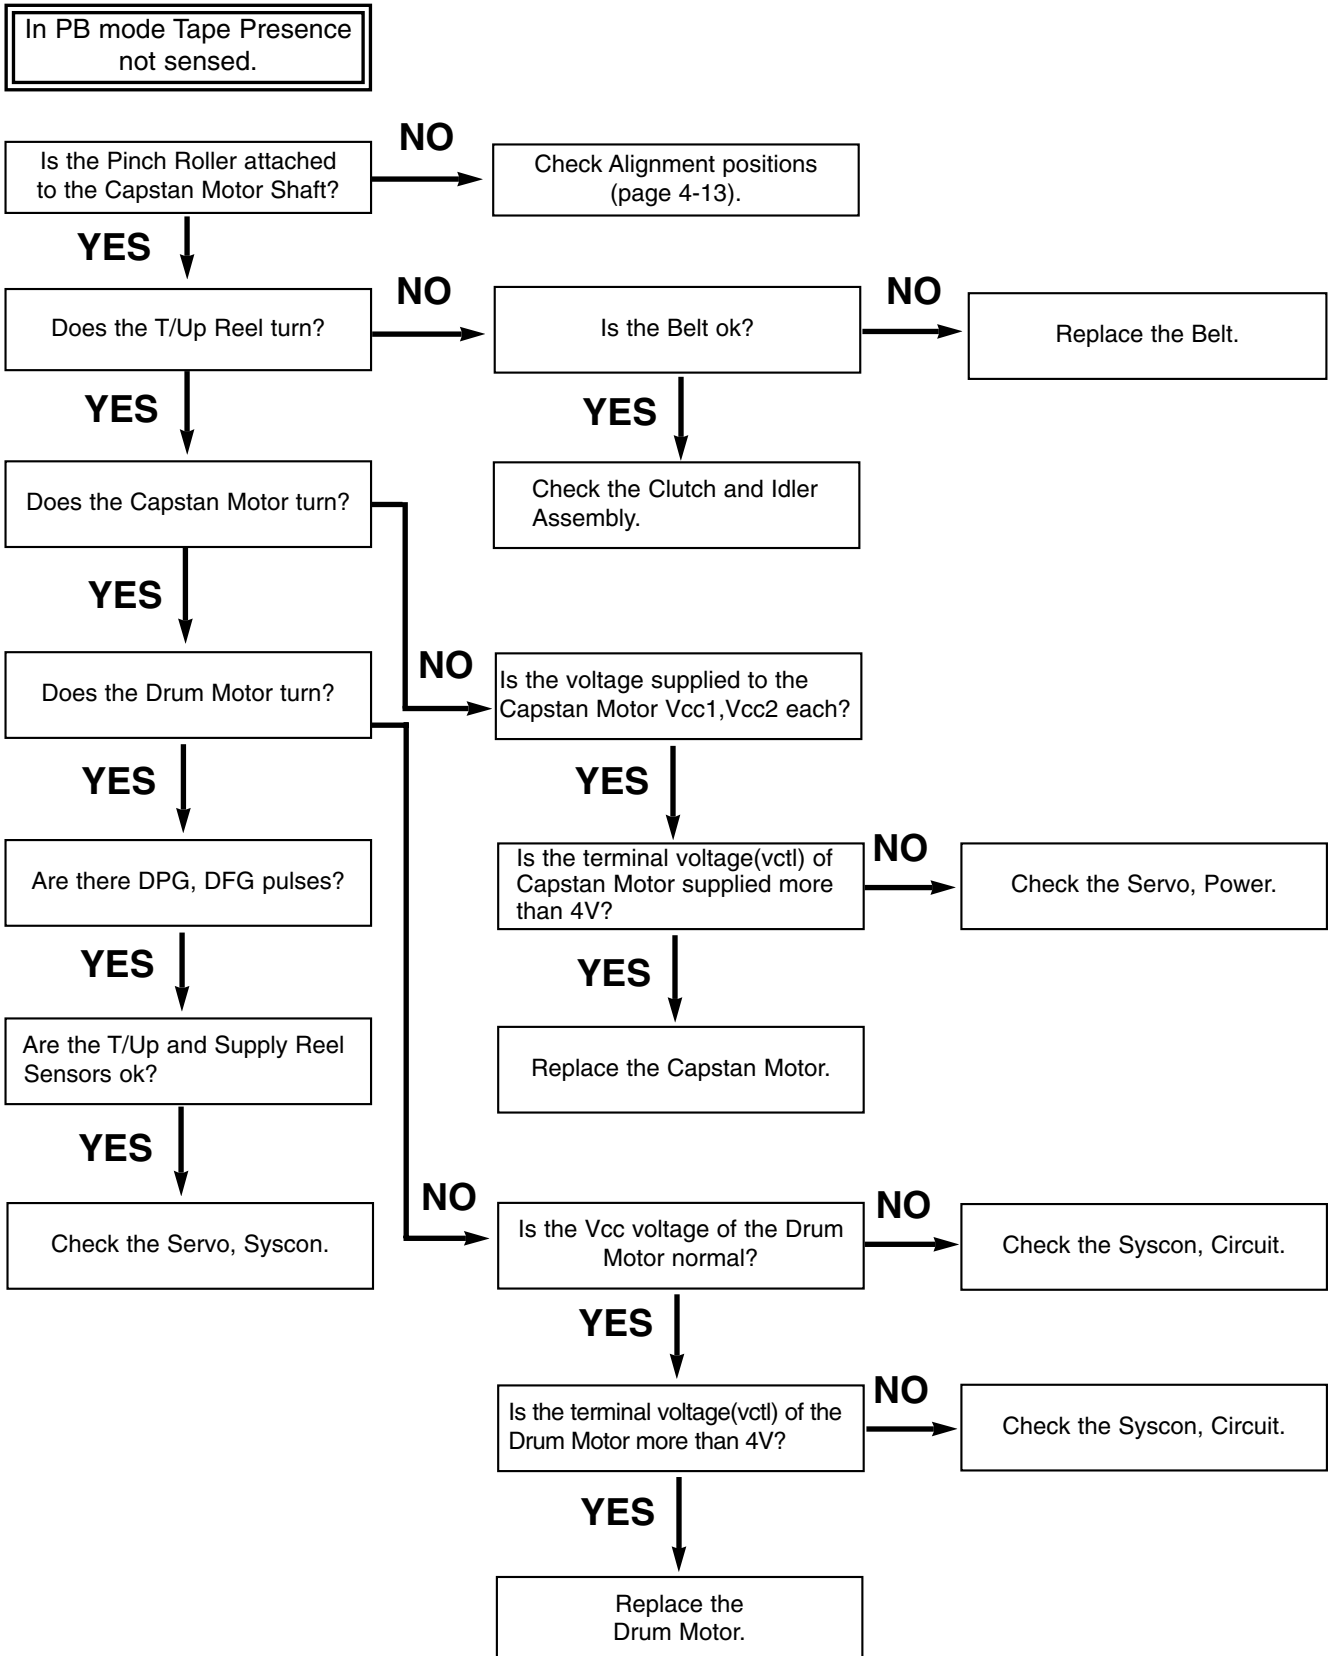


MECHANISM TROUBLESHOOTING GUIDE

2. Front Loading Mechanism

A.

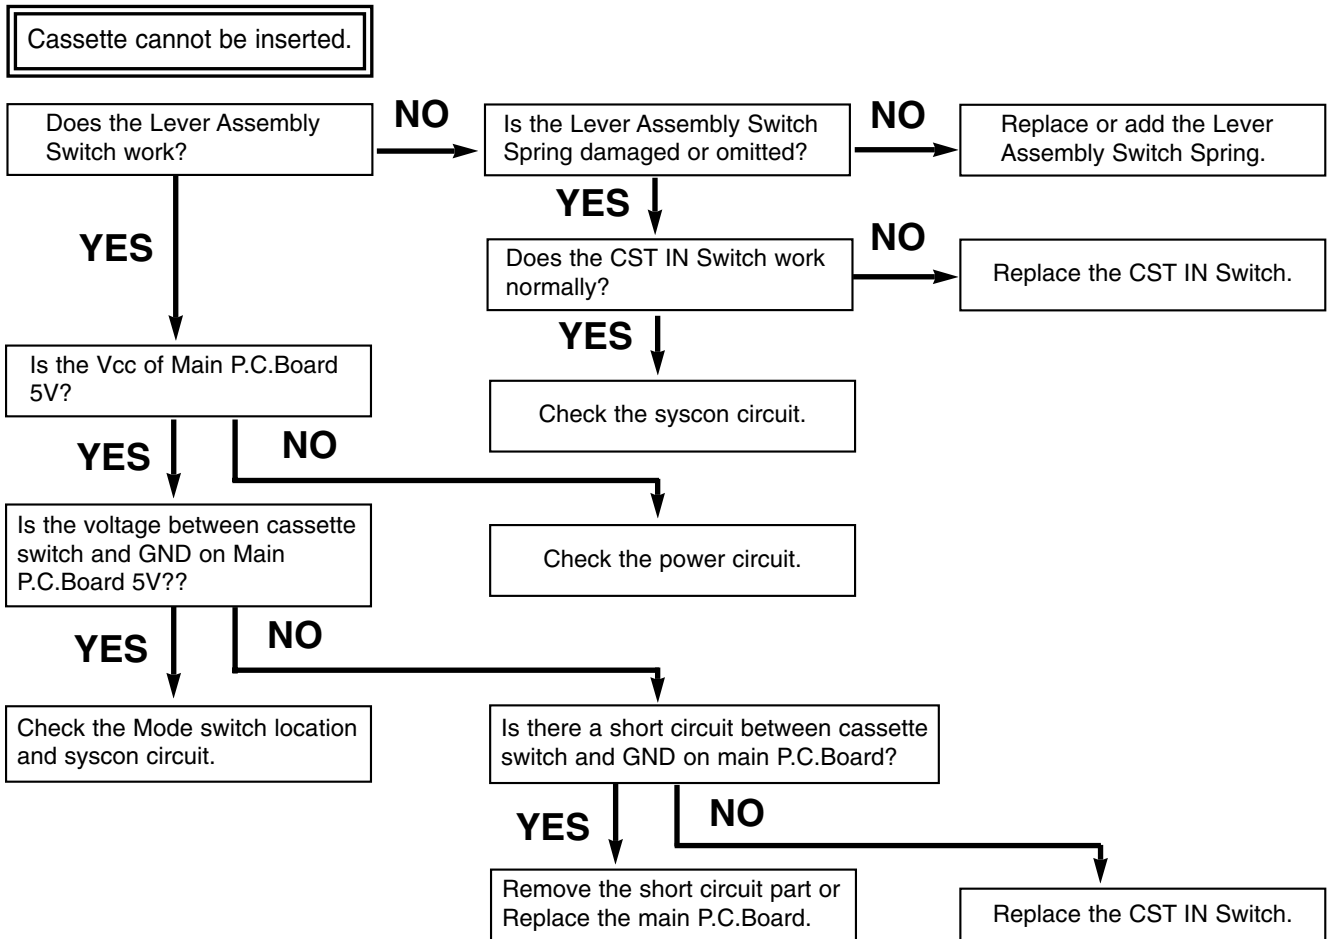


B.

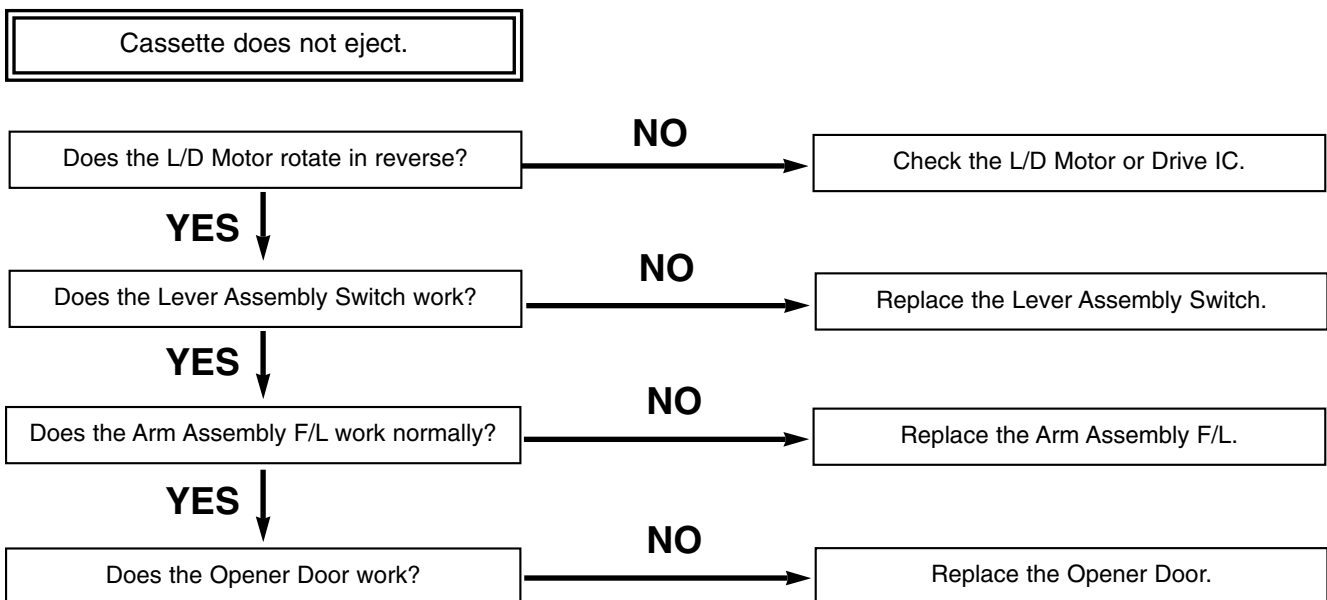


MECHANISM TROUBLESHOOTING GUIDE

C.

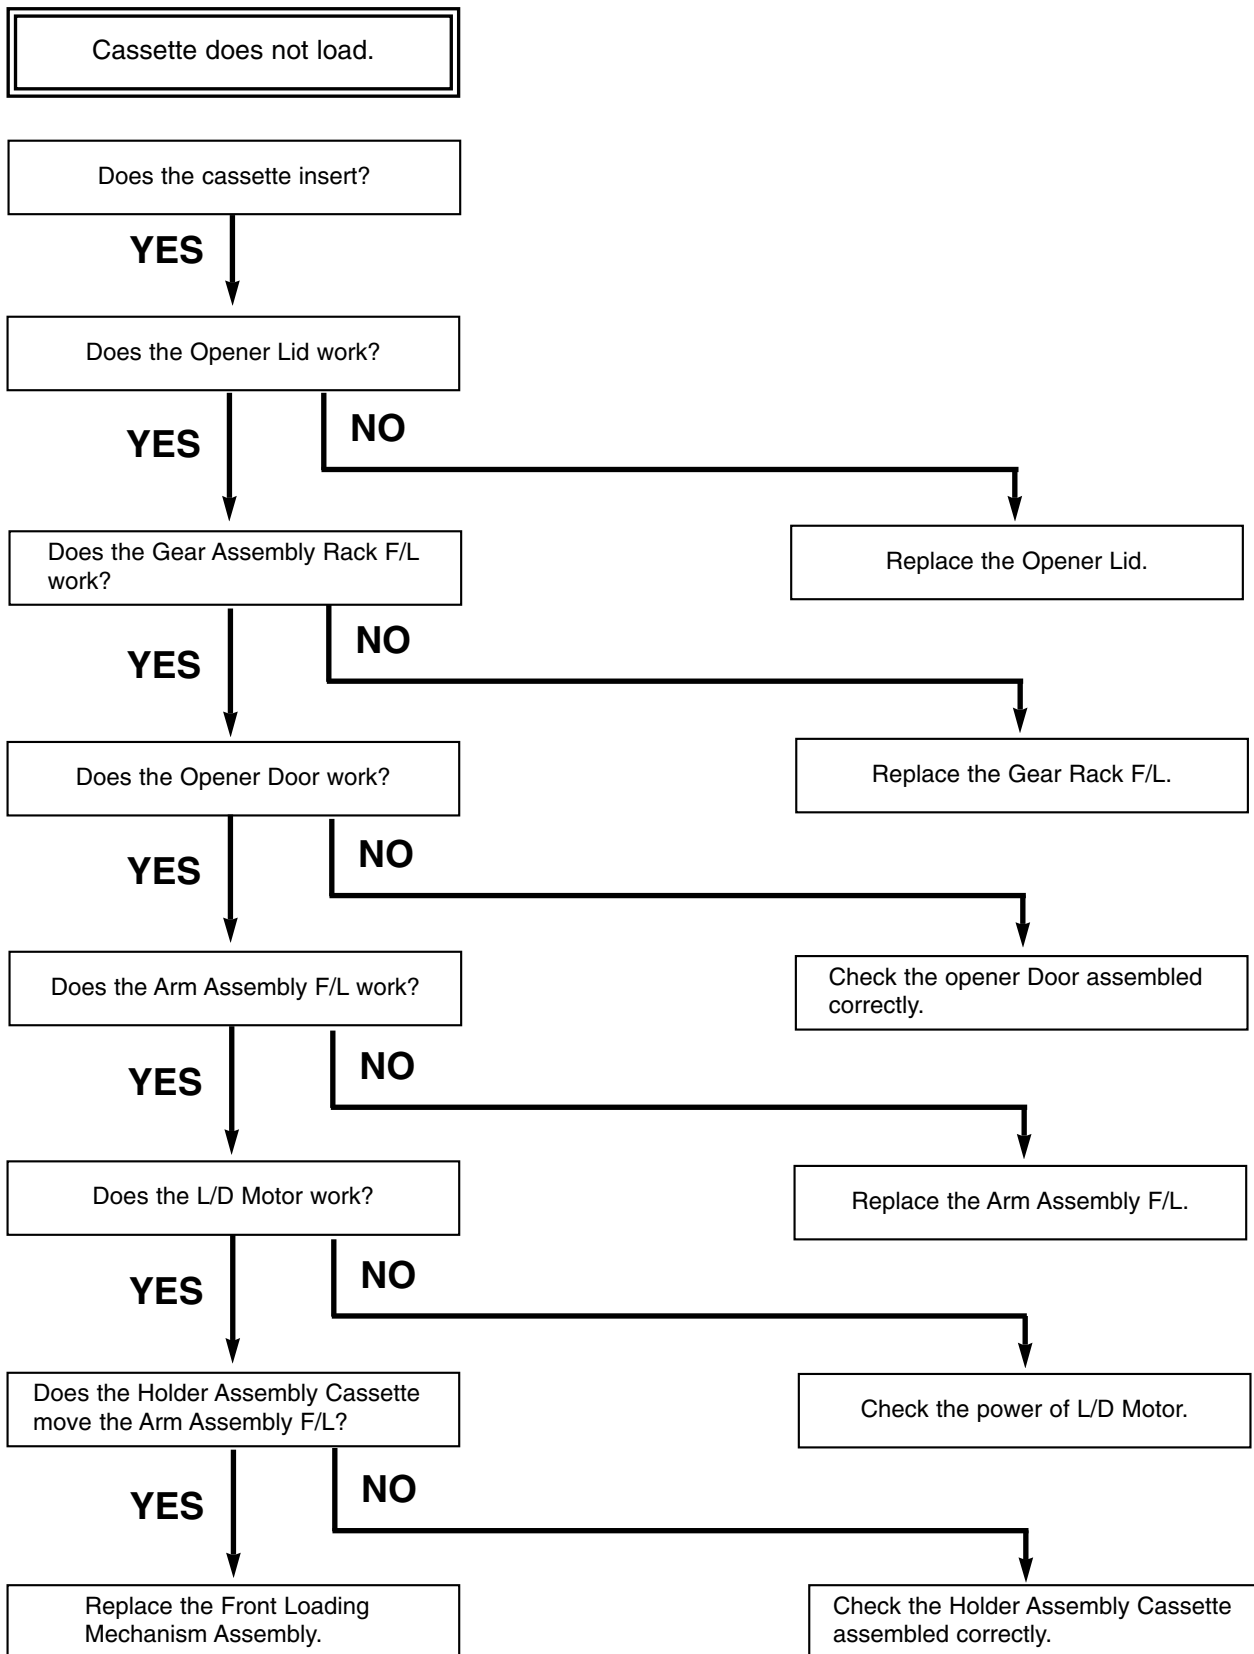

EXPLODED VIEWS


1. Front Loading Mechanism Section

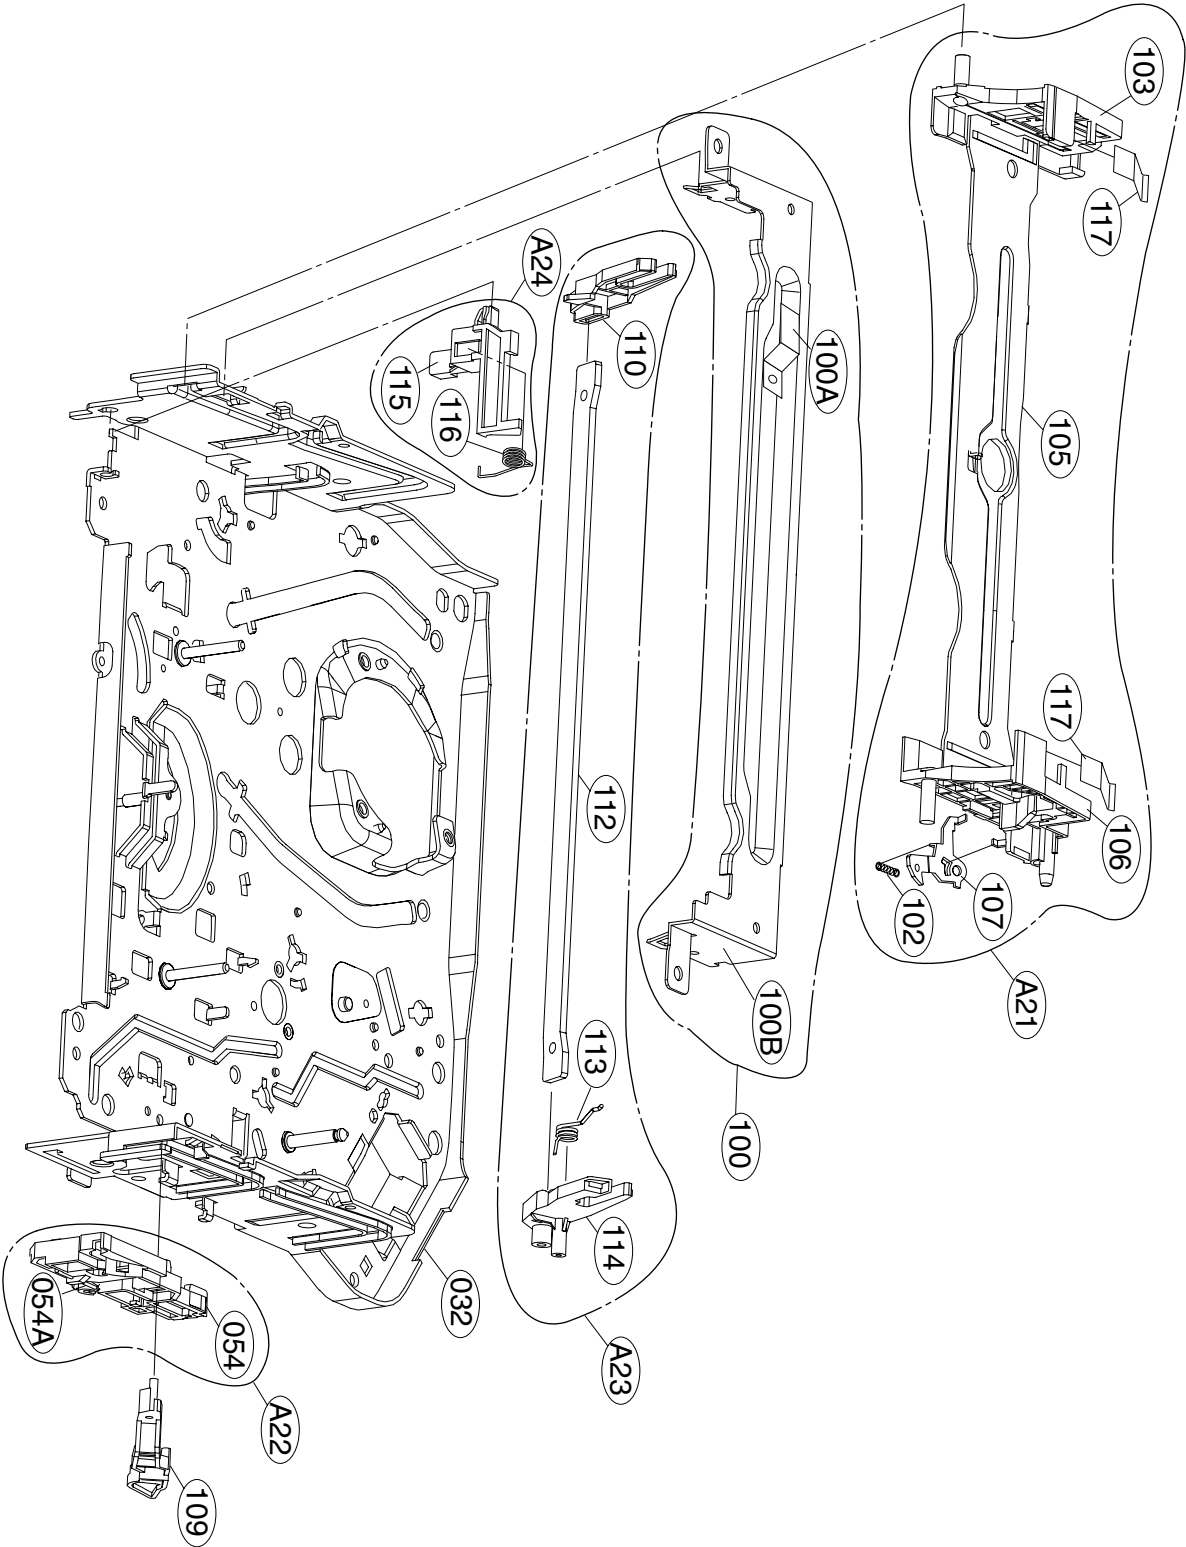

EXPLODED VIEWS

2. Moving Mechanism Section(1)


★ OPTIONAL PART

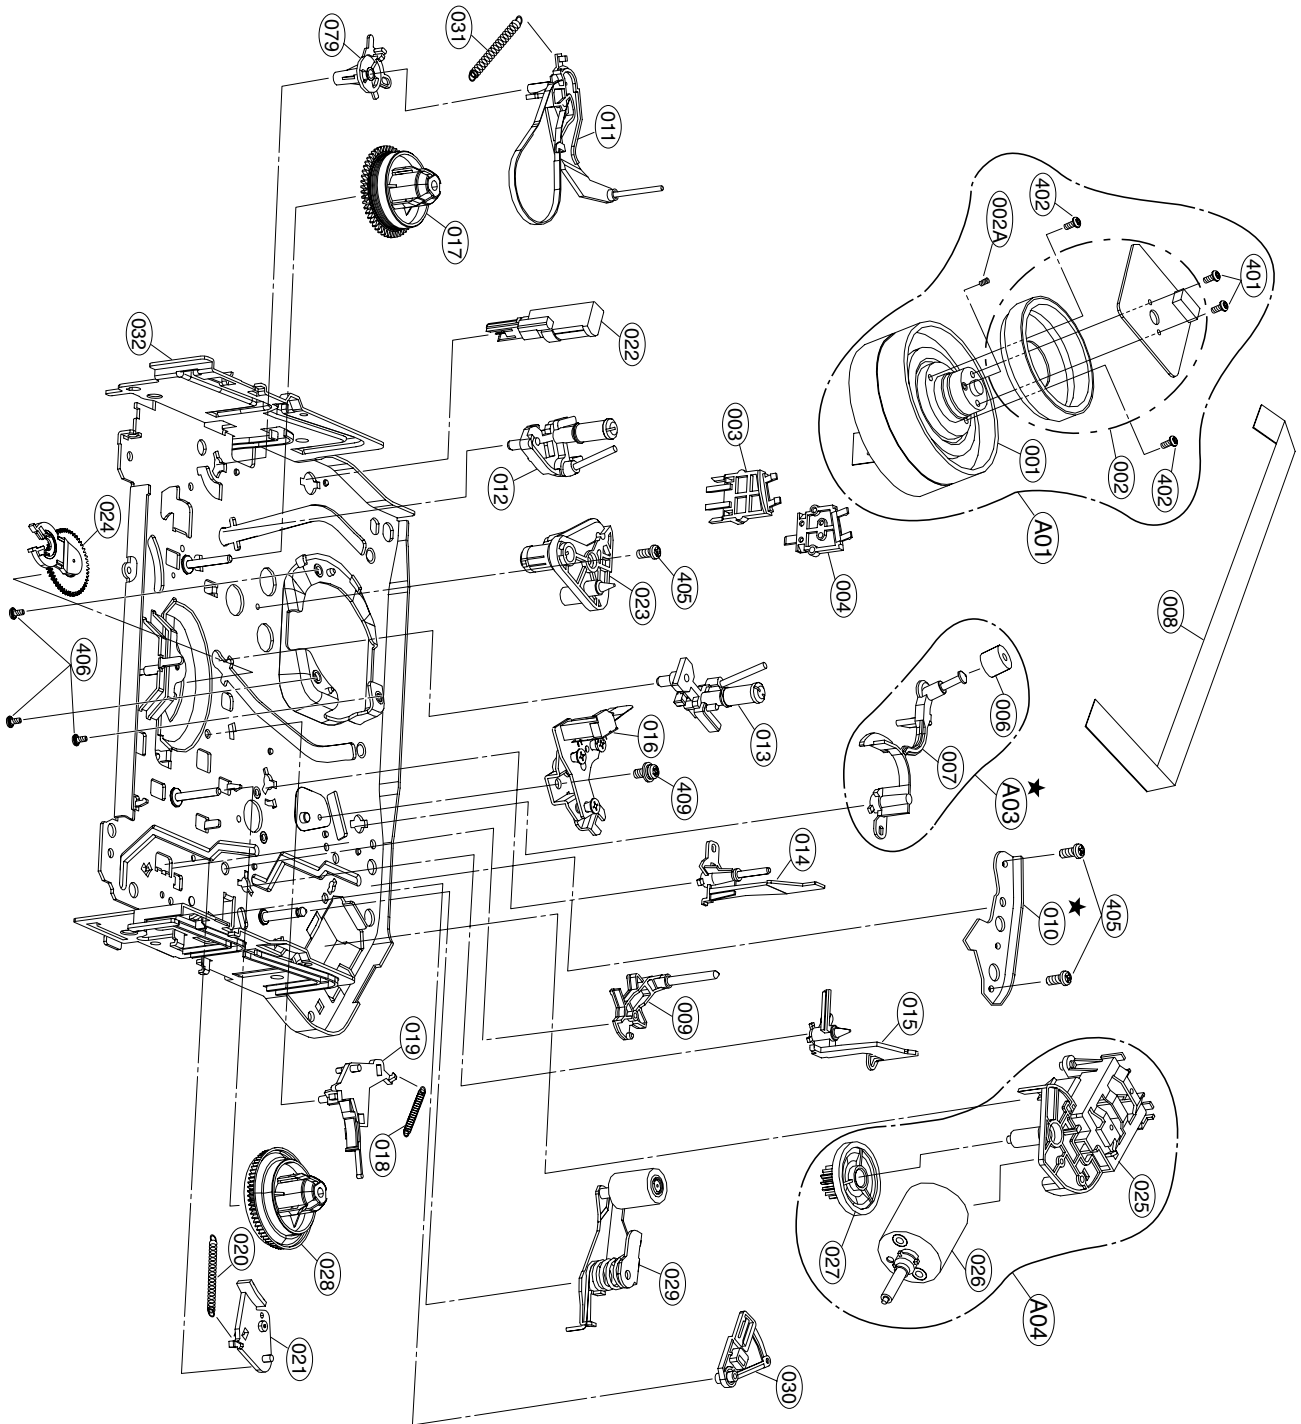

EXPLODED VIEWS

3. Moving Mechanism Section(2)

★ OPTIONAL PART

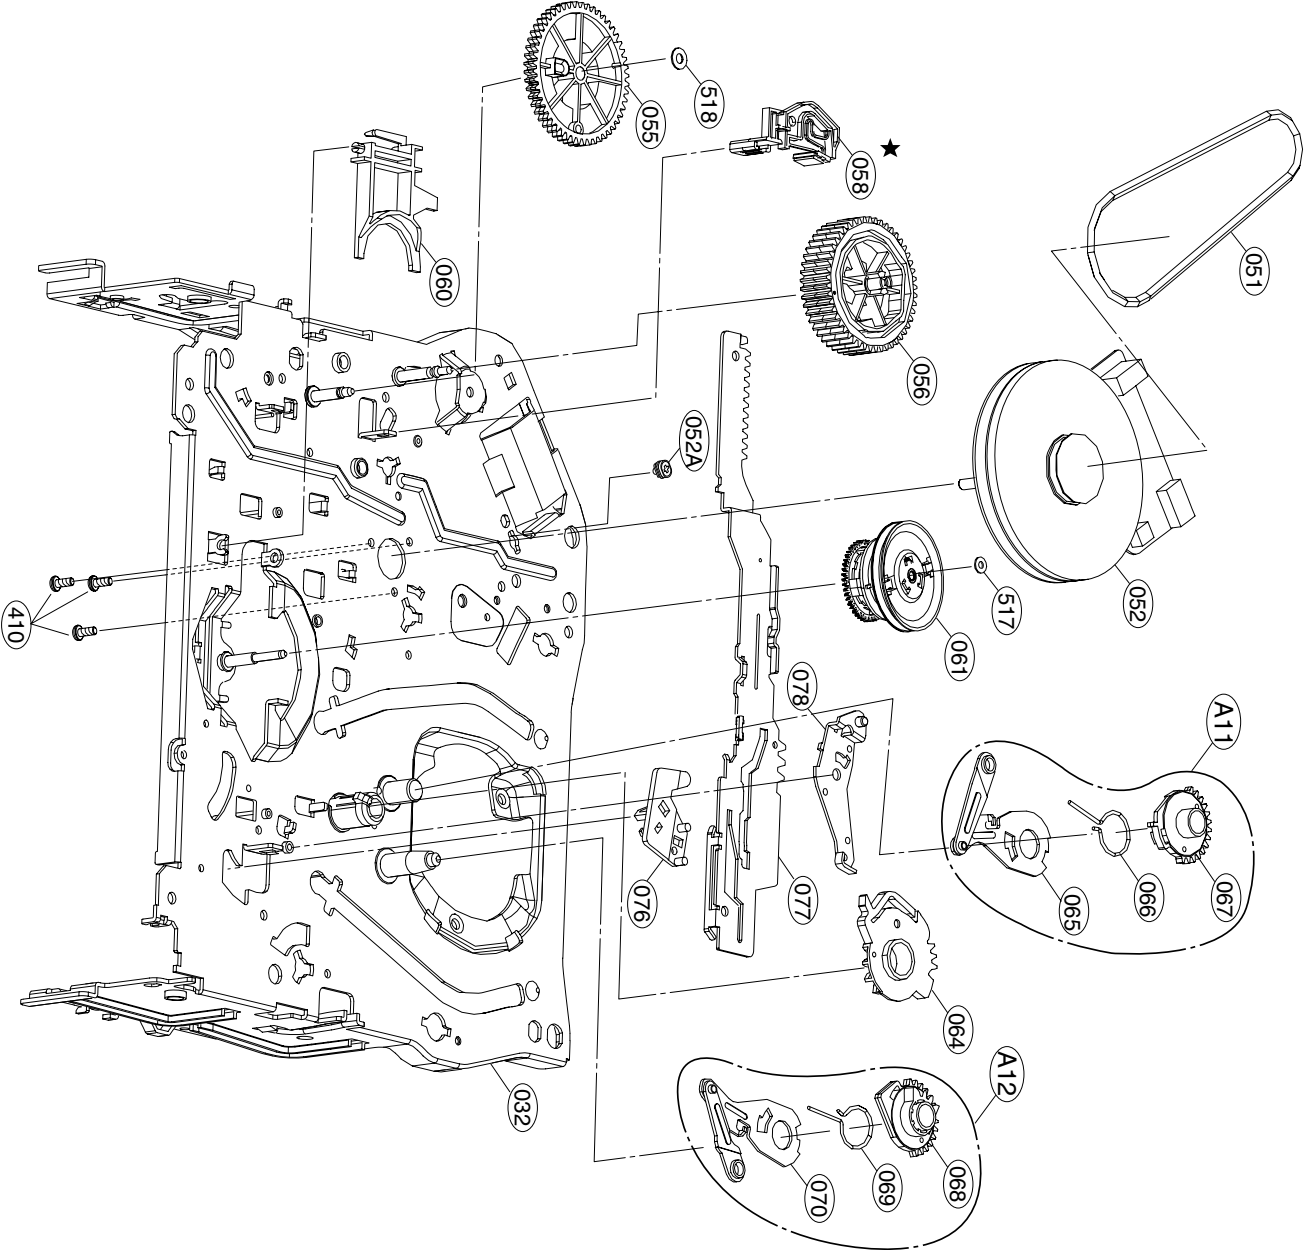

SECTION 5. REPLACEMENT PARTS LIST

NOTE: Warning



Parts that are shaded are critical With respect to risk of fire or electrical shock.

MODEL : NTH960N

MECHANICAL SECTION

NSP : Not Service Part

RUN DATE : 2004.05.01

| S | AL | LOCA.NO | PART NO. | DESCRIPTION | SPECIFICATION | REMARKS |
|-------------------------------|----|---------|-------------|---------------------|--------------------------------|---------|
| ASSEMBLY PARTS SECTION | | | | | | |
| | | A00 | 6721R-0771U | DECK ASSEMBLY,VIDEO | DECK/MECHA D35 LG T/L (4HD(ALL | |
| | | A01 | 6723R-D402G | DRUM(CIRC) ASSEMBLY | DECK/MECHA (8N4T) D35-4CH NTSC | |
| | | A04 | 4811R-0038B | BRACKET ASSEMBLY | L/D | |
| | | A11 | 4471R-0005A | GEAR ASSY | P3 | |
| | | A12 | 4471R-0004A | GEAR ASSY | P2 | |
| | | A21 | 4931R-0047A | HOLDER ASSY | CST | |
| | | A22 | 4471R-0006A | GEAR ASSY | RACK F/L | |
| | | A23 | 4261R-0023A | ARM ASSY | F/L | |
| | | A24 | 4510R-0046A | LEVER | ASSY SWITCH | |
| PARTS SECTION | | | | | | |
| | | 001 | 6723R-D305G | DRUM(CIRC) ASSEMBLY | DECK/MECHA SUB D35-4CH NT (8N4 | |
| | | 002 | 4680R-B008A | MOTOR(MECH) | DRUM VH4302-800 SANYO FOR D35K | |
| | | 002A | 5202R00002C | BRUSH,CARBON | ASSY D33 (TIP+2 SPRING) 1.4, | |
| | | 003 | 4930R-0285A | HOLDER | FPCB(4CH) | |
| | | 004 | 5006R-0034A | CAP | FPC | |
| | | 008 | 6850R-HG18Z | CABLE,FLAT | P=1.25 FFC UL2896(0.05X0.8) 7 | |
| | | 009 | 4260R-0038A | ARM | T/UP(D35) | |
| | | 011 | 4261R-0022A | ARM ASSY | TENSION(D35) | |
| | | 012 | 3041R-0037A | BASE ASSY | P2 | |
| | | 013 | 3041R-0038A | BASE ASSY | P3 | |
| | | 014 | 3041R-0039A | BASE ASSY | P4 | |
| | | 015 | 5870R-0005A | OPENER | LID(D35) | |
| | | 016 | 3041R-0036A | BASE ASSEMBLY | A/C HEAD (ALPS) | |
| | | 017 | 4408R-0003A | REEL | S | |
| | | 018 | 4970R-0140A | SPRING | COIL RS D35 | |
| | | 019 | 4421R-0008A | BRAKE ASSEMBLY | RS | |
| | | 020 | 4970R-0128A | SPRING | COIL D35 (TB) | |
| | | 021 | 4421R-0006A | BRAKE ASSY | T | |
| | | 022 | 6520D00002A | HEAD(CIRC) | D35 FE ST FE HEAD | |
| | | 023 | 3040R-0057A | BASE | LOADING | |
| | | 024 | 4261R-0024A | ARM ASSEMBLY | IDLER (H) | |
| | | 025 | 4810R-0111A | BRACKET | L/D | |
| | | 026 | 4680R-D006A | MOTOR(MECH) | LOADING RF-370CA-12560 MABUCHI | |
| | | 027 | 4470R-0093A | GEAR | DECK/MECHA WHEEL OTHER | |
| | | 028 | 4408R-0004A | REEL | T | |
| | | 029 | 4261R-0019E | ARM ASSEMBLY | DECK/MECHA PINCH | |
| | | 030 | 4510R-0043A | LEVER | T/UP | |
| | | 031 | 4970R-0123A | SPRING | COIL TENSION(D35) | |
| | | 032 | 3141R-0040A | CHASSIS ASSEMBLY | D35 | |
| | | 051 | 4400R-0005A | BELT | CAPSTAN | |
| | | 052 | 4680R-A012B | MOTOR(MECH) | CAPSTAN MCVC-035TB LGIT FOR T/ | |
| | | 052A | 4980R-0023A | SUPPORTER | CAPSTAN(D35) | |
| | | 054 | 4470R-0100A | GEAR | RACK F/L | |
| | | 054A | 4970R-0124B | SPRING | COIL D35 (RACK F/L) | |
| | | 055 | 4470R-0097A | GEAR | DRIVE(D35) | |
| | | 056 | 4470R-0096A | GEAR | CAM(D35) | |
| | | 058 | 4421R-0007A | BRAKE ASSY | CAPSTAN | |
| | | 060 | 4510R-0040A | LEVER | F/R(D35) | |
| | | 061 | 4265R-0005A | CLUTCH ASSEMBLY | D35 (M) | |
| | | 064 | 4470R-0098A | GEAR | SECTOR(D35) | |
| | | 065 | 4261R-0021A | ARM ASSY | P3 | |
| | | 066 | 4970R-0122A | SPRING | COIL D35 | |
| | | 067 | 4470R-0095A | GEAR | P3 | |
| | | 068 | 4470R-0094A | GEAR | P2 | |
| | | 069 | 4970R-0122A | SPRING | COIL D35 | |
| | | 070 | 4261R-0020A | ARM ASSY | P2 | |
| | | 076 | 4510R-0047A | LEVER | SPRING | |
| | | 077 | 3300R-M116A | PLATE | SLIDER | |
| | | 078 | 4510R-0041A | LEVER | TENSION | |

| S | AL | LOCA.NO | PART NO. | DESCRIPTION | SPECIFICATION | REMARKS |
|--------------|----|---------|-------------|------------------------------|--------------------------------|---------|
| | | 079 | 3040R-0056A | BASE | TENSION(D35) | |
| | | 100 | 3301R-M022A | PLATE ASSEMBLY | TOP | |
| | | 102 | 4970R-0130A | SPRING | COIL D35 (STOPPER) | |
| | | 103 | 4930R-0276A | HOLDER | SIDE(L) | |
| | | 105 | 4930R-0274A | HOLDER | CST | |
| | | 106 | 4930R-0275A | HOLDER | SIDE(R) | |
| | | 107 | 4510R-0044A | LEVER | STOPPER | |
| | | 109 | 5870R-0004A | OPENER | DOOR | |
| | | 110 | 4260R-0035A | ARM | F/L(L) | |
| | | 112 | 3070R-0002A | BODY | F/L | |
| | | 113 | 4970R-0127A | SPRING | COIL D35 (F/L(R)) | |
| | | 114 | 4260R-0036A | ARM | F/L(R) | |
| | | 115 | 4510R-0042A | LEVER | SWITCH | |
| | | 116 | 4970R-0138A | SPRING | COIL D35 SWITCH | |
| | | 117 | 3300R-M137A | PLATE | SPRING CST | |
| | | 116 | 4970R-0138A | SPRING | COIL D35 SWITCH | |
| | | 117 | 3300R-M137A | PLATE | SPRING CST | NSP |
| SCREW | | | | | | |
| | | 402 | 1MPC0261418 | SCREW MACHINE,PAN HEAD | D 2.6 L 4.0 MSWR3/FZY | |
| | | 405 | 1SZZR-0031B | SCREW,DRAWING | + 1 D2.6 L5.8 SWRCH16A/FZY TAP | |
| | | 406 | 1MEC0302018 | PAN HEAD MACHINE SCREW S/W + | D 3.0 L 6.0 MSWR3/FZY | |
| | | 409 | 1SZZR-0032B | SCREW,DRAWING | + 1 D2.6 L5.0 SWRCH18A/FZY TAP | |
| | | 410 | 1APF0262218 | SCREW TAP TITE(B),PAN HEAD | #NAME? | |
| | | 452 | 353-051A | SCREW,DRAWING | SPECIAL | |
| | | 517 | 1WZZR-0004D | WASHER,DRAWING | STOPPER | |
| | | 518 | 1WZZR-0004A | WASHER,DRAWING | STOPPER | |

Cabinet & Main Frame Section

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARKS |
|-------------------------|----|----------|-------------|-------------------------|--------------------------------|---------|
| ASSEMBLY SECTION | | | | | | |
| | | A00 | 6721R-0771U | DECK ASSEMBLY,VIDEO | DECK/MECHA D35 LG T/L (4HD(ALL | |
| | | A42 | 6871RK5700K | PWB(PCB) ASSEMBLY,C/SKD | SNILN4T3526 | |
| | | A43 | 05503807 | PANEL ASSEMBLY,FRONT | NTH960 C-TYPE | |
| | | A44 | 3211RKS008B | FRAME ASSEMBLY | VCR MAIN(S008B) + PACKING | |
| | | A45 | 3501RK3200B | BOARD ASSEMBLY | CCD TL-AT230 | |
| PARTS SECTION | | | | | | |
| | | 250 | 3110R-S040F | CASE | LV-TL1960 2960 MOLD AIRHALL BA | |
| | | 260 | 3210R-0023A | FRAME | VCR - MAIN | |
| | | 277 | 4940R-Z075A | KNOB | SHUTTLE(TL-AR30M) | |
| | | 278 | 4940R-Z076B | KNOB | CCD TL-AT130 MOLD | |
| | | 280 | 3720R-F721D | PANEL,VIDEO | CCD LV-TL1960 S MOLD HIPS 40AF | |
| | | 281 | 524-013A | MAGNET | VCR - ASSY DOOR | |
| | | 283 | 50502527 | DOOR | HRV30C | |
| | | 284 | 442-681A | SPRING | DOOR | |
| | | 285 | 4940R-Z086A | KNOB | CCD LV-TL124 MOLD | |
| | | 286 | 4940R-S017A | KNOB | SLIDE (LV-TL24) | |
| | | 300 | 6410RZH01A | POWER CORD | IT10S2(6A/250V) VOLEX IMMETRO | |
| | | 320 | 50502166 | PANEL | NTH960C | |
| | | 323 | 3111R-0089B | CASE ASSY | PRE-AMP (PBSB-SH) | |
| | | 325 | 4930R-0190B | HOLDER ASSEMBLY | LCD PWB(ABS XR-401)) | |
| | | 330 | 3550R-0210A | COVER | BOTTOM(LARGE) | |
| SCREW | | | | | | |
| | | 452 | 353-051A | SCREW,DRAWING | SPECIAL | |
| | | 457 | 353-051E | SCREW,DRAWING | SPECIAL (3X12) | |
| | | 462 | 353-136A | SCREW,DRAWING | SPECIAL(FBK) (353S353A) | |

Packing & Accessory Section

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARKS |
|---|----|----------|-------------|----------------------------|--------------------------------|---------|
| | | 801 | 3835RS0069N | INSTRUCTION ASSEMBLY | CCD TL-AT230M-AABBDL1_ENG_POR_ | |
| | | 802 | 3890R-C065K | BOX,MASTER | TL-AT130M AABBDL . 1 | |
| | | 803 | 3920R-E016A | PACKING | Packing LV-TL24I 0.02 0 EPS 10 | |
| | | 804 | 3858R-S001A | SHEET (MECH) | Packing LDPE 600M 630MM 0.5 VC | |
| | | 808 | 534-008C | BATTERY,MANGANESE | AAAM(R03) SEOTONG 1.5 V - 1PA | |
| | | 900 | 6711R1P041H | REMOTE CONTROLLER ASSEMBLY | P9 LV-TL1960 | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|------------------------|----|----------|-------------|--------------------------------|--------------------------------|--------|
| BATTERY,LITHIUM | | | | | | |
| | | RB500 | 534-059AAAA | BATTERY,LITHIUM | LR6A-2S/ MATUSHITA - - LITHIUM | |
| BUZZER | | | | | | |
| | | BZ501 | 6908RB0001A | BUZZER | PKM24SP-3801 PKM24SP-3801 MURA | |
| | | RL301 | 6920R-B201A | BUZZER | UT205-5SC YUYU AC 250 V 5-0 A | |
| CAPACITOR | | | | | | |
| | | C101 | 624-088F | CAPACITOR,DRAWING | PCX2 275V 0.1UF,M (PILKO) | |
| | | C102 | 624-088F | CAPACITOR,DRAWING | PCX2 275V 0.1UF,M (PILKO) | |
| | | C103 | 624-082C | CAPACITOR,AL.ELECTROLYTIC | 100MF/400V SHL SMPS S/Y | |
| | | C105 | 0CQ1031Y519 | CAPACITOR,FIXED FILM | 0.01UF D 630V 10% PE NI TP5 | |
| | | C106 | 624-087A | CAPACITOR | HIGH-VOL 150P/1KV SMPS NEW-KOR | |
| | | C109 | 624-085D | CAPACITOR | CE 47UF/50V KME (SMPS) | |
| | | C111 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C112 | 0CG3320U630 | CAPACITOR,SEMI CERAMIC | 3300 PF 400V M E R(NK,AD,SD) | |
| | | C113 | 0CG3310U510 | CAPACITOR,FIXED CERAMIC(TEMP.C | 330PF D 400V 10% B(Y5P) R | |
| | | C114 | 0CQ4732K409 | CAPACITOR,FIXED FILM | 0.047UF S 50V 5% PE TP5 | |
| | | C116 | 0CE108BF630 | CAPACITOR,FIXED ELECTROLYTIC | 1000UF KME 16V M FM5 BULK | |
| | | C117 | 624-082H | CAPACITOR | CE 1000UF/10V SHL(10*12.5)T/P | |
| | | C118 | 0CE2276D638 | CAPACITOR,FIXED ELECTROLYTIC | 220M SMS 10V M FM5 TP(5) | |
| | | C119 | 624-085D | CAPACITOR | CE 47UF/50V KME (SMPS) | |
| | | C120 | 0CE477BH630 | CAPACITOR,AL.ELECTROLYTIC | 470UF KME TYPE 25V M FM5 BULK | |
| | | C121 | 624-082G | CAPACITOR,FIXED ELECTROLYTIC | CE 470UF/25V SHL(10*12.5)T/P | |
| | | C123 | 0CE337BJ610 | CAPACITOR,FIXED ELECTROLYTIC | 330UF KME TYPE 35V 20% FL BULK | |
| | | C128 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C152 | 0CE1064F638 | CAPACITOR,ELECTROLYTIC | 10M SRA 16V M FM5 TP(5) | |
| | | C153 | 0CE1064F638 | CAPACITOR,ELECTROLYTIC | 10M SRA 16V M FM5 TP(5) | |
| | | C154 | 0CE1064F638 | CAPACITOR,ELECTROLYTIC | 10M SRA 16V M FM5 TP(5) | |
| | | C155 | 0CE4754K638 | CAPACITOR,FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C170 | 0CE1044K638 | CAPACITOR,ELECTROLYTIC | 0.1M SRA 50V M FM5 TP(5) | |
| | | C172 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C173 | 0CE4764J638 | CAPACITOR,AL.ELECTROLYTIC | 47UF SRA,SS 35V M FM5 TP 5 | |
| | | C301 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C302 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C303 | 0CE1054K638 | CAPACITOR,ELECTROLYTIC | 1.0M SRA/SS50V M FM5 TP(5) | |
| | | C304 | 0CE2274C638 | CAPACITOR,ELECTROLYTIC | 220M SRA 6.3V M FM5 TP(5) | |
| | | C305 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C306 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C307 | 0CX2700K408 | CAPACITOR TUBULA(T.C) | 27P 50V J SL TA26 | |
| | | C308 | 0CX3300K408 | CAPACITOR TUBULA(T.C) | 33P 50V J SL TA26 | |
| | | C309 | 0CN3310K518 | CAPACITOR TUBULA(HIGH DIELE) | 330P 50V K B TA26 | |
| | | C310 | 0CE4754K638 | CAPACITOR,FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C311 | 0CN1810K518 | CAPACITOR,FIXED TUBULAR(High d | 180P 50V K B TA26 | |
| | | C312 | 0CX2200K408 | CAPACITOR TUBULA(T.C) | 22P 50V J SL TP26 | |
| | | C313 | 0CN1010K418 | CAPACITOR,TUBULAR(HIGH DIELEC) | 100PF 50V J B TA26 | |
| | | C314 | 0CN1020K518 | CAPACITOR TUBULA(HIGH DIELE) | 1000P 50V K B TA26 | |
| | | C315 | 0CE1063F638 | CAPACITOR,AL.ELECTROLYTIC | 10M SRE/SE 16V M FM5 TP(5) | |
| | | C316 | 0CE1063F638 | CAPACITOR,AL.ELECTROLYTIC | 10M SRE/SE 16V M FM5 TP(5) | |
| | | C317 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C318 | 0CE2254K638 | CAPACITOR,FIXED ELECTROLYTIC | 2.2UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C319 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C322 | 0CE4764F638 | CAPACITOR,ELECTROLYTIC | 47M SRA/SS 16V M FM5 TP(5) | |
| | | C323 | 0CE4764F638 | CAPACITOR,ELECTROLYTIC | 47M SRA/SS 16V M FM5 TP(5) | |
| | | C324 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C325 | 0CN1050K948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 1UF 50V Z F TA26 D | |
| | | C326 | 0CE1063F638 | CAPACITOR,AL.ELECTROLYTIC | 10M SRE/SE 16V M FM5 TP(5) | |
| | | C327 | 0CE1063F638 | CAPACITOR,AL.ELECTROLYTIC | 10M SRE/SE 16V M FM5 TP(5) | |
| | | C328 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C329 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C330 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C331 | 0CE2274C638 | CAPACITOR,ELECTROLYTIC | 220M SRA 6.3V M FM5 TP(5) | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|---|----|----------|-------------|--------------------------------|--------------------------------|--------|
| | | C332 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C333 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C334 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C336 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C337 | 0CE4754K638 | CAPACITOR,FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C338 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C339 | 0CE1054K638 | CAPACITOR,ELECTROLYTIC | 1.0M SRA/SS50V M FM5 TP(5) | |
| | | C340 | 0CN3330K518 | CAPACITOR,FIXED TUBULAR(High d | 0.033UF 50V K B TA26 | |
| | | C341 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C343 | 0CN4730K948 | CAPACITOR,FIXED TUBULAR(High d | 0.047UF D 50V 80%,-20% F(Y5V) | |
| | | C344 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C345 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C346 | 0CE2274C638 | CAPACITOR,ELECTROLYTIC | 220M SRA 6.3V M FM5 TP(5) | |
| | | C348 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C349 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C354 | 0CE2274C638 | CAPACITOR,ELECTROLYTIC | 220M SRA 6.3V M FM5 TP(5) | |
| | | C355 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C358 | 0CE1054K638 | CAPACITOR,ELECTROLYTIC | 1.0M SRA/SS50V M FM5 TP(5) | |
| | | C360 | 0CC0500K015 | CAPACITOR,CERAMIC(TEMP COMP) | 5P 50V C NP0 TR | |
| | | C368 | 0CN1020K518 | CAPACITOR TUBULA(HIGH DIELE) | 1000P 50V K B TA26 | |
| | | C369 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C375 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C377 | 0CE1044K638 | CAPACITOR,ELECTROLYTIC | 0.1M SRA 50V M FM5 TP(5) | |
| | | C380 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C381 | 0CE4764F638 | CAPACITOR,ELECTROLYTIC | 47M SRA/SS 16V M FM5 TP(5) | |
| | | C384 | 0CE4774C638 | CAPACITOR,FIXED ELECTROLYTIC | 470UF SRA,SS 6.3V 20% FM5 TP 5 | |
| | | C386 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C3B1 | 0CN3330K518 | CAPACITOR,FIXED TUBULAR(High d | 0.033UF 50V K B TA26 | |
| | | C3G1 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C3G2 | 0CE4764F638 | CAPACITOR,ELECTROLYTIC | 47M SRA/SS 16V M FM5 TP(5) | |
| | | C3G3 | 0CN3320F668 | CAPACITOR,TUBULAR(HIGH DIELEC) | 3300P 16V M TA26 | |
| | | C3G4 | 0CN4730K948 | CAPACITOR,FIXED TUBULAR(High d | 0.047UF D 50V 80%,-20% F(Y5V) | |
| | | C3G5 | 0CE4754K638 | CAPACITOR,FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C3G6 | 0CE4754K638 | CAPACITOR,FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C3G7 | 0CE4754K638 | CAPACITOR,FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C3G8 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C3G9 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C401 | 0CE4764F638 | CAPACITOR,ELECTROLYTIC | 47M SRA/SS 16V M FM5 TP(5) | |
| | | C402 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C403 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C405 | 0CE1063F638 | CAPACITOR,AL.ELECTROLYTIC | 10M SRE/SE 16V M FM5 TP(5) | |
| | | C406 | 0CE1063F638 | CAPACITOR,AL.ELECTROLYTIC | 10M SRE/SE 16V M FM5 TP(5) | |
| | | C410 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C412 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C413 | 0CQ1032K409 | CAPACITOR,FIXED FILM | 0.01UF S 50V 5% PE TP5 | |
| | | C414 | 0CQ1032K409 | CAPACITOR,FIXED FILM | 0.01UF S 50V 5% PE TP5 | |
| | | C415 | 0CE2264F638 | CAPACITOR,FIXED ELECTROLYTIC | 22UF SRA,SS 16V 20% FM5 TP 5 | |
| | | C416 | 0CN2220F668 | CAPACITOR,TUBULAR(HIGH DIELEC) | 2200P 16V M X TA26 | |
| | | C417 | 0CN1820F668 | CAPACITOR TUBULA(HIGH DIELE) | 1800P 16V M X TA26 | |
| | | C418 | 0CQ1532K409 | CAPACITOR,FIXED FILM | 0.015UF S 50V 5% PE TP5 | |
| | | C419 | 0CQ1032K409 | CAPACITOR,FIXED FILM | 0.01UF S 50V 5% PE TP5 | |
| | | C420 | 0CE4765K618 | CAPACITOR,AL.ELECTROLYTIC | 47UF SR,SV 50V M FL TP 5 | |
| | | C421 | 0CQ2232L559 | CAPACITOR,FIXED FILM | 0.022UF S 63V 10% PP NI TP5 | |
| | | C424 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C431 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C466 | 0CE3354K638 | CAPACITOR,FIXED ELECTROLYTIC | 3.3UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C480 | 0CE4754K638 | CAPACITOR,FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C490 | 0CE1054K638 | CAPACITOR,ELECTROLYTIC | 1.0M SRA/SS50V M FM5 TP(5) | |
| | | C501 | 0CN1040K948 | CAPACITOR,FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C502 | 0CE4764C638 | CAPACITOR,ELECTROLYTIC | 47M SRA 6.3V M FM5 TP(5) | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|---|----|----------|-------------|---------------------------------|--------------------------------|--------|
| | | C503 | 0CE4774C638 | CAPACITOR, FIXED ELECTROLYTIC | 470UF SRA,SS 6.3V 20% FM5 TP 5 | |
| | | C505 | 0CE1074F638 | CAPACITOR, ELECTROLYTIC | 100U SRA 16V M FM5 TP(5) | |
| | | C507 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C509 | 0CN223AK948 | CAPACITOR, TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C510 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C514 | 0CC1500K415 | CAPACITOR, CERAMIC(TEMP COMP) | 15P 50V J NP0 TS | |
| | | C515 | 0CC1200K415 | CAPACITOR, FIXED CERAMIC(TEMP.C | 12PF D 50V 5% TR NP0 | |
| | | C516 | 0CE1054K636 | CAPACITOR, ELECTROLYTIC | 1.0U SRA 50V M FM5 BP TP(D) | |
| | | C517 | 0CE4774C638 | CAPACITOR, FIXED ELECTROLYTIC | 470UF SRA,SS 6.3V 20% FM5 TP 5 | |
| | | C520 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C521 | 0CN1040K948 | CAPACITOR, FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C522 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C525 | 0CN223AK948 | CAPACITOR, TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C526 | 0CE4764J638 | CAPACITOR, AL.ELECTROLYTIC | 47UF SRA,SS 35V M FM5 TP 5 | |
| | | C528 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C529 | 0CN1040K948 | CAPACITOR, FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C530 | 0CE4764C638 | CAPACITOR, ELECTROLYTIC | 47M SRA 6.3V M FM5 TP(5) | |
| | | C534 | 0CE4754K638 | CAPACITOR, FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C535 | 0CE4754K638 | CAPACITOR, FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C540 | 0CE4764F638 | CAPACITOR, ELECTROLYTIC | 47M SRA/SS 16V M FM5 TP(5) | |
| | | C541 | 0CE4754K638 | CAPACITOR, FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C542 | 0CN6810K518 | CAPACITOR TUBULA(HIGH DIELE) | 680P 50V K B TA26 | |
| | | C543 | 0CN2220F668 | CAPACITOR, TUBULAR(HIGH DIELEC) | 2200P 16V M X TA26 | |
| | | C544 | 0CQ3332K409 | CAPACITOR, FIXED FILM | 0.033UF S 50V 5% PE TP5 | |
| | | C545 | 0CN2220F668 | CAPACITOR, TUBULAR(HIGH DIELEC) | 2200P 16V M X TA26 | |
| | | C546 | 0CE4764H638 | CAPACITOR, FIXED ELECTROLYTIC | 47M SRA 25V M FM5 TP(5) | |
| | | C551 | 0CQ4732K409 | CAPACITOR, FIXED FILM | 0.047UF S 50V 5% PE TP5 | |
| | | C552 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C554 | 0CN1040K948 | CAPACITOR, FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C555 | 0CE2264F638 | CAPACITOR, FIXED ELECTROLYTIC | 22UF SRA,SS 16V 20% FM5 TP 5 | |
| | | C557 | 0CN1040K948 | CAPACITOR, FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C561 | 0CE4764C638 | CAPACITOR, ELECTROLYTIC | 47M SRA 6.3V M FM5 TP(5) | |
| | | C567 | 0CN1020K518 | CAPACITOR TUBULA(HIGH DIELE) | 1000P 50V K B TA26 | |
| | | C570 | 0CC1200K415 | CAPACITOR, FIXED CERAMIC(TEMP.C | 12PF D 50V 5% TR NP0 | |
| | | C571 | 0CC1500K415 | CAPACITOR, CERAMIC(TEMP COMP) | 15P 50V J NP0 TS | |
| | | C573 | 0CN5610K518 | CAPACITOR TUBULA(HIGH DIELE) | 560P 50V K B TA26 | |
| | | C574 | 0CN1020K518 | CAPACITOR TUBULA(HIGH DIELE) | 1000P 50V K B TA26 | |
| | | C576 | 0CE2264F638 | CAPACITOR, FIXED ELECTROLYTIC | 22UF SRA,SS 16V 20% FM5 TP 5 | |
| | | C581 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C582 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C583 | 0CN1040K948 | CAPACITOR, FIXED TUBULAR(HIGH D | 0.1UF D 50V 80%,-20% F(Y5V) TA | |
| | | C584 | 0CE1054K636 | CAPACITOR, ELECTROLYTIC | 1.0U SRA 50V M FM5 BP TP(D) | |
| | | C5F1 | 0CE4766K638 | CAPACITOR, ELECTROLYTIC | 47M SMS 50V M FM5 TP | |
| | | C5F2 | 0CE4766K638 | CAPACITOR, ELECTROLYTIC | 47M SMS 50V M FM5 TP | |
| | | C6F3 | 0CE4764C638 | CAPACITOR, ELECTROLYTIC | 47M SRA 6.3V M FM5 TP(5) | |
| | | C6F4 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C6F5 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C6F8 | 0CE4766K638 | CAPACITOR, ELECTROLYTIC | 47M SMS 50V M FM5 TP | |
| | | C5K0 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C5K1 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C5K2 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C6R1 | 0CE4764C638 | CAPACITOR, ELECTROLYTIC | 47M SRA 6.3V M FM5 TP(5) | |
| | | C601 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C602 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C603 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C604 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C605 | 0CN1030F678 | CAPACITOR TUBULA(HIGH DIELE) | 0.01M 16V M Y TA26 | |
| | | C901 | 0CN1020K518 | CAPACITOR TUBULA(HIGH DIELE) | 1000P 50V K B TA26 | |
| | | C902 | 0CN1020K518 | CAPACITOR TUBULA(HIGH DIELE) | 1000P 50V K B TA26 | |
| | | C903 | 0CN1020K518 | CAPACITOR TUBULA(HIGH DIELE) | 1000P 50V K B TA26 | |
| | | C904 | 0CN1020K518 | CAPACITOR TUBULA(HIGH DIELE) | 1000P 50V K B TA26 | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|--------------|----|----------|-------------|--------------------------------|--------------------------------|--------|
| | | C906 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C907 | 0CE4764F638 | CAPACITOR,ELECTROLYTIC | 47M SRA/SS 16V M FM5 TP(5) | |
| | | C908 | 0CE1054K638 | CAPACITOR,ELECTROLYTIC | 1.0M SRA/SS50V M FM5 TP(5) | |
| | | C909 | 0CE1054K638 | CAPACITOR,ELECTROLYTIC | 1.0M SRA/SS50V M FM5 TP(5) | |
| | | C910 | 0CE1054K638 | CAPACITOR,ELECTROLYTIC | 1.0M SRA/SS50V M FM5 TP(5) | |
| | | C911 | 0CE1054K638 | CAPACITOR,ELECTROLYTIC | 1.0M SRA/SS50V M FM5 TP(5) | |
| | | C917 | 0CN223AK948 | CAPACITOR,TUBULAR(HIGH DIELEC) | 0.022UF 50V Z F TA26 S | |
| | | C918 | 0CE4754K638 | CAPACITOR,FIXED ELECTROLYTIC | 4.7UF SRA,SS 50V 20% FM5 TP 5 | |
| | | C919 | 0CE1064F638 | CAPACITOR,ELECTROLYTIC | 10M SRA 16V M FM5 TP(5) | |
| | | C921 | 0CE1074F638 | CAPACITOR,ELECTROLYTIC | 100U SRA 16V M FM5 TP(5) | |
| | | C922 | 0CX2700K408 | CAPACITOR TUBULA(T.C) | 27P 50V J SL TA26 | |
| | | C923 | 0CE2264F638 | CAPACITOR,FIXED ELECTROLYTIC | 22UF SRA,SS 16V 20% FM5 TP 5 | |
| | | C924 | 0CE4774C638 | CAPACITOR,FIXED ELECTROLYTIC | 470UF SRA,SS 6.3V 20% FM5 TP 5 | |
| COIL | | | | | | |
| | | FL401 | 633-032K | COIL,IFT | NON BIAC OSC,1CHIP 5V(KS-75M) | |
| | | L103 | 633-088G | COIL,CHOKE | 22MH TOKO 5MM TP | |
| | | L104 | 633-088G | COIL,CHOKE | 22MH TOKO 5MM TP | |
| | | L301 | 0LR1800K035 | INDUCTOR RADIAL LEAD | 180M K 6X6 L5 TP | |
| | | L302 | 0LA0472K018 | INDUCTOR AXIAL LEAD | 47M K 2.3X3.4 L5 TP | |
| | | L303 | 0LA1200K018 | INDUCTOR AXIAL LEAD | 120M K 2.3X3.4 L5 TP | |
| | | L304 | 0LR4700K035 | INDUCTOR RADIAL LEAD | 470M K 6X6 L5 TP | |
| | | L306 | 0LR2200K035 | INDUCTOR RADIAL LEAD | 220M K 6X6 L5 TP | |
| | | L307 | 0LR4700K035 | INDUCTOR RADIAL LEAD | 470M K 6X6 L5 TP | |
| | | L309 | 0LR2700J025 | INDUCTOR,RADIAL LEAD | 270UH 5% 4X5 TR5 | |
| | | L380 | 0LR1000K035 | INDUCTOR RADIAL LEAD | 100M K 6X6 L5 TP | |
| | | L3G1 | 0LR1000K035 | INDUCTOR RADIAL LEAD | 100M K 6X6 L5 TP | |
| | | L401 | 0LR1000K035 | INDUCTOR RADIAL LEAD | 100M K 6X6 L5 TP | |
| | | L405 | 0LR1000K035 | INDUCTOR RADIAL LEAD | 100M K 6X6 L5 TP | |
| | | L503 | 0LR1000K035 | INDUCTOR RADIAL LEAD | 100M K 6X6 L5 TP | |
| | | L504 | 0LA1000K018 | INDUCTOR AXIAL LEAD | 100M K 2.3X3.4 L5 TP | |
| | | L505 | 0LR1000K035 | INDUCTOR RADIAL LEAD | 100M K 6X6 L5 TP | |
| | | L901 | 0LA1000K018 | INDUCTOR AXIAL LEAD | 100M K 2.3X3.4 L5 TP | |
| | | L902 | 0LA1000K018 | INDUCTOR AXIAL LEAD | 100M K 2.3X3.4 L5 TP | |
| | | L904 | 0LR1000K035 | INDUCTOR RADIAL LEAD | 100M K 6X6 L5 TP | |
| DIODE | | | | | | |
| | | BD101 | 0DD160000DA | DIODE,RECTIFIERS | S1WBA60 BK SHINDENGEN - 600V - | |
| | | D102 | 0DD010009CA | DIODE,RECTIFIERS | EG01C TP SANKEN - - - - - | |
| | | D103 | 0DR180209AA | DIODE,RECTIFIERS | ERA18-02KFRB TP FUJI DO204AL 2 | |
| | | D106 | 0DR158220AA | DIODE,RECTIFIERS | 1N5822 BK RECTRON DO201AD 40V | |
| | | D107 | 0DR180209AA | DIODE,RECTIFIERS | ERA18-02KFRB TP FUJI DO204AL 2 | |
| | | D108 | 0DD010009AC | DIODE,RECTIFIERS | EU01W(R-FORM) TP SANKEN | |
| | | D109 | 0DR302000AB | DIODE,RECTIFIERS | HER302 BK RECTRON DO201AD 100V | |
| | | D110 | 0DD010009AC | DIODE,RECTIFIERS | EU01W(R-FORM) TP SANKEN | |
| | | D154 | 0DD207000AB | DIODE,RECTIFIERS | 2A07 2A RECT(T/S)P=12.5 F DELT | |
| | | D155 | 0DD207000AB | DIODE,RECTIFIERS | 2A07 2A RECT(T/S)P=12.5 F DELT | |
| | | D156 | 0DD207000AB | DIODE,RECTIFIERS | 2A07 2A RECT(T/S)P=12.5 F DELT | |
| | | D158 | 0DR104009AB | DIODE,RECTIFIERS | RL104 R. TP GULF SEMICONDUCTOR | |
| | | D159 | 0DR104009AB | DIODE,RECTIFIERS | RL104 R. TP GULF SEMICONDUCTOR | |
| | | D161 | 0DR104009AB | DIODE,RECTIFIERS | RL104 R. TP GULF SEMICONDUCTOR | |
| | | D301 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D380 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D401 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D402 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D403 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D501 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D510 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D511 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D5F6 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D901 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D902 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|-----------------|----|----------|-------------|--------------------------------|--------------------------------|--------|
| | | D903 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D904 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| | | D905 | 0DD133009AA | DIODE,SWITCHING | 1SS133 DETECT,SW TP | |
| DIGITRON | | | | | | |
| | | DG601 | 6302R-V106A | DIGITRON | 9MT-173GNK FUTABA UNIVERSAL LV | |
| FILTER | | | | | | |
| | | BC101 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD901 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD902 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD903 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD904 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD905 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD906 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD907 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD908 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD909 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD910 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD911 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | BD922 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| | | L102 | 616-145H | FILTER(CIRC),DRAWING | SHT LFS2020V4-04350 | |
| | | W1A2 | 636-004C | FILTER(CIRC),EMC | BEAD CORE BFS3550R2FD8,R T/P | |
| FUSE | | | | | | |
| △ | | F101 | 0FS1601B51B | FUSE,SLOW BLOW | 1600MA 250 V 5.2X20 CY/GL KS / | |
| HOLDER | | | | | | |
| | | ES501 | 4931R-0050A | HOLDER ASSY | END | |
| | | ES502 | 4931R-0050A | HOLDER ASSY | END | |
| | | FH01 | 586-008B | HOLDER | FUSE CLIP TP SINSUNG | |
| | | FH02 | 586-008B | HOLDER | FUSE CLIP TP SINSUNG | |
| | | LD501 | 4931R-0017A | HOLDER ASSEMBLY | MV995A NON LED | |
| IC | | | | | | |
| | | F104 | GIRH100000B | IC,ROHM | ICP-N10 T104 TP IC DETACT | |
| △ | | IC101 | 0ISK615300A | IC,SANKEN | STR-G6153T 5PIN FM CUT BK PWM | |
| | | IC103 | 0ISS431000A | IC,SAMSUNG ELECTRONICS | KA431AZ (LM431AZ) | |
| | | IC301 | 0ISA715820A | IC,SANYO | LA71582M 100QFP BK AVCP TIMELA | |
| | | IC3G1 | 0IMA391600A | IC,MATSUSHITA | AN3916 SDIP ST AGC IC | |
| | | IC501 | 0IMCRMA024B | IC,MICRO CONTROLLER | MN101D06F LE 2ND MATSUSHITA 10 | |
| | | IC503 | 0ICS241600B | IC,CATALYST | CAT24WC16P 8P DIP ST 16K SERIA | |
| | | IC505 | 0IKE704200B | IC,KEC | KIA7042P 3P 4.2V RESET(TAPING) | |
| | | IC6F1 | 0IPRPPY002A | IC,PERIPHERALS | PT6315 PTC 44 LQFP TRAY VFD DR | |
| | | IC901 | 0IJR641300A | IC,JRC | NJU6413AD 16P DIP ST RS232C DR | |
| JACK | | | | | | |
| | | JK901 | 572-034R | JACK,RCA | BJP-202-WH BAE EUN (WHITE) ST, | |
| | | JK902 | 572-034R | JACK,RCA | BJP-202-WH BAE EUN (WHITE) ST, | |
| LED | | | | | | |
| | | LD601 | 6301R1K001A | LED ASSY | LTL16KEEH74 LITEON KOREA 17 | |
| | | LD602 | 6301R1K001A | LED ASSY | LTL16KEEH74 LITEON KOREA 17 | |
| RESISTOR | | | | | | |
| | | FR101 | 0RF0471Q619 | RESISTOR,DRAWING | 4.7 OHM 1/4 W(3.4) 5.00% TR | |
| | | R101 | 614-007A | RESISTOR | 2.7/2W CEMENT SMPS V | |
| | | R102 | 0RS1003K619 | RESISTOR,FIXED METAL OXIDE FIL | 100K OHM 2 W 5.00% TR | |
| | | R103 | 0RD0681F608 | RESISTOR,FIXED CARBON FILM | 6.8 OHM 1/6 W 5.00% TA26 | |
| | | R104 | 0RS5602K619 | RESISTOR,FIXED METAL OXIDE FIL | 56K OHM 2 W 5.00% TR | |
| | | R107 | 0RD1504H632 | RESISTOR,FIXED CARBON FILM | 1.5M OHM 1/2 W 5.00% MF10 | |
| | | R109 | 0RS0350K619 | RESISTOR,FIXED METAL OXIDE FIL | 0.35 OHM 2 W 5.00% TR | |
| | | R114 | 0RD1003F608 | RESISTOR,FIXED CARBON FILM | 100K OHM 1/6 W 5% TA26 | |
| | | R116 | 0RD3300F608 | RESISTOR,FIXED CARBON FILM | 330 OHM 1/6 W 5% TA26 | |
| | | R117 | 0RD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R118 | 0RD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R119 | 0RN3301F408 | RESISTOR,FIXED METAL FILM | 3.3K OHM 1/6 W 1% TA26 | |
| | | R120 | 0RN2701F408 | RESISTOR,FIXED METAL FILM | 2.7K OHM 1/6 W 1% TA26 | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|---|----|----------|-------------|----------------------------|-------------------------|--------|
| | | R121 | ORD1800F608 | RESISTOR,FIXED CARBON FILM | 180 OHM 1/6 W 5% TA26 | |
| | | R122 | ORD1003F608 | RESISTOR,FIXED CARBON FILM | 100K OHM 1/6 W 5% TA26 | |
| | | R152 | ORD5600F608 | RESISTOR,FIXED CARBON FILM | 560 OHM 1/6 W 5% TA26 | |
| | | R156 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R157 | ORD3300F608 | RESISTOR,FIXED CARBON FILM | 330 OHM 1/6 W 5% TA26 | |
| | | R161 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R162 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R166 | ORD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R167 | ORD3901F608 | RESISTOR,FIXED CARBON FILM | 3.9K OHM 1/6 W 5% TA26 | |
| | | R168 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R170 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R171 | ORD3301F608 | RESISTOR,FIXED CARBON FILM | 3.3K OHM 1/6 W 5% TA26 | |
| | | R172 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R173 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R174 | ORD3300F608 | RESISTOR,FIXED CARBON FILM | 330 OHM 1/6 W 5% TA26 | |
| | | R175 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R177 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R302 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R303 | ORD1802F608 | RESISTOR,FIXED CARBON FILM | 18K OHM 1/6 W 5% TA26 | |
| | | R304 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R305 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R306 | ORD2700F608 | RESISTOR,FIXED CARBON FILM | 270 OHM 1/6 W 5% TA26 | |
| | | R307 | ORD3300F608 | RESISTOR,FIXED CARBON FILM | 330 OHM 1/6 W 5% TA26 | |
| | | R308 | ORD2701F608 | RESISTOR,FIXED CARBON FILM | 2.7K OHM 1/6 W 5% TA26 | |
| | | R309 | ORD6800F608 | RESISTOR,FIXED CARBON FILM | 680 OHM 1/6 W 5% TA26 | |
| | | R310 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R311 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R312 | ORD1801F608 | RESISTOR,FIXED CARBON FILM | 1.8K OHM 1/6 W 5% TA26 | |
| | | R313 | ORD2700F608 | RESISTOR,FIXED CARBON FILM | 270 OHM 1/6 W 5% TA26 | |
| | | R316 | ORD1500F608 | RESISTOR,FIXED CARBON FILM | 150 OHM 1/6 W 5% TA26 | |
| | | R317 | ORD6802F608 | RESISTOR,FIXED CARBON FILM | 68K OHM 1/6 W 5% TA26 | |
| | | R318 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R319 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R320 | ORD1501F608 | RESISTOR,FIXED CARBON FILM | 1.5K OHM 1/6 W 5% TA26 | |
| | | R321 | ORD1801F608 | RESISTOR,FIXED CARBON FILM | 1.8K OHM 1/6 W 5% TA26 | |
| | | R322 | ORD8201F608 | RESISTOR,FIXED CARBON FILM | 8.2K OHM 1/6 W 5% TA26 | |
| | | R326 | ORD2701F608 | RESISTOR,FIXED CARBON FILM | 2.7K OHM 1/6 W 5% TA26 | |
| | | R335 | ORD3902F608 | RESISTOR,FIXED CARBON FILM | 39K OHM 1/6 W 5% TA26 | |
| | | R338 | ORD2700F608 | RESISTOR,FIXED CARBON FILM | 270 OHM 1/6 W 5% TA26 | |
| | | R340 | ORD1802F608 | RESISTOR,FIXED CARBON FILM | 18K OHM 1/6 W 5% TA26 | |
| | | R341 | ORD2701F608 | RESISTOR,FIXED CARBON FILM | 2.7K OHM 1/6 W 5% TA26 | |
| | | R349 | ORD5601F608 | RESISTOR,FIXED CARBON FILM | 5.6K OHM 1/6 W 5% TA26 | |
| | | R380 | ORD2200F608 | RESISTOR,FIXED CARBON FILM | 220 OHM 1/6 W 5% TA26 | |
| | | R381 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R384 | ORD1800F608 | RESISTOR,FIXED CARBON FILM | 180 OHM 1/6 W 5% TA26 | |
| | | R385 | ORD1800F608 | RESISTOR,FIXED CARBON FILM | 180 OHM 1/6 W 5% TA26 | |
| | | R386 | ORD0752F608 | RESISTOR,FIXED CARBON FILM | 75 OHM 1/6 W 5.00% TA26 | |
| | | R387 | ORD1004F608 | RESISTOR,FIXED CARBON FILM | 1M OHM 1/6 W 5% TA26 | |
| | | R388 | ORD0752F608 | RESISTOR,FIXED CARBON FILM | 75 OHM 1/6 W 5.00% TA26 | |
| | | R389 | ORD1502F608 | RESISTOR,FIXED CARBON FILM | 15K OHM 1/6 W 5% TA26 | |
| | | R390 | ORD5601F608 | RESISTOR,FIXED CARBON FILM | 5.6K OHM 1/6 W 5% TA26 | |
| | | R391 | ORD4702F608 | RESISTOR,FIXED CARBON FILM | 47K OHM 1/6 W 5% TA26 | |
| | | R392 | ORD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R393 | ORD4702F608 | RESISTOR,FIXED CARBON FILM | 47K OHM 1/6 W 5% TA26 | |
| | | R3B1 | ORD3901F608 | RESISTOR,FIXED CARBON FILM | 3.9K OHM 1/6 W 5% TA26 | |
| | | R3G1 | ORD5601F608 | RESISTOR,FIXED CARBON FILM | 5.6K OHM 1/6 W 5% TA26 | |
| | | R3G2 | ORD2702F608 | RESISTOR,FIXED CARBON FILM | 27K OHM 1/6 W 5% TA26 | |
| | | R3G3 | ORD3902F608 | RESISTOR,FIXED CARBON FILM | 39K OHM 1/6 W 5% TA26 | |
| | | R3G4 | ORD1503F608 | RESISTOR,FIXED CARBON FILM | 150K OHM 1/6 W 5% TA26 | |
| | | R3G5 | ORD1800F608 | RESISTOR,FIXED CARBON FILM | 180 OHM 1/6 W 5% TA26 | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|---|----|----------|-------------|----------------------------|--------------------------|--------|
| | | R3G6 | ORD1800F608 | RESISTOR,FIXED CARBON FILM | 180 OHM 1/6 W 5% TA26 | |
| | | R402 | ORD2204F608 | RESISTOR,FIXED CARBON FILM | 2.2M OHM 1/6 W 0.05 TA26 | |
| | | R403 | ORD6801F608 | RESISTOR,FIXED CARBON FILM | 6.8K OHM 1/6 W 5% TA26 | |
| | | R404 | ORD5600F608 | RESISTOR,FIXED CARBON FILM | 560 OHM 1/6 W 5% TA26 | |
| | | R406 | ORD3301F608 | RESISTOR,FIXED CARBON FILM | 3.3K OHM 1/6 W 5% TA26 | |
| | | R408 | ORD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R409 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R410 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R411 | ORD2202F608 | RESISTOR,FIXED CARBON FILM | 22K OHM 1/6 W 5% TA26 | |
| | | R412 | ORD1801F608 | RESISTOR,FIXED CARBON FILM | 1.8K OHM 1/6 W 5% TA26 | |
| | | R413 | ORD8201F608 | RESISTOR,FIXED CARBON FILM | 8.2K OHM 1/6 W 5% TA26 | |
| | | R414 | ORD1202F608 | RESISTOR,FIXED CARBON FILM | 12K OHM 1/6 W 5% TA26 | |
| | | R415 | ORD3303F608 | RESISTOR,FIXED CARBON FILM | 330K OHM 1/6 W 5% TA26 | |
| | | R416 | ORD1800F608 | RESISTOR,FIXED CARBON FILM | 180 OHM 1/6 W 5% TA26 | |
| | | R418 | ORD1802F608 | RESISTOR,FIXED CARBON FILM | 18K OHM 1/6 W 5% TA26 | |
| | | R419 | ORD0472F608 | RESISTOR,FIXED CARBON FILM | 47 OHM 1/6 W 5% TA26 | |
| | | R420 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R421 | ORD0221F608 | RESISTOR,FIXED CARBON FILM | 2.2 OHM 1/6 W 5% TA26 | |
| | | R424 | ORD2700F608 | RESISTOR,FIXED CARBON FILM | 270 OHM 1/6 W 5% TA26 | |
| | | R425 | ORD4702F608 | RESISTOR,FIXED CARBON FILM | 47K OHM 1/6 W 5% TA26 | |
| | | R430 | ORD3901F608 | RESISTOR,FIXED CARBON FILM | 3.9K OHM 1/6 W 5% TA26 | |
| | | R431 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R482 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R486 | ORD5600F608 | RESISTOR,FIXED CARBON FILM | 560 OHM 1/6 W 5% TA26 | |
| | | R488 | ORD2202F608 | RESISTOR,FIXED CARBON FILM | 22K OHM 1/6 W 5% TA26 | |
| | | R490 | ORD4702F608 | RESISTOR,FIXED CARBON FILM | 47K OHM 1/6 W 5% TA26 | |
| | | R491 | ORD1202F608 | RESISTOR,FIXED CARBON FILM | 12K OHM 1/6 W 5% TA26 | |
| | | R492 | ORD1501F608 | RESISTOR,FIXED CARBON FILM | 1.5K OHM 1/6 W 5% TA26 | |
| | | R493 | ORD0102F608 | RESISTOR,FIXED CARBON FILM | 10 OHM 1/6 W 5% TA26 | |
| | | R501 | ORD2200F608 | RESISTOR,FIXED CARBON FILM | 220 OHM 1/6 W 5% TA26 | |
| | | R502 | ORD2200F608 | RESISTOR,FIXED CARBON FILM | 220 OHM 1/6 W 5% TA26 | |
| | | R504 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R505 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R507 | ORD1201F608 | RESISTOR,FIXED CARBON FILM | 1.2K OHM 1/6 W 5% TA26 | |
| | | R508 | ORD5600F608 | RESISTOR,FIXED CARBON FILM | 560 OHM 1/6 W 5% TA26 | |
| | | R509 | ORD6800F608 | RESISTOR,FIXED CARBON FILM | 680 OHM 1/6 W 5% TA26 | |
| | | R510 | ORD1503F608 | RESISTOR,FIXED CARBON FILM | 150K OHM 1/6 W 5% TA26 | |
| | | R511 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R512 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R513 | ORD3901F608 | RESISTOR,FIXED CARBON FILM | 3.9K OHM 1/6 W 5% TA26 | |
| | | R515 | ORD2700F608 | RESISTOR,FIXED CARBON FILM | 270 OHM 1/6 W 5% TA26 | |
| | | R516 | ORD2200F608 | RESISTOR,FIXED CARBON FILM | 220 OHM 1/6 W 5% TA26 | |
| | | R517 | ORD2200F608 | RESISTOR,FIXED CARBON FILM | 220 OHM 1/6 W 5% TA26 | |
| | | R6F1 | ORD5600F608 | RESISTOR,FIXED CARBON FILM | 560 OHM 1/6 W 5% TA26 | |
| | | R6F2 | ORD5600F608 | RESISTOR,FIXED CARBON FILM | 560 OHM 1/6 W 5% TA26 | |
| | | R521 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R522 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R525 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R526 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R527 | ORD1000F608 | RESISTOR,FIXED CARBON FILM | 100 OHM 1/6 W 5% TA26 | |
| | | R529 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R532 | ORD6802F608 | RESISTOR,FIXED CARBON FILM | 68K OHM 1/6 W 5% TA26 | |
| | | R534 | ORD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R541 | ORD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R543 | ORD2701F608 | RESISTOR,FIXED CARBON FILM | 2.7K OHM 1/6 W 5% TA26 | |
| | | R544 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R546 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R547 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R548 | ORD1003F608 | RESISTOR,FIXED CARBON FILM | 100K OHM 1/6 W 5% TA26 | |
| | | R550 | ORD2200F608 | RESISTOR,FIXED CARBON FILM | 220 OHM 1/6 W 5% TA26 | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|---|----|----------|-------------|----------------------------|-------------------------|--------|
| | | R553 | ORD2200F608 | RESISTOR,FIXED CARBON FILM | 220 OHM 1/6 W 5% TA26 | |
| | | R554 | ORD4700F608 | RESISTOR,FIXED CARBON FILM | 470 OHM 1/6 W 5% TA26 | |
| | | R555 | ORD2200F608 | RESISTOR,FIXED CARBON FILM | 220 OHM 1/6 W 5% TA26 | |
| | | R556 | ORD2202F608 | RESISTOR,FIXED CARBON FILM | 22K OHM 1/6 W 5% TA26 | |
| | | R557 | ORD2702F608 | RESISTOR,FIXED CARBON FILM | 27K OHM 1/6 W 5% TA26 | |
| | | R558 | ORD2202F608 | RESISTOR,FIXED CARBON FILM | 22K OHM 1/6 W 5% TA26 | |
| | | R559 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R560 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R563 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R564 | ORD2702F608 | RESISTOR,FIXED CARBON FILM | 27K OHM 1/6 W 5% TA26 | |
| | | R567 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R569 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R570 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R571 | ORD2202F608 | RESISTOR,FIXED CARBON FILM | 22K OHM 1/6 W 5% TA26 | |
| | | R572 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R573 | ORD8200F608 | RESISTOR,FIXED CARBON FILM | 820 OHM 1/6 W 5% TA26 | |
| | | R574 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R575 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R576 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R577 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R578 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R579 | ORD5602F608 | RESISTOR,FIXED CARBON FILM | 56K OHM 1/6 W 5% TA26 | |
| | | R580 | ORD5600F608 | RESISTOR,FIXED CARBON FILM | 560 OHM 1/6 W 5% TA26 | |
| | | R581 | ORD5600F608 | RESISTOR,FIXED CARBON FILM | 560 OHM 1/6 W 5% TA26 | |
| | | R582 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R583 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R585 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R589 | ORD2700F608 | RESISTOR,FIXED CARBON FILM | 270 OHM 1/6 W 5% TA26 | |
| | | R590 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R591 | ORD4701F608 | RESISTOR,FIXED CARBON FILM | 4.7K OHM 1/6 W 5% TA26 | |
| | | R592 | ORD4702F608 | RESISTOR,FIXED CARBON FILM | 47K OHM 1/6 W 5% TA26 | |
| | | R593 | ORD1202F608 | RESISTOR,FIXED CARBON FILM | 12K OHM 1/6 W 5% TA26 | |
| | | R595 | ORD1000F608 | RESISTOR,FIXED CARBON FILM | 100 OHM 1/6 W 5% TA26 | |
| | | R596 | ORD1000F608 | RESISTOR,FIXED CARBON FILM | 100 OHM 1/6 W 5% TA26 | |
| | | R597 | ORD1000F608 | RESISTOR,FIXED CARBON FILM | 100 OHM 1/6 W 5% TA26 | |
| | | R598 | ORD1000F608 | RESISTOR,FIXED CARBON FILM | 100 OHM 1/6 W 5% TA26 | |
| | | R5B1 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R5B3 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R5B4 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R5C5 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R5C6 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R5C7 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R5F0 | ORD0122F608 | RESISTOR,FIXED CARBON FILM | 12 OHM 1/6 W 5.00% TA26 | |
| | | R5F1 | ORD0122F608 | RESISTOR,FIXED CARBON FILM | 12 OHM 1/6 W 5.00% TA26 | |
| | | R5F2 | ORD0102F608 | RESISTOR,FIXED CARBON FILM | 10 OHM 1/6 W 5% TA26 | |
| | | R5F3 | ORD0102F608 | RESISTOR,FIXED CARBON FILM | 10 OHM 1/6 W 5% TA26 | |
| | | R6F4 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R6F5 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R6F6 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R6F7 | ORD5602F608 | RESISTOR,FIXED CARBON FILM | 56K OHM 1/6 W 5% TA26 | |
| | | R5K0 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R5K1 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R5K2 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R6R1 | ORD3300F608 | RESISTOR,FIXED CARBON FILM | 330 OHM 1/6 W 5% TA26 | |
| | | R603 | ORD1801F608 | RESISTOR,FIXED CARBON FILM | 1.8K OHM 1/6 W 5% TA26 | |
| | | R604 | ORD1801F608 | RESISTOR,FIXED CARBON FILM | 1.8K OHM 1/6 W 5% TA26 | |
| | | R605 | ORD1501F608 | RESISTOR,FIXED CARBON FILM | 1.5K OHM 1/6 W 5% TA26 | |
| | | R606 | ORD1501F608 | RESISTOR,FIXED CARBON FILM | 1.5K OHM 1/6 W 5% TA26 | |
| | | R607 | ORD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R608 | ORD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R609 | ORD2701F608 | RESISTOR,FIXED CARBON FILM | 2.7K OHM 1/6 W 5% TA26 | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|---|----|----------|-------------|----------------------------|------------------------|--------|
| | | R610 | ORD2701F608 | RESISTOR,FIXED CARBON FILM | 2.7K OHM 1/6 W 5% TA26 | |
| | | R611 | ORD3901F608 | RESISTOR,FIXED CARBON FILM | 3.9K OHM 1/6 W 5% TA26 | |
| | | R612 | ORD3901F608 | RESISTOR,FIXED CARBON FILM | 3.9K OHM 1/6 W 5% TA26 | |
| | | R613 | ORD6801F608 | RESISTOR,FIXED CARBON FILM | 6.8K OHM 1/6 W 5% TA26 | |
| | | R614 | ORD6801F608 | RESISTOR,FIXED CARBON FILM | 6.8K OHM 1/6 W 5% TA26 | |
| | | R615 | ORD1202F608 | RESISTOR,FIXED CARBON FILM | 12K OHM 1/6 W 5% TA26 | |
| | | R616 | ORD1202F608 | RESISTOR,FIXED CARBON FILM | 12K OHM 1/6 W 5% TA26 | |
| | | R617 | ORD6802F608 | RESISTOR,FIXED CARBON FILM | 68K OHM 1/6 W 5% TA26 | |
| | | R618 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R621 | ORD1801F608 | RESISTOR,FIXED CARBON FILM | 1.8K OHM 1/6 W 5% TA26 | |
| | | R622 | ORD1501F608 | RESISTOR,FIXED CARBON FILM | 1.5K OHM 1/6 W 5% TA26 | |
| | | R623 | ORD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R624 | ORD2701F608 | RESISTOR,FIXED CARBON FILM | 2.7K OHM 1/6 W 5% TA26 | |
| | | R625 | ORD6802F608 | RESISTOR,FIXED CARBON FILM | 68K OHM 1/6 W 5% TA26 | |
| | | R626 | ORD6802F608 | RESISTOR,FIXED CARBON FILM | 68K OHM 1/6 W 5% TA26 | |
| | | R627 | ORD6802F608 | RESISTOR,FIXED CARBON FILM | 68K OHM 1/6 W 5% TA26 | |
| | | R628 | ORD6802F608 | RESISTOR,FIXED CARBON FILM | 68K OHM 1/6 W 5% TA26 | |
| | | R629 | ORD6802F608 | RESISTOR,FIXED CARBON FILM | 68K OHM 1/6 W 5% TA26 | |
| | | R630 | ORD6802F608 | RESISTOR,FIXED CARBON FILM | 68K OHM 1/6 W 5% TA26 | |
| | | R634 | ORD0101F608 | RESISTOR,FIXED CARBON FILM | 1 OHM 1/6 W 5.00% TA26 | |
| | | R635 | ORD0101F608 | RESISTOR,FIXED CARBON FILM | 1 OHM 1/6 W 5.00% TA26 | |
| | | R636 | ORD0101F608 | RESISTOR,FIXED CARBON FILM | 1 OHM 1/6 W 5.00% TA26 | |
| | | R637 | ORD0101F608 | RESISTOR,FIXED CARBON FILM | 1 OHM 1/6 W 5.00% TA26 | |
| | | R638 | ORD0101F608 | RESISTOR,FIXED CARBON FILM | 1 OHM 1/6 W 5.00% TA26 | |
| | | R904 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R905 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R906 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R907 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R908 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R909 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R910 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R911 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R912 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R914 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R915 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R916 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R917 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R918 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R919 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R920 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R921 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R922 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R923 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R924 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R925 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R926 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R927 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R928 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R929 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R930 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R931 | ORD5600F608 | RESISTOR,FIXED CARBON FILM | 560 OHM 1/6 W 5% TA26 | |
| | | R932 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R933 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R934 | ORD2201F608 | RESISTOR,FIXED CARBON FILM | 2.2K OHM 1/6 W 5% TA26 | |
| | | R935 | ORD1001F608 | RESISTOR,FIXED CARBON FILM | 1K OHM 1/6 W 5% TA26 | |
| | | R936 | ORD1002F608 | RESISTOR,FIXED CARBON FILM | 10K OHM 1/6 W 5% TA26 | |
| | | R937 | ORD2702F608 | RESISTOR,FIXED CARBON FILM | 27K OHM 1/6 W 5% TA26 | |
| | | R938 | ORD8201F608 | RESISTOR,FIXED CARBON FILM | 8.2K OHM 1/6 W 5% TA26 | |
| | | R939 | ORD2200F608 | RESISTOR,FIXED CARBON FILM | 220 OHM 1/6 W 5% TA26 | |
| | | R940 | ORD0562F608 | RESISTOR,FIXED CARBON FILM | 56 OHM 1/6 W 5% TA26 | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|-----------------------------------|----|----------|-------------|----------------------------|--------------------------------|--------|
| | | VR501 | 613-032W | RESISTOR,DRAWING | RH063MCJ5R (220K) | |
| | | VR601 | 611-024B | RESISTOR,DRAWING | RK09K113000123B | |
| REMOTE CONTROLLER RECEIVER | | | | | | |
| | | RC6R1 | 6712R2938GA | REMOTE CONTROLLER RECEIVER | TSOP1238SP1 VISHAY(TEMIC) 37-9 | |
| SENSOR | | | | | | |
| ▲ | | IC102 | 657-063A | SENSOR | LTV-817B,PHOTO COUPLER(LITEON) | |
| | | RS501 | 6500RAB003A | SENSOR | SG-260 KODENSHI D33 REEL SENSO | |
| | | RS502 | 6500RAB003A | SENSOR | SG-260 KODENSHI D33 REEL SENSO | |
| SWITCH | | | | | | |
| | | CS501 | 6600M000026 | SWITCH,PUSH | MPU12970MLB0 VCR CST IN S/W MI | |
| | | JS601 | 556-272A | SWITCH | JRS0000-0502 SMK NON 1V 10MA V | |
| | | MS501 | 6600JB8005B | SWITCH,MODE | NON 5V 1MA VERTICAL -G | |
| | | SL601 | 6600Q000007 | SWITCH,SLIDE | CSS-2201A CHANG SHIN 30V DC 0. | |
| | | SW601 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW602 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW603 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW604 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW605 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW606 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW607 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW608 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW609 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW610 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW611 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW612 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW613 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW614 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW615 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW616 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW617 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW618 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW619 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW620 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW621 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| | | SW901 | 556-219B | SWITCH,TACT | THVV502GAA POSTECH DC 12 V 5- | |
| TRANSISTOR | | | | | | |
| | | Q152 | 0TR320309AA | TRANSISTOR,BIPOLARS | KTC3203 KEC TP TO92 50V 150MA | |
| | | Q153 | 0TR127309AA | TRANSISTOR | KTA1273-TP-Y (KTA966A)KEC | |
| | | Q155 | 0TR127309AA | TRANSISTOR | KTA1273-TP-Y (KTA966A)KEC | |
| | | Q156 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q157 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q159 | 0TR127309AA | TRANSISTOR | KTA1273-TP-Y (KTA966A)KEC | |
| | | Q161 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q162 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q163 | 0TR127309AA | TRANSISTOR | KTA1273-TP-Y (KTA966A)KEC | |
| | | Q164 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q301 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q302 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q303 | 0TR126609AE | TRANSISTOR | KTA1266-GR,TP(KTA1015),KEC | |
| | | Q304 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q305 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q380 | 0TR126609AE | TRANSISTOR | KTA1266-GR,TP(KTA1015),KEC | |
| | | Q381 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q382 | 0TR126609AE | TRANSISTOR | KTA1266-GR,TP(KTA1015),KEC | |
| | | Q3G1 | 0TR126609AE | TRANSISTOR | KTA1266-GR,TP(KTA1015),KEC | |
| | | Q402 | 0TR126609AE | TRANSISTOR | KTA1266-GR,TP(KTA1015),KEC | |
| | | Q403 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q404 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q405 | 0TR320309AA | TRANSISTOR,BIPOLARS | KTC3203 KEC TP TO92 50V 150MA | |
| | | Q406 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q481 | 0TR126609AE | TRANSISTOR | KTA1266-GR,TP(KTA1015),KEC | |

| S | AL | LOCA.NO. | PART NO | DESCRIPTION | SPECIFICATION | REMARK |
|--------------------|----|----------|-------------|------------------------|--------------------------------|--------|
| | | Q501 | 0TR319809AC | TRANSISTOR | KTC3198-TP-BL (KTC1815)KEC | |
| | | Q502 | 0TR319809AA | TRANSISTOR,BIPOLARS | KTC3198(KTC1815) KEC TP TO92 5 | |
| | | Q503 | 0TR127309AA | TRANSISTOR | KTA1273-TP-Y (KTA966A)KEC | |
| | | Q504 | 0TR126609AE | TRANSISTOR | KTA1266-GR,TP(KTA1015),KEC | |
| | | Q506 | 0TR126609AE | TRANSISTOR | KTA1266-GR,TP(KTA1015),KEC | |
| | | Q512 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q513 | 0TR103009AF | TRANSISTOR,BIPOLARS | KRA103M(KRA2203) KEC TP TO92M | |
| | | Q514 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q515 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q521 | 0TR320309AA | TRANSISTOR,BIPOLARS | KTC3203 KEC TP TO92 50V 150MA | |
| | | Q901 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q902 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q903 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q904 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q905 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q906 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q907 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q908 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q909 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q910 | 0TR120309AE | TRANSISTOR | SRC1203 TP AUK TO92 22K,22K | |
| | | Q911 | 0TR320309AA | TRANSISTOR,BIPOLARS | KTC3203 KEC TP TO92 50V 150MA | |
| | | Q912 | 0TR534309BA | TRANSISTOR,BIPOLARS | 2SC5343-L TP AUK TO92 - | |
| | | Q913 | 0TR198009CA | TRANSISTOR | 2SA1980G TP AUK TO92 | |
| | | Q914 | 0TR198009CA | TRANSISTOR | 2SA1980G TP AUK TO92 | |
| TRANSFORMER | | | | | | |
| | | T101 | 642-023U | TRANSFORMER,SMPS[COIL] | SJE-023U SJ/CS WIDE EER2828 | |
| VARISTOR | | | | | | |
| | | V101 | 656-004C | VARISTOR,DRAWING | SVC681D-10A SAMHWA 4.O CUT | |
| X-TAL | | | | | | |
| | | X302 | 6202R2357AE | RESONATOR,CRYSTAL | HC49U SSANG TAE 3-579575MHZ 1 | |
| | | X501 | 6202R-DA01A | RESONATOR,CRYSTAL | CFS-308 CITIZEN 32-768KHZ 20 | |
| | | X502 | 6202R1143DC | RESONATOR,CRYSTAL | H49U BUBANG 14-31818HZ 25PPM 1 | |
| ZENER DIODE | | | | | | |
| | | ZD101 | 0DZ332609FA | DIODE,ZENER | UZ-3.3BSB 26MM TP PYUNG CHANG | |
| | | ZD152 | 0DZ910009BB | DIODE,ZENER | MTZJ9.1C TP ROHM-K DO34 0.5W 8 | |
| | | ZD502 | 0DZ622609AB | DIODE,ZENER | UZ-6.2BSA 26MM TP PYUNG CHANG | |
| | | ZD503 | 0DZ622609AB | DIODE,ZENER | UZ-6.2BSA 26MM TP PYUNG CHANG | |
| | | ZD901 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD902 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD903 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD904 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD905 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD906 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD907 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD908 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD909 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD910 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD911 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD912 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD913 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD914 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD915 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD916 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD917 | 0DZ132609BB | DIODE,ZENER | UZ-13BSA 26MM TP PYUNG CHANG | |
| | | ZD920 | 0DZ910009BB | DIODE,ZENER | MTZJ9.1C TP ROHM-K DO34 0.5W 8 | |

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>