

## SPECIFICATIONS

ARRAY SERIES	4890A,4891A	4892A,4892A-90	4893A	4894A,4894A-90
Frequency Response ( $\pm 3$ dB) <sup>1</sup> :	70 Hz - 18 kHz	50 Hz - 18 kHz	38 Hz - 400 Hz	46 Hz - 18 kHz
Sensitivity:	98 dB (1 W, 1m)	98 dB (1 W, 1m)	98 dB (1 W, 1m)	100 dB (1 W, 1m)
Recommended Amplifier Power <sup>2</sup> :				
High Frequency:	300 W at 8 ohms	300 W at 8 ohms	N/A	300 W at 8 ohms
Low Frequency:	600 W at 8 ohms	600 W at 8 ohms	600 W at 8 ohms each transducer, 1200 W total	600 W at 8 ohms each transducer (x2)
Nominal Coverage:	4890A: 60° horizontal, 40° vertical or 40° horizontal, 60° vertical 4891A: 60° horizontal, 40° vertical	4892A: 45° horizontal, 35° vertical 4892A-90: 90° horizontal, 35° vertical	Array Dependent	4894A: 45° horizontal, 35° vertical 4894A-90: 90° horizontal, 35° vertical
LOW FREQUENCY TRANSDUCERS:				
Nominal Diameter:	355 mm (14 in)	355 mm (14 in)	(Two) 355 mm (14 in)	(Two) 355 mm (14 in)
Nominal Impedance:	8 ohms	8 ohms	Two Transducers with separate pinouts, 8 ohms each	Two Transducers with separate pinouts, 8 ohms each
Power Rating:	600 W AES, 50 Hz to 500 Hz, 2400 W peak	600 W AES, 50 Hz to 500 Hz, 2400 W peak	600 W AES, each transducer 50 Hz to 500 Hz, 1200 W AES total system; 2400 W peak each transducer, 4800 W peak total system	600 W AES, 50 Hz to 500 Hz, 2400 W peak 1200 W AES total system; 2400 W peak each transducer, 4800 W peak total system
HIGH FREQUENCY TRANSDUCER:				
Throat Diameter:	38 mm (1 1/2 in) exit	38 mm (1 1/2 in) exit	N/A	38 mm (1 1/2 in) exit
Nominal Impedance:	8 ohms	8 ohms	N/A	8 ohms
Power Rating:	75 W AES, 1 kHz to 10 kHz, 300 W peak	75 W AES, 1 kHz to 10 kHz, 300 W peak	N/A	75 W AES, 1 kHz to 10 kHz, 300 W peak
HIGH FREQUENCY HORN:				
Type:	Optimized Aperture Flat-Front Bi-Radial®, die cast aluminum	Optimized Aperture Flat-Front Bi-Radial®	N/A	Optimized Aperture Flat-Front Bi-Radial®
ENCLOSURE:				
Flying System:	None	S.A.E.E. - JBL proprietary, modular, certified	S.A.E.E. - JBL proprietary, modular, certified	S.A.E.E. - JBL proprietary, modular, certified
Finish:	DuraFlex™ Black Textured Paint	DuraFlex™ Black Textured Paint	DuraFlex™ Black Textured Paint	DuraFlex™ Black Textured Paint
Grille:	16 ga. perforated steel, foam backed	16 ga. perforated steel, foam backed	16 ga. perforated steel, foam backed	16 ga. perforated steel, foam backed
Dimensions H x W x D:	4890A: 376 x 686 x 376 mm (14.8 x 27 x 14.8 in) 4891A: 470 x 394 x 559 mm (18.5 x 15.5 x 22 in)	628 x 394 x 362 mm (24 3/4 x 15 1/2 x 14 1/4 in)	1066 x 394 x 362 mm (42 x 15 1/2 x 14 1/4 in)	1066 x 394 x 362 mm (42 x 15 1/2 x 14 1/4 in)

<sup>1</sup>Half space measurement

<sup>2</sup>Recommended Power Amplifier ratings are a guide for amplifier selection considering normal program material and line voltage available to amplifiers, although lower power amplifiers may be utilized. The Array Series systems are capable of greater peak power input.

## ARRAY SERIES CONTROLLERS

	DSC260	DSC280
Frequency Response <sup>1</sup> :	20 Hz - 20 kHz (<+/- 0.5 dB)	15 Hz - 20 kHz $\pm 0.25$ dB
Configuration:	Mono 4, 5 and 6-way	2 Channels; 1, 2, 3, 4-way out
Inputs (Balanced):	2 Channels, +20 dBu max level 10 kOhms Electronically balanced XLR connectors	Analog: 2 Ch, Max level +20 dBu, Pin 2+ Digital Option, AES/EBU
Outputs (Balanced):	6 Channels, +10 dBu into 600 Ohms max level Electronically balanced XLR connectors	8 Bands, Max level 20 dBu, Pin 2+
Front Panel Controls:	Mute for each output band, Function, Parameter, Memory	Mute for each output band, Function, Parameter, Memory
Rear Panel Controls:		AC voltage selection, +10 dB input switch
Display:	2 x 16 character backlit LCD	LEDS for; meters, mute, switch enable, LCD screen for programming functions
Dynamic Range:	>100 dB	>105 dB
Total Harmonic Distortion:	<0.05%, 20 Hz-20 kHz, @+10 dBu	<.001%, 20- 20 kHz, @ +10 dBu
Nominal Gain:	-10 dB	0 dB (Unity Gain)
Limiters:	User adjustable threshold	User adjustable threshold
Sampling Rate:	46.875 kHz	48 kHz
Input/Output Converters:	20 bit	20 bit
Crossover Frequency:	1 kHz	1 kHz
Dimensions (H x W x D):	44.4 x 483 x 203 mm (1.75 x 19 x 8 in)	89 x 483 x 357 mm (3.5 x 19 x 14 in)
Weight:	2.8 kg (6.2 lbs)	6.8 kg (15 lbs)

<sup>1</sup>Equalization, infrasonic filters disabled

For detailed technical and architectural specifications, contact JBL Professional.



# ARRAY SERIES™ LOUDSPEAKER SYSTEM



JBL Professional  
8500 Balboa Boulevard, Northridge, CA 91329  
(818) 894-8850  
www.jblpro.com

A Harman International Company

CAT ARRAY 2000  
2/00/15M

©2000 JBL Professional

www.jblpro.com All Manuals Search And Download.



# The Array Series: Loudspeaker Systems That Reaffirm JBL's Commitment To Total Engineering.

## The Array Series Solution: A Compact, Flexible System For Professionals


Array Series is an optimized system which combines precision engineered transducers and advanced control technology for a level of performance second to none. Since its introduction these system products have found favor around the world in a wide variety of applications: musical theater, concert audio, corporate A/V rental work, dance music club installations and broadcast/film special event support, to name but a few.

### Optimized System Engineering

To optimize transducer integration, JBL engineers turned to advanced signal processing technology to assure smooth response and phase integrity. Crossover filters, transducer alignment, system equalization and protective limiting are implemented to be completely transparent, allowing the transducers to perform to their maximum potential. Available digital controllers offer the user a choice of features and performance to complement any installation or portable touring system.

### Low Frequency Transducer: Maximum Continuous SPL

The optimized Thermal Management System magnet structure substantially increases continuous power handling for greater total acoustic output and dynamic range compared to conventional designs.



## The Sum Of Its Parts

### Low Frequency Transducers

For Array Series, JBL engineers developed the first-ever neodymium-based pro audio low frequency transducer. This 335 mm (14 in.) device features an advanced magnet structure, used for high flux density and low overall weight. Harmonic distortion is reduced through the use of dual shorting rings (one aluminum and the other copper). Linearity is maintained, even at high-excursion extremes, with the use of a 100 mm (4 in.) diameter edgewound aluminum ribbon voice coil. The audible result is absolute clarity and definition in the bass/low mid frequency region.



JBL's exclusive VGCTM (Vented Gap Cooling) technology is part of an optimized Thermal Management System which makes efficient use of both forced air and convective cooling. Convection cooling is maximized by encasing the compact, powerful neodymium magnet within the diecast aluminum frame, engineered to act as a large, efficient heatsink. This design reduces thermal compression by as much as

60% compared to competitive products, allowing Array Series systems to deliver higher sound pressure levels at full dynamic range.

A glass fiber/paper composite cone is used to achieve a greater stiffness-to-weight ratio. The new cone formulation, along with its ribbed-wall geometry, greatly reduces distortion by minimizing cone break-up.

### High Frequency Compression Driver

Array Series products use a 38 mm (1 1/2 in.) exit compression driver that features a neodymium magnet assembly for maximum magnetic energy and minimal weight. A damped 100 mm (4 in.) diameter pure titanium diaphragm is positioned over JBL's Coherent Wave™ phasing plug for phase-correct summing at the exit throat.

### Optimized Aperture™ Bi-Radial® Horns

To achieve smooth, even dispersion at low distortion in both the horizontal and vertical planes, Optimized Aperture Flat-Front Bi-Radial horns were developed for Array Series systems. The family includes a 45° model with a uniform, narrow coverage pattern segment that combines well in arrays. 60° and 90° horns provide accurate, consistent coverage for non-arraying applications.



## Upgraded Enclosures Now Feature DuraFlex™


Long term enclosure durability is assured by 13-ply birch hardwood construction, proven joinery techniques and JBL's rugged DuraFlex™ exterior coating. Structural integrity is enhanced by internal steel braces which double as attachment points for S.A.F.E.™ flying hardware accessories. The enclosure's sidewalls taper at 22.5° angles, matching horn coverage angles for effective array construction.

For easy transport, two comfortable handles are installed on the side walls. The 4892A features a 35 mm (1 3/8 in.) pole mount cup on the bottom surface, for use with Tripod Speaker Stands. The grille is 16 gauge perforated steel, lined with open-cell reticulate foam to protect against moisture damage and dust. Input is through two paralleled 8-pole Speakon™ connectors, which access each transducer component individually.

## Advanced Control Electronics

Sophisticated control electronics allow Array Series transducers to perform to their maximum capability. Careful consideration has been given to the overall circuit topology of crossover filters, transducer alignment, system equalization and protective limiting.

The DSC260 provides cost-effective signal processing with simple setup. The DSC280 offers additional precision, flexibility

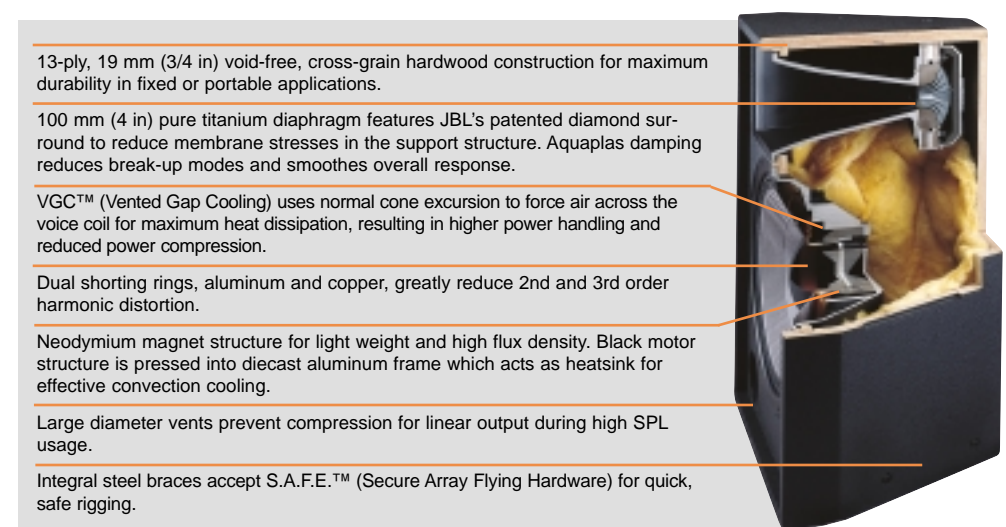

and user convenience available only in the digital domain. Either choice will provide superior, high level sound quality.

### DSC280



### DSC260



### S.A.F.E.™ Flying Hardware

An important aspect of Array Series is the ability to assemble loudspeaker

clusters quickly and with absolute safety. Designed, engineered and certified with a 6:1 safety factor, S.A.F.E. flying hardware easily meets and exceeds the most stringent safety requirements for sound system rigging. A complete line of hardware is available to allow cluster construction for any application.



## There's An Array System Designed For The Only Application That Matters- Yours.

### 4890A, 4891A

Two-Way Single 355 mm (14 in) Full Range System

These stage monitors use two configurations; vertical format for minimal footprint, and horizontal for minimal height to allow unobtrusive presence on stage. A 600 x 400 horn that rotates in the 4890A and 45° cabinet angles provide optimum coverage for any application. Linear response at high level satisfies even the most demanding artist.



### 4892A, 4892A-90

Two-Way Single 355 mm (14 in) Full Range System

These compact packages exhibit outstanding full range output and are capable of very high sound pressure levels. Both deliver impressive performance, the 4892A as a dedicated array component and the 4892A-90 for single system applications. A 35 mm (1 3/8 in) pole mount adapter is standard.



The 4892A, 4893A, & 4894A can be arrayed together making it possible to custom tailor clusters for virtually any desired coverage.

### 4894A, 4894A-90

Two-Way Dual 355 mm (14 in) Full Range System

In situations where greater low energy is required, the 4894A and 4894A-90 deliver. They are the ideal system choice for outdoor and larger venue applications where maximum sound pressure level is required without compromising fidelity. The 4894A can be used as an array element and for side fill applications. The 4894A-90 provides wider coverage from a single enclosure.



### 4893A

Dual 355 mm (14 in) Subwoofer System

Delivers sub-bass support for the Array Series full range systems. Its compact, solidly constructed enclosure houses two advanced VGC low frequency transducers for tight, solid and dynamic bass.



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>