



An allusion is a “hint,” a “reference.” The Allusion® Salon™ Spa bath is a true glimpse of the good life. With clean, contemporary, minimalist lines, the Allusion® family of products makes a striking statement — one that speaks to more than a hint of style.

FEATURES:

- Multi-speed motor
- 4 fully adjustable TheraPro™ jets
- 6 fully adjustable AccuPro™ jets
- 800 watt variable speed heated air blower
- Bottom air channels for maximum massage
- 256 color Chromatherapy lighting system
- Illumatherapy optional
- Drain-assist purge system
- Water-level sensor
- RapidHeat™ inline heater
- All-in-one electronic control panel
- PrO₃™ Sanitation System



**Allusion® 6636
SALON™ SPA with
CHROMATHERAPY**

MODEL NUMBER:
BK30

EXTERIOR DIMENSIONS:
66" long x 36" wide x
26" high

OF JETS/TYPE OF JETS:
4 TheraPro™ Jets
6 AccuPro™ Jets

OPERATING GALLONS:
65 gallons

**Allusion® 6636
SALON™ SPA with
ILLUMATHERAPY™**

MODEL NUMBER:
BT80

EXTERIOR DIMENSIONS:
66" long x 36" wide x
26" high

OF JETS/TYPE OF JETS:
4 TheraPro™ Jets
6 AccuPro™ Jets


OPERATING GALLONS:
65 gallons



Allusion® 6636 SALON™ SPA BATH

BK30	Allusion® 6636 Salon™ Spa Right Hand with Chromatherapy lighting
BT80	Allusion® 6636 Salon™ Spa Right Hand with Illumatherapy™ jet lighting

- Left and Right Drain Location
- Accessories / Hardware:
 - 4 X HTC Jet Rings Kit: #D095
- Trim Kit Finishes Available:
 - (827) – Chrome
 - (898) – Brushed Chrome
 - (815) – Satin Nickel
 - (829) – Bright Brass
 - (805) – Platinum
 - (826) – Brushed Nickel
 - (845) – Oil Rubbed Bronze

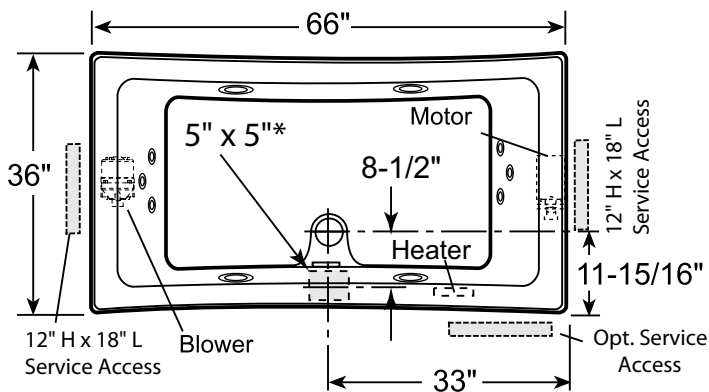

Product Shown: Allusion® 6636 Salon™ Spa Right Hand (BK30) Shown.

* Measurements inside unit represent cutout in floor to allow for drain/overflow.

Minimum Service Access dimensions given.

INSTALLATION NOTES

Refer to installation instructions included with fixture before beginning installation. Please confirm product availability and specifications before commencing with any installation work.

PRODUCT SPECIFICATIONS AND AVAILABILITY ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Technical Specifications

DIMENSIONS

66" L x 36" W x 26" H
(1829 mm) L x (914 mm) W x (660 mm) H

DRAIN/OVERFLOW

A: 17-3/8" (441 mm) B: 11-15/16" (210 mm)

CUTOUT

Template Provided Part Number: BY20000

TOTAL WEIGHT

881 lb (400 kg) / 53 lb/sq. ft. (261 kg/m²)

OPERATING GALLONAGE

65 U.S. Gal. (246 Liters)
Min. 55 U.S. Gal. (208 Liters)
Max. 75 U.S. Gal. (284 Liters)

PRODUCT WEIGHT

200 lb (91 kg)

SKIRT MOUNTING

Not Available

ELECTRICAL SPECIFICATIONS


All require a dedicated GFCI protected separate circuit(s).

Blower: 120VAC, 20AMP, 60 Hz.

Motor/Pump and RapidHeat™: 240VAC, 20AMP, 60 Hz.

HEATER (STANDARD)

RapidHeat™: P/N BN60000

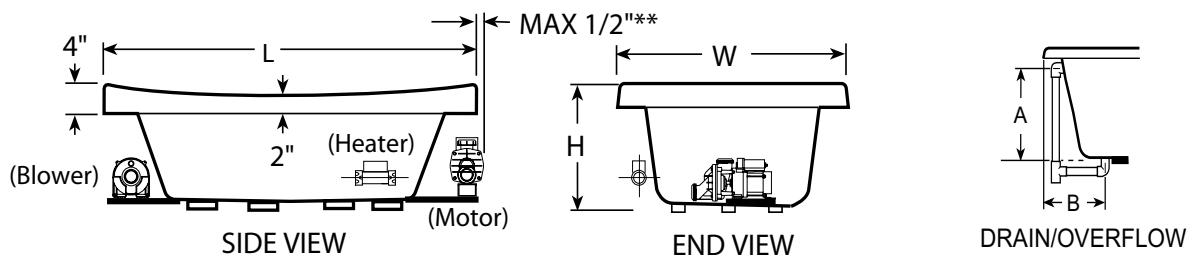

** See Install manual for installations instructions.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>