

# PLEASE READ THIS INFORMATION

Thank you for purchasing the Wireless Phone Jack System.

Enclosed you will find:

- 1 - Base unit (two phone connectors on the right side)
- 1 - Extension unit (single phone connector on the right side)
- 1 - Six-foot phone cord
- 1 - Owner's manual




**Note:**


- Do not plug base or extension unit into surge protectors, plug strips, extension cords, other AC-power extension devices or GFCI-protected outlets
- Phone connected to extension unit will not operate during a power failure
- Phone jacks can only be used for one phone line
- Follow installation procedure specifically as detailed in the owner's manual
- If you lose dial tone or a phone connection, unplug and reset your units as detailed in the Troubleshooting section on the next page


## EASY HOOK-UP

1. Plug the base unit (two phone connectors on right side) into an AC outlet; the indicator light on the base unit will illuminate red. Next, connect the base unit to an existing phone jack using six-foot phone cord (included); then connect the phone to the unused connector on the base unit.

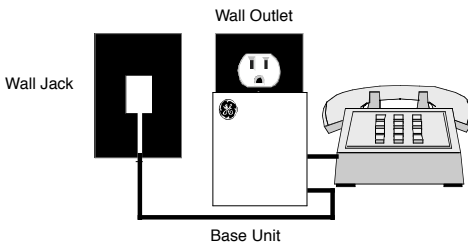

2. Plug the extension unit (single phone connector on right side) into an AC outlet where connection is needed. The indicator light on the extension unit will blink red. As soon as it recognizes the base unit, the indicator light will then illuminate green; the indicator light on the base unit will also illuminate green, after it recognizes the extension unit.



Trouble Shooting  
On Reverse Side 

# TROUBLE SHOOTING

Because you are using AC power lines for communication between units, you may experience no dial tone or a rapid beeping at the extension unit. You may also notice the indicator lights on your base and extension units remain solid red. Should this occur, try the following steps:

1. Unplug extension unit from AC outlet. Find an AC outlet near installed base unit. Unplug base unit, then plug it back into the same AC outlet. Next, plug extension unit into an AC outlet near base unit. Indicator lights on both units should be green. If they remain solid red, refer to next step.
2. Press and hold button on right side of base unit until the indicator light is solid red. (Approximately five seconds.) Release the button, then indicator light will blink orange. This creates a new link code and places base unit into program mode.
3. Press and release button on extension unit; indicator light will flash red, then turn solid green.
4. Press and release button on base unit to take it out of program mode. The indicator light will change from flashing orange to solid green.
5. Connect extension unit to desired device.



Again, this system uses AC power lines to communicate. Because of this, you may encounter static, buzzing or humming at certain AC outlets. If the noise is persistent, relocate the base and/or extension unit.

We are dedicated to quality customer service. If you experience unusual levels of noise or the performance of the Wireless Phone Jack System does not improve after following the above directions, **DO NOT RETURN THE SYSTEM TO THE STORE WHERE YOU PURCHASED IT**; please call the Customer Service Helpline at:

**1-800-654-8483**

Or visit our website at: [www.jascoproducts.com](http://www.jascoproducts.com).

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>