


MICROWAVE WALL OVEN COMBO

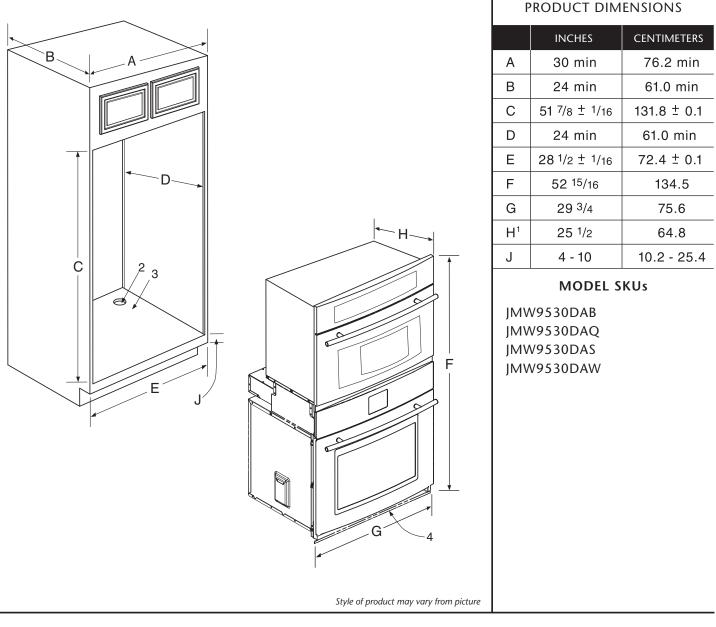

NOTES:

- 1. Excluding door handle.
- 2. 1 1/4" Diameter Conduit Access Hole. Hole must be cut as close to corner of cabinet as possible.
- 3. 5/8" plywood floor (must support 310 pounds).
- 4. Do not block air intake slots along bottom of oven.
- 5. Installed combo wall oven overlaps the cut out 15/16" (2.4 cm) at the top and 1/8" (.3 cm) at the bottom. This must be taken into consideration when locating cutout if installed unit is to be centered in the cabinet.
- 6. These appliances have been designed in accordance with the requirements of various safety agencies and comply with the maximum allowable wood cabinet temperatures of 194° F. If these appliances are installed with cabinets that have a lower working temperature than 194° F, discoloration, delamination or melting may occur.

Electrical requirements: Provide for 120/240 or 120/208 VAC, 60 Hz.

See serial plate on front of unit for power requirements

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com