

Stealthbox®

INSTALLATION GUIDE for the

SB-GM-SLVCTR2/10W3v3

2007 - Up Silverado, Sierra, Avalanche, Suburban, Tahoe, Yukon & Yukon XL
with Front Row 40/20/40 Split Bench Seating



Thank you for choosing a JL Audio Stealthbox® for your automotive sound system. With proper installation, your new vehicle-specific enclosed subwoofer system will deliver years of listening pleasure.

We strongly recommend that you have your new Stealthbox® installed by your authorized JL Audio dealer. The installation professionals employed by your dealer have the necessary tools and experience to disassemble and reassemble your vehicle properly. Also, keep in mind that your warranty coverage extends to 2 years if your system is installed or approved by your authorized JL Audio dealer. If you prefer to perform your own installation, please read this installation guide completely before beginning the process.

JL AUDIO®
Ahead of the Curve™

! IMPORTANT

If you choose to perform the installation yourself, it is absolutely vital that the Stealthbox® be properly mounted to the vehicle according to these instructions. Failure to mount the enclosure properly presents two problems:

- 1) The sub-bass performance will suffer due to the movement of the enclosure caused by the force exerted by the woofer(s).
- 2) A loose enclosure presents a serious safety hazard in the event of a collision or sudden deceleration.

INSTALLATION DIFFICULTY:

2 OUT OF 5

**ESTIMATED TIME:
1-2 HOURS**



STEP 1

Remove any contents from the front seat area.

Flip the center seat back / storage bin in the up position.



STEP 2

Move both front seats all the way forward.

From the passenger side of the vehicle, look to the side of the center seat back / storage bin.

Remove the black plastic push clip.

Remove the plastic trim.



STEP 3

From the driver's side of the vehicle, look to the side of the center seat back / storage bin.

Remove the bolt and plastic trim.

**STEP 4**

From the driver's side of the vehicle, look to the side of the center seat back / storage bin.

Use an hex key to remove the black bolt that secures the gray bracket to the center seat back / storage bin.

**STEP 5**

From the passenger's side of the vehicle, look to the side of the center seat back / storage bin.

Use an hex key to remove the black bolt that secures the gray bracket to the center seat back / storage bin.

**STEP 6**

Grab a hold of the bottom cushion and pull forward. Remove the bottom cushion from the vehicle.

**STEP 7**

Remove the plastic tray from vehicle.

**STEP 8**

Remove the four rear bolts that secure the seating to the floor.

**STEP 9**

Remove the four front nuts that secure the seating to the floor.

**STEP 10**

Run speaker wire from the amplifier location to the Stealthbox® location.

**STEP 11**

Slide the rear of the Stealthbox® into the mounting area first, then drop the front of the Stealthbox® into place.

**STEP 12**

Place the supplied lock washer and then flat washer onto the supplied bolt.

Tilt the seating back.

From under the center seat section, place the bolt assembly through a factory hole and into the threaded insert of the Stealthbox®. This hole can be viewed in **STEP 7**, circled.

Secure the bolt assembly to the Stealthbox®, do not over tighten.

**STEP 13**

We do not recommend the use of this center section to be used as a seat. You can remove the seat belt latch as an extra precaution.

**STEP 14**

Secure the bolts and nuts that were removed in **STEPS 8 & 9**.

Secure the plastic covers that were removed in **STEPS 2 & 3**.

**CONGRATULATIONS**

You have completed the installation for this model!

Please refer to the Power Recommendation section for an amplifier recommendation and basic set-up help.

INCLUDED HARDWARE

- (1) 3/8-inch -16 x 1-1/4-inch Hex Bolt
- (1) 3/8-inch Lock Washer
- (1) 3/8-inch Flat Washer

SPECIFICATIONS

Enclosure Type: Acoustic Suspension (sealed)

Driver Type: 10W3v3


Nominal Impedance: 4 ohms mono

Continuous Power Handling: 300 Watts

POWER RECOMMENDATION

JL Audio recommends using a high quality amplifier such as the JL Audio 250/1v2.

The diagram below shows the recommended crossover, infrasonic filter and equalizer settings for the 250/1v2 when being used to power your Stealthbox®.

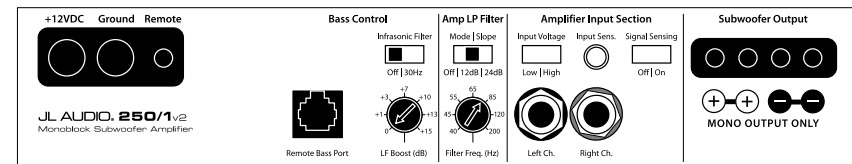

The JL Audio 250/1v2 is a very versatile audio component. Please consult the owner's manual for even more detailed information about installing and tuning this amplifier.

MID/HIGH FREQUENCY DRIVER FITMENT

A variety of JL Audio coaxial and component systems will fit in the factory speaker locations of your vehicle.

Front Speaker Size / Location: 6.5-inch / Front Doors

Fits JL Audio Models: TR650-CSi, TR650-CXi, VR650-CSi, VR650-CXi, XR650-CSi, XR650-CXi, C5650, C5-650x & ZR650-CSi

Rear Speaker Size / Location: 5.25-inch / Rear Door

Fits JL Audio Models: TR525-CXi, VR525-CSi, VR525-CXi, C5-525, C5-525x & ZR525-CSi



JL AUDIO®
Ahead of the Curve™

(954) 443-1100

www.jlaudio.com

All specifications are subject to change without notice. "JL Audio" and the JL Audio logo, "Stealthbox" and the Stealthbox logo are registered trademarks of JL Audio, Inc. "Ahead of the Curve" and its respective logo is a trademark of JL Audio, Inc.
JLA-SKU#011248-09-06-2067 • Printed in USA • ©2007 JL Audio, Inc. • U.S. PATENTS: #5,734,734 #5,949,898 #6,118,884 #6,229,902 #6,243,479 #6,294,959 #6,501,844 #6,496,590 #6,441,685 #5,687,247 #6,219,431 #6,625,292 #D472,891 #D480,709 Other U.S. & Foreign patents pending. For more detailed information please visit us online at www.jlaudio.com.



10369 NORTH COMMERCE PARKWAY • MIRAMAR, FLORIDA • 33025 • USA

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>