JVC

English

VIDEO CASSETTE PLAYER

HR-P500K/P100A

Thank you for purchasing this JVC video cassette player. To ensure optimum performance of this unit, please read this instruction manual thoroughly.

1 Features

- 3 system (PAI /MESECAM/NTSC)
- NTSC playback (on PAL television) • RF output G/K switchable
- · Digital auto tracking
- HQ (High Quality)
- Auto playback function
- Repeat playback
- Shuttle search
- Still and slow motion
- Line recording • Karaoke (HR-P500K only)

• B.E.S.T. (Biconditional Equalized Signal Tracking) picture system

Even when the video cassette player's power is off, pressing the eject button will ejected, the power will be turned off again automatically.


When a tape is loaded or elected the VCP video head is cleaned automatically.

Only cassettes marked "VHS" can be used with this video cassette player.

5 Wireless remote control

When using the remote control for operation of the video cassette player, make sure that it is pointed at the remote sensor window.

You can also use the player's remote control to operate a JVC television.



- 1 Transmitting windov
- TV/VCR (Player) button 2
- To switch JVC TV's mode between TV and VIDEO TV button 3
- To enable remote control of JVC TV. 4 AUTO button
- To enable/disable auto tracking mode SP/LP/EP(////) button To select the recording tape speed To select JVC TV's sounds.
- 「「(大)」「(TV Muting) button (5) To select output sound mode (HR-
- P500K only) • To mute the JVC TV volume. PLAY button 6
- To start playback
- REW << I button To rewind the video tape. Also to start
- verse shuttle search playback. STOP button (\mathbf{I})
- To stop playback
- 9 MENU button To accesse Mode Set screen.
- 1 ▲/▼ buttons To select the mode TV PR +/- buttons
 - To select a prest position.

2 Automatic features

- Auto power on The video cassette player is automatically turned on when the tape is inserted.
- Auto rewind The video tape is automatically rewound when the end of the tape is reached during the play, recording or shuttle search forward
- Auto playback
- If the video cassette's safety tab has been removed, playback will begin automatically when the tape is inserted into the video cassette player

Power off eject

turn the power on and eject the tape. Once Auto head cleaning

LPT0458-001A

(13)

- ① STANDBY/ON 心/I button
- To turn the power on and off (standby (12) TRACKING -/+ buttons
 - To adjust tracking during playback
- $0000/\times$ button To reset the tape counter
- (14) FF
- To fast forward the video tape. Also to start forward shuttle search playback. (1) II PAUSE button
- To freeze the picture during playback. Also to engage the recording pause mode.
- </► buttons 16
- To set the mode TV -+/- (TV Volume) buttons
- Fo adjust the TV volume (f) OK/OSD button
- To fix the setting.
- To display the information on the
- television's display. REC button (18)
- Press the REC and PLAY buttons together, to start recording

Operating JVC TVs Buttons with a small dot on the left side of the name can also be used to operate your JVC TV while holding down TV. To operate your TV, while holding down TV, press the corresponding button: 0/1. TV/ VCR, TV PR +/-, TV 🖂+/- (TV Volume), 띠/啾(TV Muting), //// (TV Sounds).

Notes:

- · Point the remote control toward the remote sensor window. The maximum operating distance of
- the remote control is about 8 m.

Note:

- When inserting the batteries, be sure to insert in the correct directions as indicated under the battery cover.
- If the remote control doesn't work properly, remove its batteries, wait a short time, replace the batteries and then try again.

3 Precautions

The rating plate and the safety caution are on the rear of the unit.

WARNING: DANGEROUS VOLTAGE IN-SIDE WARNING: TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS UNIT TO **BAIN OR MOISTURE.**

4 Controls

HR-P500K

HR-P100A

HR-P500K

HR-P100A

Connection B

AUDIO OUT terminals

τv

3

4

Download from Www.Somanuals.com. All Manuals Search And Download

Connection A (basic)

Rear panel

(1)

(13)

(1)

JVC

(1)

(1)

JVC

Front panel

The STANDBY/ON U/I button does not completely shut off mains power from the unit, but switches operating current on and off. This unit is produced to comply with Standard IEC 60065.

When the equipment is installed in a cabinet or a shelf, make sure that it has sufficient space on all sides to allow for ventilation (10 cm or more on both side, on top and at the rear.)

When discarding batteries, environmental problems must be considered and the local rules or laws governing the disposal of these batteries must be followed strictly

Failure to heed the following precautions may result in damage to the player, remote control or video cassette player.

- 1. DO NOT place the player ... in an environment prone to extreme temperatures or humidity in direct sunlight.
 - .. in a dusty environment.

 - . in an environment where strong magnetic fields are generated. . on a surface that is unstable or subject to vibration.
- 2. DO NOT block the player's ventilation openings or holes.

(If the ventilation openings or holes are blocked by a newspaper or cloth, etc., the heat may not be able to get out.)

- DO NOT place heavy objects on the player or remote control.
- 4. DO NOT place anything which might spill on top of the player or remote control. If water or liquid is allowed to enter this equipment, fire or electric shock may be caused.)
- 5. <u>DO NOT</u> expose the apparatus to dripping or splashing.
- 6. DO NOT use this equipment in a bathroom or places with water. Also DO NOT place any containers filled with water or liquids (such as cosmetics or medicines, flower vases, potted plants, cups, etc.) on top of this unit.
- DO NOT place any naked flame sources, such as lighted candles, on the apparatus.
- AVOID violent shocks to the player during transport.

Beware of moisture condensation

Moisture in the air will condense on the VCP when you move it from a cold place to a warm place, or under extremely humid conditions - just as water droplets form on the surface of a glass filled with cold liquid. Moisture condensation on the head drum will cause damage to the tape. In conditions where condensation may occur, keep the VCP's power turned on for a few hours to let the moisture dry.

When transporting

Be sure to remove cassette from VCP before packing. Avoid violent shocks to the VCP during packing and transport

6 On screen display

7 Connections

following connections.

When "O.S.D" is set to "ON" (See "9 Mode set"), various operational indicators appear on the TV screen

Make sure that the power to the video cassette player and TV is off before making the

If you put a TV set directly on this Video cassette player or install it too close to a TV set,

noise may occur. If this noise occurs, separate the Video cassette player and the TV set.

Tape speed SP/LP/EP

Colour system indicator


Tape position indicator

Cassette loaded mark

Audio mode display (HR-P500K only)


Tape direction

Counter display

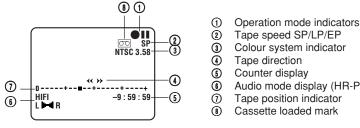

Connection A

Connection B

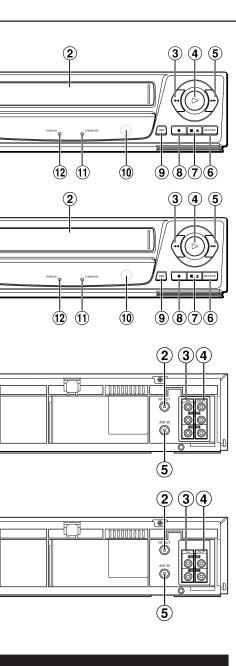

In order to use the video cassette player it must be connected between the antenna and the

Connect your TV antenna cable to the video cassette player's ANT. IN terminal.

Connect one end of the provided RF antenna cable to the video cassette player's RF. OUT terminal and the other end to the TV's antenna terminal

3 Connect the power cord to your household AC outlet.

For connection of a TV that has VIDEO/AUDIO IN/OUT terminals. This connection is necessary to record TV programmes. Use RCA type pin connection cords (available from audio/video stores) for connection. This connection is in addition to connection A.

Follow steps 1 and 2 of "Connection A".

O Connect the TV's VIDEO OUT and AUDIO OUT terminals to the video cassette player's VIDEO IN and AUDIO IN terminals.

Connect the TV's VIDEO IN and AUDIO IN terminals to the VCP's VIDEO OUT and

Connect the power cord to your household AC outlet.

Front panel

- ① STANDBY/ON Ů/I button
- To turn the power on and off (standby mode).
- (2) Cassette loading slot Load the video cassette here
- Rewind **4** button 3
- To rewind the video tape and to start reverse shuttle search playback mode.
- ④ Plav ⊳ button To start playback
- (5) Fast forward ►► button
- To fast forward the video tape and to start forward shuttle search playback mode. ⑥ SP / LP / EP button
- To select the recording tape speed.
- ⑦ Stop/Eject ■/▲ button To stop playback and to eject the video tape.
- (8) Record

 button To start recording
- ③ OSD button
- To display the information on the television's display
- ത Remote sensor window For remote control operation
- (1) STANDBY / REC indicator
- · Lights when the power turns off (Standby mode) or during recording mode. Blinks during recording pause mode
- 12 POWER-ON indicator
- Lights when the power turns on.
- (1) MIC input terminals (HR-P500K only)

Rear pane

- (1) AC power cord
- ② RF. OUT terminal
- ③ AUDIO/VIDEO IN terminals
- AUDIO/VIDEO OUT terminals
- (5) ANT. IN terminal
- The video cassette player illustrations appearing in this instruction manual are of the HR-P500K

8 Setting the video channel

To watch videos on your TV, it must be set to the same UHF channel as the video cassette player. This channel is used as the video channel This video cassette player has been preset to UHF channel 36.

• When you have connected the VIDEO/AUDIO OUT terminals of this video cassette player to your TV's video/audio in terminals (connection B of the "Connections" section), setting the video channel is not necessary. In this case simply set the TV's TV/VCR switch to VCR.

IMPORTANT:

Before performing the following steps, make sure the player's power is off and there is no cassette inserted in the player.

Access video channel set mode.

Hold down ■/▲ on the video cassette player until the both of POWER-ON and STANDBY/REC indicators light.

Set video channels. 2

- Set your TV to UHF channel 36. If the two vertical white bars appear clearly on the screen as shown in the illustration on the right, press OK and then go to step 3.
- If the two vertical white bars do not appear clearly, press TRACKING + or - to set the video cassette player to a vacant channel between 32 and 40 which is not occupied by any local station in your area.
- The mode indicators tell channel position. The indicators blink different speed by the channel position as shown on the right.


Press OK 3

- STANDBY/REC indicator goes off
- Set TV system. 4

Set "RF OUT" to "B/G" or "D/K". (See "9 Mode set")

-2912

indicator





The channel on which the screen to the left appear clearly in step 2 is your Video Channel.


To view picture signals from the video player, set your TV to the Video Channel


| СН | POWER-ON (green) | STANDBY/REC (red) | Blinking Speed |
|----|---------------------|----------------------|-------------------|
| 40 | - | blink | fast |
| 39 | - | blink | |
| 38 | - | blink | |
| 37 | - | blink | slow |
| 36 | light | light | - |
| 35 | blink | _ | slow |
| 34 | blink | - | |
| 33 | blink | _ | • |
| 32 | blink | _ | fast |

















9 Mode set

You can change various mode setting on the Mode Set screen by following procedure described below

Access the Mode Set screen. MIC MIN +---+-=-+ MAX ECHO 0 +---+=-+ 10 Press MENU. $2 \begin{array}{c} \text{Select the mode.} \\ \text{Press } \blacktriangle / \blacksquare \text{ to move the pointer to the item you want to change} \end{array}$ NTSC 3.58 B/G $[\blacktriangle/ \bigtriangledown] \rightarrow [\checkmark/ \triangleright]$ (MENU) : EXIT Select the mode setting. 3 Press ◀/► *"MIC" and "ECHO"appears Return to the normal screen. only with the HR-P500K. 4 Press MENU The defendence is the later term in the state of the later.

| | *The default setting is bold in the table below |
|---|---|
| ■MIC (HR-P500K only) | See "Karaoke features" below. |
| ■ECHO (HR-P500K only) | See "Karaoke features" below. |
| ■O.S.D. ON OFF | When the function is set to "ON", various operational indicators appear on the TV screen. NOTE: When you use this video cassette player as the source player for editing, be sure to set "O.S.D." to "OFF" before starting. |
| ■B.E.S.T. ON OFF | You can set the B.E.S.T.(Bicondional Equalized Signal Tracking) system to "ON" or "OFF". |
| ■NTSC NTSC3.58: Select this mode to watch NTSC tapes on a NTSC system TV. NTSC4.43: Select this mode to watch NTSC tapes on a multi-system TV. (that has an NTSC4.43 setting) Select NTSC4.43 to record 4.43 signal. NTSC→PAL: Select this mode to watch NTSC tapes on a PAL system TV. | To watch an NTSC tape, it will be necessary to select one of the output mode. NOTES: NTSC Playback on PAL TV The vertical size of the playback picture will shrink and some picture "noise" may appear on the screen. The playback picture may roll. In this case adjust the picture with the TV's vertical hold knob (with some TV's this adjustment may not be possible). The colour of the playback picture may differ from the original. In the forward/reverse shuttle search or still modes there may be no colour depending on the TV and video cassette player combination. |
| RFOUT B/G: New Zealand, Kuwait, U.A.E., Indonesia, Singapore, Thailand, Malaysia, Iran, Saudi Arabia D/K: Egypt, Morocco, Lebanon, | Set appropriate TV system that matches the system of TV being used. |

12 Karaoke features

Irag, China, Mongolia, Russia

Karaoke (HR-P500K only)

Use this feature to enjoy karaoke video. Connect a microphone to both MIC 1 and MIC 2 for duets.

Insert a pre-recorded Karaoke tape.

Press ►. 0

- Karaoke search You can search the desired tune by pressing </> The Karaoke search can be operated
- only when the mute section is more than 4 seconds between tune and tune.
- Adjust the MIC or ECHO volume as Press MENU to access the Mode Set screen then press $\blacktriangle/{\pmb{\nabla}}$ to select MIC or ECHO

Press ◄/► to adjust the MIC or ECHO volume. Press MENU to return normal screen.

Start singing. 4

Note

Check that the power is off (standby mode) before plugging in the microphone.

Soundtrack Selection (HR-P500K) only)

During Playback


Pressing 4/4 changes the soundtrack being played back as follows:



NTSC, PAL and MESECAM video tapes can be played back on this video cassette player. Refer to the "Mode Set" section for details

Before proceeding:

- Turn on the power of the TV and video cassette plaver. Make sure that the TV is set to the video
- channel or that the TV's TV/VIDEO switch is set to VIDEO (refer to the "Setting the video channel" section for details).



- Load a pre-recorded cassette. If the safety tab on the cassette is removed, playback will start automatically.
- Press ► to start playback. • "B.E.S.T. PICTURE SYSTEM" appears on the screen. (when B.E.S.T. is set to "ON". 3 "9 Mode set")
- Press ■/▲ or the remote control's to stop playback. Then press $\blacksquare / \triangleq$ to remove the cassette.
- To fast forward or rewind the tape: ■ From the stop mode, press ►► or

13 B.E.S.T. picture system

The B.E.S.T. (Biconditional Equalized Sig

nal Tracking) system checks the condition

of the tape in use during recording and

playback, and compensates to provide the

highest-possible recording and playback

pictures. The default setting for both

The video cassette player assesses the

quality of the tape once you initiate record-

■ The player spends approximately 7 sec-

The B.E.S.T. system works only after a

Once the cassette is ejected, the

recording, B.E.S.T. is re-performed.

B.E.S.T. data is cancelled.

tape has been inserted and the Record

mode is first initiated. It does not work

The next time the cassette is used for

onds assessing the condition of the tape.

recording and playback is "ON".

then begins recording.

during recording.

Recording

ina

ATTENTION:

Since the B.E.S.T. system works before recording actually starts, there is a delay of approximately 7 seconds after ● and ► on the remote are pressed, or on the player is pressed. To make sure you record the desired scene or programme in its entirely. first perform the following steps:

- 1 Press and hold and to engage the Record Pause mode. • The player then automatically check the condition of the tape
- and, after approximately 7 seconds. reenters Record Pause. 2 Press ► to start recording.
- If you want to bypass the B.E.S.T. system and begin recording im-mediately, set "B.E.S.T." to "OFF".

Playback

The video cassette player assesses the quality of the tape once you initiate playback. When watching a tape recorded with B.E.S.T. set to on, it is recommended that vou leave B.E.S.T. on during playback as

- The player adjusts the playback picture quality based on the quality of the tape
- B.E.S.T. is active during Auto Tracking.

Note:

When watching a rental tape, or one recorded on another video player, set B.E.S.T. to on or off to your preference.

Slow motion playback

Slow motion playback is 1/6 of the normal playback speed. The sound will be cut during slow motion playback.

During playback: Press II for 2 seconds.

■ Press ► to return to the normal play-

back speed.

- Notes · If the picture shakes during the slow mode. use TRACKING +/- to correct
- the picture. • After approx. 5 minutes, the slow mode will disengage to protect the video tape

Still picture and frame advance


Use this feature to freeze the playback picture and to advance one frame at a time. The sound will be cut during this mode.

During playback:

- Press II. The picture will be frozen.
- 2 Press repeatedly to advance frames.
- Each time the button is pressed the still picture will advance one frame.
- Press ► to resume normal playback. Notes:
- If the picture shakes during the still mode, use TRACKING +/- to correct the picture.
- After the picture has been frozen for approx. 5 minutes, the still mode will disengage to protect the video tape.

14 Editing

Editing To/From Another Recorde



- Connect the player's AUDIO and VIDEO OUT connectors to the recorder's AUDIO and VIDEO IN connectors
- Put the player in the Play mode. 2

3 Put the recorder in the Record mode. Notes

- NTSC tapes being played back in the NTSC PLAYBACK ON PAL TV mode cannot be dubbed to another recorder.
- When you dub an NTSC tape using your recorder as the playback deck, select NTSC 3.58 (or 4.43) with the Colour System Output switch.

Important:

To edit, both the player and the recorder must be of the same colour system. Set "NTSC" to appropriate mode. (See "9 Mode set")

Shuttle search playback

Use this feature during playback to visually locate any point on a recorded cassette The sound will be cut during shuttle search operation.

During playback:

Press **>>** or **<<** to engage shuttle search forward or reverse.

■ Press ► to resume normal playback.

For short searches, press and hold >> or When released, normal playback will continue.

Tracking adjustment

Automatic tracking is adjusted each time a cassette is inserted in the video cassette player, you may wish to adjust tracking manually during playback.

Manual tracking:

- Press the remote control's AUTO.
- Press the remote control's TRACK-∠ ING + or – to adjust tracking.
- Press AUTO to return to automatic tracking.

Counter reset

- Press OSD to show counter display on the screen.
- O Press 0000 to reset the counter.

15 Troubleshooting

| Problem | |
|--|-------------|
| No power | |
| Tape cannot be ejected | ۱ ۲ |
| No picture | |
| No colour | i |
| Shuttle search does not function | l r |
| Disturbances in playback picture | |
| Remote control does not function | F |
| Auto playback does not function | r |
| Recording does not function | / \ T |
| The video cassette player does not function properly | r r |

About Head cleaning

- been erased.
- this case, head cleaning requiring highly technical care is necessary.
- For head cleaning, consult the nearest JVC dealer.

Repeat playback

Use this feature to repeat playback of a cassette 100 times.

During playback:

- Press ► for more than 5 seconds. The Play indicator will blink slowly and playback of the cassette will repeat 100 times automatically.
- **⑦** Press to stop repeat playback. Tape playback will be stopped and the repeat playback mode will be cancelled.

Note:

Pressing ►, ◄◄, ►► or II also stops Repeat playback

Rewind playback or power off

When the tape has finished rewinding, the Video cassette player will play back or turn itself off.

During stop

- a- For Automatic Start Of Playback Press ◀◀, then press ► within 2 seconds.
- b- For Automatic Power Off
- Press **4**, then press 0/1 within 2 seconds.

ATTENTION:

In the search, still, slow-motion or frame advance mode,

- the picture will be distorted.
- the noise bars will appear.
- there will be loss of colour.
- the picture may not appear.
- However, this is not malfunction.
- These problems may occur especially with HR-P100A.

Check point

- Is the power cord plugged in?
- Is the power turned on?
- Was the video cassette player's ■/▲ button pressed?
- Is the TV set to the video channel?
- Is a cassette loaded?
- Are the connections correct?
- Set the Colour System Output switch according to the recorded tape system.
- Is the video cassette player in the playback node?
- Is tracking adjusted properly?
- Is the TV adjusted properly? Install this VCP a little way apart from the TV

The batteries are weak.

- Replace the batteries.
- The video cassette's recording safety tab has not been removed.
- Are the connections correct?
- Was the Record button pressed?
- The video cassette's recording safety tab is removed.
- Microcomputer malfunction
- Disconnect the power plug from the AC outlet and then re-insert it.
- The microcomputer will be reset to its initial mode.

■ If the picture playback becomes blurred, it does not mean that the recorded program has


Dirt accumulated on the video heads after long periods of use causes such troubles. In

11 Recording

Use the following procedure to record TV programmes on a blank video tape.

Before proceeding:

- To record TV programmes, the video cassette player must be connected to the TV as shown in connection B of the "Connections" section.
- Turn on the power of the TV and video cassette player
- Make sure that the video cassette's safety tab is intact. If it has been removed, cover the hole with adhesive tape.



- Load a blank video tape.
- Press SP/LP/EP(I/II) to set the re-C cording speed.
- Press
 to start recording. (On the remote control unit press ● and ► at the same time.)

The recording indicator will light during recording.

B.E.S.T. takes place at the beginning of each first SP and first LP (or EP) recording after inserting the cassette.

■ Press ■/▲ or the remote control's ■ to stop recording.

To stop recording temporarily:

- Press II. The recording indicator will blink.
- Press ► to resume recording.

Notes

- To engage recording standby, press and then press II. The STANDBY/REC indicator will blink during recording standby. Press ► again to start recording.
- If
 does not work, check to see if the cassette safety tab has been removed
- The player automatically stops when record-standby continues for more than 5 minutes.
- The video tape will be rewound automatically when the end of the tape is reached.

16 Specifications

| Format Video recording system Rotary heads | . Rotary, slant azimuth helical scan system |
|--|---|
| RF output | UHF ch 32 – 40 adjustable (preset ch 36) |
| Recording (line input) | . PAL, SECAM (MESECAM tape) NTSC 3.58, NTSC 4.43 |
| Playback (line output) | NTSC 3.58, NTSC 4.43 PAL, SECAM (MESECAM tape) NTSC 3.58 NTSC 4.43 Simulated PAL (NTSC tape) |
| Video | |
| Line input level Line output level S/N ratio Horizontal resolution | |
| Audio | More than 220 lines (N130) |
| Line output level | . –8 dBs/50 k ohms, unbalanced . –8 dBs/1 k ohm, unbalanced . 70 Hz to 10,000 Hz (Normal) [HR-P500K] |
| Power requirements | 20 Hz to 20,000 Hz (Hi-Fi audio) |
| Rating | . AC 110 V – 240 V, 50 Hz/60 Hz . AC 90 V – 260 V, 50 Hz/60 Hz |
| Power consumption | 14 W |
| | [HR-P100A] 13 W |
| Operation temperature Dimensions Weight | . 5°C to 40°C . 360 mm (W) × 94 mm (H) × 279 mm (D) |
| Standard accessories Remote control unit Batteries for remote control RF antenna cable Microphone (HR-P500K only) . Conversion plug | . 2 . 1 . 1 |

· Design and specifications subject to change without notice.



JVC

INSTRUCTIONS

English

VIDEO CASSETTE PLAYER

HR-P94K/P54A

Thank you for purchasing this JVC video cassette player. To ensure optimum performance of this unit, please read this instruction manual thoroughly.

1 Features

- 3 system (PAL/MESECAM/NTSC)
- NTSC playback (on PAL television) RF output G/K switchable
- Digital auto tracking
- HQ (High Quality)
- Auto playback function
- Repeat playback
- Shuttle search
- Still and slow motion
- Line recording
- Karaoke (HR-P94K only) B.E.S.T. (Biconditional Equalized Signal Tracking) picture system


When a tape is loaded or elected the VCF video head is cleaned automatically.

Only cassettes marked "VHS" can be used with this video cassette player

5 Wireless remote control

When using the remote control for operation of the video cassette player, make sure that it is pointed at the remote sensor window.

You can also use the player's remote control to operate a JVC television.



- 1 Transmitting window
- TV/VCR (Player) button 2 To switch JVC TV's mode between TV
- and VIDEO
- TV button (3) To enable remote control of JVC TV. (4) AUTO button
- To enable/disable auto tracking mode SP/LP/EP(////) button • To select the recording tape speed. To select JVC TV's sounds.
- (5) 「秋 (TV Muting) button • To select output sound mode (HR-
- P94K only). To mute the JVC TV volume.
- PLAY button (6) To start playback
- ന REW ┥ 🗹 button
- To rewind the video tape. Also to start reverse shuttle search playback.
- (8) STOP button Fo stop plavback
- 9 MENU button
- To accesse Mode Set screen. 10 ▲/▼ buttons

To select the mode TV PR +/- buttons To select a prest position.

The video cassette player is automatically turned on when the tape is inserted. Auto rewind

2 <u>Automatic fea</u>tures

The video tape is automatically rewound when the end of the tape is reached during the play, recording or shuttle search forward mode

Auto playback

Auto power on

If the video cassette's safety tab has been removed, playback will begin automatically when the tape is inserted into the video cassette player

Power off eject

Even when the video cassette player's power is off, pressing the eject button will turn the power on and eject the tape. Once ejected, the power will be turned off again automatically.

Auto head cleaning

LPT0457-001A

- (f) STANDBY/ON 心/I button To turn the power on and off (standby
- 12 TRACKING -/+ buttons To adjust tracking during playback.
- 0000/X button (13)
- To reset the tape counter 1 FF **>>** 🕑 button
- To fast forward the video tape. Also to start forward shuttle search playback.
- (15) PAUSE button To freeze the picture during playback Also to engage the recording pause
- ✓/> buttons 16
- To set the mode. TV - +/- (TV Volume) buttons To adjust the TV volume.
- **OK/OSD** button To fix the setting
- •To display the information on the
- television's display. REC button 18
- Press the REC and > PLAY buttons together, to start recording.

Operating JVC TVs

Buttons with a small dot on the left side of the name can also be used to operate your JVC TV while holding down **TV**. To operate your TV, while holding down TV press the corresponding button: U/I, TV/ VCR, TV PR +/-, TV -(TV Volume), 刘/砅(TV Muting), //// (TV Sounds).

Notes:

• Point the remote control toward the remote sensor window. • The maximum operating distance of

the remote control is about 8 m.

- When inserting the batteries, be sure to insert in the correct directions as indicated under the battery cover.
- If the remote control doesn't work properly remove its batteries, wait a short time, replace the batteries and then try again.

3 Precautions

The rating plate and the safety caution are on the rear of the unit

WARNING: DANGEROUS VOLTAGE IN-SIDE WARNING: TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THIS UNIT TO RAIN OR MOISTURE

| NAIL OK MOIOTOKE. |
|---|
| The STANDBY/ON $0/1$ button does not completely shut off mains power from the unit, but switches operating current on and off. |
| This unit is produced to comply with Standard IEC 60065. |
| |

When the equipment is installed in a cabinet or a shelf, make sure that it has sufficient space on all sides to allow for ventilation (10 cm or more on both side, on top and at the rear.)

When discarding batteries, environmental problems must be considered and the local rules or laws governing the disposal of these batteries must be followed strictly.

Failure to heed the following precautions may result in damage to the player, remote control or video cassette player.

- 1. DO NOT place the player . . .
 - in an environment prone to extreme temperatures or humidity. in direct sunlight.
 - . in a dusty environment.

 - . in an environment where strong magnetic fields are generated. . on a surface that is unstable or subject to vibration.
- 2. DO NOT block the player's ventilation openings or holes. (If the ventilation openings or holes are blocked by a newspaper or cloth, etc., the heat may
- not be able to get out.)
- DO NOT place heavy objects on the player or remote control.
- 4. <u>DO NOT</u> place anything which might spill on top of the player or remote control. If water or liquid is allowed to enter this equipment, fire or electric shock may be caused.)
- 5. <u>DO NOT</u> expose the apparatus to dripping or splashing.
- 6. DO NOT use this equipment in a bathroom or places with water. Also DO NOT place any containers filled with water or liquids (such as cosmetics or medicines, flower vases potted plants, cups, etc.) on top of this unit.
- 7. DO NOT place any naked flame sources, such as lighted candles, on the apparatus. 8. AVOID violent shocks to the player during transport.

Beware of moisture condensation

Moisture in the air will condense on the VCP when you move it from a cold place to a warm place, or under extremely humid conditions - just as water droplets form on the surface of a glass filled with cold liquid. Moisture condensation on the head drum will cause damage to the tape. In conditions where condensation may occur, keep the VCP's power turned on for a few hours to let the moisture dry

When transporting

Be sure to remove cassette from VCP before packing. Avoid violent shocks to the VCP during packing and transport

6 On screen display

When "O.S.D" is set to "ON" (See "9 Mode set"), various operational indicators appear on the TV screen.

Tape speed SP/LP/EP

Colour system indicator

Tape position indicator

Cassette loaded mark

Audio mode display (HR-P94K only)


Tape direction

Counter display


(1) ① Operation mode indicators SP NTSC 3.58 (2) -2 -3 ര (4) -4 6 +HIFI L I - R -(5) -9:59:59 ര 6

7 Connections

Make sure that the power to the video cassette player and TV is off before making the following connections

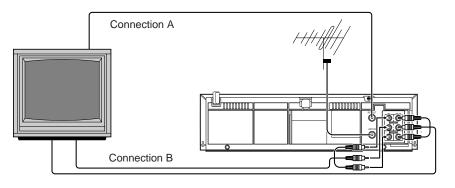

Note: If you put a TV set directly on this Video cassette player or install it too close to a TV set, noise may occur. If this noise occurs, separate the Video cassette player and the TV set

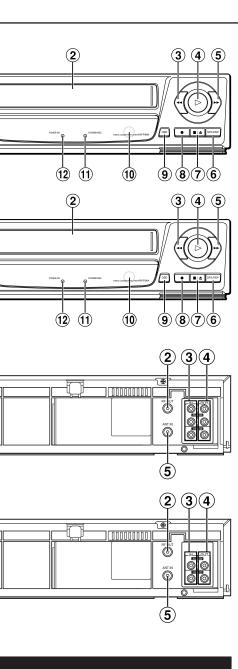

4 Controls

HR-P94K

HR-P54A

HR-P94K

HR-P54A

Connection B

AUDIO OUT terminals

TV/

3

Download from Www.Somanuals.com. All Manuals Search And Download

Connection A (basic)

Rear panel

(1)

(13)

1

JVC

(JANDRYJON

 $(\mathbf{1})$

1

JVC

Front panel

In order to use the video cassette player it must be connected between the antenna and the

Connect your TV antenna cable to the video cassette player's ANT. IN terminal.

Connect one end of the provided RF antenna cable to the video cassette player's RF. OUT terminal and the other end to the TV's antenna terminal

Connect the power cord to your household AC outlet.

For connection of a TV that has VIDEO/AUDIO IN/OUT terminals. This connection is necessary to record TV programmes. Use RCA type pin connection cords (available from audio/video stores) for connection. This connection is in addition to connection A.

Follow steps 1 and 2 of "Connection A".

Connect the TV's VIDEO OUT and AUDIO OUT terminals to the video cassette player's VIDEO IN and AUDIO IN terminals.

Connect the TV's VIDEO IN and AUDIO IN terminals to the VCP's VIDEO OUT and

4 Connect the power cord to your household AC outlet.

Front panel

- ① STANDBY/ON Ů/I button
- To turn the power on and off (standby mode).
- ② Cassette loading slot Load the video cassette here
- ③ Rewind ◄◄ button
- To rewind the video tape and to start reverse shuttle search plavback mode
- ④ Play ⊳ button To start playback
- ⑤ Fast forward ►► button
- To fast forward the video tape and to start forward shuttle search playback mode. 6 SP / LP / EP button
- To select the recording tape speed.
- ⑦ Stop/Eject ■/▲ button To stop playback and to eject the video tape.
- 8 Record

 button To start recording
- () OSD button
- To display the information on the television's display
- (ii) Remote sensor window For remote control operation
- (1) STANDBY / REC indicator
- Lights when the power turns off (Standby mode) or during recording mode. Blinks during recording pause mode.
- POWER-ON indicator
- Lights when the power turns on
- (1) MIC input terminals (HR-P94K only)

Rear panel

- ① AC power cord
- ② RF. OUT terminal
- ③ AUDIO/VIDEO IN terminals
- AUDIO/VIDEO OUT terminals
- (5) ANT. IN termina
- * The video cassette player illustrations appearing in this instruction manual are of the HR-P94K

8 Setting the video channel

To watch videos on your TV, it must be set to the same UHF channel as the video cassette player. This channel is used as the video channel.

This video cassette player has been preset to UHF channel 36.

Note:

 When you have connected the VIDEO/AUDIO OUT terminals of this video cassette player to your TV's video/audio in terminals (connection B of the "Connections" section), setting the video channel is not necessary. In this case simply set the TV's TV/VCR switch to VCR.

IMPORTANT:

Before performing the following steps, make sure the player's power is off and there is no cassette inserted in the player.

Access video channel set mode.

Hold down ■/▲ on the video cassette player until the both of POWER-ON and STANDBY/REC indicators light.

Set video channels. 2

- Set your TV to UHF channel 36. If the two vertical white bars appear clearly on the screen as shown in the illustration on the right, press OK and then go to step 3.
- If the two vertical white bars do not appear clearly, press TRACKING + or - to set the video cassette player to a vacant channel between 32 and 40 which is not occupied by any local station in vour area.
- The mode indicators tell chan nel position. The indicators blink different speed by the channel position as shown on the right.


3 Press OK.

- STANDBY/REC indicator goes off
- Set TV system. Δ

Set "RF OUT" to "B/G" or "D/K". (See "9 Mode set")



TEST SIGNAL




To view picture signals from the video player, set your TV to the Video Channel

| СН | POWER-ON (green) | STANDBY/REC (red) | Blinking Speed |
|----|---------------------|----------------------|-------------------|
| 40 | - | blink | fast |
| 39 | - | blink | |
| 38 | - | blink | |
| 37 | - | blink | slow |
| 36 | light | light | - |
| 35 | blink | - | slow |
| 34 | blink | - | |
| 33 | blink | _ | + |
| 32 | blink | - | fast |










9 Mode set

You can change various mode setting on the Mode Set screen by following procedure described below

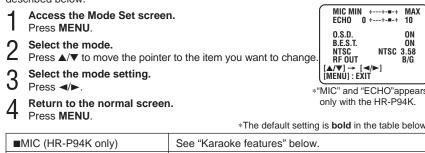

| ■MIC (HR-P94K only) | See "Karaoke features" below. |
|---|---|
| ■ECHO (HR-P94K only) | See "Karaoke features" below. |
| ■O.S.D ON OFF | When the function is set to "ON", various operational indicators appear on the TV screen. NOTE: When you use this video cassette player as the source player for editing, be sure to set "O.S.D" to "OFF" before starting. |
| ■B.E.S.T. ON OFF | You can set the B.E.S.T.(Bicondional Equalized Signal Tracking) system to "ON" or "OFF". |
| ■NTSC NTSC3.58: Select this mode to watch NTSC tapes on a NTSC system TV. NTSC4.43: Select this mode to watch NTSC tapes on a multi-system TV. (that has an NTSC4.43 setting) Select NTSC4.43 to record 4.43 signal. NTSC→PAL: Select this mode to watch NTSC tapes on a PAL system TV. | To watch an NTSC tape, it will be necessary to select one of the output mode. NOTES: NTSC Playback on PAL TV The vertical size of the playback picture will shrink and some picture "noise" may appear on the screen. The playback picture may roll. In this case adjust the picture with the TV's vertical hold knob (with some TV's this adjustment may not be possible). The colour of the playback picture may differ from the original. In the forward/reverse shuttle search or still modes there may be no colour depending on the TV and video cassette player combination. |
| RFOUT B/G: New Zealand, Kuwait, U.A.E., Indonesia, Singapore, Thailand, Malaysia, Iran, Saudi Arabia | Set appropriate TV system that matches the system of TV being used. |

12 Karaoke features

Karaoke (HR-P94K only)

D/K: Egypt, Morocco, Lebanon,

Irag, China, Mongolia, Russia

Use this feature to enjoy karaoke video. Connect a microphone to both MIC 1 and MIC 2 for duets.

Insert a pre-recorded Karaoke tape.

O Press ►.

Karaokesearch

You can search the desired tune by pressing </> The Karaoke search can be operated only when the mute section is more than

- 4 seconds between tune and tune.
- Adjust the MIC or ECHO volume as necessary. Press MENU to access the Mode Set screen then press \blacktriangle/∇ to select MIC

or ECHO volume. Press MENU to return normal screen.

4 Start singing.

Note

Check that the power is off (standby mode) before plugging in the microphone

Soundtrack Selection (HR-P94K only)

During Playback Pressing 4/4 changes the soundtrack being played back as follows:




10 Playback

NTSC, PAL and MESECAM video tapes can be played back on this video cassette player. Refer to the "Mode Set" section for details

Before proceeding:

- Turn on the power of the TV and video cassette plaver. Make sure that the TV is set to the video
- channel or that the TV's TV/VIDEO switch is set to VIDEO (refer to the "Setting the video channel" section for details)



- Load a pre-recorded cassette If the safety tab on the cassette is renoved, playback will start automatically.
- \bigcirc Press \blacktriangleright to start playback. • "B.E.S.T. PICTURE SYSTEM" appears on the screen. (when B.E.S.T. is set to "ON". 🐨 "9 Mode set")
- Press ■/▲ or the remote control's to stop playback. Then press ∎/▲ to remove the cassette.
- To fast forward or rewind the tape: ■ From the stop mode, press ►► or

13 B.E.S.T. picture system

The B.E.S.T. (Biconditional Equalized Sig-

nal Tracking) system checks the condition

of the tape in use during recording and

playback, and compensates to provide the

highest-possible recording and plavback

pictures. The default setting for both

The video cassette player assesses the

quality of the tape once you initiate record-

■ The player spends approximately 7 sec-

• The B.E.S.T. system works only after a

tape has been inserted and the Record

mode is first initiated. It does not work

Once the cassette is ejected, the

The next time the cassette is used for

recording, B.E.S.T. is re-performed.

onds assessing the condition of the tape.

recording and playback is "ON".

then begins recording.

during recording.

B.E.S.T. data is cancelled.

Recording

ing.

Notes

ATTENTION:

Since the B.E.S.T. system works before recording actually starts, there is a delay of approximately 7 seconds after ● and ► on the remote are pressed, or on the player is pressed. To make sure you record the desired scene or programme in its entirely, first perform the following steps:

- 1 Press and hold and to engage the Record Pause mode. • The player then automatically check the condition of the tape
- and, after approximately 7 seconds, reenters Record Pause. 2 Press ► to start recording.
- If you want to bypass the B.E.S.T. system and begin recording immediately.set "B.E.S.T." to "OFF"

Playback

The video cassette player assesses the quality of the tape once you initiate playback. When watching a tape recorded with B.E.S.T. set to on, it is recommended that you leave B.E.S.T. on during playback as well

- The player adjusts the playback picture quality based on the quality of the tape
- B.E.S.T. is active during Auto Tracking.

Note:

When watching a rental tape, or one recorded on another video player, set B.E.S.T. to on or off to your preference.

Slow motion playback

Slow motion playback is 1/6 of the normal playback speed. The sound will be cut during slow motion playback.

During playback:

- Press II for 2 seconds.
- Press >toreturntothenormalplay

backspeed.

Notes

- · If the picture shakes during the slow mode, use TRACKING +/- to correct the picture.
- After approx. 5 minutes, the slow mode will disengage to protect the video tape.

Still picture and frame advance

Use this feature to freeze the playback picture and to advance one frame at a time. The sound will be cut during this mode.

During playback:


- Press II. The picture will be frozen.
- 2 Press repeatedly to advance frames.
- Each time the button is pressed the still picture will advance one frame.

Press >toresumenormalplayback.

- Notes: If the picture shakes during the still mode, use TRACKING +/- to correct the picture.
- · After the picture has been frozen for approx. 5 minutes, the still mode will disengage to protect the video tape.

14 Editing

Editing To/From Another Recorder



- Connect the player's AUDIO and VIDEO OUT connectors to the recorder's AUDIO and VIDEO IN connectors
- Put the player in the Play mode
- 3 Put the recorder in the Record mode.

Notes:

- NTSC tapes being played back in the NTSC PLAYBACK ON PAL TV mode cannot be dubbed to another recorder.
- When you dub an NTSC tape using your recorder as the playback deck, select NTSC 3.58 (or 4.43) with the Colour System Output switch.

Important:

To edit both the player and the recorder must be of the same colour system. Set "NTSC" to appropriate mode. (See "9 Mode set")

Shuttle search playback

Use this feature during playback to visually locate any point on a recorded cassette The sound will be cut during shuttle search operation.

During playback:

Press **>>** or **<<** to engage shuttle search forward or reverse.

Press >toresumenormalplayback.

For short searches, press and hold >> or When released, normal playback will continue.

Tracking adjustment

Automatic tracking is adjusted each time a cassette is inserted in the video cassette player, you may wish to adjust tracking manually during playback.

Manual tracking:

- Press the remote control's AUTO.
- $2 \ \ \, \begin{array}{l} \mbox{Press the remote control's TRACK-} \\ \mbox{ING + or to adjust tracking.} \end{array} \\$
- PressAUTOtoreturntoautomatic tracking.

Counter reset


- Press OSD to show counter display on the screen.
- **9** Press 0000 to reset the counter.

15 Troubleshooting

| Problem |
|--|
| No power |
| Tape cannot be ejected |
| No picture |
| No colour |
| Shuttle search does not function |
| Disturbances in playback picture |
| Remote control does not function |
| Auto playback does not function |
| Recording does not function |
| The video cassette player does not function properly |

About Head cleaning

- been erased.
- For head cleaning, consult the nearest JVC dealer.



NTSC 3.58 B/G

Repeat playback

Use this feature to repeat playback of a cassette 100 times

During playback:

- Press ► for more than 5 seconds. The Play indicator will blink slowly and playback of the cassette will repeat 100 times automatically.
- 2 Press to stop repeat playback. Tape playback. Tape playback will be stopped and the
- repeat playback mode will be cancelled. Note:

Pressing ►, ◄◄, ►► or ∎ also stops Repeat playback

Rewind playback or power off

When the tape has finished rewinding, the Video cassette player will play back or turn itself off.

During stop:

- a- For Automatic Start Of Playback Press ◀◀, then press ► within 2 seconds.
- b- For Automatic Power Off

Press ◀◀, then press ⊕/I within 2 seconds.

ATTENTION.

In the search, still, slow-motion or frame advance mode,

- the picture will be distorted.
- the noise bars will appear.
- there will be loss of colour. the picture may not appear.
- However, this is not malfunction.

These problems may occur especially with HR-P54A.

Check point

Is the power cord plugged in?

- Is the power turned on?
- Was the video cassette player's ∎/▲ button pressed?
- Is the TV set to the video channel?
- Is a cassette loaded? Are the connections correct?
- Set the Colour System Output switch accord-
- ing to the recorded tape system. Is the video cassette player in the playback
- mode? Is tracking adjusted properly? Is the TV adjusted properly?

Install this VCP a little way apart from the TV set

The batteries are weak Replace the batteries.

- The video cassette's recording safety tab has not been removed.
- Are the connections correct?
- Was the Record button pressed?
- The video cassette's recording safety tab is removed.
- Microcomputer malfunction.
- Disconnect the power plug from the AC outlet and then re-insert it.
- The microcomputer will be reset to its initial mode

■ If the picture playback becomes blurred, it does not mean that the recorded program has


Dirt accumulated on the video heads after long periods of use causes such troubles. In this case, head cleaning requiring highly technical care is necessary.

11 Recording

Use the following procedure to record TV programmes on a blank video tape.

Before proceeding:

- To record TV programmes, the video cassette player must be connected to the TV as shown in connection B of the "Connections" section.
- Turn on the power of the TV and video cassette player
- Make sure that the video cassette's safety tab is intact. If it has been removed, cover the hole with adhesive tape.



- Load a blank video tape.
- **O** Press SP/LP/EP(////) to set the re-C cording speed.
- B Press to start recording. (On the remote control unit press and ► at the same time.)

The recording indicator will light during recording.

B.E.S.T. takes place at the beginning of each first SP and first LP (or EP) recording after inserting the cassette.

- Press ■/▲ortheremotecontrol's tostoprecordina.
- To stop recording temporarily: Press II.
- The recording indicator will blink. Press ► to resume recording.


Notes:

- To engage recording standby, press and then press II. The STANDBY/REC indicator will blink during recording standby. Press ► again to start recording.
- If
 does not work, check to see if the cassette safety tab has been removed.
- The player automatically stops when record-standby continues for more than 5 minutes.
- The video tape will be rewound automatically when the end of the tape is reached.

16 Specifications

| Rotary heads | Rotary, slant azimuth helical scan system |
|---|---|
| RF output | System B/G, D/K type modulation UHF ch 32 – 40 adjustable (preset ch 36) |
| Recording (line input) | PAL, SECAM (MESECAM tape) NTSC 3.58, NTSC 4.43 |
| Playback (line output) | PAL, SECAM (MESECAM tape) NTSC 3.58 NTSC 4.43 |
| Video | Simulated PAL (NTSC tape) |
| Line input level Line output level S/N ratio Horizontal resolution | More than 250 lines (PAL/MESECAM) |
| Audio | More than 220 lines (NTSC) |
| Line input level Line output level Frequency response | |
| Power requirements | 20112 to 20,000 112 (111-1 1 addio) |
| Rating | AC 110 V – 240 V, 50 Hz/60 Hz AC 90 V – 260 V, 50 Hz/60 Hz |
| Power consumption | 14 W [HR-P54A] |
| Operation temperature | 13 W 5°C to 40°C |
| | 360 mm (W) \times 94 mm (H) \times 279 mm (D) |
| Standard accessories Remote control unit Batteries for remote control RF antenna cable | 2 1 |
| Microphone (HR-P94K only) Design and specifications su | |
| Design and specifications still | IDIECLIO CUANDE WITHOUT NOTICE |

• Design and specifications subject to change without notice.



Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com