



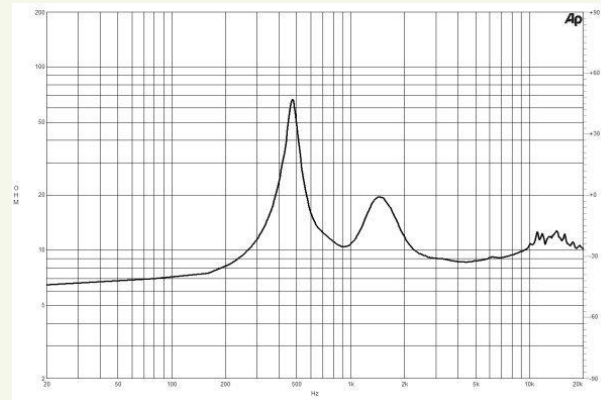

# DE800 | HF Drivers

220 W continuous program power capacity  
 1.4" horn throat diameter  
 75 mm (3 in) aluminium voice coil  
 Composite Polyimide/Titanium diaphragm  
 500 – 18000 Hz response  
 108 dB sensitivity  
 Neodymium magnet assembly with shorting copper cap

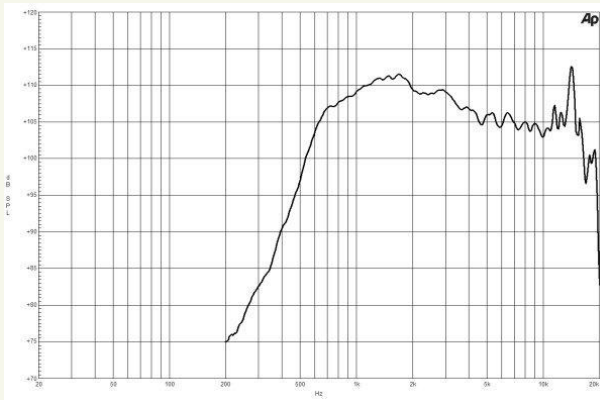

LF Drivers | Coaxials | HF Drivers | Horns

## Specifications

Throat Diameter (1)	36 mm (1.4 in)
Nominal Impedance (2)	8 ohm
Minimum Impedance	8.6 ohm
Nominal Power Handling (3)	110 W
Continuous Power Handling (4)	220 W
Sensitivity (1W/1m) (5)	108 dB
Frequency Range	0.5 -18 kHz
Recommended Crossover (6)	1.2 kHz
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Diaphragm Material	Composite Polyimide/Titanium
Flux Density	1.85 T

## Mounting and Shipping Info

Four M6 holes 90° on 102 mm (4 in) diameter	
Overall Diameter	124 mm (4.9 in)
Depth	56 mm (2.2 in)
Net Weight (1 unit)	2.3 kg (5.1 lb)
Shipping Weight (4 units)	9.8 kg (21.5 lb)
Shipping Box (4 units)	300x160x180 mm (11.8x6.3x7.1 in)

<sup>1</sup> Driver mounted on B&C ME90 horn

<sup>2</sup> Also available in 16 ohms, data upon request

<sup>3</sup> 2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance.

<sup>4</sup> Power on Continuous Program is defined as 3 dB greater than the Nominal rating.

<sup>5</sup> Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.

<sup>6</sup> 12 dB/oct. or higher slope high-pass filter.



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>