


CU-V602J

Be sure to consult your nearest JVC dealer when attaching the metal brace to the ceiling.

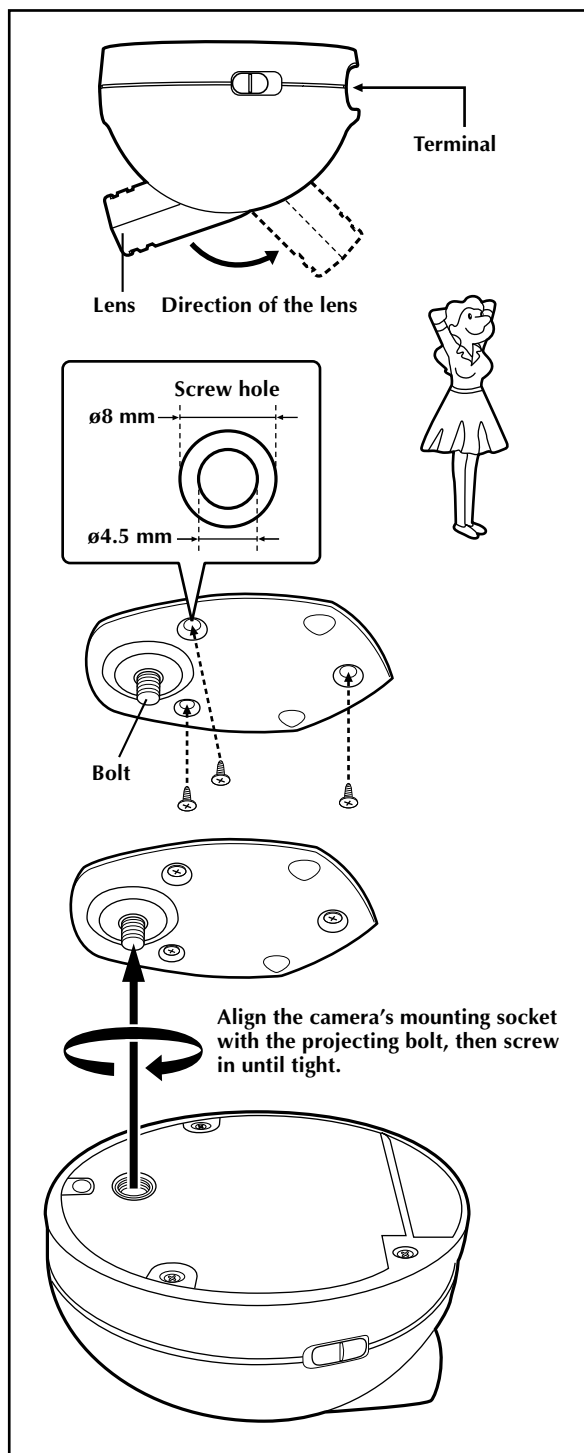

1. POSITION THE CAMERA LENS

Point the lens towards the side which has the video and audio output terminals.

2. CHECK THE METAL BRACE POSITION

Before attaching the metal brace to the ceiling, first attach the camera to the metal brace to check the correct metal brace position. If a desirable metal brace position is not possible, attach the provided spacer around the bolt projecting from the metal brace.

3. ATTACH THE METAL BRACE

Select a section of ceiling which is made of material which will enable screws to be securely tightened.

Place the metal brace on the ceiling so that the bolt projecting from it is positioned in the direction opposite of the camera lens.

Align the screw* with the hole located on the metal brace, and screw it into the ceiling. Repeat for all 3 screws*. Make sure that the metal brace is firmly attached to the ceiling.

* Use appropriate commercially available screws.

4. ATTACH THE CAMERA TO THE METAL BRACE

Align the camera's mounting socket with the bolt projecting from the metal brace. Then rotate the camera until the bolt is securely screwed into the mounting socket.

5. CONNECT THE CABLE TO THE CAMERA

Use the provided AC Power Adapter and AV cable (20 m). Make sure that the cord is firmly connected to the terminal.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>