# **JVC**



**Car Docking Kit** 

# **SIRIUS**

# KS-K6002/KS-K6001



**INSTALLATIONS** 

#### **INFORMATION (Only for KS-K6002)**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the manufacturer for compliance could void the user's authority to operate the equipment.

## Safety Precautions



#### WARNINGS:

Take the following precautions to prevent traffic accidents and avoid personal injury:


- Installation must be performed according to this installation manual. JVC is not responsible for issues arising from installations not performed according to the procedures in this manual.
- Do not install the unit where it may obstruct your view through the windshield or of your vehicle's indicator displays.
- Do not install the unit where it may hinder the function of safety devices such as an airbag.
   Doing so may prevent the airbag from functioning properly in the event of an accident.
- The installation and use suggestions contained in this manual are subject to any restrictions or limitations that may be imposed by applicable law—the purchaser should check applicable law for any restrictions or limitations before installing and/ or operating this unit.
- Failure to follow these safety instructions and warnings may result in a serious accident.



#### **CAUTIONS:**

Take the following precautions to keep the unit in proper working order:


- Be sure the unit is connected to a 12 V DC power supply with a negative ground connection.
- Do not install the unit where it will be exposed to high levels of humidity, moisture, or dust.
- When replacing a fuse in the cigarette lighter adapter, use only a new one with the proper rating.
   Using a fuse with the wrong rating may cause the unit to malfunction



- To prevent a short circuit when replacing a fuse, first unplug the cigarette lighter adapter from the cigarette lighter.
- When drilling holes to mount the unit, make sure not to damage wiring or other systems.

#### **Box Contents**

After you unpack your Car Docking Kit, make sure everything here is included:

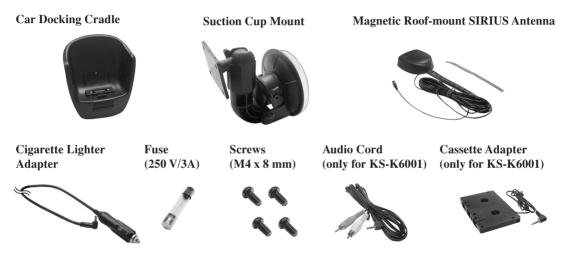

For the latest information about this and other JVC PnP products, visit the JVC Web site at <a href="http://www.jvcmobile.com">http://www.jvcmobile.com</a>. If anything is missing or damaged, or if your Car Docking Kit fails to operate, notify your shipper immediately. It is recommended that you keep the original packaging in case you need to ship your Car Docking Kit in the future.

## Installation in Your Car



### A CAUTION:

Do not put JVC PnP in the car docking cradle until you have completed the installation.

## 1 Determine where you want to mount JVC PnP.

- Do not install JVC PnP where it may obstruct your view through the windshield or your view of your car's indicator displays.
- Do not install JVC PnP where it will hinder your access to the car's controls.
- Do not install JVC PnP where it may hinder the function of safety devices such as an airbag.
   Doing so may prevent the airbag from functioning properly in the event of an accident.
- Find a location that provides good visibility of and access to JVC PnP's front panel.

## 2 Assemble the supplied suction cup mount to JVC PnP using the supplied screws.

• When using other screws, use the screws of less than 8 mm long with a diameter of 4 mm.



To be continued...

## Installation in Your Car (Continued)



## CAUTION:

Do not plug the cigarette lighter adapter into he cigarette lighter until you have completed the installation.

3 Plug the cigarette lighter adapter into the back of the cradle—DC 12V.





#### 4 For KS-K6001:

(LINE IN or AUX)...

Plug the cassette adapter into the back of the cradle—AUDIO OUT.





Only for KS-K6002: An optional hard-wired FM transmitter—FM Switching Box Assembly (Parts No. 112C3159) is available. By connecting this Assembly between the FM OUT terminal of the cradle and the antenna input terminal of your car stereo, you can obtain stable and reliable transmission/reception.

If your car stereo has a line input (LINE IN or AUX)...

Plug the supplied audio cord into the back of the cradle—AUDIO OUT.

• Plug the audio cable's white (L ch) and red (R ch) connectors into your car stereo.



#### 4 For KS-K6002:

Activate the FM signal transmitter (refer to page 24 of KT-SR1000' Instructions), and set the FM frequency output selector to select one of the following frequencies—88.1 MHz, 88.3 MHz, 88.5 MHz, and 88.7 MHz.



 It is recommended to preset the frequency selected by the FM frequency output selector into your car stereo so you can easily tune in to the frequency.

**Note:** You can also connect a cassette adapter or an audio cord (both not supplied) to the AUDIO OUT jack to send the singals to your car stereo.

## Finding the Best Antenna Mounting Location

1 Temporarily plug the antenna into the back of the cradle—SAT (MAIN) until it is firmly seated.



- 2 Find an antenna location on a metal surface of your car—at least 30 cm × 30 cm (12 inches × 12 inches), and at least 15 cm (6 inches) from a window.
  - The antenna's powerful magnet will secure it to the metal surface.
  - Best reception is achieved with the antenna mounted on the roof or trunk for convertibles.
  - If your car has a roof rack or skid ribs, it may be necessary to mount the antenna off-center.
- **3** Temporarily plug the cigarette lighter adapter into the cigarette lighter.

4 Slide JVC PnP all the way into the cradle so that the connector at the bottom of the unit makes proper contact in the cradle.



5 Press the () (POWER) button to turn on your JVC PnP.



- If your JVC PnP has been properly connected and the antenna is receiving the SIRIUS signal, you will hear audio.
- If your JVC PnP has not been properly connected, "Antenna Error" will appear on the display of your JVC PnP.
  - Re-orient the antenna until you hear audio (refer to "8 Antenna Aiming Options" on page 27 of the KT-SR1000 Instructions).
  - Make sure your car is not in garage, or somewhere the satellite signal could be blocked.

## Running the Antenna Cable

Before routing the antenna cable, confirm that the antenna is mounted in a good location.

1 Turn off your JVC PnP then remove it from the cradle.



2 Unplug the cigarette lighter adapter from the cigarette lighter and the antenna from the cradle.

3 Route the cable from the antenna into the trunk by tucking it underneath the rubber molding around rear window.



- Route the cable from the lowest point of the rear window. Take advantage of any existing cable channels or wiring conduits.
- For SUVs, minivans & 5-door vehicles, bring the cable into the car under the rubber molding for the tailgate, and continue under the interior trim.
- 4 From the trunk, route the cable around the passenger compartment and to the back of the cradle.



#### CAUTION:

- Do not pull the cable across sharp edges that could damage it.
- Do not route the cable nearby areas where it could become tangled in driver's and passenger's feet.

- Plug the antenna into the antenna into the back of the cradle—SAT (MAIN) until it is firmly seated.
- **6** Plug the cigarette lighter adapter into the cigarette lighter.
- 7 Attach the SIRIUS antenna to the metal surface of the car, such as roof of your car.
  - You can use the supplied double-side adhesive tape to attach the antenna cord firmly.



**Note:** It is strongly recommended to unplug the cigarette lighter adapter after you turn off the car ignition.



## http://www.jvcmobile.com

Visit us on-line for

Technical Support & Customer Satisfaction Survey.

US RESIDENTS ONLY

## Having TROUBLE with operation?

**USA ONLY** 

Call 1-800-252-5722

http://www.jvc.com We can help you!





## **Authorized Service Centers**



TOLL FREE: 1 (800) 252-5722 http://www.jvc.com

Dear Customer.

In order to receive the most satisfaction from your purchase, please read the instruction booklet before operating the unit. In the event that repairs are necessary, please call 1 (800) 252-5722 for your nearest authorized service location or visit our website at **www.JVC.com** 

Remember to retain your Bill of Sale for Warranty Service.

Do not attempt to service the product yourself -

#### Caution

To prevent electrical shock, do not open the cabinet. There are no user serviceable parts inside. Please refer to qualified service personnel for repairs.

#### **Accessories**

To purchase accessories for your JVC product, please call toll free: 1 (800) 252-5722 or visit us on the web at **www.JVC.com** 



#### LIMITED WARRANTY

**SRR ACCESSORIES** 

JVC COMPANY OF AMERICA warrants this accessory, except as set forth below ONLY TO THE ORIGINAL PURCHASER AT RETAIL to be FREE FROM DEFECTIVE MATERIALS AND WORKMANSHIP for a period of one (1) year from the date of the original retail purchase.

THIS LIMITED WARRANTY IS VALID ONLY IN THE FIFTY (50) UNITED STATES, THE DISTRICT OF COLUMBIA AND IN THE COMMONWEALTH OF PUERTO RICO.

#### WHAT WE WILL DO:

If this product is found to be defective within the warranty period, JVC will, at its option, either repair or replace the defective part(s) or replace the product with a new or refurbished functionally equivalent product.

#### WHAT YOU MUST DO FOR WARRANTY SERVICE:

<u>Please do not return your product to the retailer.</u> Instead, please return your product, transportation prepaid, to JVC's Repair/ Replacement facility. Please be sure to box the product carefully, preferably in the original packaging, and include a brief description of the problem(s).

The address of the Repair/Replacement facility is illustrated on our website, www.jvc.com or can be obtained by telephone at 800-252-5722.

PLEASE BE SURE TO INCLUDE A COPY OF YOUR BILL OF SALE

If you have any questions concerning your JVC Product, please contact our Customer Relations Department at (800)252-5722.

#### WHAT IS EXCLUDED:

The warranty does not cover:

- Products which have been subject to abuse, accident, alteration, modification, tampering, negligence, misuse, faulty
  installation, lack of reasonable care, or if repaired or serviced by anyone other than a service facility authorized by JVC
  to render such service, or if the model or serial number has been altered, tampered with, defaced or removed.
- 2. Initial installation and/or hook-up.
- 3. Operational adjustments covered in the Owner's Manual, normal maintenance.
- 4. Damage that occurs in shipment, due to act of God, and cosmetic damage.
- 5. Products used for commercial purposes (including but not limited to rental).
- 6. The elimination of externally generated static or noise or the correction of antenna problems.
- This warranty is void if the unit has been serviced by anyone other than a service facility authorized by JVC to render such service

There are no express warranties except as listed above.

#### AFTER THE WARRANTY:

Please contact JVC's Customer Relations Department at (800) 252-5722 to obtain the cost of out of warranty repair or replacement.

THE DURATION OF ANY IMPLIED WARRANTIES, INCLUDING THE IMPLIED WARRANTY OF MERCHANTABILITY, IS LIMITED TO THE DURATION OF THE EXPRESS WARRANTY HEREIN.

JVC SHALL NOT BE LIABLE FOR ANY LOSS OF USE OF THE PRODUCT, INCONVENIENCE, OR ANY OTHER DAMAGES, WHETHER DIRECT, INCIDENTAL OR CONSEQUENTAL (INCLUDING, WITHOUT LIMITATION, DAMAGE TO TAPES, RECORDS OR DISCS) RESULTING FROM THE USE OF THIS PRODUCT, OR ARISING OUT OF ANY BREACH OF THIS WARRANTY. ALL EXPRESS AND IMPLIED WARRANTIES, INCLUDING THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSE, ARE LIMITED TO THE WARRANTY PERIOD SET FORTH ABOVE.

Some states do not allow the exclusion of incidental or consequential damages or limitations on how long an implied warranty lasts, so these limitations or exclusions may not apply to you. This warranty gives you specific legal rights and you may also have other rights which vary from state to state.

JVC COMPANY OF AMERICA
DIVISION OF JVC AMERICAS CORP.

1700 Valley Road Wayne, New Jersey 07470

http://www.jvc.com

For	customer	use:
-----	----------	------

Enter below the Model No. and Serial No. which is located either on the rear, bottom or side of the cabinet. Retain this information for future reference.		
Model No.:	Serial No.:	
Purchase Date :	Name Of Dealer :	

Download from Www.Somanuals.com. All Manuals Search And Download.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com