



## SUBWOOFER SYSTEM 5.1 CHANNEL

# JS-P802

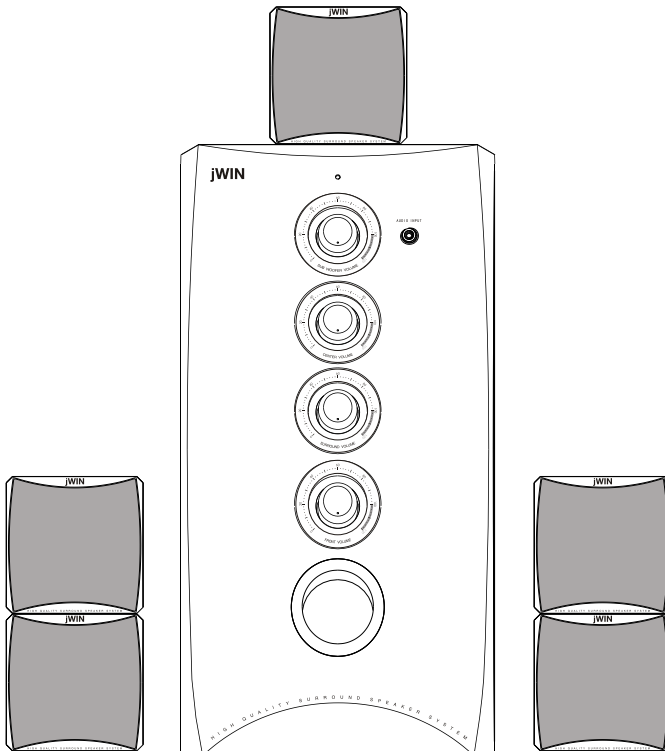

## COMPOSITION

Wooden cabinet for sub-woofer -----	1PC
Plastic cabinet for center -----	1PC
Plastic cabinet for satellite -----	4PCS
Link cable for front -----	2PC(1.8m)
Link cable for center -----	1PC(1.8m)
Link cable for surround -----	2PC(5m)
Input cable -----	3PCS
Instruction manual -----	1PC

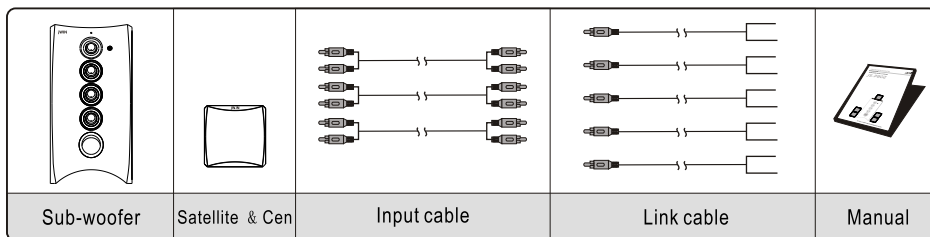

## SPECIFICATIONS

Output power: subwoofer: 35 W

Front: 15W\*2

Center: 15W\*1

Surround: 15W\*2

Impedance : 4 OHM

Drive unit : subwoofer: 5"

Front: 3"

Center: 3"

Surround: 3"

frequency response: 30Hz-20KHz

separation of satellite: 45dB

S/N: 60dB

Power supply: ~AC 110V/220V 60Hz/50Hz

## **INTRODUCTION**

### **HOME THEATRE SYSTEM**

#### **Active Sub-woofer With Satellite Speakers**

#### **Operating Manual**

#### **Congratulations On Your Purchase!**

Your new Home Theater System with active Sub-woofer is designed to deliver maximum Enjoyment ,Please take a few minutes to read this manual thoroughly. It will explain the features and operation of your unit and help to ensure a trouble-free installation.

#### **Unpacking and installation**

Please unpack your unit carefully ,We recommend that you save the carton and packing material ,They will be helpful if you ever need to move your unit or send it for service . To avoid damage , never place the unit near radiators, in front of heating vents, in direct sunlight, in excessively humid places, or near water.

#### **For your safety**

When disconnecting the AC power cord, pull the power plug, Never tug on the cord by itself. Never handle the AC power plug with wet hands, as this can cause fire or electric shock, Avoid overloading the AC power plugs and extension cords beyond their capacity, as this can cause fire, when not in use, unplug the AC power cord from the AC power outlet if the unit will not be used for several months or more.

#### **Damage requiring service**

Do not attempt to repair the unit by yourself , it should be done by a qualified service technician.

#### **Caution**

To reduce the risk of electric shock, do not remove front or back cover . If this unit is used at high volumes, the area around the heat sink will become very hot. Do not touch this area, or allow anything to block the ventilation. Keep the sub-woofer box dry and allow enough space for ventilation. Do not put vases or other articles on it.

## INTRODUCTION

### Warning

To prevent fire or shock hazard, do not expose the unit to rain or moisture.

### Before connecting the AC cord

Check that the degree of voltage shown on the rear panel matches your local voltage.  
Adjust the power voltage under your local voltage by the button on the back panel.




The symbol means that the product is double insulated and you do not need an earth connection.



This symbol means that this product keeps to the european safety and electrical interference directives.

**CONNECTION**

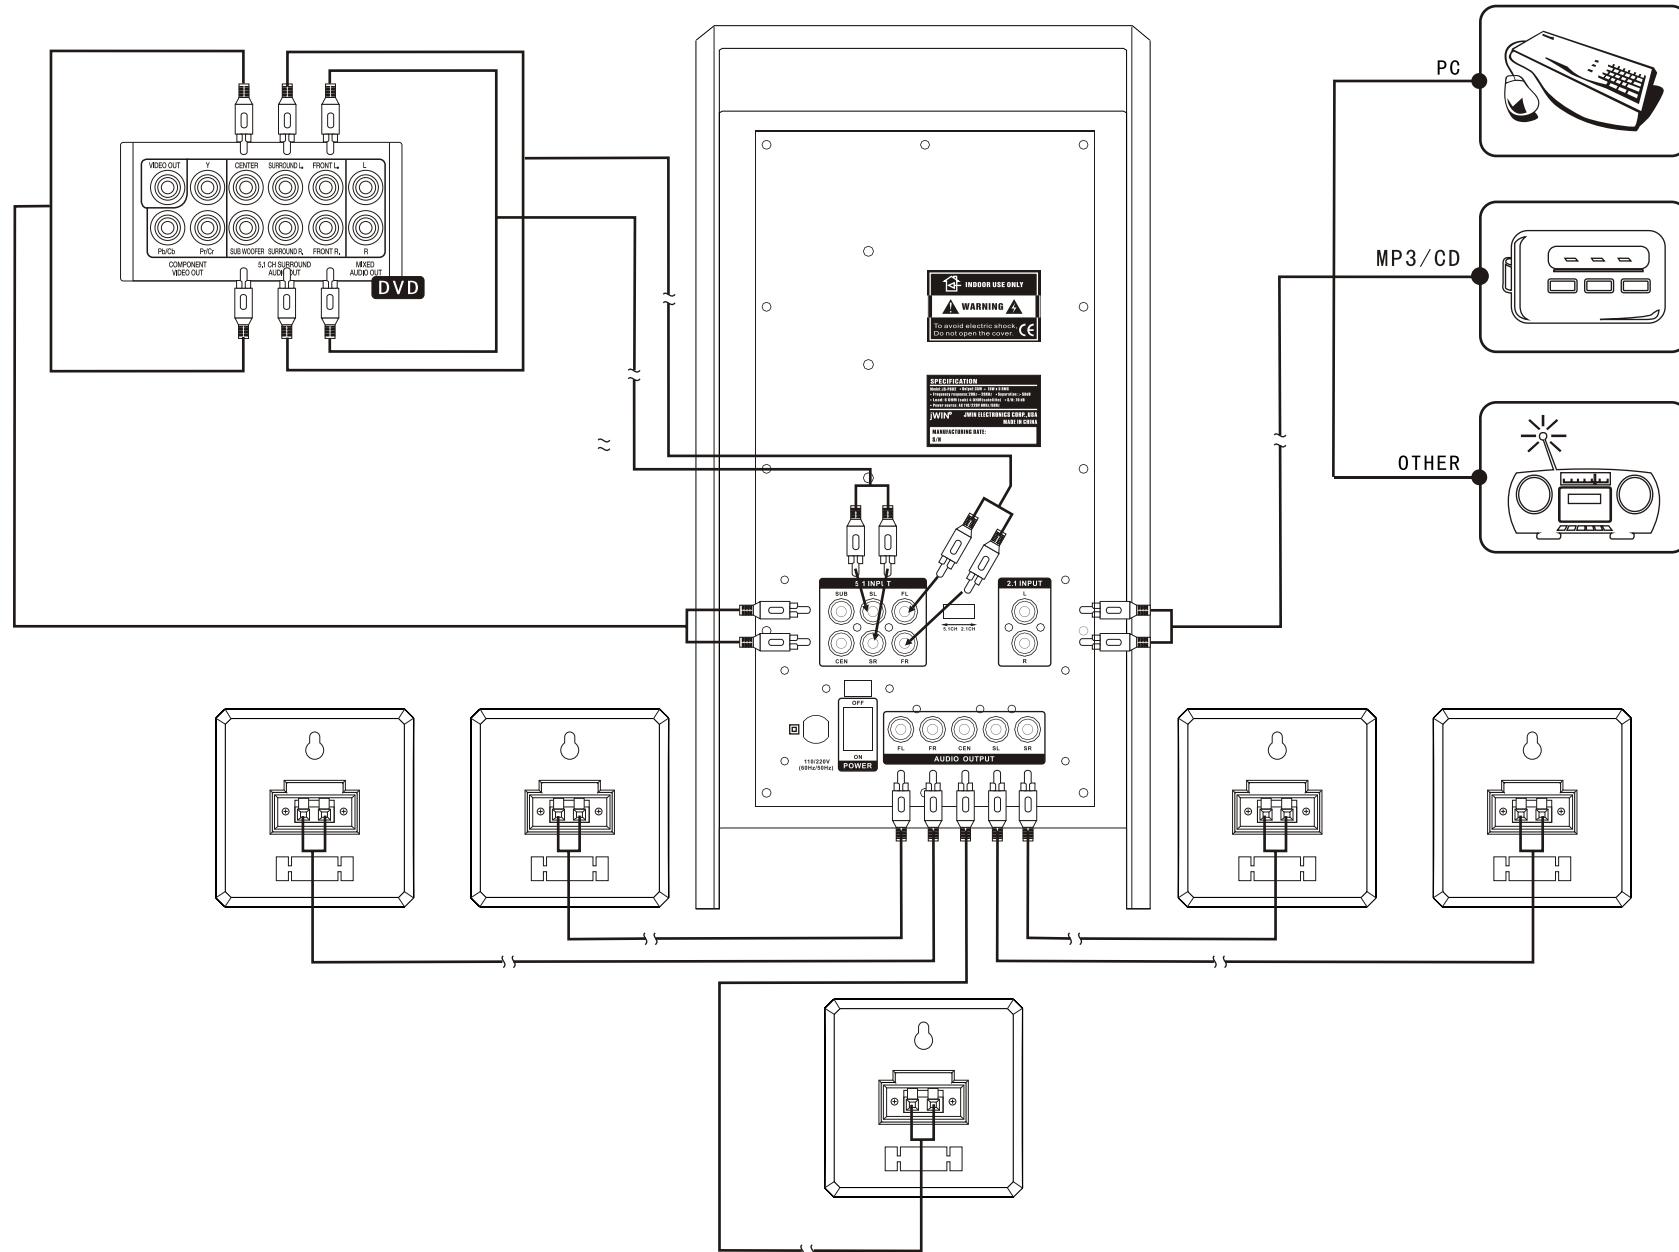

## CONNECTING EQUIPMENT

Jacks and plugs of the connecting cord color-coded as follows:

Red jacks and plugs: For the right channel of audio signals

White jack and plugs: For the left channel of audio signals

### NOTE

Insert the plugs fully into the jacks, Loose connections may produce a humming sound or other noise interference

### IMPORTANT

Connect the speakers and all other external equipment and lastly connect the AC power cord.

## CONNECTING +TO+, -TO- TERMINALS

To get the proper sound effect, the speaker terminals on the unit and the speaker should be connected with proper polarity the + terminal on the unit should be connected to the + terminal on the speaker (and to-)

Improper connections can cause short circuits in the speaker(s) terminals.

### NOTE

Do not leave objects generating magnetism near the speakers.

### NOTE

DTS surrounddol by prologic and dol by digital surround depends on DVD player or any one coder. This speaker system is providing 5.1 virtual surround effect.

## OPERATING GUIDE .

### Power-on


(Be sure to check the connections before you power on your system)

1. Adjust all buttons to their minimum or lowest setting
2. Press Power on the back panel.
3. Adjust the front and center volume, the surround volume and the bass volume by tuning the appropriate Buttons until you reach your desired effect.

### Source in put

This function could ensure the shift of audio, You may choose each mode of 5.1.S.Vol and 2.1 by 5.1-2.1 Button on the back panel.

## FUNCTION

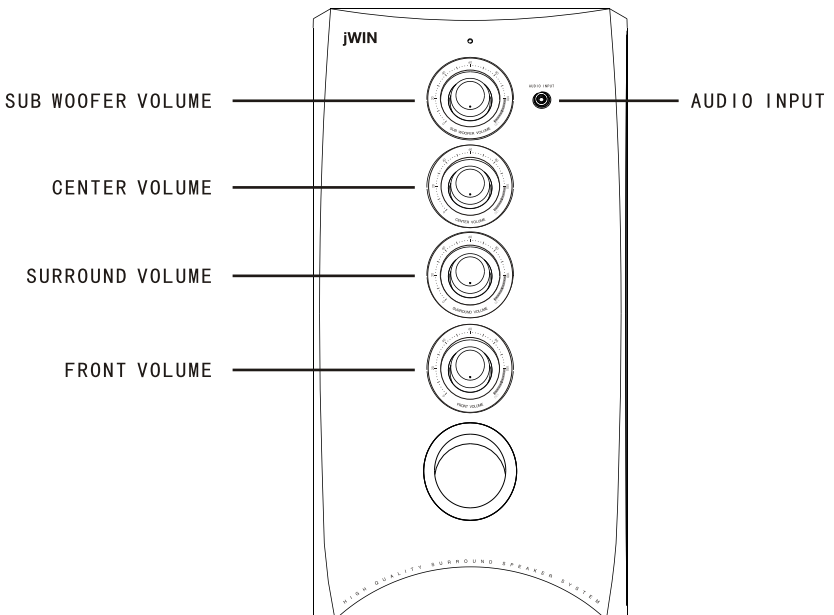





## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>