


**P-touch**  
ELECTRONIC LABELING SYSTEM  
**1280**  
**USER'S GUIDE**  
English / Español  
www.brother.com  
LN963001  
Printed in China

# 1 PREPARATION

## Unpacking Your P-touch Labeler


Check that the package contains the followings before using your P-touch labeler.

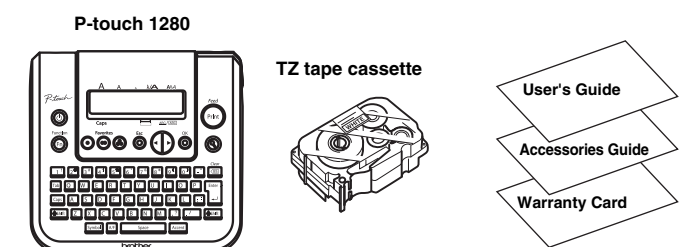


Included items may differ by distribution.

## Power Supply & Tape Cassettes


- Open the back cover by pressing in the rough area at the top end of the machine. If a tape cassette is already installed, remove it by pulling it straight up. Also, if batteries are already installed, remove them. Make sure that the power is turned off when replacing batteries or tape cassette.



- Insert six new AAA-size alkaline batteries (LR03), making sure that their poles point in the correct directions. Always replace all six batteries at the same time using brand new ones.




- Insert a tape cassette, making sure that it snaps into place.

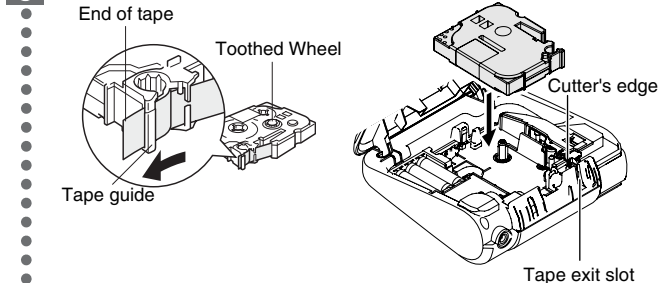


- Make sure that the end of the tape feeds under the tape guides.
- If the ink ribbon is loose, use your finger to wind the toothed wheel in the direction of the arrow on the cassette.
- Use only Brother TZ tapes with this machine.

- Securely close the back cover, making sure that it snaps into place. After you have installed the tape, feed the tape (see Feeding) once and then push in the tape cutter lever to cut the tape.




When using optional AC adapter (model AD-30/AD-24)

- Insert the plug on the adapter cord into the adapter jack on the top end of the machine.
  - Insert the plug into the nearest standard electrical outlet.
- For memory back up, we recommend using AAA-size alkaline batteries (LR03) together when using the AC adapter.



# 2 OPERATION

## Keyboard & LCD

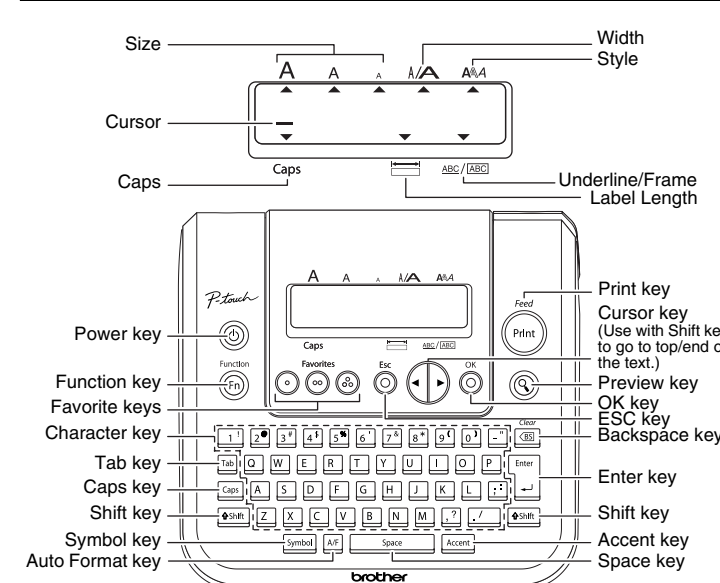


The LCD shows one row of 15 characters; however, the text that you enter can be up to 80 characters in length.

## Initial Setting

- Start your machine**  
Supply power by using six AAA batteries or the optional AC adapter, and then press **ON**.
- Set the language (English/Spanish/French/Portuguese)**  
Press **Language** and use the arrow keys to select a language, then press **OK**.
- Set the unit (inch/mm)**  
Press **Unit** and use the arrow keys to select a unit, then press **OK**.

- The machine automatically turns off if no key is pressed within 5 minutes.
- To cancel operations, press **ESC**.
- To initialize the settings, turn off the machine and then while holding down **ESC** and **ON**, press **ON** to turn the machine back on. Finally, release **ESC** and **ON**.

## Creating Labels

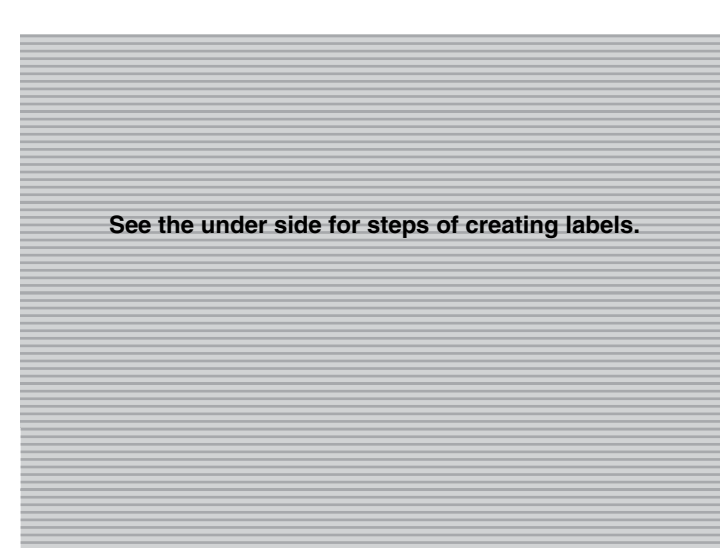

# 3 REFERENCE

## Troubleshooting

Message	Cause/Remedy
Battery Weak!	The batteries are weak.
Check Battery!	The installed batteries are about to run out.
Invalid!	<ul style="list-style-type: none"> <li>There is no text above the cursor when you set Numbering.</li> <li>Invalid character is selected for Numbering.</li> <li>Invalid number is selected for Tab Length or Label Length.</li> </ul>
No Text!	<ul style="list-style-type: none"> <li>You tried to print a text file when there is no data stored in the memory.</li> <li>The Print key is pressed when no text is entered.</li> <li>You tried to set Copies, Numbering or Mirror when no text is entered.</li> </ul>
Line Limit!	<ul style="list-style-type: none"> <li>You tried to enter a 3rd line by pressing Enter key.</li> <li>You tried to print a 2 line text when 9/64" (3.5mm) or 1/4" (6mm) tape is installed.</li> </ul>
No Cassette!	You tried to print a label when there is no cassette installed.
Cutter Error!	Tape cutter lever is used in the middle of printing process.
Full!	The maximum number of characters (80 characters) have already been entered.
Text Too Long!	The text length exceeds the selected label length or the selected Auto Format setting length.
No Frame OK?	Printing on 9/64" (3.5 mm) tape with invalid Frame setting ON. (Select <b>OFF</b> to print with no Frame, <b>ON</b> to cancel.)

## What to do when...

Problem	Solution
The display stays blank after you have turned on the machine.	<ul style="list-style-type: none"> <li>Check that the batteries are correctly inserted.</li> <li>If the batteries are weak, replace them.</li> <li>Check that the AD-30/AD-24 adapter is correctly connected.</li> </ul>
The machine does not print, or the printed characters are blurred.	<ul style="list-style-type: none"> <li>Check that the tape cassette has been inserted correctly.</li> <li>If the tape cassette is empty, replace it.</li> </ul>
The printed characters are not formed properly.	The batteries may be weak. Replace them.
The memory has cleared on its own.	The batteries may be weak. Replace them.
A blank horizontal line appears through the printed label.	<ul style="list-style-type: none"> <li>There may be some dust on the print head. Remove the tape cassette and use a dry cotton swab to gently wipe the print head with an up-and-down motion.</li> <li>The print head can be cleaned more easily if the optional print head cleaning cassette (TZ-CL3) is used.</li> </ul>
The machine has "locked up" (i.e., nothing happens when a key is pressed, even though the machine is on).	<ul style="list-style-type: none"> <li>Turn off the machine, and then while holding down <b>ESC</b> and <b>ON</b>, press <b>ON</b> to turn the machine back on.</li> <li>Finally, release <b>ESC</b> and <b>ON</b>.</li> <li>Note: The text and formats in the display and all text files stored in the memory are erased. Also, the language and unit settings will be cleared.</li> </ul>

## Specifications

Item	Specification
Dimensions	6.4" (W) x 6.0" (D) x 2.4" (H) (160 mm (W) x 151 mm (D) x 60 mm (H))
Weight	1.03 lbs. (470 g) (without batteries and tape cassette)
Power supply	Six AAA-size alkaline batteries (LR03) or optional AC adapter (model AD-30/AD-24)
Tape cassette	Brother TZ tape (width) : 9/64" (3.5 mm), 1/4" (6 mm), 3/8" (9 mm), 1/2" (12 mm)

## Accessories (Supplies may differ by distribution.)

Accessories	Stock No.
Tape Cassettes	See the attached "Supplies and Accessories Guide".
AC Adapter	model AD-30/AD-24
Cutter Unit	TC-5 (replacement)
Carrying Case	CC1000

If the cutter blade becomes blunt after repetitive use and the tape cannot be cut cleanly, replace with new cutter unit (stock no. TC-5) by obtaining from an authorized brother reseller.

## INTRODUCTION

With your PT-1280, you can create labels for any application. Select from the many frames, character sizes and styles to design beautiful custom labels. In addition, the variety of tape cartridges available allows you to print labels with different widths and exciting colors.

Read this manual carefully before starting and keep the manual in a handy place for future reference.

### FCC NOTICE

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:


- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.
- Changes or modifications not expressly approved by Brother Industries, Ltd. could void the user's authority to operate the equipment.

## GENERAL PRECAUTIONS

- Use only Brother TZ tapes with this machine. Do not use tapes that do not have the **TZ** mark.
- Do not clean the machine with alcohol or other organic solvents. Only use a soft, dry cloth.
- Do not touch the print head mechanism. Use a soft wipe (e.g. a cotton swab) when cleaning the print head.
- To avoid injuries, do not touch the cutter's edge.
- To prevent damage or breakage of the glass, do not press hard on the LCD display.
- Do not put any foreign objects into or heavy objects on the machine.
- Do not leave any rubber or vinyl on the machine for an extended period of time, otherwise the machine may be stained.
- Do not get the machine wet, such as by touching with wet hands or spilling beverages on to the machine.
- Do not expose the machine to extremely high temperatures or high humidity. Never leave it on the dashboard, in the back of your car, near heaters or other hot appliances. Keep it out of both direct sunlight and rain.
- Avoid using the machine in extremely dusty places.
- Do not pull on the tape being fed from the P-touch labeler, otherwise the tape cassette may be damaged.
- Do not attempt to cut the tape while printing or feeding since this will damage the tape.
- Do not try to print labels using an empty tape cassette set in the P-touch labeler. Doing so will damage the print head.
- Remove the batteries and disconnect the AC adapter if you do not intend to use the machine for an extended period of time. (Note: When power is disconnected for more than three minutes, all text shown in the display and any text files stored in the memory will be lost. Language and unit settings will also be cleared.)
- Do not use old and new batteries together or mix alkaline batteries with other type batteries, or set the positive and negative end in the wrong position. Otherwise, the batteries may leak or be damaged.
- Use only the AC adapter designed exclusively for this machine to prevent any damage or failure.


# 2 DESIGNING LABELS

## Setting [Size]

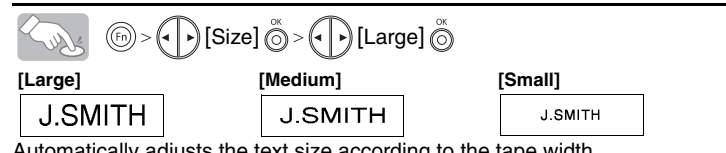


Automatically adjusts the text size according to the tape width.


## Setting [Width]

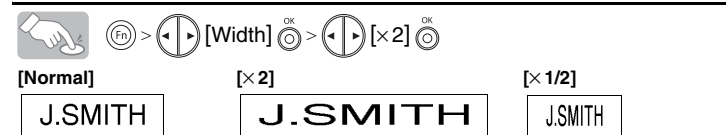


## Setting [Style] (Vertical)

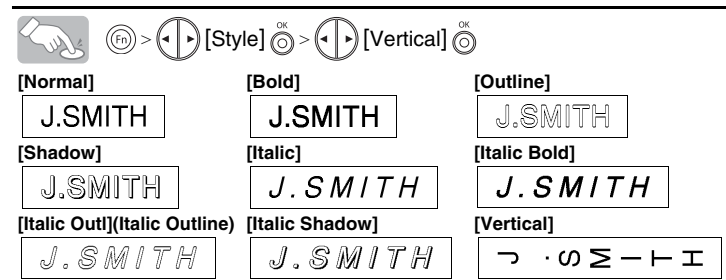


## Setting [Underline/Frame]

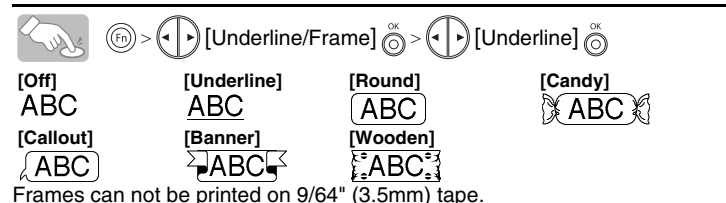


## Setting [Tab]

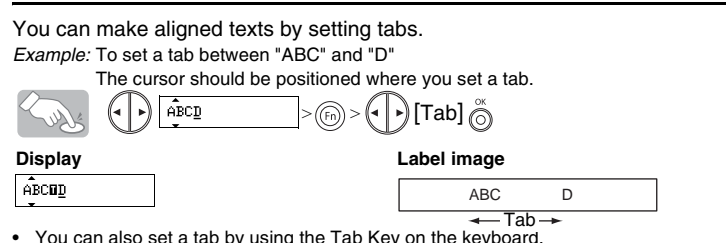

## Setting [Tab Length] (Auto / 0.0" - 4.0")



## Setting [Label Length] (Auto / 1.2" - 12.0")



## Setting [Auto Format]

You can choose label length from six formats to create labels for various applications.

Application	Length	Application	Length
VHS Spine	5.5"	CD Case Spine	4.4"
MiniDV Spine	1.6"	File Tab	3.2"
Audio Tape	3.5"	Divider Tab	1.6"

# 3 PRINTING LABELS

## Text Preview

- You can preview the text before printing.
- The LCD shows the whole text and the label length (inch/mm), then returns to the original text.
  - Only the text can be previewed, not the font, style, size, underline/frame or any additional features.


## Feeding (Tape Feed)




## Printing

- To cut off the label, push in the tape cutter lever on the upper-right corner of the machine.
- To prevent damage to the tape, do not try to cut while the message "Print" or "Feed" is displayed.


## Setting [Margin] (Tape Margin)

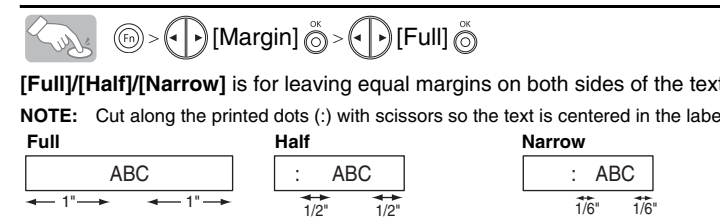

[Chain Print] is for printing more than 1 copy of a label with minimum margin <e.g. 1>. You can also create a label containing texts in various styles; print a text in one style, and before feeding, enter the second text in another style <e.g. 2>.


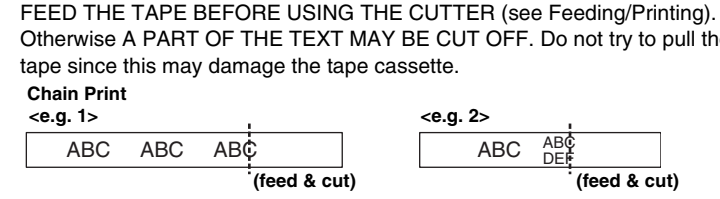


## Using [Print Option]

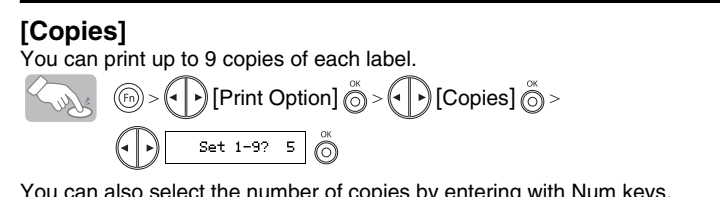


You can print many copies of the same text while increasing a selected number by 1 after each label is printed.

Example: To print copies of a label containing a serial number (0123, 0124 and 0125)



Use clear tape in [Mirror], so the labels can be read correctly from the opposite side when attached on glass, windows or other transparent surfaces.

# 4 COMPLETED LABELS

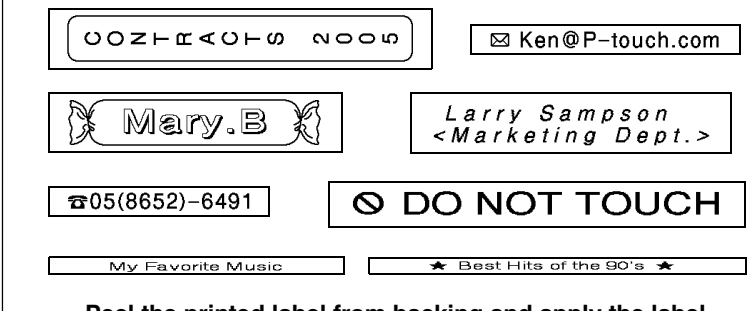

## USEFUL FUNCTIONS

### Memory (Favorites)

You can save and print your favorite label in seconds at the touch of a button. There are three Favorite Keys (F1 - F3) to store your three favorite labels

To Save: Press **F1** -> **Save** (F1) to store the label.

To Print: Press **F1** -> **Print** (F1) to print the label.

To Open: Press **F1** -> **Open** (F1) to open the label.

When the saved text contains more than 8 characters, use **Left Arrow** to scroll through the text.

### Function Shortcuts

In addition to the basic steps to search for a function, PT-1280 provides you with function shortcuts so you can easily jump to a frequently used function just by pressing **Function Key** and the shortcut key shown in the table below. To confirm, press **OK**.

Key	Function	Key	Function
[Size]	[Size]	[Tab Length]	[Tab Length]
[Width]	[Width]	[Label Length]	[Label Length]
[Style]	[Style]	[Auto Format]	[Auto Format]
[Underline/Frame]	[Underline/Frame]	[Margin]	[Margin]
[Tab]	[Tab]	[Print Option]	[Print Option]

Should you encounter any problems with your product, please do not return your product to the store!


After referring to the User's guide, if you still need assistance, call Brother Customer Service at:

Voice : 1-877-4-PTOUCH  
Web : www.brother.com  
Fax : 1-901-379-1210


If you need to locate a service center, please call 1-800-284-HELP or visit us at www.brother.com

# 1 MAKING TEXT

## Switching Upper Case/Lower Case

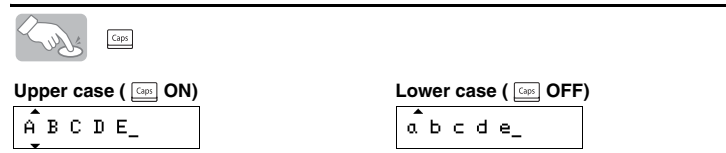

## Making Two Line Text

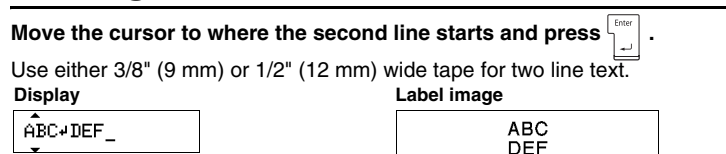

## Entering Symbols

Group	Symbols	Group	Symbols
1	. , : ; ' " ' .	7	\$ % € £ ¥ °
2	@ - & * _ \ /	8	² ³ ³ ★ ● ○
3	# % ? ! ' ¨ i *	9	↓ ~ = = = = μ Ω
4	+ - × ÷ ± =	10	☹ ☹ ☹ ☹ ☹ ☹ ☹
5	( ) [ ] < >	11	☎ ☎ ☎ ☎ ☎ ☎ ☎
6	→ ← ↑ ↓		

- To go to the next group, press **Next**.
- To cancel operations, press **ESC**.

## Entering Accented Characters

Accented Characters	Accented Characters
A A A A A A A A A A	a ä å ä å æ ø å ä å ä å
C C C C	c ç c c
D D D	d d' ð ð
E E E E E E E E	e é è ê ë ð ð ð ð
G G G	g ú ú
I I I I I I I I	i i i i i i i i
K K	k k
L L L L L L	l l l l l l l l
N N N N N	n ñ ñ ñ ñ
O O O O O O O O	o ö ö ö ö ö ö ö ö
R R R R	r r' r' r'
S S S S S	s š š š š
T T T T T	t t' t' t'
U U U U U U U U	u ú ú ú ú ú ú ú
Y Y Y Y	y ý ý ý
Z Z Z Z	z ž ž ž


- To cancel operations, press **ESC**.
- The order of accented characters differ by the selected LCD language.

## To Clear

By pressing the Backspace Key, the letters will be deleted one by one.

All text and settings will be cleared.



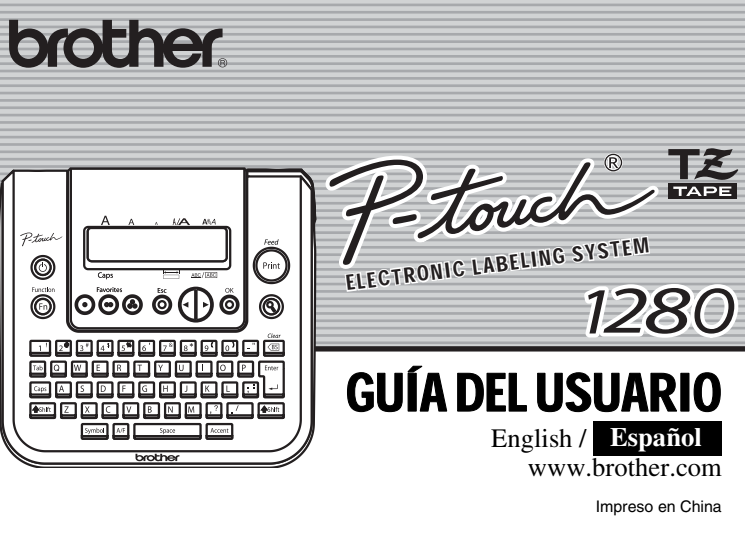

# GUÍA DEL USUARIO


Este dispositivo cumple la parte 15 de las normas de la FCC. Su funcionamiento está sujeto a las siguientes condiciones: (1) este dispositivo no puede causar interferencias nocivas y (2) este dispositivo debe aceptar todas las interferencias recibidas, incluidas aquellas que puedan causar un funcionamiento no deseado.

## PRECAUCIONES GENERALES

- Utilice solamente cintas TZ de Brother con esta máquina. No utilice cintas que no tengan la marca TZ.
No limpie la máquina con alcohol o cualquier otro disolvente orgánico.
No toque el mecanismo del cabezal de impresión.
No introduzca objetos extraños dentro de la máquina ni ponga objetos pesados sobre la máquina.

# 1 PREPARACIÓN


## Desembalaje de la P-touch

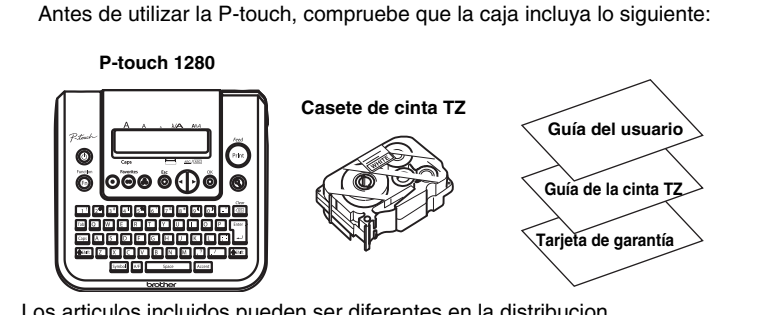


Los artículos incluidos pueden ser diferentes en la distribución.

## Fuente de alimentación y casetes de cinta

- Abra la cubierta posterior, presionando la parte rugosa del extremo superior de la máquina. Si ya hay un casete de cinta instalado, extráigalo levantándolo recto.

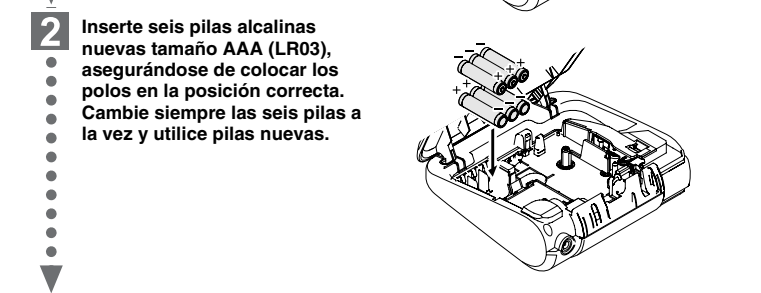


- Inserte seis pilas alcalinas nuevas tamaño AAA (LR03), asegurándose de colocar los polos en la posición correcta. Cambie siempre las seis pilas a la vez y utilice pilas nuevas.

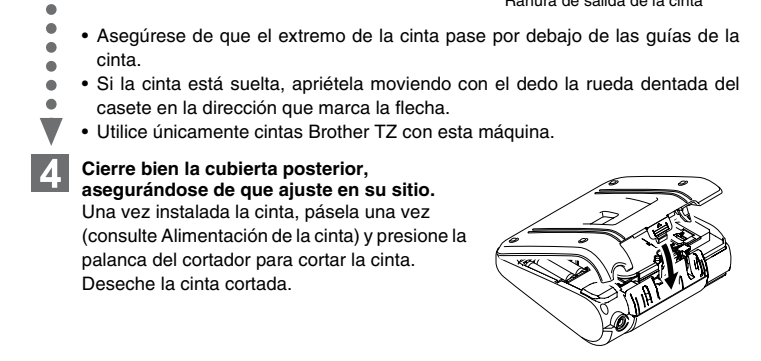

- Cierre bien la cubierta posterior, asegurándose de que ajuste en su sitio. Una vez instalada la cinta, pásela una vez (consulte Alimentación de la cinta) y presione la palanca del cortador para cortar la cinta.

# 2 FUNCIONAMIENTO

## Teclado y pantalla LCD

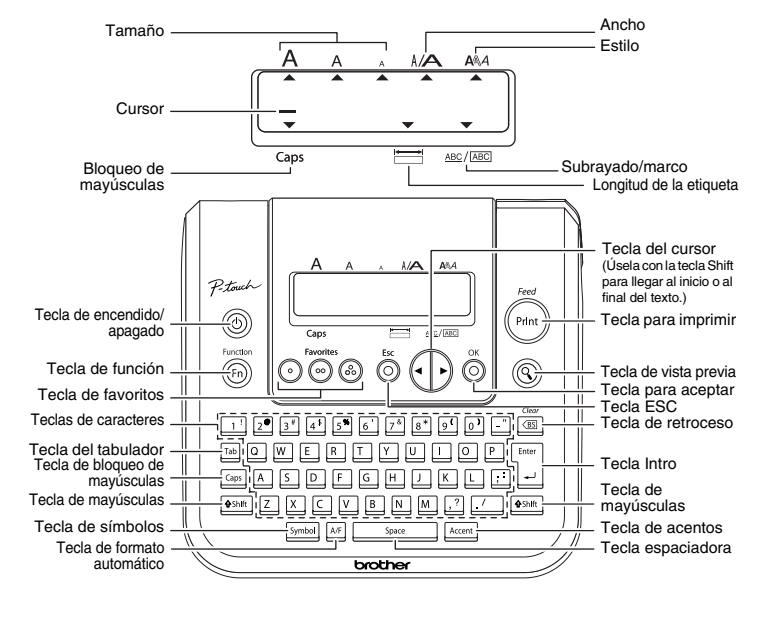

La pantalla LCD muestra una fila de 15 caracteres; sin embargo, puede escribir texto con una longitud de hasta 80 caracteres.

## Instalación inicial

- Encienda la máquina. Conecte la máquina a la fuente de alimentación (seis pilas AAA o la red eléctrica, si utiliza el adaptador de CA opcional) y presione [On].
Defina el idioma (inglés, español, francés o portugués).
Elija un idioma con [Leng] y presione [OK].

- Defina las unidades (mm/pulg). Elija una unidad con [Unid] y presione [OK].

La máquina se apagará automáticamente si no se presiona ninguna tecla durante 5 minutos.

Para cancelar las operaciones, presione [Esc]. Para inicializar los ajustes, apague la máquina y después, al mismo tiempo que mantiene presionadas las teclas [Func] y [Esc], presione [Esc] para encenderla.

## Creación de etiquetas

Consulte los pasos para crear etiquetas en la parte inferior.

# 3 REFERENCIA

## Solución de problemas

Mensaje	Causa/Solución
Batería baja!	Las pilas están bajas.
Revisar Bat.!	Las pilas instaladas están a punto de agotarse.
No es válido!	No había texto sobre el cursor cuando seleccionó la numeración. El carácter seleccionado para la numeración no es válido. El valor seleccionado para la longitud del tabulado o de la etiqueta no es válido.
No hay texto!	Intentó imprimir un archivo de texto cuando no había datos almacenados en la memoria. Presionó la tecla de imprimir sin escribir el texto. Intentó definir las copias, la numeración o el espejo sin escribir el texto.
Límite línea!	Intentó agregar una tercera línea presionando la tecla Return (intro). Intentó imprimir un texto de 2 líneas con una cinta de 3,5 mm o 6 mm instalada.
Sin Cinta!	Intentó imprimir una etiqueta sin que hubiera un casete instalado.
Error cortador!	Usó la palanca del cortador a mitad del proceso de impresión.
[Lleno]!	Ya escribió el número máximo de caracteres (80 caracteres).
Texto larg.!	El texto supera la longitud de la etiqueta o del formato automático seleccionado.
¿OK sin marco?	Está imprimiendo en una cinta de 3,5 mm con un ajuste de marco activado que no es válido. (Seleccione [Marco] para imprimir sin marco o [Sin] para cancelar.)

## Qué puede hacer cuando...

Problema	Solución
La pantalla aparece en blanco después de encender la máquina.	Compruebe que las pilas estén instaladas correctamente. Si las pilas están bajas, cámbielas. Compruebe que el adaptador esté conectado correctamente.
La máquina no imprime o los caracteres impresos se ven borrosos.	Compruebe que el casete de cinta esté instalado correctamente. Si el casete de cinta está vacío, cámbielo. Si las pilas están bajas, cámbielas.
La memoria se ha borrado sola.	Es posible que las pilas estén bajas. Cámbielas.
Aparece una línea horizontal blanca a través de la etiqueta impresa.	Es posible que haya polvo en el cabezal de impresión. Retire el casete de cinta y limpie con cuidado el cabezal de impresión con un hisopo de algodón seco y movimientos de arriba a abajo. Para limpiar más fácilmente el cabezal de impresión, puede utilizar el casete limpiador de cabezales (TZ-CL3).
La máquina está "bloqueada" (es decir, no responde al presionar ninguna tecla, aunque esté encendida).	Apague la máquina y a continuación, mientras mantiene presionadas las teclas [Func] y [Esc], presione [Esc] para volver a encenderla. Por último, suelte [Func] y [Esc]. Nota: se borrará el texto y el formato que aparecen en la pantalla, así como todos los archivos de texto almacenados en la memoria. También se borrarán los ajustes de idioma y unidades.

## Especificaciones

Elemento	Especificación
Dimensiones	6,4" (An) x 6,0" (Prof) x 2,4" (Al) (160 mm (An) x 151 mm (Prof) x 60 mm (Al))
Peso	1,03 lb. (470 g) (sin pilas ni casete de cinta)
Fuente de alimentación	Seis pilas alcalinas tamaño AAA (LR03) o adaptador de CA opcional (modelo AD-30/AD-24)
Casete de cinta	Cinta Brother TZ (ancho): 9/64" (3,5 mm), 1/4" (6 mm), 3/8" (9 mm), 1/2" (12 mm)

## Accesorios

Accesorios	Nº cat.
Casetes de cinta	Consulte el "Supplies and Accessories Guide" adjunto.
Adaptador de CA	modelo AD-30/AD-24
Cortador	TC-5 (repuesto)
Estuche de transporte	CC1000


Si la cuchilla del cortador pierde filo con el uso y no puede cortar correctamente la cinta, cambie todo el cortador (nº de cat. TC-5) por otro comprado a un distribuidor autorizado de Brother.

## Información de contacto


Esta información varía para cada país. Consulte el sitio Web. (http://www.brother.com/)

# 1 CREACIÓN DEL TEXTO

## Cambio entre mayúsculas y minúsculas

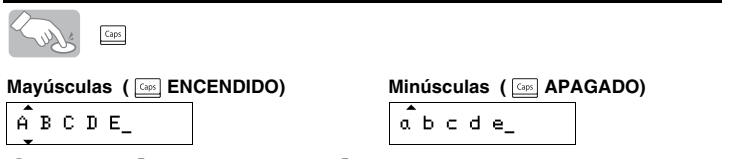

## Creación de dos líneas de texto

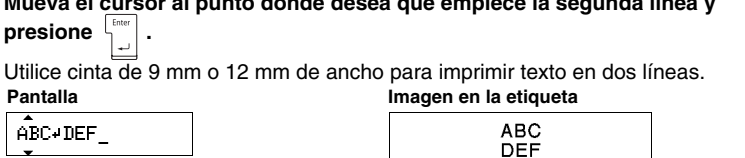

## Uso de símbolos

Grupo	Símbolos	Grupo	Símbolos
1	. , : ; " ' °	7	\$ % € £ ¥ °
2	@ - & ~ \ /	8	2 3 ★ ● ○
3	# % ? ! _ ¡ ¢ *	9	~ ^ ~ ~ ~ ~ ~ ~
4	+ - × ÷ ± =	10	☹ ☹ ☹ ☹ ☹ ☹ ☹
5	( ) [ ] < >	11	☎ ☎ ☎ ☎ ☎ ☎ ☎
6	→ ← ↑ ↓		


- Para ir al siguiente grupo, presione [Leng].
- Para cancelar las operaciones, presione [Esc].

## Caracteres con acentos

Caracteres con acento	Caracteres con acento
A Á Â Ã Ä Å Æ Ç È É	a á â ã ä å æ ç è é
C Ć Ĉ Ċ Ď Ę	c ć ĉ ċ ě ę
D Đ Ę Ę Ę Ę Ę Ę	d đ ę ę ę ę ę ę
E Ę Ę Ę Ę Ę Ę Ę	e ę ę ę ę ę ę ę
G Ę Ę Ę Ę Ę Ę Ę	g ę ę ę ę ę ę ę
I Ę Ę Ę Ę Ę Ę Ę	i ę ę ę ę ę ę ę
K Ę Ę Ę Ę Ę Ę Ę	k ę ę ę ę ę ę ę
L Ę Ę Ę Ę Ę Ę Ę	l ę ę ę ę ę ę ę
N Ę Ę Ę Ę Ę Ę Ę	n ę ę ę ę ę ę ę
O Ę Ę Ę Ę Ę Ę Ę	o ę ę ę ę ę ę ę
R Ę Ę Ę Ę Ę Ę Ę	r ę ę ę ę ę ę ę
S Ę Ę Ę Ę Ę Ę Ę	s ę ę ę ę ę ę ę
T Ę Ę Ę Ę Ę Ę Ę	t ę ę ę ę ę ę ę
U Ę Ę Ę Ę Ę Ę Ę	u ę ę ę ę ę ę ę
Y Ę Ę Ę Ę Ę Ę Ę	y ę ę ę ę ę ę ę
Z Ę Ę Ę Ę Ę Ę Ę	z ę ę ę ę ę ę ę


- Para cancelar las operaciones, presione [Esc].
- El orden de los caracteres acentuados será diferente según el idioma seleccionado para la pantalla.

## Para borrar

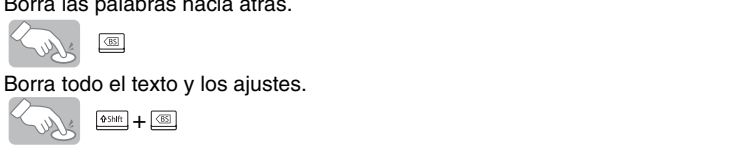

# 2 DISEÑO DE ETIQUETAS


## Ajuste del [Tamaño]

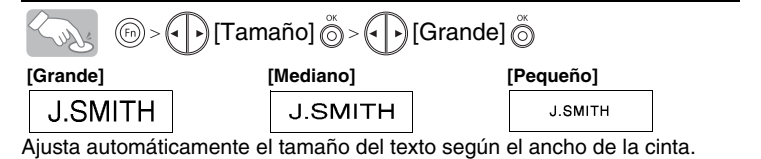


## Ajuste del [Ancho]




## Ajuste del [Estilo] (Vertical)

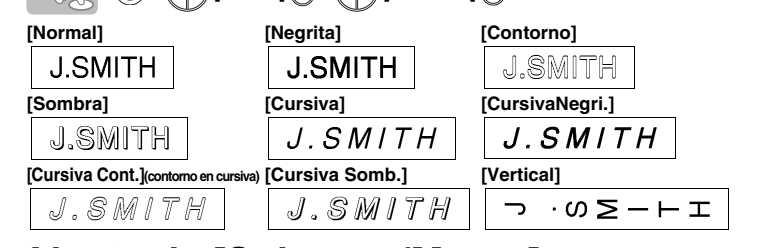


## Ajuste de [Subrayar/Marco]

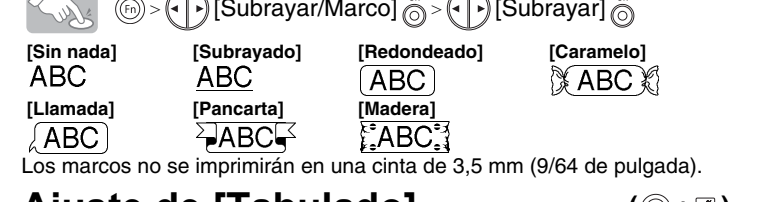


## Ajuste de [Tabulado]

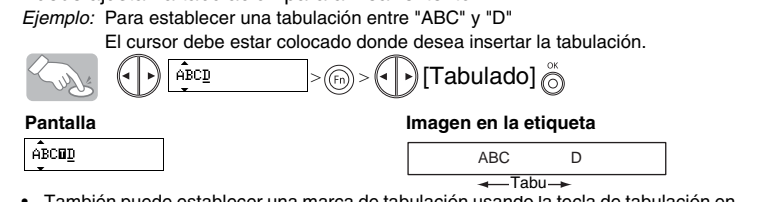

## Ajuste de la [Longitud Tab]

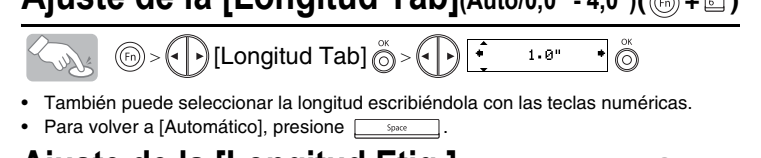

## Ajuste de la [Longitud Etq.]

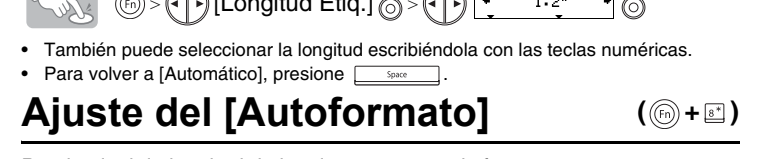

## Ajuste del [Autoformato]

Aplicación	Longitud	Aplicación	Longitud
Dorso de VHS	5,5"	Dorso caja CD	4,6"
Dorso MiniDV	1,6"	Pestaña arch.	3,2"
Cinta audio	3,5"	Pestaña adviv.	1,6"

# 3 IMPRESIÓN DE ETIQUETAS

## Vista previa del texto

- La pantalla LCD muestra el texto completo y la longitud de la etiqueta (en mm/pulg), y después vuelve al texto original.
- La vista previa sólo muestra el texto, no el tipo de letra, el tamaño, el subrayado/marco ni ninguna otra característica adicional.


## Alimentación (Alimentación de la cinta)



## Impresión


- Para cortar la etiqueta, presione la palanca del cortador, situada en la esquina superior derecha de la máquina.
- Para evitar que la cinta se estropee, no intente cortarla mientras aparece el mensaje de impresión o alimentación.

## Ajuste del [Margen] (margen de la cinta)



[Lleno]/[Mitad]/[Estrecha] es para dejar márgenes iguales a ambos lados del texto.


NOTA: Corte por la línea punteada (·) con unas tijeras para centrar el texto en la etiqueta.

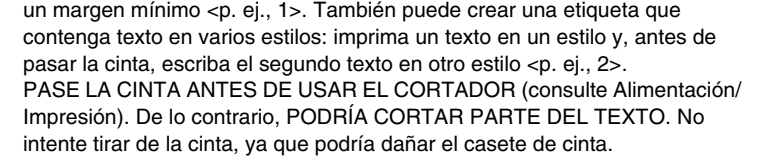

[Impri. cadena] se usa para imprimir más de una copia de una etiqueta, con un margen mínimo <p. ej., 1>. También puede crear una etiqueta que contenga texto en varios estilos: imprima un texto en un estilo y, antes de pasar la cinta, escriba el segundo texto en otro estilo -p. ej., 2>.


PASE LA CINTA ANTES DE USAR EL CORTADOR (consulte Alimentación/Impresión). De lo contrario, PODRÍA CORTAR PARTE DEL TEXTO. No intente tirar de la cinta, ya que podría dañar el casete de cinta.

## Uso de [Opción impr.]

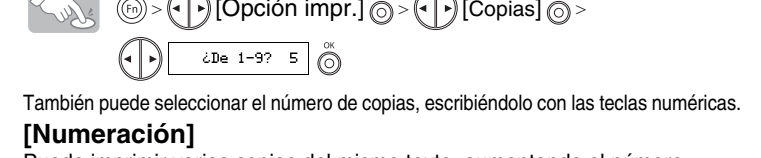


También puede seleccionar el número de copias, escribiéndolo con las teclas numéricas.

## [Numeración]




Al definir el número, establezca el número más alto que desea imprimir.

## [Espejo]



# [CREACIÓN DE ETIQUETAS]

# 4 ETIQUETAS TERMINADAS

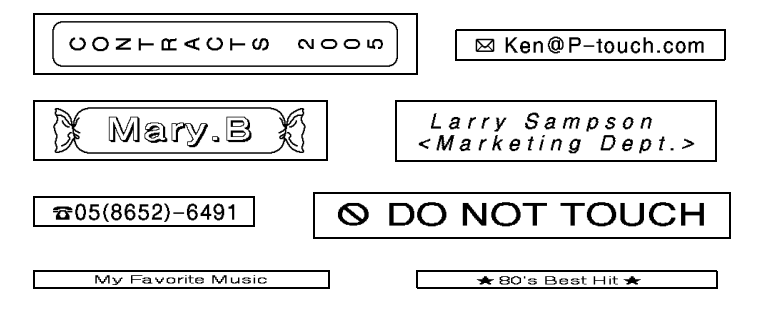

Despegue la parte posterior de la etiqueta impresa y pegue la etiqueta.

## FUNCIONES ÚTILES


### Memoria (Favoritos)

Puede guardar en la memoria los textos que utiliza con más frecuencia, y recuperarlos posteriormente e imprimirlos directamente si es necesario. Puede guardar un texto en cada tecla Favoritos (F1 - F9) (máximo: 3 textos).


### Para guardar:



### Para imprimir:



### Para abrir:



Si el texto guardado tiene más de 8 caracteres, use [Leng] para recorrer el texto.

### Teclas de acceso directo

Tecla	Función	Tecla	Función
[Func]	[Tamaño]	[Leng]	[Longitud Tab]
[Esc]	[Ancho]	[Func]	[Longitud Etq.]
[Leng]	[Estilo]	[Func]	[Autoformato]
[Func]	[Subrayar/Marco]	[Func]	[Margen]
[Func]	[Tabulado]	[Func]	[Opción impr.]

Además de los pasos básicos para buscar una función, PT-1280 ofrece teclas de acceso directo para que pueda ir a una función que usa con frecuencia con sólo presionar [Func] y la tecla de acceso directo que se muestra en la tabla siguiente. Para confirmar, presione [Func].

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>