



SERVICE MANUAL

M720T / M730T / M728T / M729T

notebook

Notebook Computer

M720T/M728T/M729T/M730T

Service Manual

Notice

The company reserves the right to revise this publication or to change its contents without notice. Information contained herein is for reference only and does not constitute a commitment on the part of the manufacturer or any subsequent vendor. They assume no responsibility or liability for any errors or inaccuracies that may appear in this publication nor are they in anyway responsible for any loss or damage resulting from the use (or misuse) of this publication.

This publication and any accompanying software may not, in whole or in part, be reproduced, translated, transmitted or reduced to any machine readable form without prior consent from the vendor, manufacturer or creators of this publication, except for copies kept by the user for backup purposes.

Brand and product names mentioned in this publication may or may not be copyrights and/or registered trademarks of their respective companies. They are mentioned for identification purposes only and are not intended as an endorsement of that product or its manufacturer.

Version 1.0
July 2008

Trademarks

Intel, **Celeron** and **Intel Core** are trademarks of Advanced Micro Devices, Inc.

Windows[®] is a registered trademark of Microsoft Corporation.

Other brand and product names are trademarks and./or registered trademarks of their respective companies.

About this Manual

This manual is intended for service personnel who have completed sufficient training to undertake the maintenance and inspection of personal computers.

It is organized to allow you to look up basic information for servicing and/or upgrading components of the *M720T/M728T/M729T/M730T* series notebook PC.

The following information is included:

Chapter 1, Introduction, provides general information about the location of system elements and their specifications.

Chapter 2, Disassembly, provides step-by-step instructions for disassembling parts and subsystems and how to upgrade elements of the system.

Appendix A, Part Lists

Appendix B, Schematic Diagrams

FCC Statement (Federal Communications Commission)

You are cautioned that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.



Warning

Use only shielded cables to connect I/O devices to this equipment. You are cautioned that changes or modifications not expressly approved by the manufacturer for compliance with the above standards could void your authority to operate the equipment.

If your purchase option includes both **Wireless LAN** and **3.5G** modules, then the appropriate antennas will be installed. Note that in order to comply with FCC RF exposure compliance requirements, the antenna must not be co-located or operate in conjunction with any other antenna or transmitter.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re orient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the service representative or an experienced radio/TV technician for help.

Operation is subject to the following two conditions:

1. This device may not cause interference.
And
2. This device must accept any interference, including interference that may cause undesired operation of the device.

FCC RF Radiation Exposure Statement:

1. This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.
2. This equipment complies with FCC RF radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and you body.

IMPORTANT SAFETY INSTRUCTIONS

Follow basic safety precautions, including those listed below, to reduce the risk of fire, electric shock and injury to persons when using any electrical equipment:

1. Do not use this product near water, for example near a bath tub, wash bowl, kitchen sink or laundry tub, in a wet basement or near a swimming pool.
2. Avoid using a telephone (other than a cordless type) during an electrical storm. There may be a remote risk of electrical shock from lightning.
3. Do not use the telephone to report a gas leak in the vicinity of the leak.
4. Use only the power cord and batteries indicated in this manual. Do not dispose of batteries in a fire. They may explode. Check with local codes for possible special disposal instructions.
5. This product is intended to be supplied by a Listed Power Unit (DC Output 19V, 3.42A OR 18.5V, 3.5A (**65W**) minimum AC/DC Adapter).

CAUTION

Always disconnect all telephone lines from the wall outlet before servicing or disassembling this equipment.

**TO REDUCE THE RISK OF FIRE, USE ONLY NO. 26 AWG OR LARGER,
TELECOMMUNICATION LINE CORD**

This Computer's Optical Device is a Laser Class 1 Product


Instructions for Care and Operation

The notebook computer is quite rugged, but it can be damaged. To prevent this, follow these suggestions:


1. **Don't drop it, or expose it to shock.** If the computer falls, the case and the components could be damaged.




2. **Keep it dry, and don't overheat it.** Keep the computer and power supply away from any kind of heating element. This is an electrical appliance. If water or any other liquid gets into it, the computer could be badly damaged.

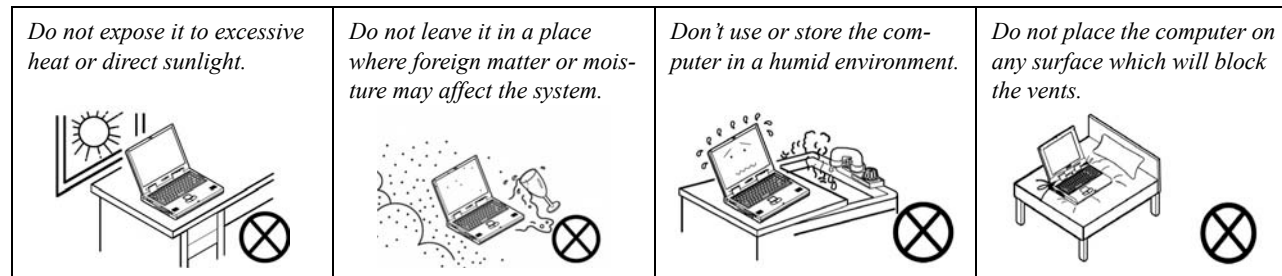

3. **Follow the proper working procedures for the computer.** Shut the computer down properly and don't forget to save your work. Remember to periodically save your data as data may be lost if the battery is depleted.

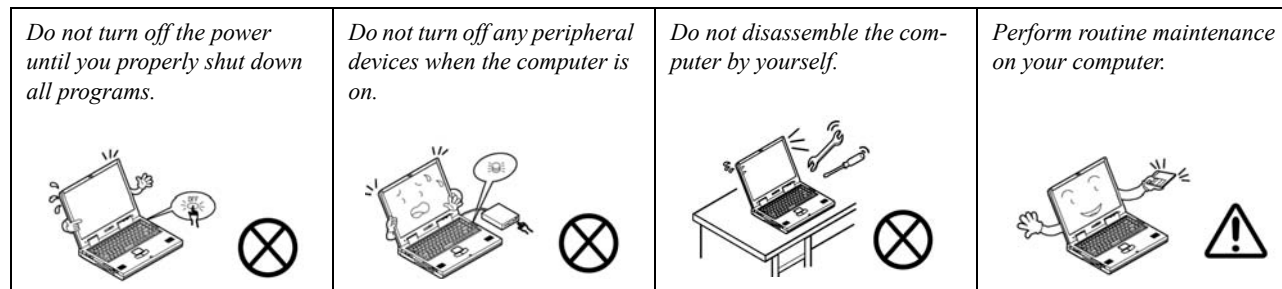


4. **Avoid interference.** Keep the computer away from high capacity transformers, electric motors, and other strong magnetic fields. These can hinder proper performance and damage your data.
5. **Take care when using peripheral devices.**

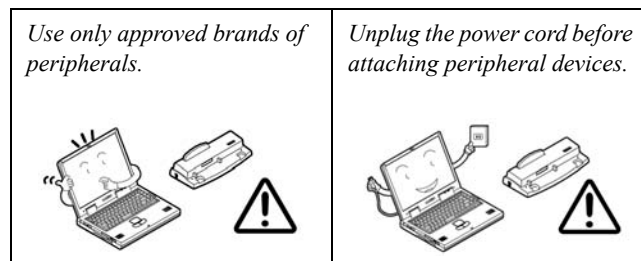

Power Safety

The computer has specific power requirements:

- Only use a power adapter approved for use with this computer.
- Your AC adapter may be designed for international travel but it still requires a steady, uninterrupted power supply. If you are unsure of your local power specifications, consult your service representative or local power company.
- The power adapter may have either a 2-prong or a 3-prong grounded plug. The third prong is an important safety feature; do not defeat its purpose. If you do not have access to a compatible outlet, have a qualified electrician install one.
- When you want to unplug the power cord, be sure to disconnect it by the plug head, not by its wire.
- Make sure the socket and any extension cord(s) you use can support the total current load of all the connected devices.
- Before cleaning the computer, make sure it is disconnected from any external power supplies.

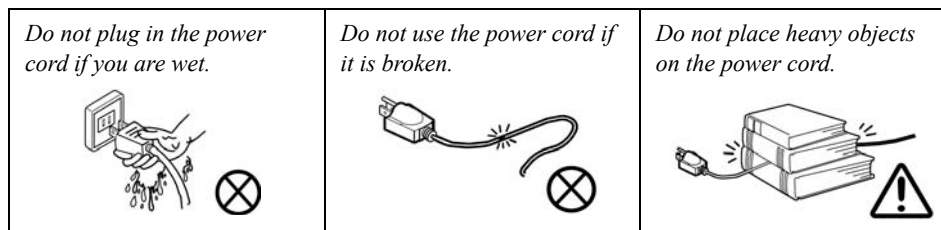

Power Safety Warning

Before you undertake any upgrade procedures, make sure that you have turned off the power, and disconnected all peripherals and cables (including telephone lines). It is advisable to also remove your battery in order to prevent accidentally turning the machine on.

Battery Precautions

- Only use batteries designed for this computer. The wrong battery type may explode, leak or damage the computer.
- Do not remove any batteries from the computer while it is powered on.
- Do not continue to use a battery that has been dropped, or that appears damaged (e.g. bent or twisted) in any way. Even if the computer continues to work with a damaged battery in place, it may cause circuit damage, which may possibly result in fire.
- Recharge the batteries using the notebook's system. Incorrect recharging may make the battery explode.
- Do not try to repair a battery pack. Refer any battery pack repair or replacement to your service representative or qualified service personnel.
- Keep children away from, and promptly dispose of a damaged battery. Always dispose of batteries carefully. Batteries may explode or leak if exposed to fire, or improperly handled or discarded.
- Keep the battery away from metal appliances.
- Affix tape to the battery contacts before disposing of the battery.
- Do not touch the battery contacts with your hands or metal objects.



Battery Disposal

The product that you have purchased contains a rechargeable battery. The battery is recyclable. At the end of its useful life, under various state and local laws, it may be illegal to dispose of this battery into the municipal waste stream. Check with your local solid waste officials for details in your area for recycling options or proper disposal.

Caution

Danger of explosion if battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Discard used battery according to the manufacturer's instructions.

Related Documents

You may also need to consult the following manual for additional information:

[User's Manual on CD](#)

This describes the notebook PC's features and the procedures for operating the computer and its ROM-based setup program. It also describes the installation and operation of the utility programs provided with the notebook PC.

Contents

Introduction1-1	Part List Illustration Location A-2
Overview 1-1	Top with Fingerprint (M720T) A-3
System Specifications 1-2	Top without Fingerprint (M720T) A-4
..... 1-4	Bottom (M720T) A-5
External Locator - Top View with LCD Panel Open 1-5	LCD (M720T) A-6
External Locator - Front & Right side Views 1-6	HDD (M720T) A-7
External Locator - Left Side & Rear View 1-7	COMBO (M720T) A-8
External Locator - Bottom View 1-8	DVD-Dual Drive (M720T) A-9
Mainboard Overview - Top (Key Parts) 1-9	Top with Fingerprint (M728T) A-10
Mainboard Overview - Bottom (Key Parts) 1-10	Top without Fingerprint (M728T) A-11
Mainboard Overview - Top (Connectors) 1-11	Bottom (M728T) A-12
Mainboard Overview - Bottom (Connectors) 1-12	LCD (M728T) A-13
Disassembly2-1	HDD (M728T) A-14
Overview 2-1	COMBO (M728T) A-15
Maintenance Tools 2-2	DVD-Dual Drive (M728T) A-16
Connections 2-2	Top with Fingerprint (M729T) A-17
Maintenance Precautions 2-3	Top without Fingerprint (M729T) A-18
Disassembly Steps 2-4	Bottom (M729T) A-19
Removing the Battery 2-5	LCD (M729T) A-20
Removing the Hard Disk Drive 2-6	HDD (M729T) A-21
Removing the Optical (CD/DVD) Device 2-8	COMBO (M729T) A-22
Removing the System Memory (RAM) 2-10	DVD-Dual Drive (M729T) A-23
Removing the Inverter Board 2-12	Top with Fingerprint (M730T) A-24
Removing the Processor 2-13	Top without Fingerprint (M730T) A-25
Removing the Wireless LAN Module 2-15	Bottom (M730T) A-26
Removing the Bluetooth Module 2-16	LCD (M730T) A-27
Removing the Keyboard 2-17	HDD (M730T) A-28
Removing the Modem 2-18	COMBO (M730T) A-29
Part ListsA-1	DVD-Dual Drive (M730T) A-30
	Schematic Diagrams..... B-1

Preface


System Block Diagram	B-2	Multi I/O Board 1/2	B-34
Intel Penryn (Socket-P) 1/2	B-3	Multi I/O Board 2/2	B-35
Intel Penryn (Socket-P) 2/2	B-4	Finger Printer Board	B-36
Cantiga 1/6 - Host	B-5	Click Board	B-37
Cantiga 2/6 - VGA, CRT	B-6	M730T ODD Bridge Board	B-38
Cantiga 3/6 - DDR	B-7	M730T Audio Board	B-39
Cantiga 4/6 - Power	B-8	Power Sequence Diagram	B-40
Cantiga 5/6 - Power	B-9	Power Sequence v3.0	B-41
Cantiga 6/6 - GND	B-10		
DDRII CHANNEL A	B-11		
DDRII CHANNEL B	B-12		
Panel, Inverter, CRT	B-13		
ICH9-M 1/5 - SATA	B-14		
ICH9-M 2/5 - PCIE, PCI, USB	B-15		
ICH9-M 3/5 - GPIO, PWR Management	B-16		
ICH9-M 4/5 - Power	B-17		
ICH9-M 5/5 - GND	B-18		
Clock Generator	B-19		
Multi I/O, ODD, CCD, BT, TPM	B-20		
New Card, Mini PCIE	B-21		
LED, FAN, TP, FP, USB	B-22		
JMB385 Card Reader	B-23		
PCI-E LAN RTL8111C	B-24		
Audio Codec ALC662	B-25		
Audio AMP2056	B-26		
KBC-ITE IT8512E	B-27		
System Power, LED BKLT	B-28		
Power VDD3, VDD5	B-29		
Power 1.5VS, 1.05VS, 3.3V, 5V	B-30		
Power 1.8V, 0.9VSM	B-31		
Power VCORE	B-32		
Power AC-IN, Charger	B-33		

Chapter 1: Introduction

Overview

This manual covers the information you need to service or upgrade the *M720T/M728T/M729T/M730T* series notebook computer. Information about operating the computer (e.g. getting started, and the *Setup* utility) is in the *User's Manual*. Information about drivers (e.g. VGA & audio) is also found in *User's Manual*. That manual is shipped with the computer.


Operating systems (e.g. *Windows XP*, *Windows Vista*, etc.) have their own manuals as do application software (e.g. word processing and database programs). If you have questions about those programs, you should consult those manuals.

The *M720T/M728T/M729T/M730T* series notebook is designed to be upgradeable. See *“Disassembly” on page 2 - 1* for a detailed description of the upgrade procedures for each specific component. Please note the warning and safety information indicated by the “

The balance of this chapter reviews the computer's technical specifications and features.


System Specifications

Feature	Specification	
Processor	Intel® Core™2 Duo Processor 35W - (478-pin) Micro-FC-PGA Package - Socket-P T9400/ T9600	45nm (45 Nanometer) Process Technology 6MB On-die L2 Cache & 1006MHz FSB 2.53/ 2.8 GHz
	Intel® Core™2 Duo Processor 25W - (478-pin) Micro-FC-PGA Package - Socket-P P8400/ P8600	45nm (45 Nanometer) Process Technology 3MB On-die L2 Cache & 1006MHz FSB 2.4/ 2.53 GHz
Core Logic	Intel GM45 + ICH9M Chipset	
LCD	M720T/M728T/M729T: 12.1" WXGA (1280 * 800) TFT LCD	M730T: 13.3" WXGA (1280 * 800) TFT LCD
Memory	64-bit Wide DDRII (DDR2) Data Channel Supports Dual Channel DDRII (DDR2) SDRAM Two 200 Pin SO-DIMM Sockets Supporting DDRII (DDR2) 667MHz/800MHz RAM Modules Memory Expandable up to 4GB (1024/2048 MB DDR2 Modules)	
Video Adapter	Intel GM45 Integrated Video High Preference 3D/2D Graphic Accelerator Supports Dynamic Video Memory Technology DVMT (up to 256MB dynamically allocated from system memory where needed) Supports DirectX10 3D Graphics Engine Accelerator	
Security	Security (Kensington® Type) Lock Slot	BIOS Password
	Fingerprint ID Reader Module (Factory Option)	Trusted Platform Module
BIOS	One 32Mb SPI Flash ROM	Phoenix™ BIOS
Storage	One Changeable 12.7mm(h) SATA (Serial) Optical Device (CD/DVD) Type Drive (see " Optional " on page 1 - 4) Easy Changeable 2.5" 9.5 mm (h) SATA (Serial) HDD	
Audio	High Definition Audio (HDA)	Direct Sound 3D™ Compatible
	Compliant with Microsoft UAA (Universal Audio Architecture)	2 * Built-In Speakers Built-In Microphone
Keyboard & Pointing Device	Winkey Keyboard	Built-In TouchPad with Scrolling Function

Feature	Specification
Interface	Three USB 2.0 Ports One Headphone-Out Jack One Microphone-In Jack One S/PDIF Out Jack One Internal Microphone One RJ-11 Modem Jack One RJ-45 LAN Jack One DC-In Jack One External Monitor Port
Card Reader	Embedded 7-in-1 Card Reader (MS/ MS Pro/ SD/ Mini SD/ MMC/ RS MMC/ MS Duo) Note: MS Duo/ Mini SD/ RS MMC Cards require a PC adapter
ExpressCard Slot	One ExpressCard/34(54) Slot
Communication *Note: The 3.5G and Intel Turbo Memory Modules cannot coexist. There is only one slot available for either of these factory option modules.	10M/ 100/ 1000Mb Base-TX Ethernet LAN Azalia 56K Modem V.90 & V.92 Compliant Intel® WiFi Link 5300 Series (3*3 - 802.11a/g/n) Wireless LAN Mini-Card Module (Option) Intel® WiFi Link 5100 Series (1*2 - 802.11a/g/n) Wireless LAN Mini-Card Module (Option) 3rd Party 802.11b/g Wireless LAN Mini-Card Module with USB interface (Option) Bluetooth 2.0 + EDR (Enhanced Data Rate) Module (Factory Option) 1.3M or 2.0M Pixel PC Camera Module with USB interface (Factory Option) 3.5G Module (see sidebar): *UMTS/HSPDA-based 3.5G Mini-Card Module with USB Interface (Factory Option) Quad-band GSM/GPRS (850 MHz, 900 MHz, 1800 MHz, 1900 MHz) UMTS WCDMA FDD (2100 MHz)
	 UMTS Modes Note that UMTS modes CAN NOT be used in North America.
Power Management	Supports ACPI 3.0 Supports Wake on LAN Supports Resume from Modem Ring
Power	Full Range AC/DC Adapter AC Input 100 - 240V, DC Output 50 - 60Hz, 19V, 3.42A or 18.5V, 3.5A (65 Watts)
Battery	4 Cell Smart Lithium-Ion Battery Pack, 14.8V/2.4AH 8 Cell Smart Lithium-Ion Battery Pack, 14.8V/4.4AH (Option)

Introduction

Feature	Specification	
Environmental Spec	Temperature Operating: 5°C - 35°C Non-Operating: -20°C - 60°C	Relative Humidity Operating: 20% - 80% Non-Operating: 10% - 90%
Dimensions & Weight	M720T/M728T/M729T: 299mm (w) * 219mm (d) * 26.5-35.7mm (h) 1.88 kg With 4 Cell Battery and ODD	M730T: 310mm (w) * 233mm (d) * 30-36mm (h) 2.0 kg With 4 Cell Battery and ODD
Optional *Note: The 3.5G and Intel Turbo Memory Modules cannot coexist. There is only one slot available for either of these factory option modules.	Optical Drive Module Options: SATA DVD/CD-RW Combo Drive Module SATA DVD Dual (Super Multi) Drive Module Intel® WiFi Link 5300 Series (3*3 - 802.11a/g/n) Wireless LAN Mini-Card Module Intel® WiFi Link 5100 Series (1*2 - 802.11a/g/n) Wireless LAN Mini-Card Module 3rd Party 802.11b/g Wireless LAN Mini-Card Module with USB interface 8 Cell Smart Lithium-Ion Battery Pack 1.3M or 2.0M Pixel USB PC Camera Module (Factory Option) Bluetooth 2.0 + EDR (Enhanced Data Rate) Module (Factory Option)	Fingerprint ID Reader Module (Factory Option) *Intel Turbo Memory (Robson) NAND Flash Memory Card Module (Factory Option) OR *UMTS/HSPDA-based 3.5G Module with Mini Card Interface (Factory Option) Quad-band GSM/GPRS (850 MHz, 900 MHz, 1800 MHz, 1900 MHz) UMTS WCDMA FDD (2100 MHz)



UMTS Modes


Note that UMTS modes CAN NOT be used in North America.

External Locator - Top View with LCD Panel Open


Figure 1
Top View



M720T/M728T/M729T

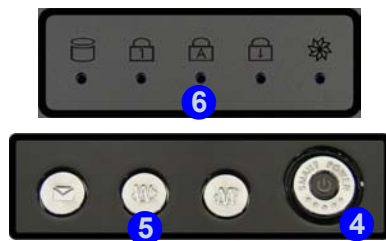

M730T

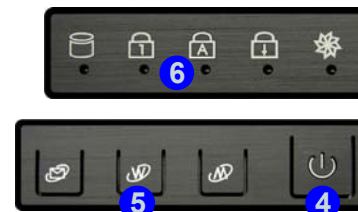

1. Optional Built-In PC Camera
2. LCD
3. Speakers
4. Power Button
5. Hot Key Buttons
6. LED Status Indicators
7. Keyboard
8. Touchpad & Buttons
9. LED Power & Communication Indicators
10. Fingerprint (Optional)
11. Built-In Microphone

***Note:** This model may have either a fingerprint module or card reader module, depending on your purchase configuration.

Introduction

Figure 2

Front Views

1. LED Power & Communication Indicators
2. 7-in-1 Card Reader
3. S/PDIF-Out Jack
4. Microphone-In Jack
5. Headphone-Out Jack

External Locator - Front & Right side Views



Figure 3

Right Side Views

1. Optical Device Drive Bay
2. USB 2.0 Port
3. RJ-11 Phone Jack
4. Security Lock Slot



1 - 6 External Locator - Front & Right side Views

External Locator - Left Side & Rear View



Figure 4
Left Side View

1. DC-In Jack
2. RJ-45 LAN Jack
3. External Monitor Port
4. Vent/Fan Intake/Outlet
5. 2 * USB 2.0 Ports
6. ExpressCard Slot

Figure 5
Rear View


1. Battery

Introduction

External Locator - Bottom View

Figure 6
Bottom View

1. Battery (M730T 8 Cell Battery Pictured)
2. Hard Disk Bay Cover (3.5G Module Location)
3. RAM & CPU Bay Cover
4. Vent/Fan Intake/Outlet (M730T Only)
5. Speakers (M730T Only)

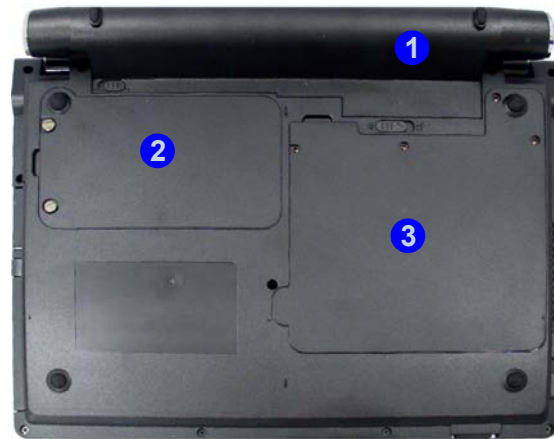

M720T/M728T/M729T



M730T



Overheating

To prevent your computer from overheating make sure nothing blocks the vent/fan intakes while the computer is in use.

Mainboard Overview - Top (Key Parts)

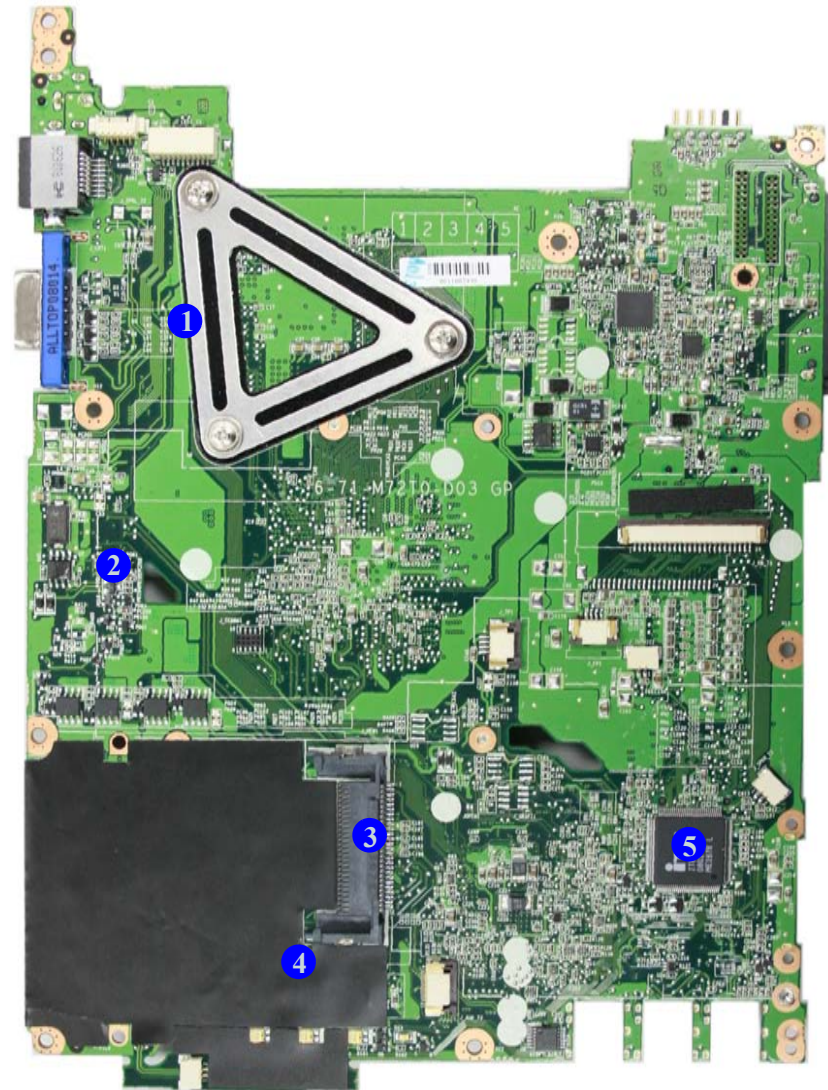


Figure 7
**Mainboard Top
Key Parts**


1. Transformer
2. VT6103L
3. ExpressCard Connector
4. ENE MR510
5. KBC ITE IT8512E

Introduction

Figure 8
**Mainboard Bottom
Key Parts**

1. CPU Socket (no CPU installed)
2. Northbridge
3. Memory Slots
DDR2 SO-DIMM
4. ICS
5. Card Reader
Socket
6. Southbridge
7. Audio Codec
8. Mini-Card
Connector (WLAN
Module)

Mainboard Overview - Bottom (Key Parts)

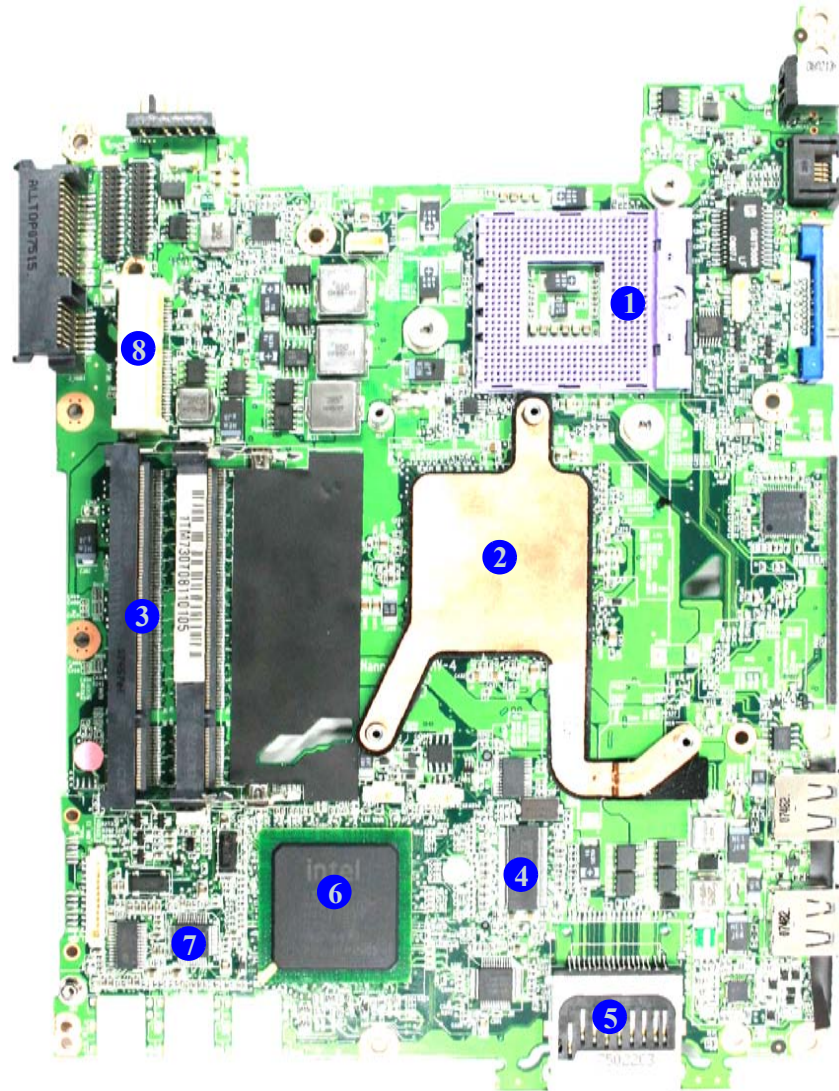

1 - 10 Mainboard Overview - Bottom (Key Parts)

Mainboard Overview - Top (Connectors)

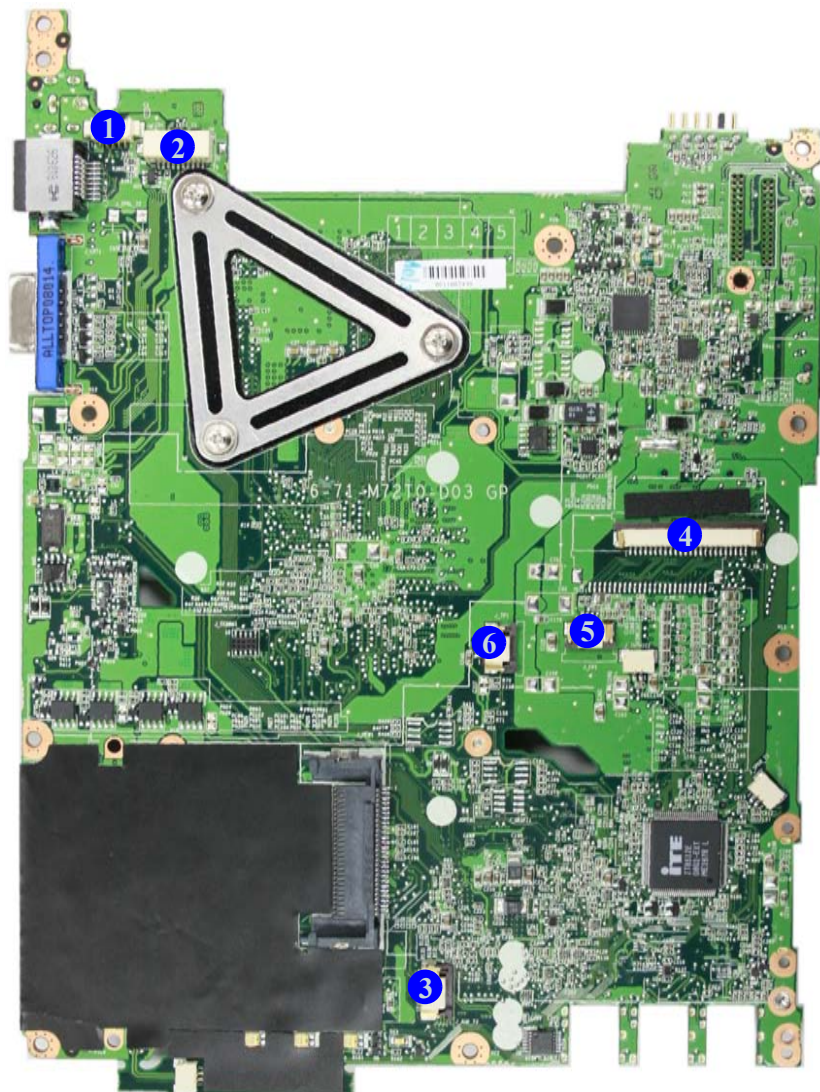


Figure 9
**Mainboard Top
Connectors**


1. Hot-key Connector
2. LCD Cable Connector
3. Keyboard Cable Connector
4. Audio Board Connector
5. Microphone Cable Connector
6. TouchPad Cable Connector

Introduction

Figure 10
**Mainboard Bottom
Connectors**

1. BT Cable Connector
2. Multi Board Connector
3. CD-ROM Connector
4. HDD Connector
5. CMOS Bat. Connector
6. CPU Fan Cable Connector
7. DC-In Jack
8. USB Port

Mainboard Overview - Bottom (Connectors)

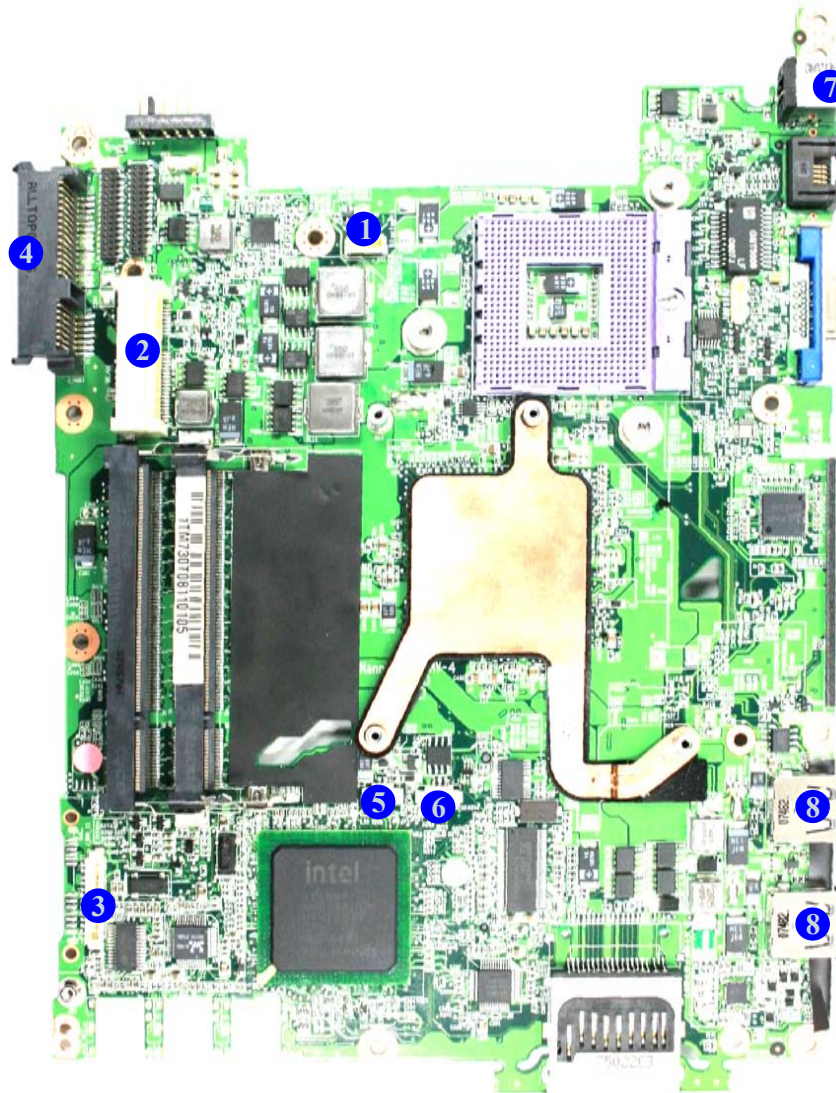

1 - 12 Mainboard Overview - Bottom (Connectors)


Chapter 2: Disassembly



Overview

This chapter provides step-by-step instructions for disassembling the *M720T/M728T/M729T/M730T* series notebook's parts and subsystems. When it comes to reassembly, reverse the procedures (unless otherwise indicated).



We suggest you completely review any procedure before you take the computer apart.

Procedures such as upgrading/replacing the RAM, optical device and hard disk are included in the User's Manual but are repeated here for your convenience.

To make the disassembly process easier each section may have a box in the page margin. Information contained under the figure # will give a synopsis of the sequence of procedures involved in the disassembly procedure. A box with a  lists the relevant parts you will have after the disassembly process is complete. **Note:** The parts listed will be for the disassembly procedure listed ONLY, and not any previous disassembly step(s) required. Refer to the part list for the previous disassembly procedure. The amount of screws you should be left with will be listed here also.

A box with a  will also provide any possible helpful information. A box with a  contains warnings.

An example of these types of boxes are shown in the sidebar.

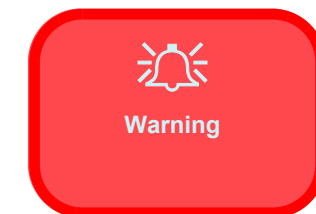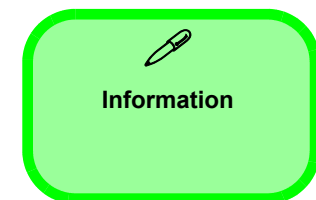

Disassembly

NOTE: All disassembly procedures assume that the system is turned **OFF**, and disconnected from any power supply (the battery is removed too).

Maintenance Tools

The following tools are recommended when working on the notebook PC:

- M3 Philips-head screwdriver
- M2.5 Philips-head screwdriver (magnetized)
- M2 Philips-head screwdriver
- Small flat-head screwdriver
- Pair of needle-nose pliers
- Anti-static wrist-strap

Connections

Connections within the computer are one of four types:

Locking collar sockets for ribbon connectors	To release these connectors, use a small flat-head screwdriver to gently pry the locking collar away from its base. When replacing the connection, make sure the connector is oriented in the same way. The pin1 side is usually not indicated.
Pressure sockets for multi-wire connectors	To release this connector type, grasp it at its head and gently rock it from side to side as you pull it out. Do not pull on the wires themselves. When replacing the connection, do not try to force it. The socket only fits one way.
Pressure sockets for ribbon connectors	To release these connectors, use a small pair of needle-nose pliers to gently lift the connector away from its socket. When replacing the connection, make sure the connector is oriented in the same way. The pin1 side is usually not indicated.
Board-to-board or multi-pin sockets	To separate the boards, gently rock them from side to side as you pull them apart. If the connection is very tight, use a small flat-head screwdriver - use just enough force to start.

Maintenance Precautions

The following precautions are a reminder. To avoid personal injury or damage to the computer while performing a removal and/or replacement job, take the following precautions:

1. **Don't drop it.** Perform your repairs and/or upgrades on a stable surface. If the computer falls, the case and other components could be damaged.
2. **Don't overheat it.** Note the proximity of any heating elements. Keep the computer out of direct sunlight.
3. **Avoid interference.** Note the proximity of any high capacity transformers, electric motors, and other strong magnetic fields. These can hinder proper performance and damage components and/or data. You should also monitor the position of magnetized tools (i.e. screwdrivers).
4. **Keep it dry.** This is an electrical appliance. If water or any other liquid gets into it, the computer could be badly damaged.
5. **Be careful with power.** Avoid accidental shocks, discharges or explosions.
 - Before removing or servicing any part from the computer, turn the computer off and detach any power supplies.
 - When you want to unplug the power cord or any cable/wire, be sure to disconnect it by the plug head. Do not pull on the wire.
6. **Peripherals** – Turn off and detach any peripherals.
7. **Beware of static discharge.** ICs, such as the CPU and main support chips, are vulnerable to static electricity. Before handling any part in the computer, discharge any static electricity inside the computer. When handling a printed circuit board, do not use gloves or other materials which allow static electricity buildup. We suggest that you use an anti-static wrist strap instead.
8. **Beware of corrosion.** As you perform your job, avoid touching any connector leads. Even the cleanest hands produce oils which can attract corrosive elements.
9. **Keep your work environment clean.** Tobacco smoke, dust or other air-borne particulate matter is often attracted to charged surfaces, reducing performance.
10. **Keep track of the components.** When removing or replacing any part, be careful not to leave small parts, such as screws, loose inside the computer.

Cleaning

Do not apply cleaner directly to the computer, use a soft clean cloth.

Do not use volatile (petroleum distillates) or abrasive cleaners on any part of the computer.



Power Safety Warning

Before you undertake any upgrade procedures, make sure that you have turned off the power, and disconnected all peripherals and cables (including telephone lines). It is advisable to also remove your battery in order to prevent accidentally turning the machine on.

Disassembly Steps

The following table lists the disassembly steps, and on which page to find the related information. **PLEASE PERFORM THE DISASSEMBLY STEPS IN THE ORDER INDICATED.**

To remove the Battery:

1. Remove the battery [page 2 - 5](#)

To remove the HDD:

1. Remove the battery [page 2 - 5](#)
2. Remove the HDD [page 2 - 6](#)

To remove the Optical Device:

1. Remove the battery [page 2 - 5](#)
2. Remove the Optical device [page 2 - 8](#)

To remove the System Memory:

1. Remove the battery [page 2 - 5](#)
2. Remove the system memory [page 2 - 10](#)

To remove the Inverter Board:

1. Remove the battery [page 2 - 5](#)
2. Remove the inverter board [page 2 - 12](#)

To remove and install a Processor:

1. Remove the battery [page 2 - 5](#)
2. Remove the processor [page 2 - 13](#)

To remove the Wireless LAN Module:

1. Remove the battery [page 2 - 5](#)
2. Remove the wireless LAN [page 2 - 15](#)

To remove the Bluetooth Module:

1. Remove the battery [page 2 - 5](#)
2. Remove the Bluetooth [page 2 - 16](#)

To remove the Keyboard:

1. Remove the battery [page 2 - 5](#)
2. Remove the keyboard [page 2 - 17](#)

To remove the Modem:

1. Remove the battery [page 2 - 5](#)
2. Remove the HDD [page 2 - 6](#)
3. Remove the system memory [page 2 - 10](#)
4. Remove the Optical device [page 2 - 8](#)
5. Remove the processor [page 2 - 13](#)
6. Remove the keyboard [page 2 - 17](#)
7. Remove the modem [page 2 - 18](#)

Removing the Battery

1. Turn the computer **off**, and turn it over.
2. Slide the latch **1** in the direction of the arrow.
3. Slide the latch **2** in the direction of the arrow, and hold it in place.
4. Slide the battery **3** in the direction of the arrow **4**.


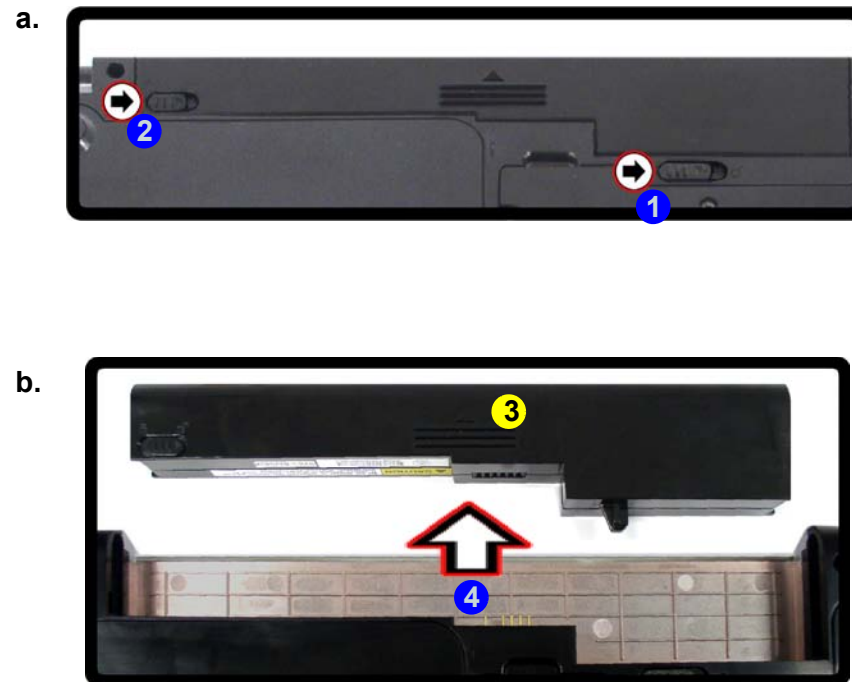


Figure 1
Battery Removal

- a. Slide the latch and hold in place.
- b. Slide the battery in the direction of the arrow.

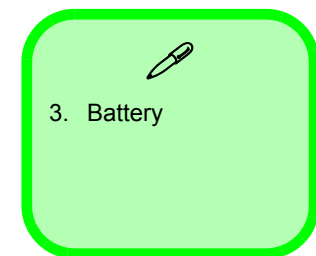

Disassembly

Figure 2
**HDD Assembly
Removal**


- a. Locate the HDD bay cover and remove the screw(s).

Removing the Hard Disk Drive

The hard disk drive can be taken out to accommodate other 2.5" serial (SATA) hard disk drives with a height of 9.5mm (h). Follow your operating system's installation instructions, and install all necessary drivers and utilities (as outlined in **Chapter 4 of the User's Manual**) when setting up a new hard disk.

Hard Disk Upgrade Process

1. Turn **off** the computer, and remove the battery ([page 2 - 5](#)).
2. Locate the hard disk bay cover and remove screw **1** & **2**.

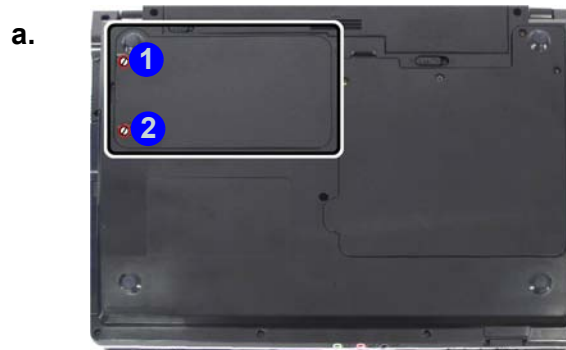

Note:

Only one model is pictured here, however the component locations are the same for both models.



- 2 Screws



HDD System Warning

New HDD's are blank. Before you begin make sure:

You have backed up any data you want to keep from your old HDD.

You have all the CD-ROMs and FDDs required to install your operating system and programs.

If you have access to the internet, download the latest application and hardware driver updates for the operating system you plan to install. Copy these to a removable medium.

3. Remove the hard disk bay cover **3**.
4. Grip the tab and slide the hard disk in the direction of arrow **4**.
5. Lift the hard disk out of the bay **5**.
6. Remove the screw **6** & **7** and the adhesive cover **8** from the hard disk **9**.
7. Reverse the process to install a new hard disk (do not forget to replace all the screws and covers).


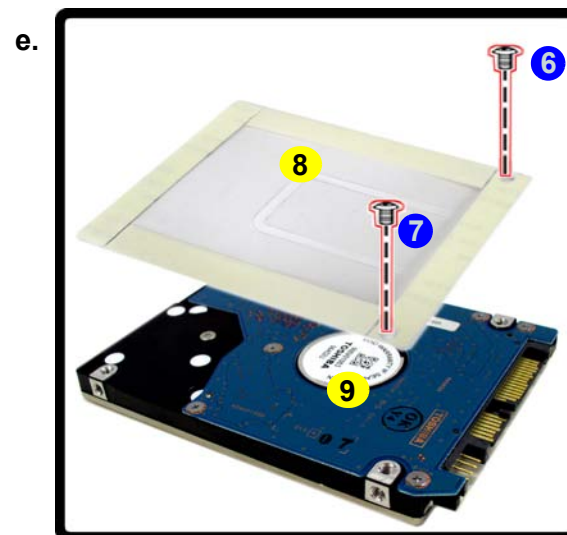


Figure 3
**HDD Assembly
Removal (cont'd.)**

- b. Remove the HDD bay cover.
- c. Grip the tab and slide the HDD in the direction of the arrow.
- d. Lift the HDD assembly out of the bay.
- e. Remove the screw and adhesive cover.

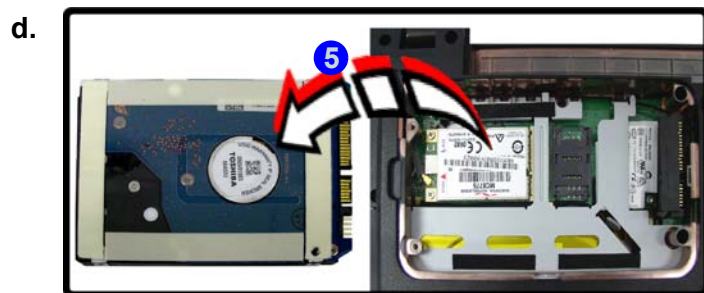


Disassembly

Figure 4
Optical Device
Removal

- Remove the screws.
- Disconnect the fan cable and remove the cover.
- Remove the screw.
- Push the optical device out off the computer at point 8.

Removing the Optical (CD/DVD) Device

- Turn **off** the computer, and remove the battery ([page 2 - 5](#)).
- M720T/M728T/M729T: (see over for M730T)** Locate the component bay cover **1** and remove screws **2** - **5**.
- Carefully (**a fan and cable are attached to the under side of the cover**) lift up the bay cover.
- Carefully disconnect the fan cable **6**, and remove the cover **1**.
- Remove the screw at point **7**, and use a screwdriver to carefully push out the optical device **9** at point **8**.
- Insert the new device and carefully slide it into the computer (the device only fits one way. **DO NOT FORCE IT**; The screw holes should line up).
- Restart the computer to allow it to automatically detect the new device.

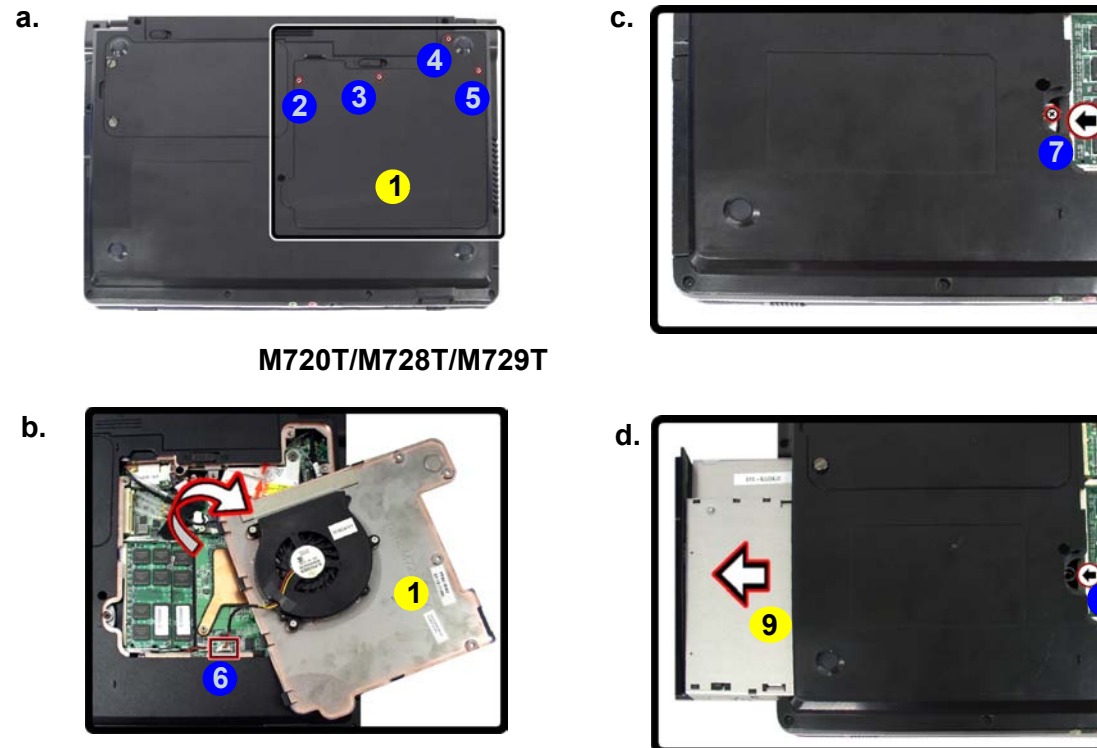


- Component Bay Cover
- Optical Device

- 5 Screws


8. **M730T:** Locate the component bay cover **1** and remove screws **2** & **5**.
9. Carefully (**a fan and cable are attached to the under side of the cover**) lift up the bay cover.
10. Carefully disconnect the fan cable **6** and remove the bay cover **1**.
11. Remove the screw at point **7**, and use a screwdriver to carefully push out the optical device **9** at point **8**.
12. Insert the new device and carefully slide it into the computer (the device only fits one way. **DO NOT FORCE IT**; The screw holes should line up).
13. Restart the computer to allow it to automatically detect the new device.

Figure 5
Optical Device Removal (cont'd.)

- e. Remove the screws.
- f. Disconnect the fan cable and remove the cover.
- g. Remove the screw.
- h. Push the optical device out off the computer at point 8.

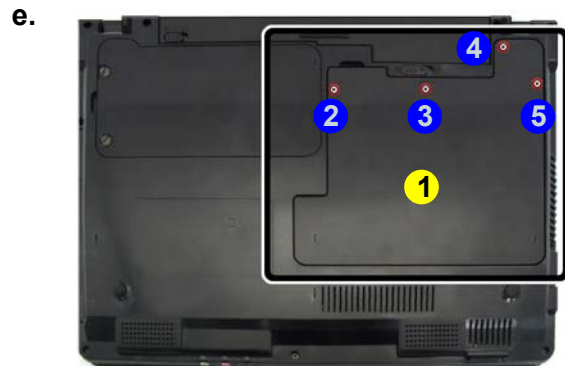

M730T

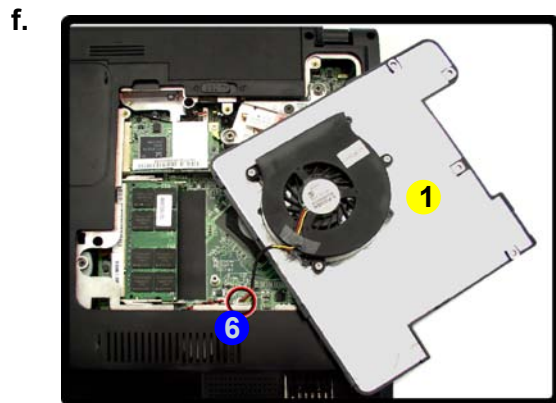

1. HDD Bay Cover
 8. Optical Device

- 4 Screws

Disassembly

Figure 6
RAM Module
Removal


- Remove the screws.
- Remove the cover.

Removing the System Memory (RAM)

The computer has two memory sockets for 200 pin Small Outline Dual In-line Memory Modules (SO-DIMM) supporting **DDR2** 667/800MHz. The main memory can be expanded up to 4GB. The SO-DIMM modules supported are 1024MB, and 2048MB and **DDRII** Modules. The total memory size is automatically detected by the POST routine once you turn on your computer.

Memory Upgrade Process

- Turn **off** the computer, remove the battery ([page 2 - 5](#)).
- Locate the component bay cover **1**, and remove screws **2 - 5**.
- Carefully (**a fan and cable are attached to the under side of the cover**) lift up the bay cover.
- Carefully disconnect the fan cable **6**, and remove the cover **1**.

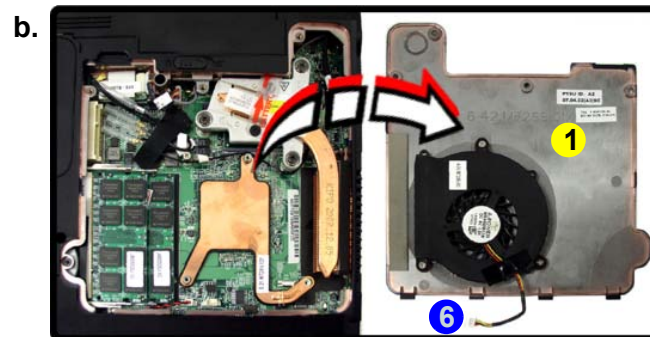

Note:

Only one model is pictured here, however the component locations are the same for both models.





Contact Warning

Be careful not to touch the metal pins on the module's connecting edge. Even the cleanest hands have oils which can attract particles, and degrade the module's performance.




- Component Bay Cover
- 3 Screws

- Gently pull the two release latches (7 & 8) on the sides of the memory socket in the direction indicated by the arrows (Figure 7c).

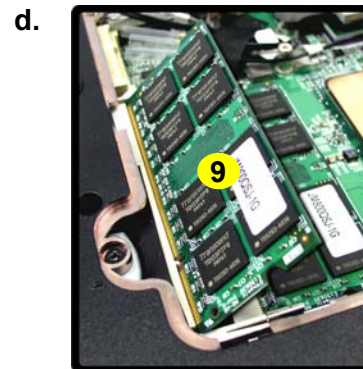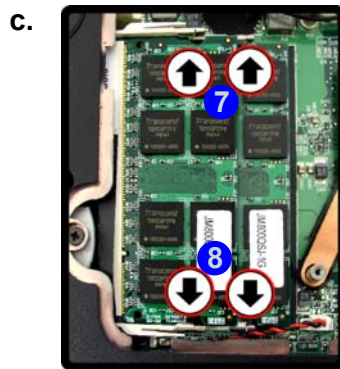

- The RAM module(s) 9 will pop-up (Figure 7d), and you can then remove it.
- Pull the latches to release the second module if necessary.
- Insert a new module holding it at about a 30° angle and fit the connectors firmly into the memory slot.
- The module's pin alignment will allow it to only fit one way. Make sure the module is seated as far into the slot as it will go. DO NOT FORCE the module; it should fit without much pressure.
- Press the module in and down towards the mainboard until the slot levers click into place to secure the module.
- Replace the bay cover and screws (**make sure you reconnect the fan cable before screwing down the bay cover**).

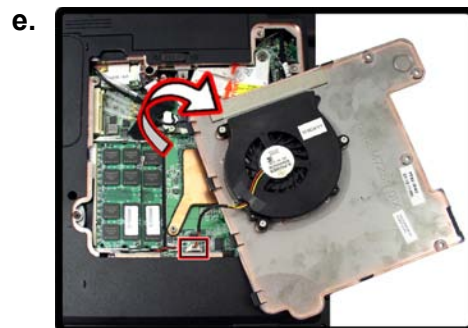


Note:

Only one model is pictured here, however the component locations are the same for both models.

- Restart the computer to allow the BIOS to register the new memory configuration as it starts up.

Figure 7
RAM Module Removal (cont'd.)

- Pull the release latch(es).
- Remove the module(s).

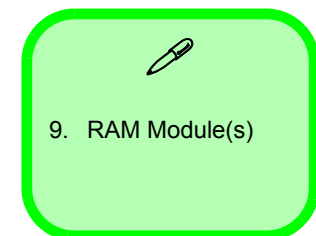


Disassembly

Figure 8
Inverter Board Removal

- Remove the 6 screws and unsnap the LCD front panel module from the back.
- Remove the screw and discharge the remaining power from the inverter board and lift the board up slightly.
- Disconnect the cables from the inverter.
- Remove the inverter.

Removing the Inverter Board

- Turn **off** the computer, and remove the battery ([page 2 - 5](#)).
- Remove any rubber covers, screws **1** - **6** ([Figure 8a](#)), then run your finger around the middle of the frame to carefully unsnap the LCD front panel module **7** from the back.
- Discharge the remaining system power (see [“Inverter Power Warning”](#) below).
- Remove screws **8** - **9** ([Figure 8b](#)) from the inverter, and carefully lift the inverter board up slightly.
- Disconnect cables **10** & **11** ([Figure 8c](#)) from the inverter, then remove the inverter **12** ([Figure 8d](#)) from the top case assembly.

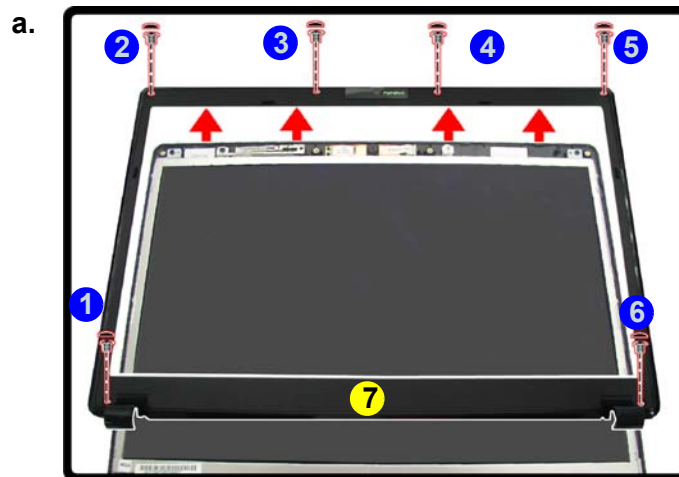

7. LCD Front Panel
 12. Inverter Board

- 8 Screws





Inverter Power Warning

In order to prevent a short circuit when removing the inverter it is necessary to discharge any remaining system power. To do so, press the computer's power button for a few seconds before disconnecting the inverter cable.

Removing the Processor

1. Turn **off** the computer, and remove the battery ([page 2 - 5](#)) and the CPU/RAM bay cover ([page 2 - 10](#)).
2. The CPU heat sink will be visible at point **1** on the mainboard.
3. Loosen screws **2** - **4** from the heat sink in the order indicated.
4. Carefully lift up the heat sink **5** ([Figure c](#)) off the computer.

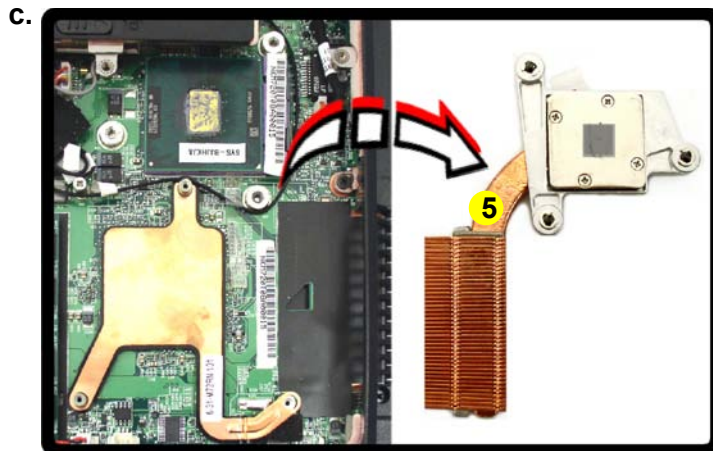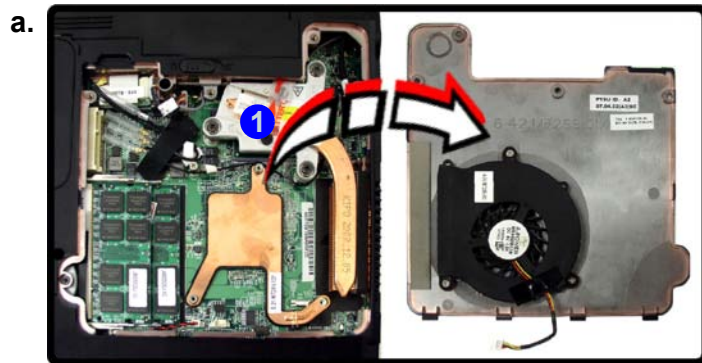

Note:

Only one model is pictured here, however the component locations are the same for both models.

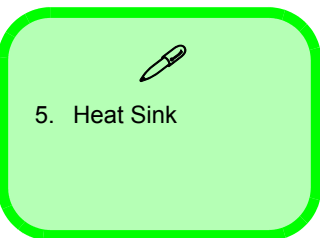
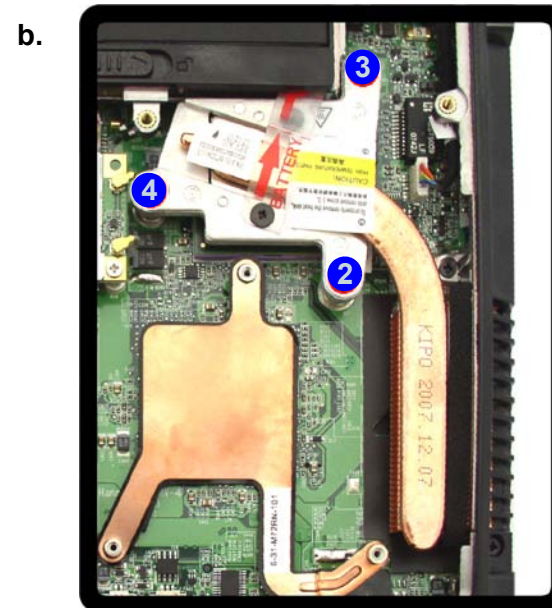



Figure 9
Processor Removal


- a. Remove the cover and locate the heat sink.
- b. Remove the 3 screws in the order indicated.
- c. Remove the heat sink.

Disassembly


Figure 10 Processor Removal Sequence

- d. Turn the release latch to unlock the CPU.
e. Lift the CPU out of the socket.


5. Turn the release latch **6** towards the unlock symbol , to release the CPU (*Figure d*).
6. Carefully (it may be hot) lift the CPU **7** up out of the socket (*Figure e*).
7. Reverse the process to install a new CPU.
8. When re-inserting the CPU, pay careful attention to the pin alignment, it will fit only one way (DO NOT FORCE IT!).

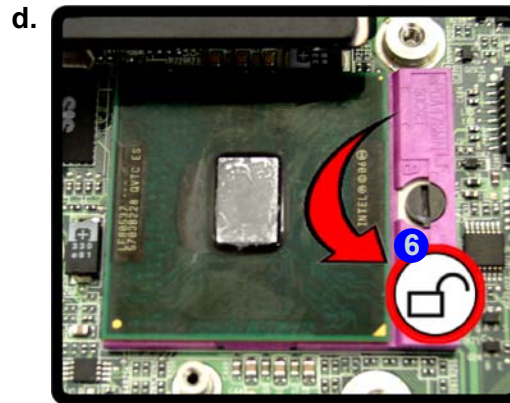

Unlock

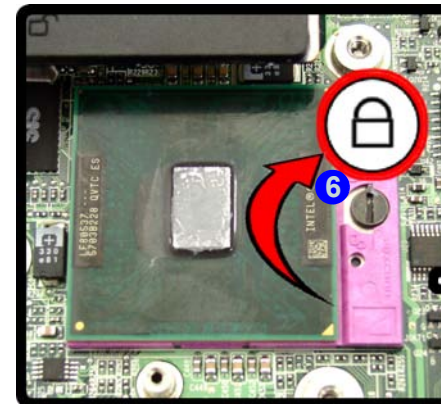

Lock

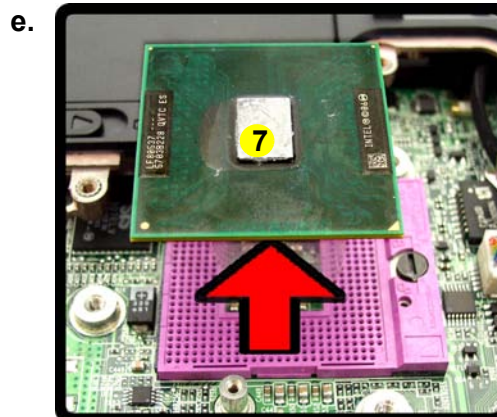

Caution


The heat sink, and CPU area in general, contains parts which are subject to high temperatures. Allow the area time to cool before removing these parts.



7. CPU

Removing the Wireless LAN Module

1. Turn **off** the computer, remove the battery ([page 2 - 5](#)) and the component bay cover ([page 2 - 10](#)).
2. The Wireless LAN module will be visible at point **1** on the mainboard.
3. Carefully disconnect cables **2** - **3**, then remove screw **4** from the module socket.
4. The Wireless LAN module **5** will pop-up.
5. Lift the Wireless LAN module ([Figure 11d](#)) up and off the computer.

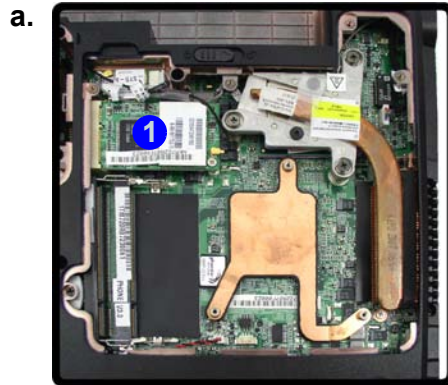

Note:

Only one model is pictured here, however the component locations are the same for both models.


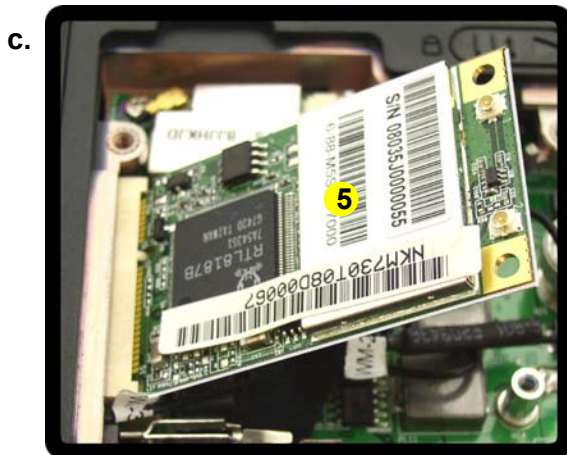



Figure 11
Wireless LAN Module Removal

- a. Remove the cover.
- b. Disconnect the cables and remove the screw.
- c. The WLAN module will pop up.
- d. Lift the WLAN module out.

Note: Make sure you reconnect the antenna cable to “1” + “2” socket ([Figure b](#)).

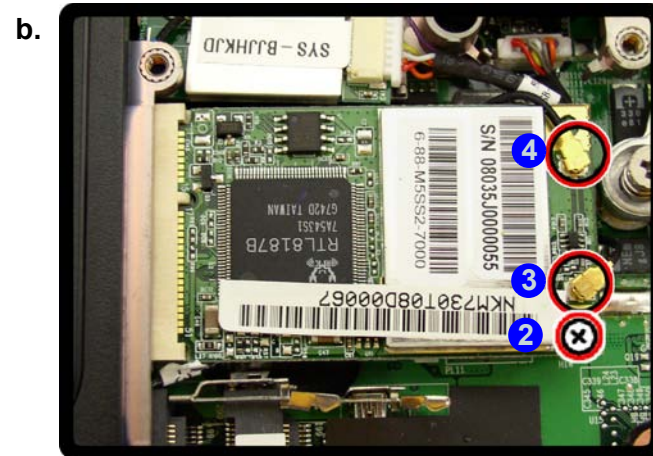

5. WLAN Module.

- 1 Screw


Disassembly

Figure 12
Bluetooth Removal

- Remove the cover and locate the Bluetooth module.
- Remove the screw and disconnect the cable and separate the connector.
- Lift the Bluetooth module out.


Removing the Bluetooth Module

- Turn off the computer, remove the battery ([page 2 - 5](#)).
- The Bluetooth module will be visible at point ① on the mainboard.
- Remove screw ② and carefully disconnect the cable ③ and separate the module from the connector ④.
- Lift the Bluetooth module ⑤ up and off the computer.

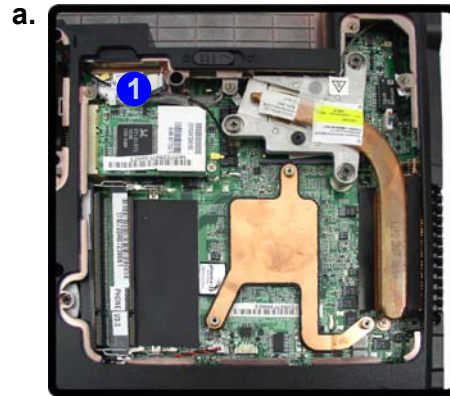

Note:

Only one model is pictured here, however the component locations are the same for both models.

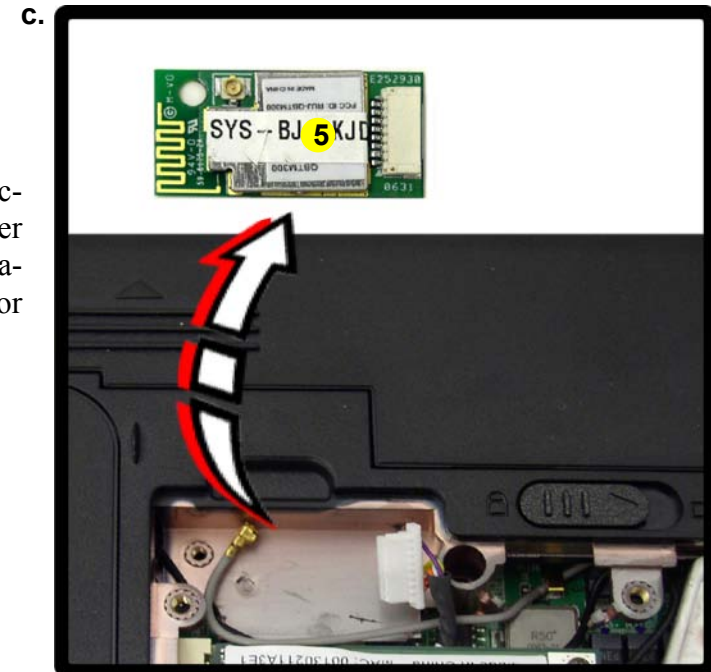

5. Bluetooth Module

- 1 Screw

Removing the Keyboard

1. Turn **off** the computer, and remove the battery ([page 2 - 5](#)).
2. Press the **three** keyboard latches at the top of the keyboard to elevate the keyboard from its normal position (you may need to use a small screwdriver to do this).
3. Carefully lift the keyboard up, being careful not to bend the keyboard ribbon cable ([Figure 13b](#)).
4. Disconnect the keyboard ribbon cable **4** from the locking collar socket **5**.
5. Carefully lift up the keyboard **6** ([Figure 13c](#)) off the computer.

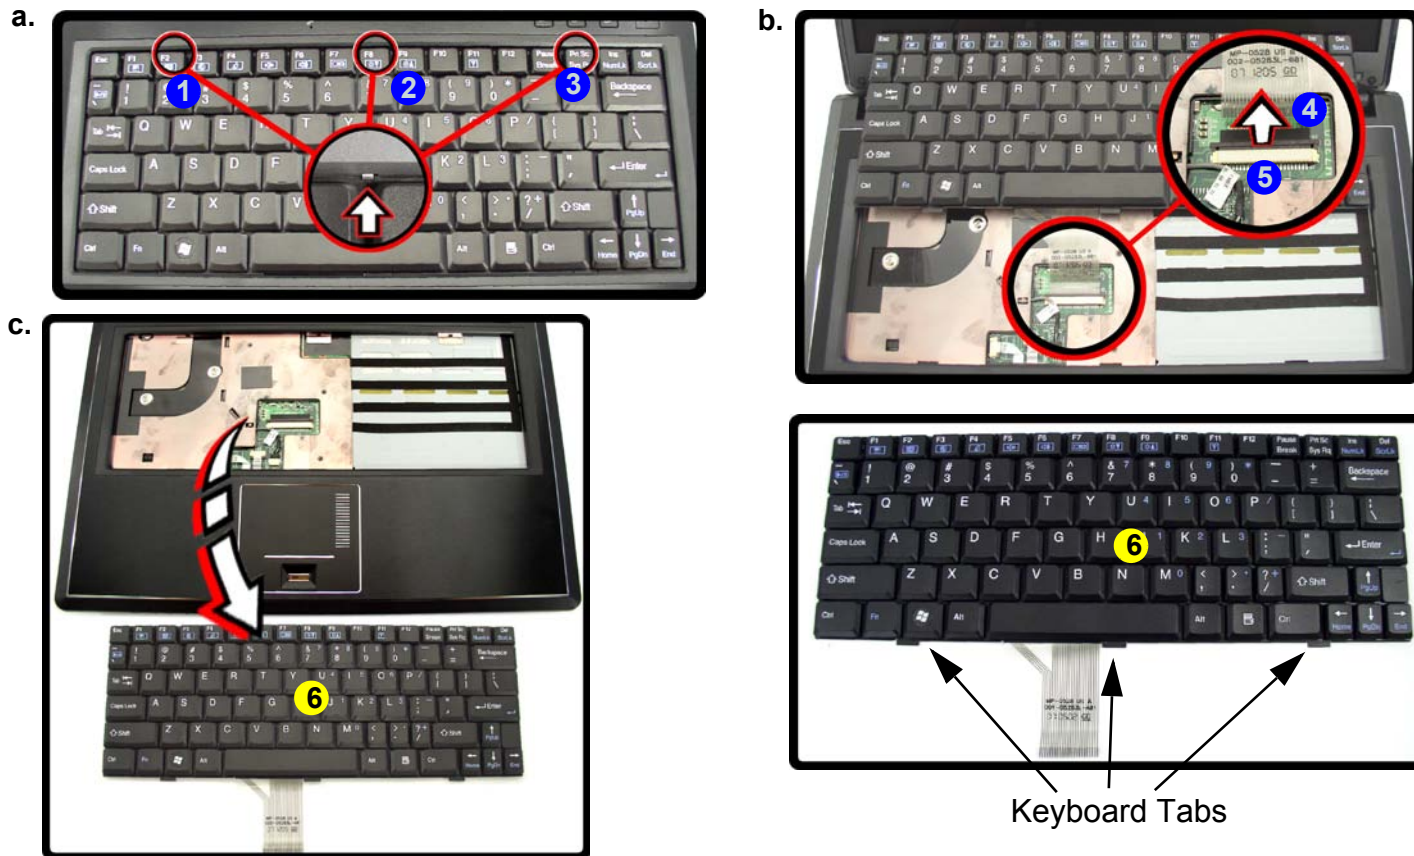




Figure 13
Keyboard Removal

- a. Press the three latches to release the keyboard.
- b. Lift the keyboard up and disconnect the cable from the locking collar.
- c. Remove the keyboard.


Re-Inserting the Keyboard

When re-inserting the keyboard firstly align the **three** keyboard tabs at the bottom of the keyboard with the slots in the case.


6. Keyboard Module.


Disassembly

Figure 14
Modem Removal



- Disconnect the connectors from under the keyboard.
- Remove the screws.
- Remove the screws and disconnect the connectors from the mainboard.
- Remove the top case.

Removing the Modem

- Turn **off** the computer, remove the battery ([page 2 - 5](#)), HDD ([page 2 - 6](#)), component bay cover ([page 2 - 10](#)), optical device ([page 2 - 8](#)), CPU ([page 2 - 13](#)), bluetooth ([page 2 - 16](#)) and keyboard ([page 2 - 17](#)).
- Disconnect the connectors **1 - 3** from under the keyboard and turn it over.
- Remove screws **4 - 5** from the rear of the computer.

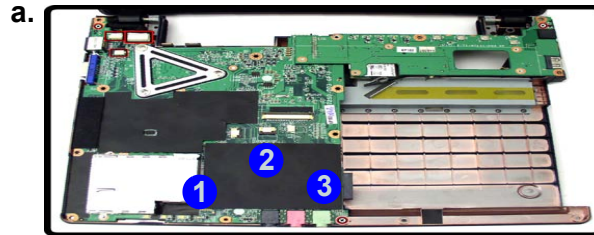

- Remove the screws **6 - 21** from the bottom case and disconnect the connectors **22 - 23** on the mainboard.
- Carefully lift up the top case **24** off the computer.



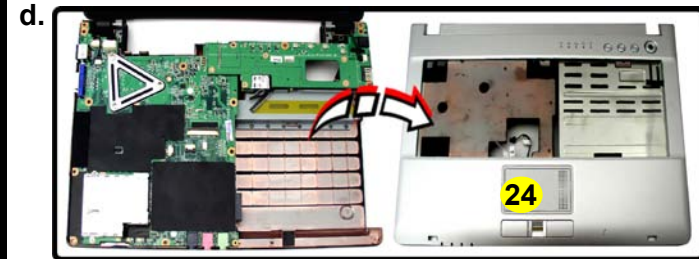
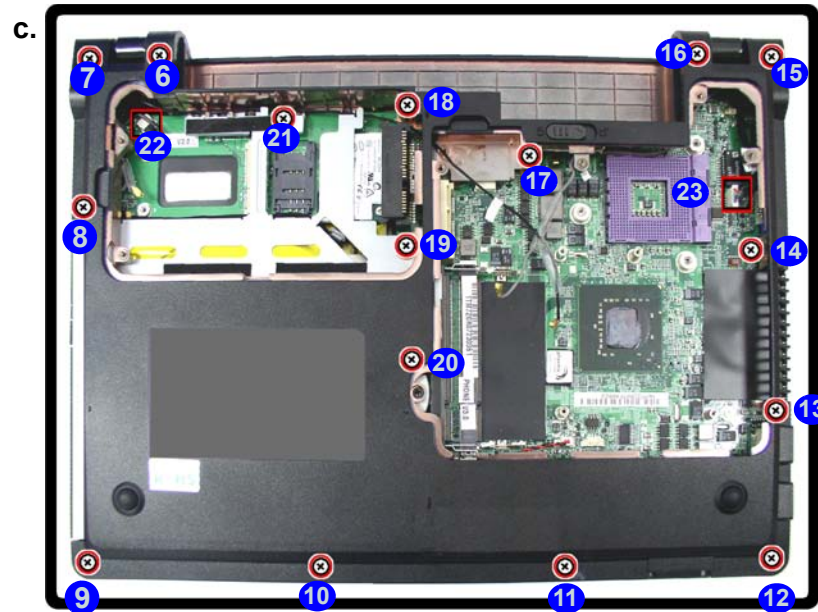


24. Top Case

- 18 Screws

Figure 15
Modem Removal Sequence

6. Remove screws 25 - 27 and disconnect the connectors 28 - 30 from the mainboard.
7. Separate the bottom case 31 from the mainboard 32 and turn it over.
8. Remove the screws 33 - 34 and disconnect the connector 35 from the modem.
9. Lift the modem 37 up off the socket 36.

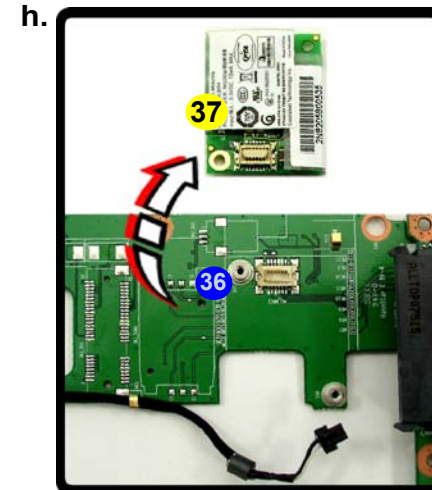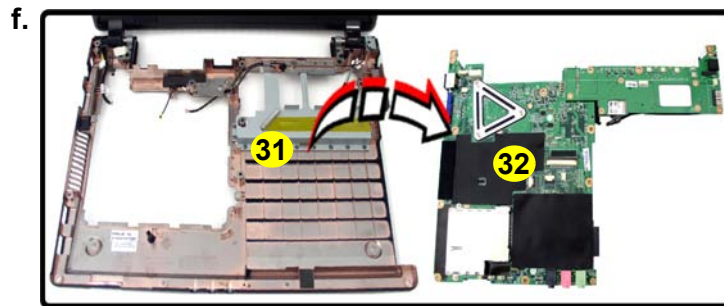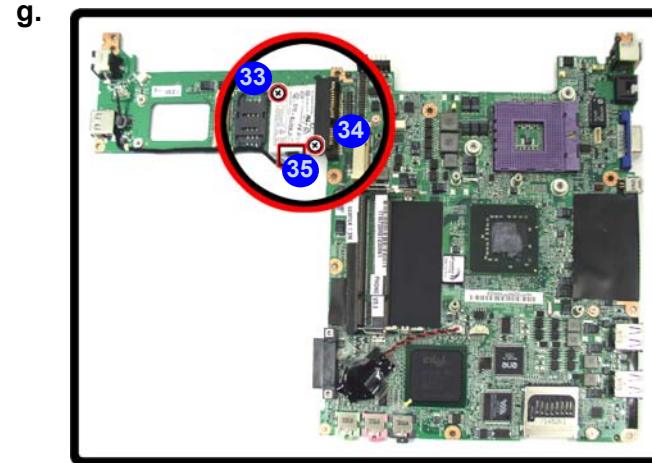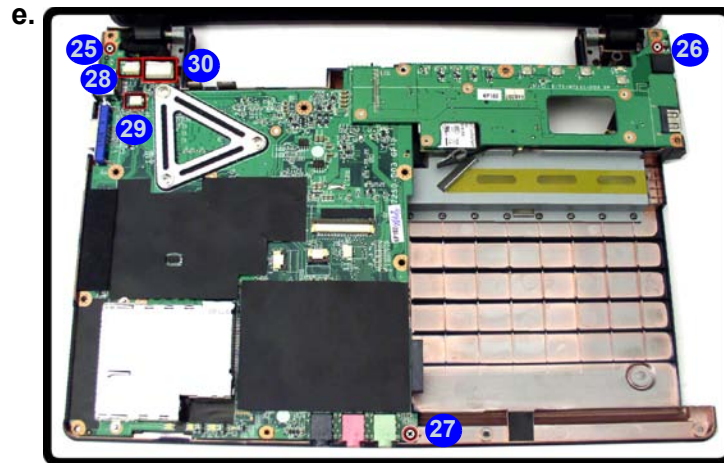

- e. Remove the screws and disconnect the connectors.
- f. Separate the bottom case from the mainboard.
- g. Remove the screws and disconnect the connector.
- h. Lift the modem up off the socket.

31. Bottom Case
32. Main Board
37. Modem

- 5 Screws

Appendix A: Part Lists

This appendix breaks down the *M720T/M728T/M729T/M730T* series notebook's construction into a series of illustrations. The component part numbers are indicated in the tables opposite the drawings.

Note: This section indicates the *manufacturer's* part numbers. Your organization may use a different system, so be sure to cross-check any relevant documentation.

Note: Some assemblies may have parts in common (especially screws). However, the part lists DO NOT indicate the total number of duplicated parts used.

Note: Be sure to check any update notices. The parts shown in these illustrations are appropriate for the system at the time of publication. Over the product life, some parts may be improved or re-configured, resulting in *new* part numbers.

Part List Illustration Location

The following table indicates where to find the appropriate part list illustration.

Table A- 1
**Part List Illustration
Location**

Parts	M720T	M728T	M729T	M730T
Top with Fingerprint	<i>page A - 3</i>	<i>page A - 10</i>	<i>page A - 17</i>	<i>page A - 24</i>
Top without Fingerprint	<i>page A - 4</i>	<i>page A - 11</i>	<i>page A - 18</i>	<i>page A - 25</i>
Bottom	<i>page A - 5</i>	<i>page A - 12</i>	<i>page A - 19</i>	<i>page A - 26</i>
LCD	<i>page A - 6</i>	<i>page A - 13</i>	<i>page A - 20</i>	<i>page A - 27</i>
HDD	<i>page A - 7</i>	<i>page A - 14</i>	<i>page A - 21</i>	<i>page A - 28</i>
COMBO	<i>page A - 8</i>	<i>page A - 15</i>	<i>page A - 22</i>	<i>page A - 29</i>
DVD-Dual Drive	<i>page A - 9</i>	<i>page A - 16</i>	<i>page A - 23</i>	<i>page A - 30</i>

Top with Fingerprint (M720T)

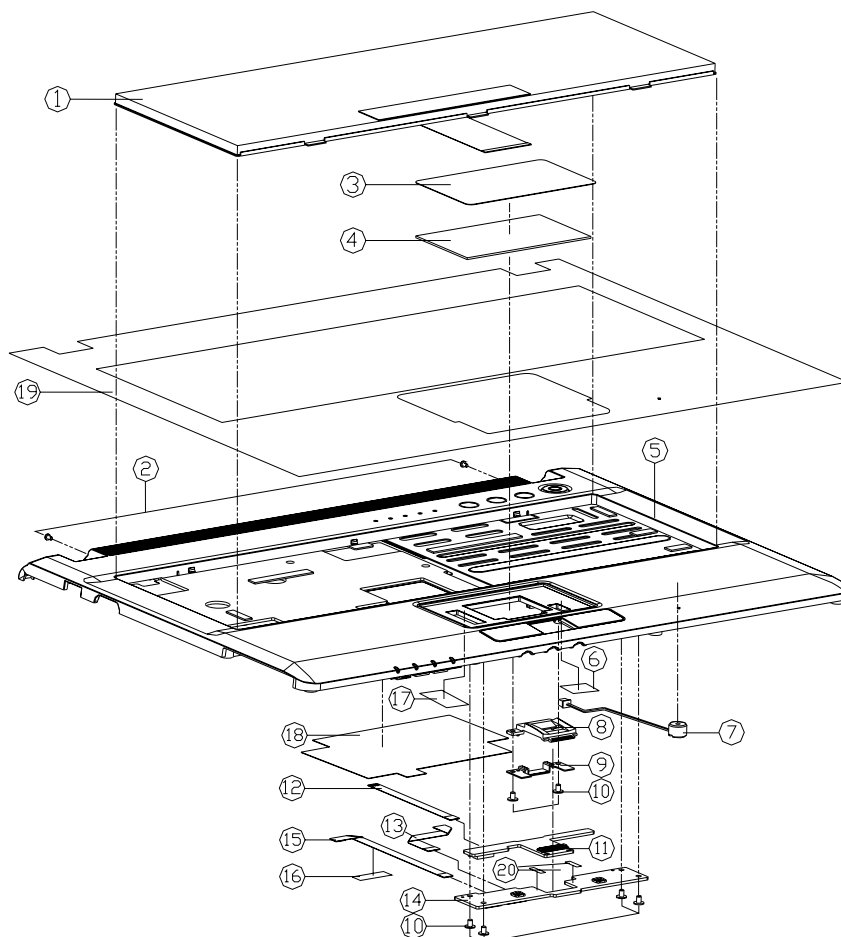



Figure A - 1
Top with Fingerprint
(M720T)

ITEM	PART NAME	PART NO	REMARK
1	K/B USA HP-0526205-4302 M720S	6-80-M7250-011-1	FDR M720T/M721T
1	K/B USA HP-0526205-4302 M721S	6-80-M7210-011-1	FDR M721T
2	SCREW M2x3L KI NI ICT NY	6-35-B1120-3RA	
3	TOUCH PAD MYLAR 8835 M720S	6-40-M7252-011	FDR M720T
3	TOUCH PAD MYLAR 8835 M721S	6-40-M7212-011	FDR M721T
3	TOUCH PAD MYLAR 8835 M725S	6-40-M7252-010	FDR M722T
4	TOUCH PAD TM61P21R389 M666JE	6-49-M66E2-010	
5	TPP CASE MODULE FLOATING M720T	6-39-M7212-012	FDR M720T
5	TPP CASE MODULE FLOATING M721T	6-39-M7212-112	FDR M721T
5	TPP CASE MODULE FLOATING M722T	6-39-M7222-112	FDR M722T
6	TOUCH PAD GROUND FOLIOGRAPH FOR DUAL	6-47-M55G2-010	
7	SCREW M2x3L KI NI ICT NY	6-23-EM55G-011	
8	OP KNOB CENTER PC-ABSICK7240 M720S	6-42-M7252-031-1	FDR M720T
8	OP KNOB CENTER PC-ABSICK7240 M721S	6-42-M7212-030	FDR M721T
8	OP KNOB CENTER PC-ABSICK7240 M725S	6-42-M7222-030	FDR M722T
9	FINGER BRACKET MODULE M720S	6-33-M7252-201	
10	SCREW M2x3L KI NI ICT GTY-PATCH	6-35-B1120-3RE	
11	FINGERPRINT BOARD V10A M720T	6-77-M721F-001A	
12	FTC CABLE FOR FINGERPRINT TO W/B 4P M720S	6-43-M7250-030	
13	FTC CABLE FOR TOUCH PAD TO W/B 4P M720S	6-43-M7250-010	
14	CLICK BOARD V1.0 M720T	6-77-M7212-001	
15	FTC CABLE FOR CLOCK TO W/B 4P M720S	6-43-M7250-020	
16	TAPE MYLAR (C)MYLAR M550J	6-40-M55J2-030	
17	TOUCH PAD GROUND FOLIOGRAPH FOR DUAL	6-47-M55G2-020	
18	FDR TOP CASE M720T	6-47-M7212-010	
19	TPP CASE PROTECT MYLAR 14118 8835 M720S	6-40-M7212-024	
20	CLOCK BOARD MYLAR FOR DUAL	6-40-M729S-011	

A.Part Lists

Top without Fingerprint (M720T)

Figure A - 2
Top without Fingerprint (M720T)

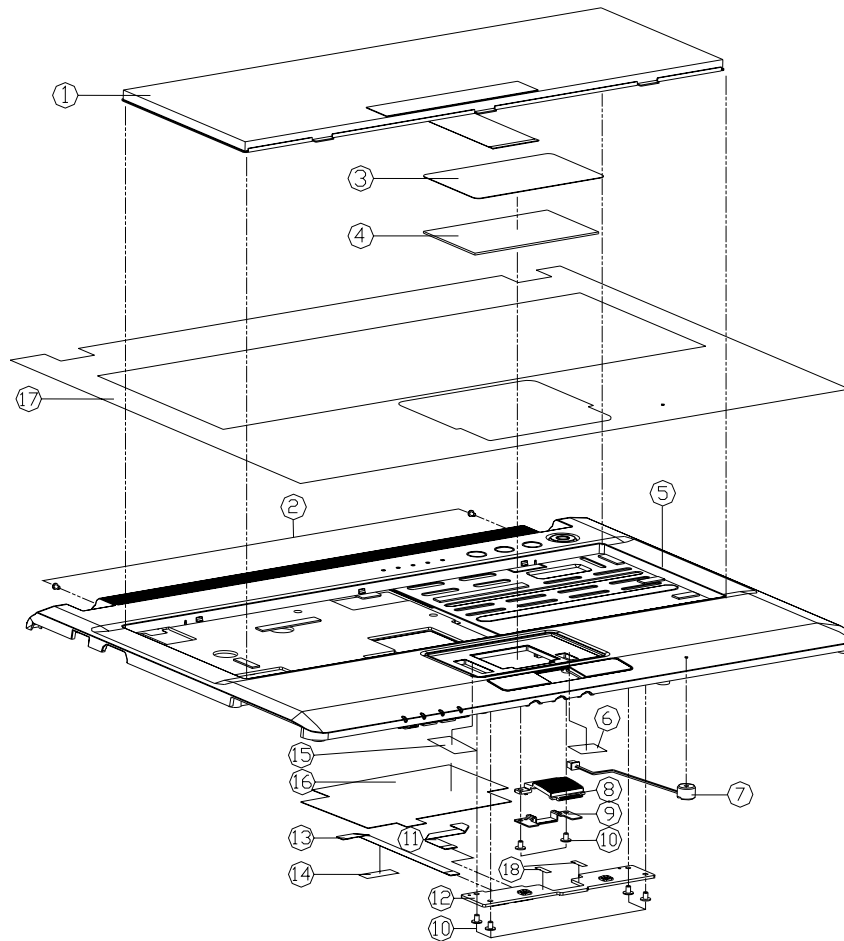


ITEM	PART NAME	PART NO	REMARK
1	K/B USA W/45283US-4302 M720S	6-80-M7250-011-1	FOR M7201/M7221
1	K/B USA W/45283US-4302 M721S	6-80-M7210-011-1	FOR M721T
2	SCREW M4X3L K1 NI ICT NY	6-35-B1120-3RA	
3	TOUCH PAD MYLAR 8835 M720S	6-40-M7252-011	FOR M720T
3	TOUCH PAD MYLAR 8835 M721S	6-40-M7212-011	FOR M721T
3	TOUCH PAD MYLAR 8835 M722S	6-40-M7252-010	FOR M722T
4	TOUCH PAD 1M61PDZIR309 M666JC	6-49-M66E2-010	
5	TOP CASE MODULE(FK8 FLDATING) M720T	6-39-M7212-012	FOR M720T
5	TOP CASE MODULE(FK8 FLDATING) M721T	6-39-M7212-112	FOR M721T
5	TOP CASE MODULE(FK8 FLDATING) M722T	6-39-M7222-112	FOR M722T
6	TOUCH PAD GROUND AL 1749	6-47-M55G2-010	
7	IC UNKNOW(FK8 FLDATING) M720T	6-23-EM55G-011	
8	IP KNEB CENTER DUMMY FC-M55G2(FK8) M720S	6-42-M7252-041-1	FOR M720T
8	IP KNEB CENTER DUMMY FC-M55G2(FK8) M721S	6-42-M7212-040	FOR M721T
8	IP KNEB CENTER DUMMY FC-M55G2(FK8) M722S	6-42-M7222-040	FOR M722T
9	FINGER BRACKET MODULE M720S	6-33-M7252-201	
10	SCREW M4X3L K1 NI ICT G1Y-PATCH	6-35-B1120-3RE	
11	FFC CABLE FOR TOUCH PAD TO M3 IP M720S	6-43-M7250-010	
12	CLICK BOARD V20 FOR M720T	6-77-M7212-001	
13	FFC CABLE FOR CLICK TO M3 IP M720S	6-43-M7250-020	
14	TAPE MYLAR (C)MYLAR M550J	6-40-M55J2-030	
15	TOUCH PAD GROUND AL 1749 FOR ORAL	6-47-M55G2-020	
16	FOR TOP CASE M720T	6-47-M7212-010	
17	TOP CASE PROTECT MYLAR (FK8) M720S	6-40-M7212-024	
18	CLK M4X3 BLUR PAPER-ORANGE	6-40-M7295-011	

A - 4 Top without Fingerprint (M720T)

LCD (M720T)

Figure A - 4
LCD
(M720T)

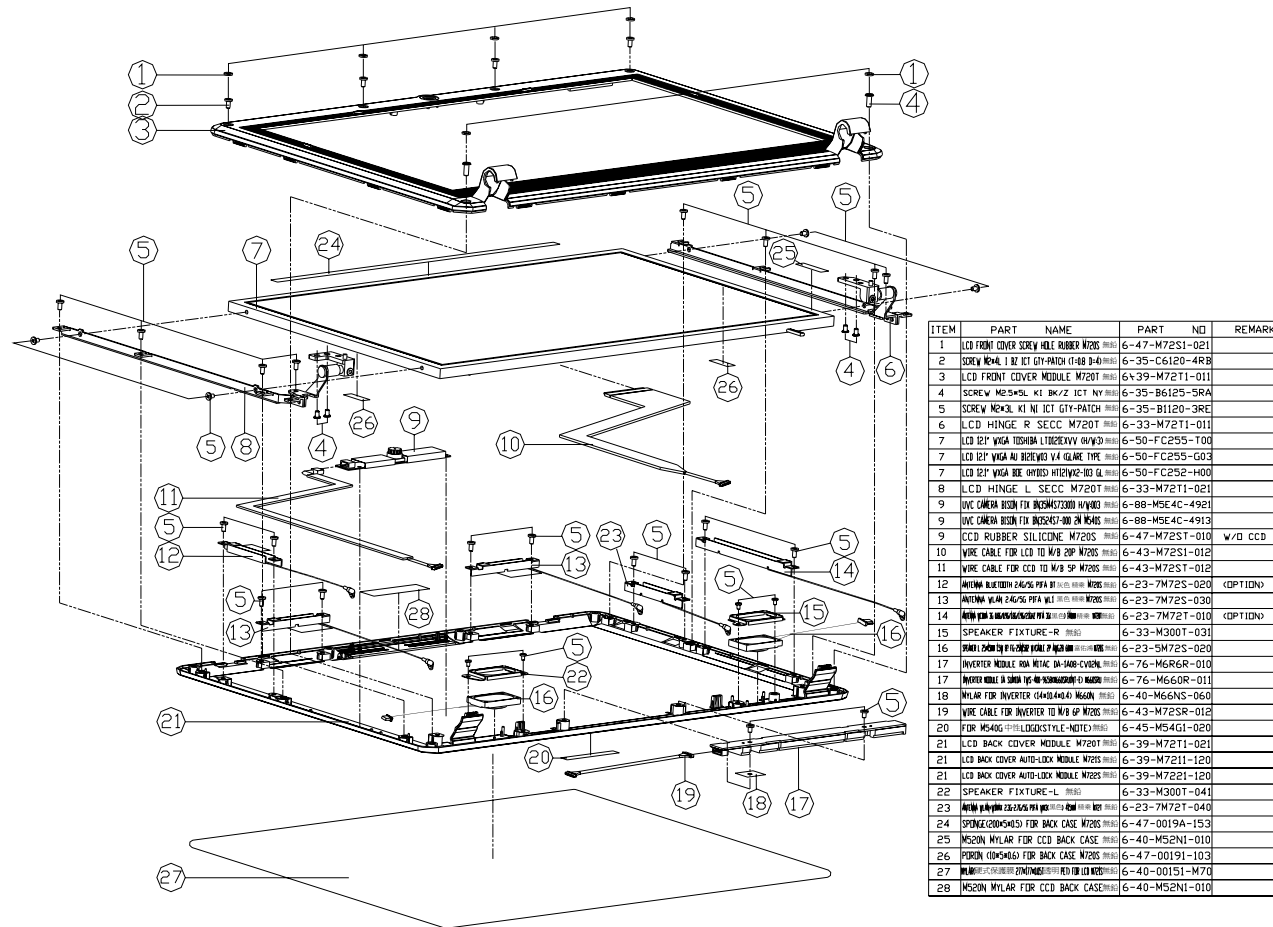

ITEM	PART NAME	PART NO	REMARK
1	LCD FRONT COVER SCREW HOLE RUBBER M720S	6-47-M72S1-021	
2	SCREW NYL 1.8Z ICT GY-PATCH (1-88 B-4)	6-35-C6120-4R-B	
3	LCD FRONT COVER MODULE M720T	6-39-M72T1-011	
4	SCREW M2.5*SL K1 BK/2 ICT NY	6-35-B6125-5RA	
5	SCREW M2*3L K1 NI ICT GY-PATCH	6-35-B1120-3RE	
6	LCD HINGE R SECC M720T	6-33-M72T1-011	
7	LCD REP VISA TOSHIBA LTM26V1VY 04K30	6-50-FC255-100	
7	LCD REP VISA AU SONY V4 LGARE TYPE	6-50-FC255-G03	
7	LCD REP VISA DE GYHDD HTEW2-NE3 GL	6-50-FC255-H00	
8	LCD HINGE L SECC M720T	6-33-M72T1-021	
9	IOC CAMERA RESIN (1X INCH4372000 HAYO)	6-88-M5E4C-4921	
9	IOC CAMERA RESIN (1X INCH4372000 2N M545)	6-88-M5E4C-4913	
9	CCD RUBBER SILICONE M720S	6-47-M72S1-010	W/O CCD
10	WIRE CABLE FOR LCD TO W/B 2P M720S	6-43-M72S1-012	
11	WIRE CABLE FOR CCD TO W/B 2P M720S	6-43-M72S1-012	
12	ANTENNA ALUMINUM 24X26 PFA W/ BUBBLE	6-23-7M72S-020	(OPTION)
13	ANTENNA NYLON 24X26 PFA W/ BUBBLE	6-23-7M72S-030	
14	ANTENNA NYLON 24X26 PFA W/ BUBBLE	6-23-7M72T-010	(OPTION)
15	SPEAKER FIXTURE-R	6-33-M300T-031	
16	INVERTER MODULE FOR M720S	6-23-5M72S-020	
17	INVERTER MODULE FOR M720T	6-76-M660R-010	
17	INVERTER MODULE FOR M720S	6-76-M660R-011	
18	NYLAR FOR INVERTER (44X14X4.0 M520)	6-40-M66NS-060	
19	WIRE CABLE FOR INVERTER TO W/B 4P M720S	6-43-M72SR-012	
20	FDR M540G (1P) LOGO STYLE-NOTICE	6-45-M54G1-020	
21	LCD BACK COVER MODULE M720T	6-39-M72T1-021	
21	LCD BACK COVER AUTO-LOCK MODULE M720S	6-39-M72T1-120	
21	LCD BACK COVER AUTO-LOCK MODULE M720S	6-39-M7221-120	
22	SPEAKER FIXTURE-L	6-33-M300T-041	
23	NYLAR FOR INVERTER (28X26 PFA W/ BUBBLE)	6-23-7M72T-040	
24	SPRING (28X54S) FOR BACK CASE M720S	6-47-0019A-153	
25	MS20N NYLAR FOR CCD BACK CASE	6-40-MS2N1-010	
26	PERON (28X54S) FOR BACK CASE M720S	6-47-00191-103	
27	NYLAR FOR INVERTER (28X26 PFA W/ BUBBLE)	6-40-00151-M70	
28	MS20N NYLAR FOR CCD BACK CASE	6-40-MS2N1-010	

HDD (M720T)


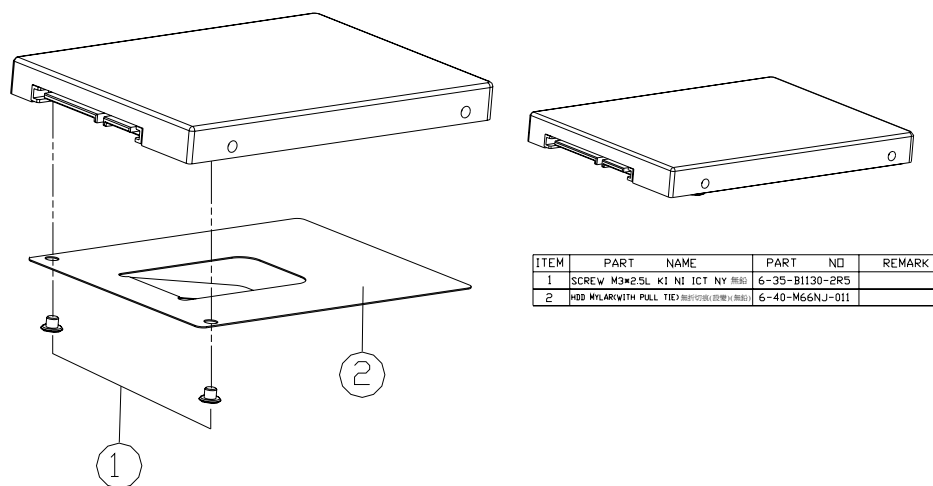


Figure A - 5
HDD
(M720T)

DVD-Dual Drive (M720T)

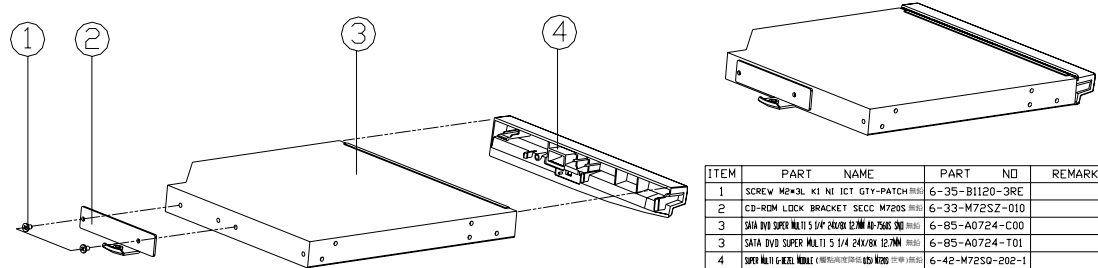

ITEM	PART NAME	PART NO	REMARK
1	SCREW M2x3L K1 NI ICT GTY-PATCH	6-35-B1120-3RE	
2	CD-ROM LOCK BRACKET SECC M720S	6-33-M72SZ-010	
3	SATA DVD SUPER MULTI 5 1/4 24X/8X 12.7MM	6-85-A0724-C00	
3	SATA DVD SUPER MULTI 5 1/4 24X/8X 12.7MM	6-85-A0724-T01	
4	SATA DVD SUPER MULTI 5 1/4 24X/8X 12.7MM	6-42-M72SQ-202-1	

Figure A - 7
DVD-Dual Drive
(M720T)

Top with Fingerprint (M728T)

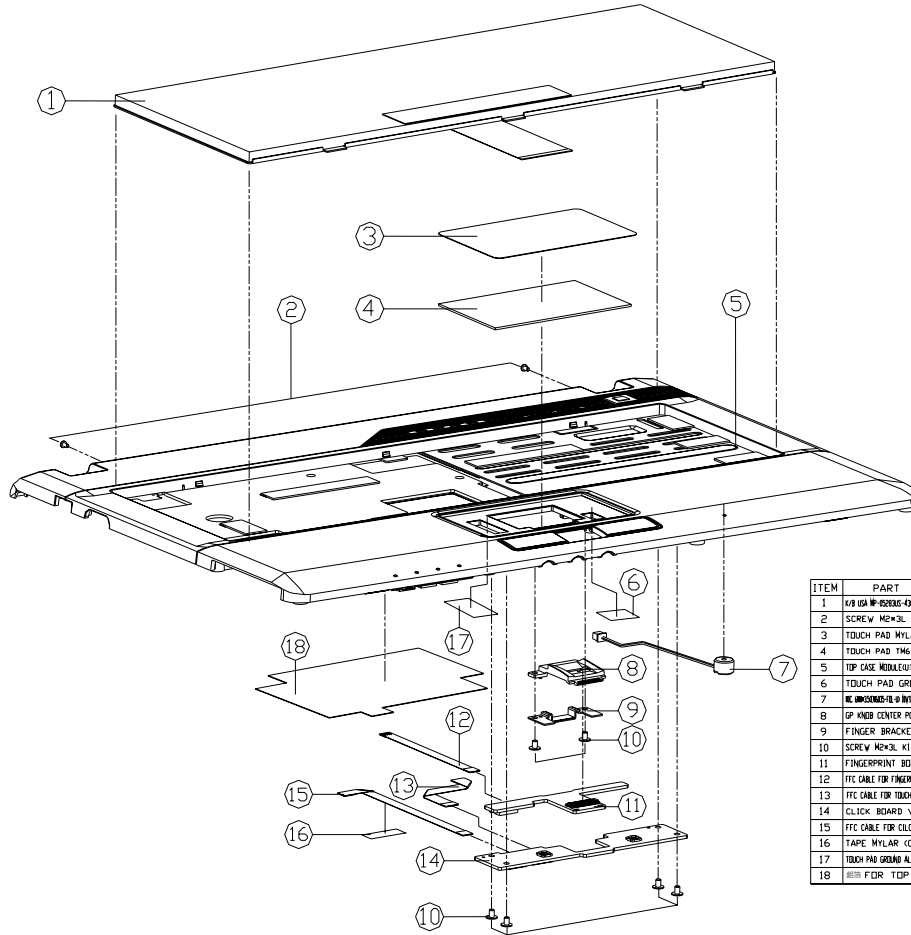


Figure A - 8
Top with Fingerprint
(M728T)

ITEM	PART NAME	PART NO	REMARK
1	TOP CASE M728T-010 M728T-010 M728T-010	6-80-M728T-011-1	
2	SCREW M2X3. KI NI ICT NY	6-35-B1120-3RA	
3	TOUCH PAD MYLAR 0835 M728S	6-40-M7282-010	
4	TOUCH PAD TM61P21K389 M660JC	6-49-M6602-010	
5	TOP CASE MIDDLE FOR FLOATING M728S	6-39-M7282-015	
6	TOUCH PAD GROUND AL 17X9	6-47-M55G2-010	
7	WIRE BRACKET FOR FINGERPRINT BOARD	6-23-E-M55G-011	
8	OP KNOB CENTER PC-ABS(CX740) M728S	6-42-M7282-030	
9	FINGER BRACKET MODULE M728S	6-33-M7282-201	
10	SCREW M2X3. KI NI ICT QTY-PATCH	6-35-B1120-3RE	
11	FINGERPRINT BOARD V10A M720T	6-77-M721F-D01A	
12	FFC CABLE FOR FINGERPRINT TO M728S	6-43-M7280-030	
13	FFC CABLE FOR TOUCH PAD TO M728S	6-43-M7280-010	
14	CLICK BOARD V10 M720T	6-77-M7212-D01	
15	FFC CABLE FOR CLICK TO M728S	6-43-M7280-020	
16	TAPE MYLAR (C)MYLAR M550J	6-40-M55J2-030	
17	TOUCH PAD GROUND AL TOLL2040 FOR DNAL	6-47-M55G2-020	
18	WIRE FOR TOP CASE M720T	6-47-M7212-010	

Top without Fingerprint (M728T)

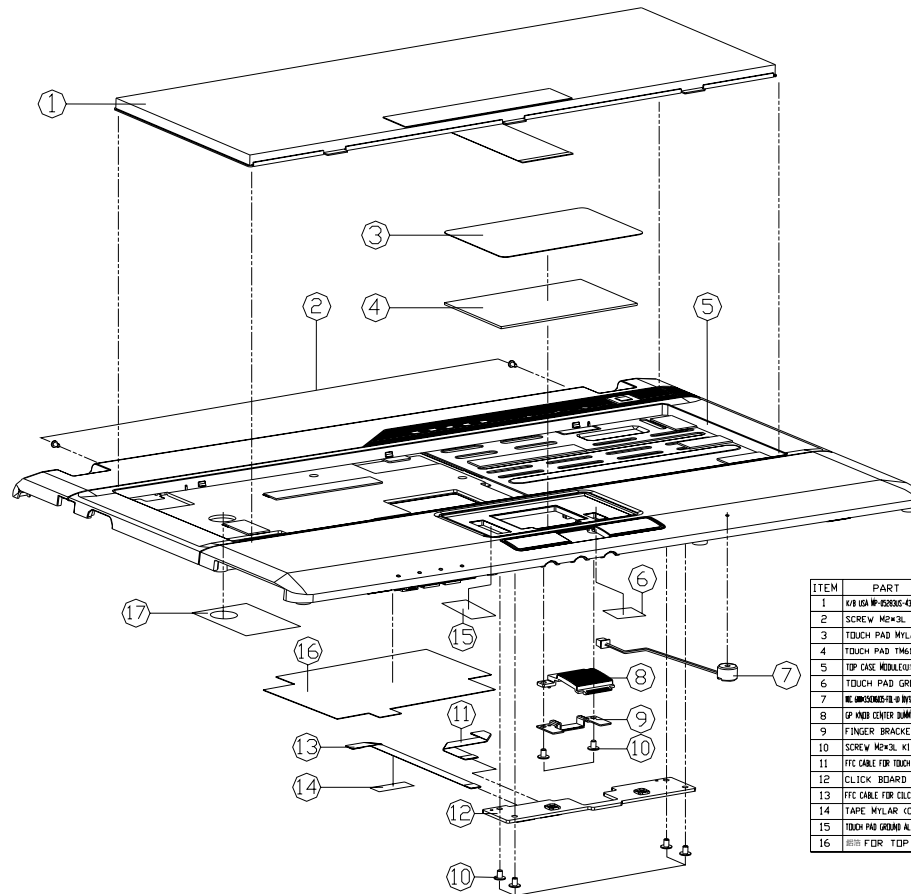


Figure A - 9
Top without
Fingerprint
(M728T)

ITEM	PART NAME	PART NO	REMARK
1	K/B USA M-020205-430 M720S (R) (U) WITH VST (R) (S)	6-80-M7250-011-1	
2	SCREW M2*3L KI NI ICT NY (R) (S)	6-35-B1120-3RA	
3	TOUCH PAD MYLAR B835 M725S (R) (S)	6-40-M7252-010	
4	TOUCH PAD TM61P22R3B9 M660JE (R) (S)	6-49-M66E2-010	
5	TOP CASE MODULE (U) KB FLOATING M725S (R) (S)	6-39-M7252-015	
6	TOUCH PAD GROUND AL 17*9 (R) (S)	6-47-M55G2-010	
7	IC ASSY (M728T) (U) (R) (S)	6-23-EM55G-011	
8	CP M728 CENTER BUTTON PC-ASSY (M728T) (R) (S)	6-42-M7222-040	
9	FINGER BRACKET MODULE M720S (R) (S)	6-33-M7252-201	
10	SCREW M2*3L KI NI ICT GTY-PATCH (R) (S)	6-35-B1120-3RE	
11	FFC CABLE FOR TOUCH PAD TO M728T (R) (S)	6-43-M7250-010	
12	CLICK BOARD V1.0 M720T (R) (S)	6-77-M72T2-001	
13	FFC CABLE FOR CLICK TO M728T (R) (S)	6-43-M7250-020	
14	TAPE MYLAR (C) MYLAR M550J (R) (S)	6-40-M55J2-030	
15	TOUCH PAD GROUND AL FOLDER (U) FOR DUAL (R) (S)	6-47-M55G2-020	
16	FDR TDP CASE M720T (R) (S)	6-47-M72T2-010	

A.Part Lists

Bottom (M728T)

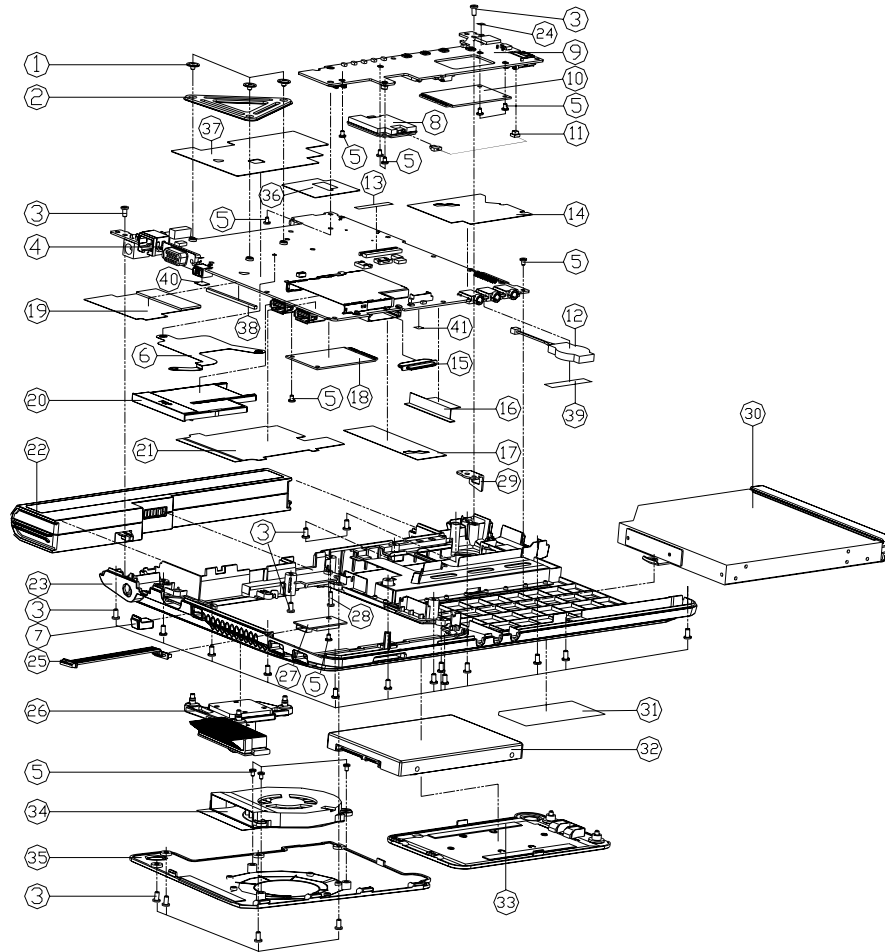


Figure A - 10
Bottom
(M728T)

ITEM	PART NAME	PART NO	REMARK
1	KEY-OPS-POS-ADJUST-KEY-UNIT-MULTI-M728T	6-35-4102S-2R5	
2	CPU SUPPORTER MODULE AL M720S	6-33-M72SS-011	
3	SCREW M2.5XSL K1 BK/Z ICT NY	6-35-B612S-SRA	
4	MAIN BOARD V30A M720T	6-77-M72T0-D03A	
5	SCREW M2XSL K1 NI ICT NY	6-35-B1120-3RA	
6	NORTH BRIDGE HEATSHW MODULE (CU) M720R	6-31-M72RN-101	
7	1394 RUBBER M720S	6-47-M72SP-010	
8	KEY-LAMP-LED-RED	6-88-L39T1-5300	
9	MULTI I/O BOARD V30A (w/D 30) M720T	6-77-M72T1-D03A	
9	MULTI I/O BOARD V30A (w/D 30) M720T	6-77-M72T1-D03A-1	
10	WLAN MEDIA KEY/2 SERIAL/KEYLESS MFCARD USA 33G	6-88-M72SW-720	(OPTION)
11	WIRE CABLE FOR RJ-11 TO MIC 2P M720S	6-43-M72SU-010	(OPTION)
12	KEY-OPS-POS-ADJUST-KEY-UNIT-MULTI-M728T	6-23-2201S-P2C	
13	M520G K/B CONN MYLAR	6-40-M520S-060	
14	MAIN BOARD AL F01L M730T	6-40-M73TS-0D0	
15	M520G CARD READER RUBBER	6-47-M52GB-010	
16	DR. DRG. 3X1 MYLAR FR83+TERADAF50F1 M720S	6-40-M72SZ-010	
17	DDR MYLAR FR83 M730T	6-40-M73TS-060	
18	COMPLEXION BR214G4N INTEL SHIELD PE	6-88-M72T2-4211	
18	WLAN BR214G4N INTEL SHIELD PEAK D2E NI	6-88-M72T2-4240	(OPTION)
18	COMPLEXION BR214G4N INTEL SHIELD PEAK	6-88-M72T2-4241	(OPTION)
18	WLAN BR214G4N INTEL SHIELD PEAK USA R1	6-88-M55S2-7000	(OPTION)
19	NORTH BRIDGE MYLAR FR83+TERADAF50F1 M730T	6-40-M73TS-021	
20	DUMMY NEW CARD PC+ABS T1E20R	6-42-T12R3-011	
21	NEW CARD MYLARFR83+TERADAF50F1 M730T	6-40-M73TS-050	
22	MAP S 11 H0V14M KCP SHIP/CONSOLE SHIELD/FR M720S	6-87-M72SS-4DF2	
22	MAP S 11 H0V14M KCP SHIP/CONSOLE SHIELD/FR M720S	6-87-M72SS-4D42	
22	MAP S 11 H0V14M KCP SHIP/CONSOLE TOP/CL/CONSOLE	6-87-M72SS-5DF2	
23	BOTTOM CASE MODULE CROSS	6-39-M72S3-018	
24	SPEAKER CABLE PASTE (FR83+SHLD) M720S	6-40-M72S3-010	
25	WIRE CABLE FOR BLUETOOTH TO M720S	6-43-M72SB-010	
26	HEAT SINK MODULE M720S	6-31-M72SN-103	
27	BLUETOOTH V20 G01700N AND ODM 8 PIN USA	6-88-M5S45-620	(OPTION)
27	BLUETOOTH V20 G01700N AND ODM 8 PIN	6-88-M5S45-390	(OPTION)
28	SCREW M2XSL K1 BK/Z ICT NY	6-35-B6120-BR0	
29	LOCK BRACKET SECC M720S	6-33-M72S3-010	
30	SATA DVD SUPER MULTI 24X/8X DVD	6-79-M72T0-000	
30	SATA DVD COMBO 24X/8X DVD/CD/RW/MS	6-79-M72T1-000	
31	PRODUCT LABEL FOR M720T	6-45-M72T3-010	
31	PRODUCT LABEL FOR M725T	6-45-M725T-010	
31	PRODUCT LABEL FOR M721T	6-45-M721T-010	
31	PRODUCT LABEL FOR M722T	6-45-M722T-010	
31	PRODUCT LABEL FOR M728T	6-45-M728T-010	
31	PRODUCT LABEL FOR M729T	6-45-M729T-010	
32	V/D HDD ASSY M720S	6-79-M72SJ-010	
33	HDD COVER MODULE M720S	6-42-M72SJ-103	
34	FAN MODULE M720S	6-31-M72SS-103	
35	CPU COVER MODULE M720T	6-42-M72TS-100	
36	RJ45 CONNECT MYLAR FR83+TERADAF50F1 M730T	6-40-M73TS-040	
37	MYLAR FOR MB (FR83+TERADAF50F1) M730T	6-40-M73TS-010	
38	MYLAR-I FOR MB (50K2+165D) PC M720S	6-40-M72SS-051	
39	TAPE MYLAR (A)MYLAR M550J	6-40-M55J2-010	
40	PROTECT MB MYLAR FR83 M720S	6-40-M72SS-040	

LCD (M728T)

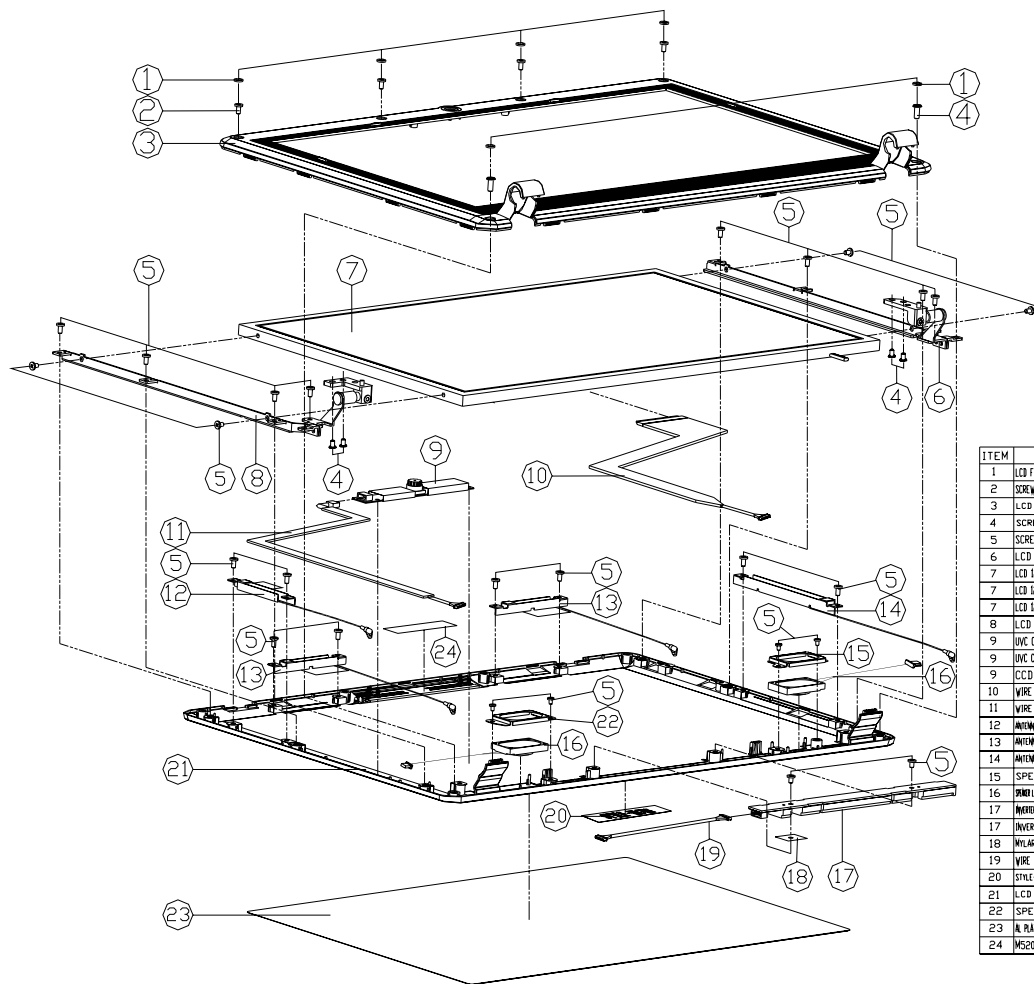



Figure A - 11
LCD
(M728T)

ITEM	PART NAME	PART NO	REMARK
1	LCD FRONT COVER SCREW HOLE RUBBER M728T	6-47-M72S1-021	
2	SCREW M4x1.1 B7 ICT GTY-PATCH (1-B8 B-4)	6-35-C6120-4RB	
3	LCD FRONT COVER MODULE M728T	6-39-M72T1-011	
4	SCREW M2.5x5L X1 BK/2 ICT NY	6-35-B6125-SRA	
5	SCREW M2x3L X1 NY ICT GTY-PATCH	6-35-B1120-3RE	
6	LCD HINGE R DIE CASTING M720S	6-33-M72S1-011	
7	LCD 12" VGA TOSHIBA L102EKVW (WVGA)	6-50-FC255-T00	
7	LCD 12" VGA AU BRCV03 V4 CLARE TYPE	6-50-FC255-G03	
7	LCD 12" VGA BEE HYD51 H12EW2-B3 GL	6-50-FC252-H00	
8	LCD HINGE L DIE CASTING M720S	6-33-M72S1-021	
9	UVIC CAMERA BSSN FIX BRCM5T3200 M728T	6-88-M5E4C-4921	
9	UVIC CAMERA BSSN FIX BRCM5T3200 2M M728T	6-88-M5E4C-4913	
9	CCD RUBBER SILICONE M720S	6-47-M72S1-010	w/d CCD
10	WIRE CABLE FOR LCD TO M/B ZIP M720S	6-43-M72S1-012	
11	WIRE CABLE FOR CCD TO M/B SP M720S	6-43-M72S1-012	
12	ANTENNA M4X10M 24G/5G PFA BT	6-23-7M72S-020	(OPTION)
13	ANTENNA M4X10M 24G/5G PFA W/L	6-23-7M72S-030	
14	ANTENNA M4X10M 3G PFA (E) 3M	6-23-7M72S-011	(OPTION)
15	SPEAKER FIXTURE-R	6-33-M300T-031	
16	SPK L BSM IN P/12.5MM VIAL P BACH MM	6-23-SM72S-020	
17	INVERTER MODULE 20A W/AC 24V-48V	6-76-M6G0R-011	
17	INVERTER MODULE 20A W/AC 24V-48V	6-76-M6R6R-010	
18	MYLAR FOR INVERTER (440x440x1)	6-40-M6GNS-060	
19	WIRE CABLE FOR INVERTER TO M/B SP M720S	6-43-M72SR-012	
20	STYLE-MPTE	6-45-M74S1-012	
21	LCD BACK COVER MODULE M728T	6-39-M72S1-022	
22	SPEAKER FIXTURE-L	6-33-M300T-041	
23	AL PATE	6-33-M72S1-011	
24	M520N MYLAR FOR CCD BACK CASE	6-40-M52N1-010	

A.Part Lists



HDD (M728T)

Figure A - 12
HDD
(M728T)

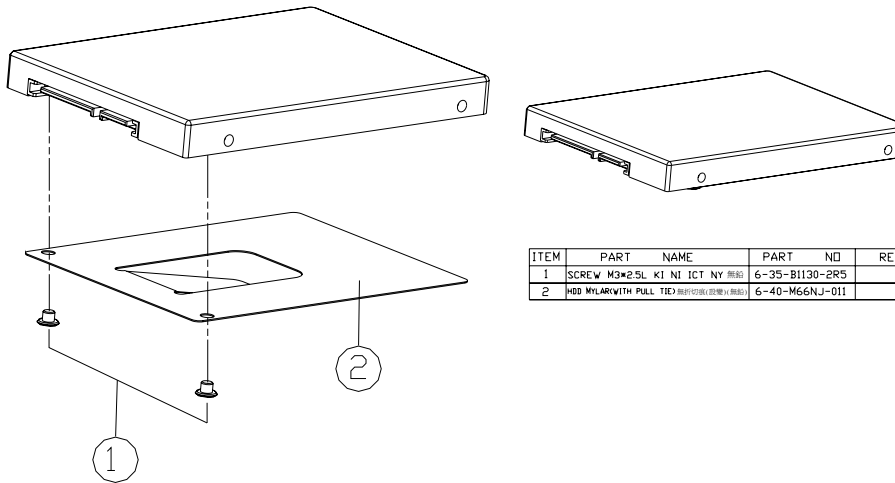

ITEM	PART	NAME	PART	NO	REMARK
1	SCREW	M3*2.5L K1 NI ICT NY #80	6-35-B1130-2R5		
2	HDD M728T WITH FULL TIE)	REFFER TO (REFFER TO #80)	6-40-M66NJ-011		

COMBO (M728T)

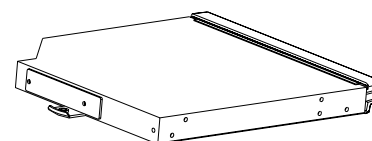
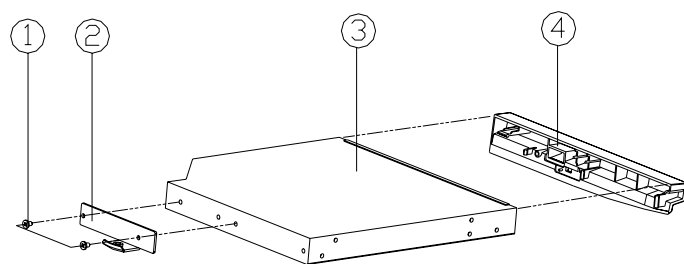


ITEM	PART NAME	PART NO	REMARK
1	SCREW M2x3L K1 NI ICT GTY-PATCH (REF)	6-35-B1120-3RE	
2	CD-ROM LOCK BRACKET SECC M720S (REF)	6-33-M72SZ-010	
3	SATA DVD SUPER MULTI 5 1/4" 24X/8X 12.7MM (REF)	6-85-90724-C00	
3	SATA DVD COMBO 5 1/4" 24X/8X 12.7MM 1SS1 T (REF)	6-85-90724-T00	
4	COMBO 6-PIN/2X MODULE (REF)	6-42-M72SX-102-1	

Figure A - 13
COMBO
(M728T)

DVD-Dual Drive (M728T)

Figure A - 14
DVD-Dual Drive
(M728T)

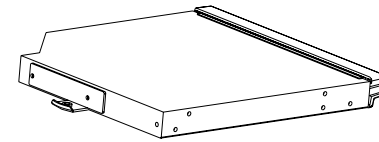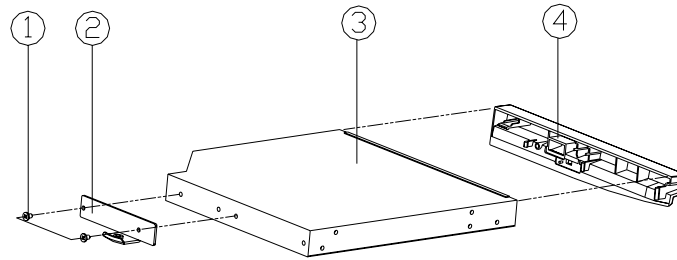

ITEM	PART NAME	PART NO	REMARK
1	SCREW M2x3L K1 NI ICT GTY-PATCH 0000	6-35-B1120-3RE	
2	CD-ROM LOCK BRACKET SECC M720S 0000	6-33-M72SZ-010	
3	SATA DVD SUPER MULTI 5 1/4 24X/16X/127MM 0000	6-85-A0724-C00	
3	SATA DVD SUPER MULTI 5 1/4 24X/16X/127MM 0000	6-85-A0724-T01	
4	DVD MULTI 6-8X/24X/16X/127MM 0000	6-42-M72SD-202-1	

Top with Fingerprint (M729T)


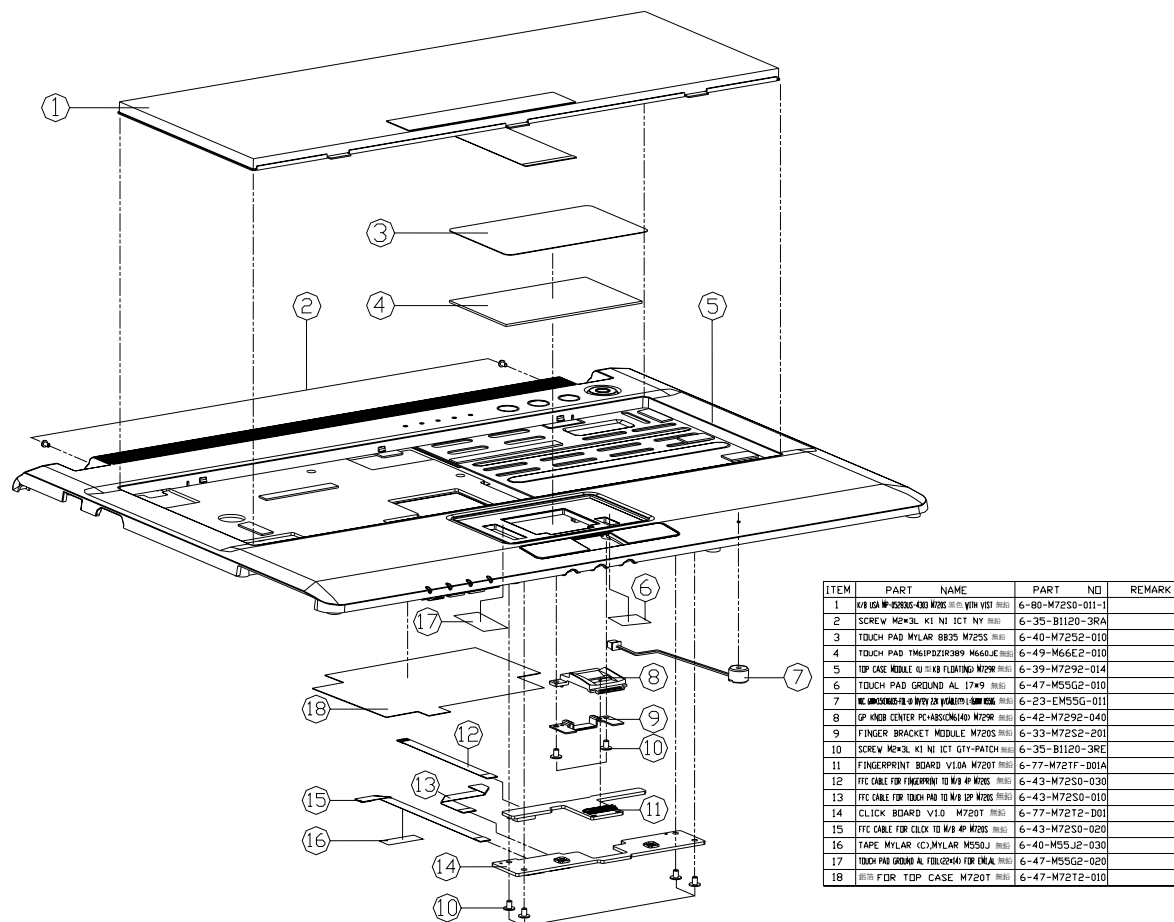


Figure A - 15
Top with Fingerprint (M729T)

A.Part Lists


Top without Fingerprint (M729T)

Figure A - 16
Top without Fingerprint
(M729T)

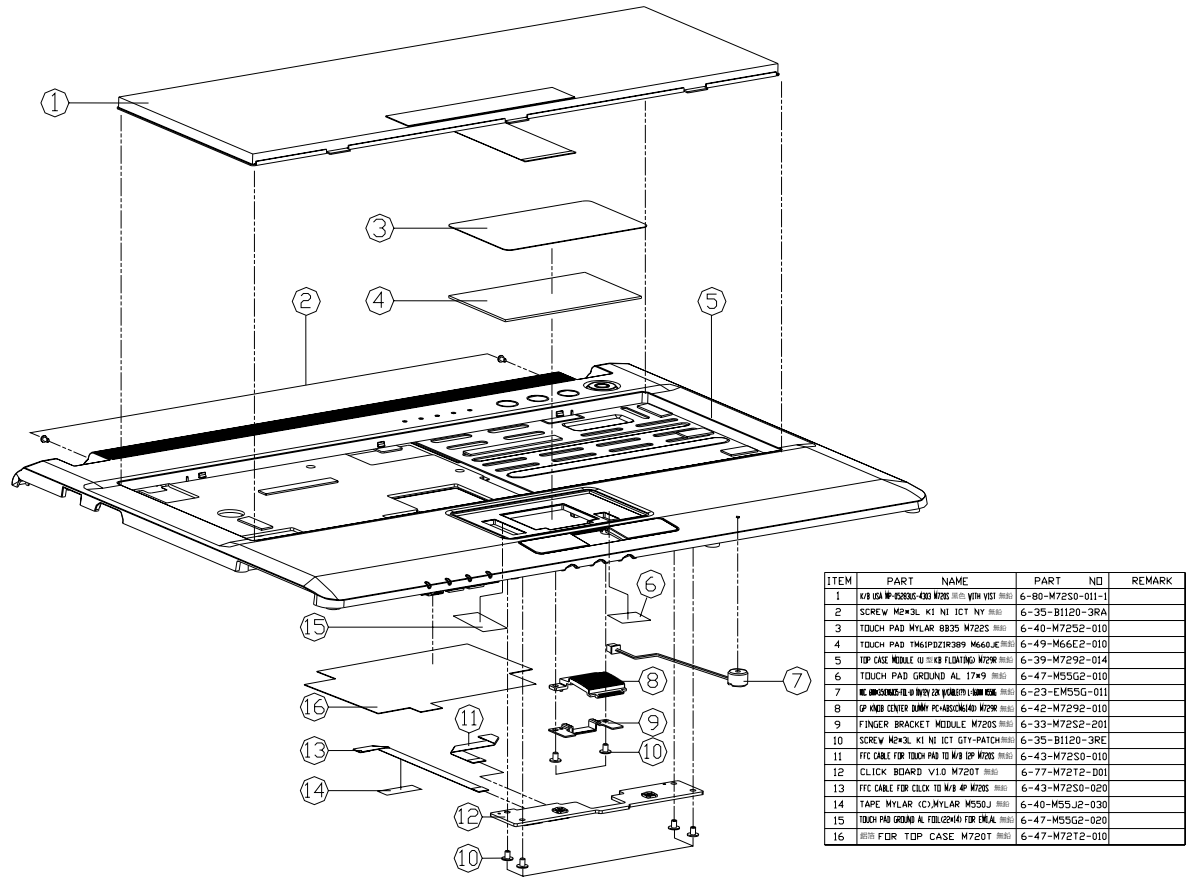

A - 18 Top without Fingerprint (M729T)

Bottom (M729T)

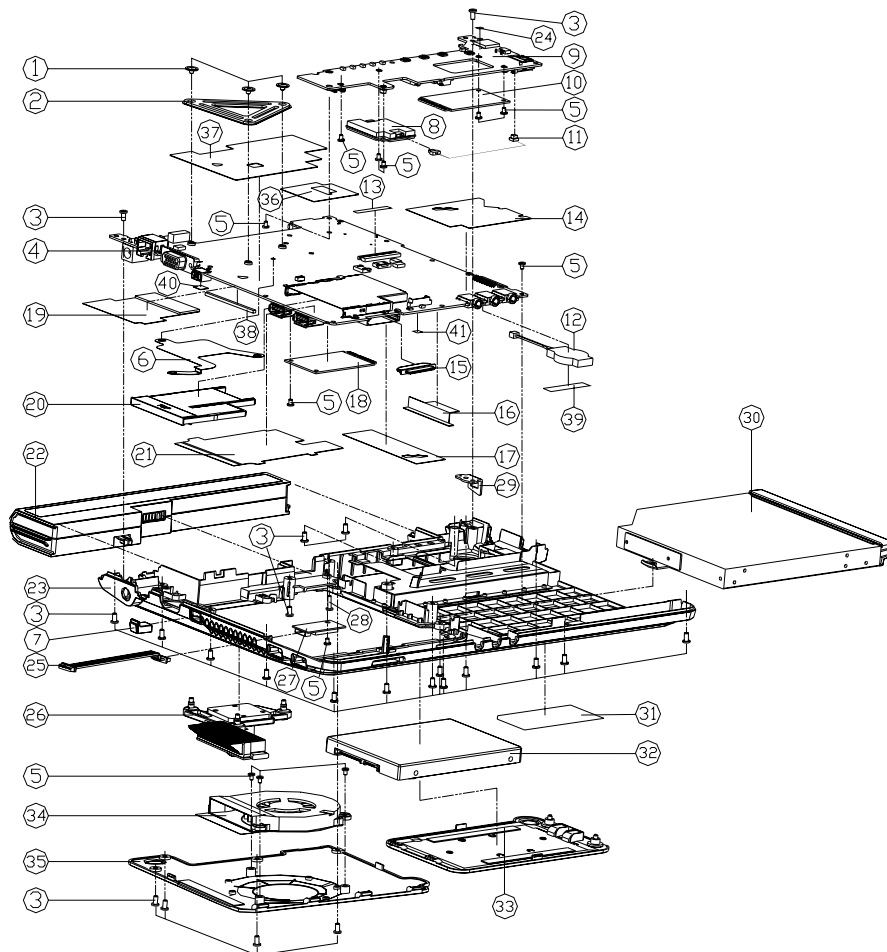


ITEM	PART NAME	PART NO	REMARK
1	45-4025-265 (C0EY) B5634 JULET WYKWH MLL 40	6-35-41025-2R5	
2	CPU SUPPORTER MODULE AL M720S	6-33-M72SS-011	
3	SCREW M2.5xSL KI BK/Z ICT NY	6-35-B612S-5RA	
4	MAIN BOARD V3.0A M720T	6-77-M72T0-D03A	
5	SCREW M2xSL KI NI ICT NY	6-35-B1120-3RA	
6	NORTH BRIDGE HEATSIK MODULE (COP M720R)	6-31-M72RN-101	
7	1394 RUBBER M720S	6-47-M72SP-010	
8	MULTI I/O BOARD V3.0A (W/3G) M720T	6-88-L39T1-5300	
9	MULTI I/O BOARD V3.0A (W/3G) M720T	6-77-M72T1-D03A-I	
10	W/HD HDD REAR COVER/LESS HD CARD USB 3.0	6-88-M72SW-720	<OPTION>
11	WIRE CABLE FOR R-J-H TO MDC 2P M720S	6-43-M72SU-010	<OPTION>
12	MS20G K/B CONN MYLAR	6-23-2201S-P2C	
13	MS20G K/B CONN MYLAR	6-40-MS2GS-060	
14	MAIN BOARD AL F01L M730T	6-40-M73TS-0D0	
15	MS20G CARD READER RUBBER	6-47-MS2GB-010	
16	TOP DDD BKT MYLAR (FRONT+REAR) M720S	6-40-M72SZ-010	
17	DDR MYLAR FRB3 M730T	6-40-M73TS-060	
18	ISABELLA INTEL (B21A) INTEL SHIRLEY PE	6-88-M72T2-4211	
18	ISABELLA INTEL (B21A) INTEL SHIRLEY PEAK	6-88-M72T2-4240	<OPTION>
18	ISABELLA INTEL (B21A) INTEL SHIRLEY PEAK	6-88-M72T2-4241	<OPTION>
18	ISABELLA INTEL (B21A) INTEL SHIRLEY PEAK	6-88-M55S2-7000	<OPTION>
19	NORTH BRIDGE MYLAR (FRONT+REAR) M720T	6-40-M73TS-021	
20	DUMMY NEW CARD PC+ABS T120R	6-42-T12R3-011	
21	NEW CARD MYLAR (FRONT+REAR) M730T	6-40-M73TS-050	
22	IMP S LI (NEW) RHP (S) M720S	6-87-M72SS-4DF2	
22	IMP S LI (NEW) RHP (S) M720S	6-87-M72SS-4D42	
22	IMP S LI (NEW) RHP (S) M720S	6-87-M72SS-5DF2	
23	BOTTOM CASE MODULE (ROSS) M720S	6-39-M72S3-01B	
24	SPEAKER CABLE PASTE (FRONT) M720S	6-40-M72S3-010	
25	WIRE CABLE FOR BLUE TOOTH TO W3 8P M720S	6-43-M72SB-010	
26	HEAT SINK MODULE M720SCE (COP M720R)	6-31-M72SN-103	
27	BLUETOOTH V2.0 (NEW) AND (COP) 8 PIN USB	6-88-M55S4-620	<OPTION>
27	BLUETOOTH V2.0 (NEW) AND (COP) 8 PIN USB	6-88-M55S4-390	<OPTION>
28	SCREW M2xSL KI BK/Z ICT NY	6-35-B6120-6R0	
29	LOCK BRACKET SECC M720S	6-33-M72S3-010	
30	SATA DVD SUPER MULTI 24X/8X SMD	6-79-M72T0-000	
30	SATA DVD COMBO 24X/8X SMD (S) ASSY	6-79-M72TX-000	
31	PRODUCT LABEL FOR M720T	6-45-M72T3-010	
31	PRODUCT LABEL FOR M725T	6-45-M725T-010	
31	PRODUCT LABEL FOR M721T	6-45-M721T-010	
31	PRODUCT LABEL FOR M722T	6-45-M722T-010	
31	PRODUCT LABEL FOR M728T	6-45-M728T-010	
31	PRODUCT LABEL FOR M729T	6-45-M729T-010	
32	W/O HDD ASS'Y M720S	6-79-M72S-J-010	
33	HDD COVER MODULE M720S	6-42-M72S-J-103	
34	FAN MODULE M720S	6-31-M72SS-103	
35	CPU COVER MODULE M720T	6-42-M72TS-100	
36	R/L PEI CONNCT MYLAR FOR HD (FRONT+REAR) M720T	6-40-M73TS-040	
37	MYLAR FOR MB (FRONT+REAR) M730T	6-40-M73TS-010	
38	MYLAR-1 FOR MB (S) M720S	6-40-M72SS-051	
39	TAPE MYLAR (A) MYLAR M550J	6-40-M55J2-010	
40	PROTECT MB MYLAR FRB3 M720S	6-40-M72SS-040	

Figure A - 17
Bottom (M729T)

A.Part Lists


LCD (M729T)

Figure A - 18
LCD
(M729T)

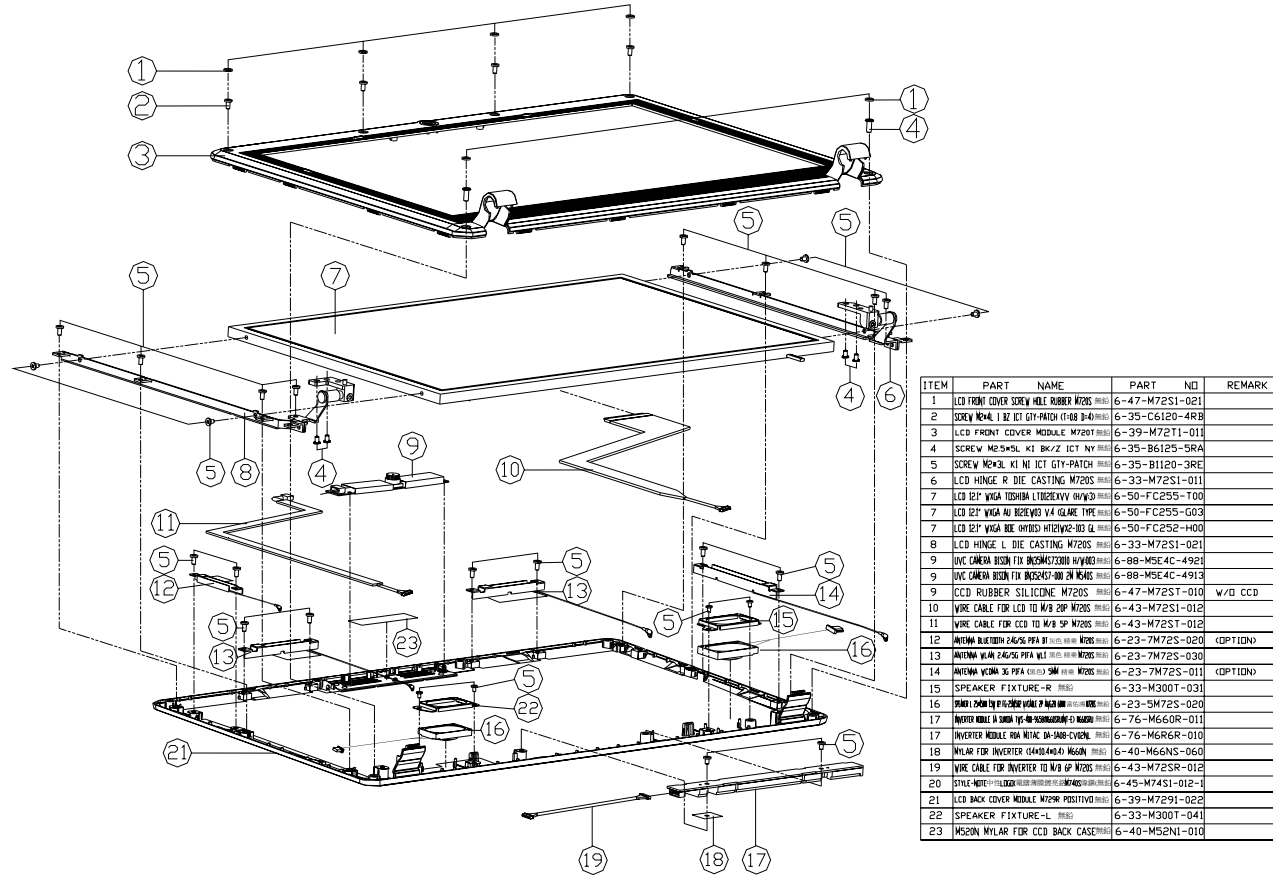

ITEM	PART NAME	PART NO	REMARK
1	LCD FRONT COVER SCREW HOLE RUBBER WZ05	6-47-M72S1-021	
2	SCREW M2x4 L 1/2 ICT GY-PATCH (1-88 3-40)H01	6-35-C6120-4RB	
3	LCD FRONT COVER MIDDLE M720T	6-39-M72T1-011	
4	SCREW M2x5UL KI BK/Z ICT NY H01	6-35-B6125-5RA	
5	SCREW M2x3L KI NI ICT GY-PATCH	6-35-B1120-3RE	
6	LCD HINGE R DIE CASTING M720S	6-33-M72S1-011	
7	LCD DEP W/GA TOSHIBA L102REKVV 09V3D	6-50-FC255-T00	
7	LCD DEP W/GA AU 82PEV3 V4 02LAKI TYPE H01	6-50-FC255-G03	
7	LCD DEP W/GA KEE 09V3D H102V2-003 (L)	6-50-FC252-H00	
8	LCD HINGE L DIE CASTING M720S	6-33-M72S1-021	
9	I/O CAMERA BUSH FR INCOMASTIC001 09V3D	6-88-M5E4C-492I	
9	I/O CAMERA BUSH FR INCOMASTIC001 09V3D	6-88-M5E4C-4913	
9	CCD RUBBER SILICONE M720S	6-47-M72ST-010	w/o CCD
10	WIRE CABLE FOR LCD TO W/B Z0P M720S	6-43-M72S1-012	
11	WIRE CABLE FOR CCD TO W/B SP M720S	6-43-M72ST-012	
12	ANTENNA BLUETOOTH ZAG5E PPA 01	6-23-7M72S-020	(OPTION)
13	ANTENNA W/LAN ZAG5E PPA W/L	6-23-7M72S-030	
14	ANTENNA W/LAN 32 PPA (010) SM	6-23-7M72S-011	(OPTION)
15	SPEAKER FIXTURE-R	6-33-M300T-031	
16	FRONT PANEL FR PRO-2000 W/LAN P M720S	6-23-5M72S-020	
17	INVERTER MODULE 5.0V 500mA 12V-09V30000000000	6-76-M660R-011	
17	INVERTER MODULE FOR NIUC DA-LAB-EVENAL	6-76-M66R6R-010	
18	W/LAR FIBR INVERTER (C40D40A) W60N	6-40-M66NS-050	
19	WIRE CABLE FOR INVERTER TO W/B 0P M720S	6-43-M72SR-012	
20	STRIP-NOE	6-45-M74S1-012-I	
21	LCD BACK COVER MIDDLE WZ0R POSITIVE	6-39-M7291-022	
22	SPEAKER FIXTURE-L	6-33-M300T-041	
23	W60N W/LAR FIBR CCD BACK CASE	6-40-M52N1-010	

HDD (M729T)


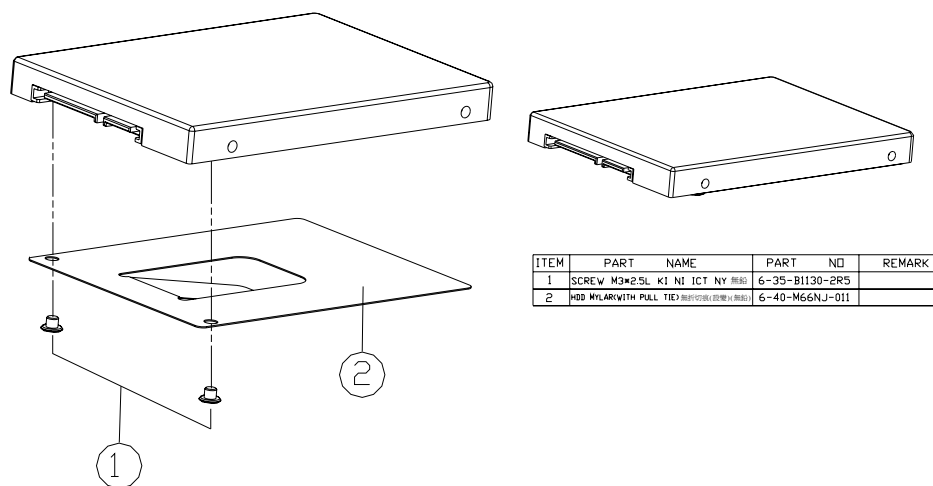


ITEM	PART NAME	PART NO	REMARK
1	SCREW M3*2.5L K1 NI ICT NY 無鉛	6-35-B1130-2R5	
2	HDD MFLARWITH PULL TIE 無鉛	6-40-M66NJ-011	

Figure A - 19
HDD
(M729T)

COMBO (M729T)

Figure A - 20
COMBO
(M729T)

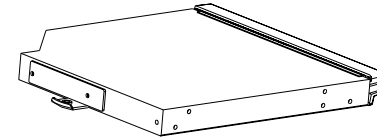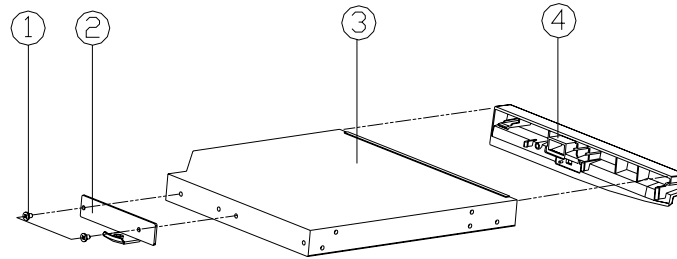

ITEM	PART NAME	PART NO	REMARK
1	SCREW M2*3L KI NI ICT GTY-PATCH (REF)	6-35-B1120-3RE	
2	CD-REM LCKB BRACKET SECC M720S (REF)	6-33-M72SZ-010	
3	SATA DVD SUPER MULTI 5 1/4" 24X/8X 12.7MM AD 7500S 500 (REF)	6-85-90724-C00	
3	SATA DVD COMBO 5 1/4" 24X/8X 12.7MM TSST 1 (REF)	6-85-90724-T00	
4	COMBO 6-BRDL MODULE (REF) (REF) (REF) (REF) (REF) (REF)	6-42-M72SX-102-1	

DVD-Dual Drive (M729T)

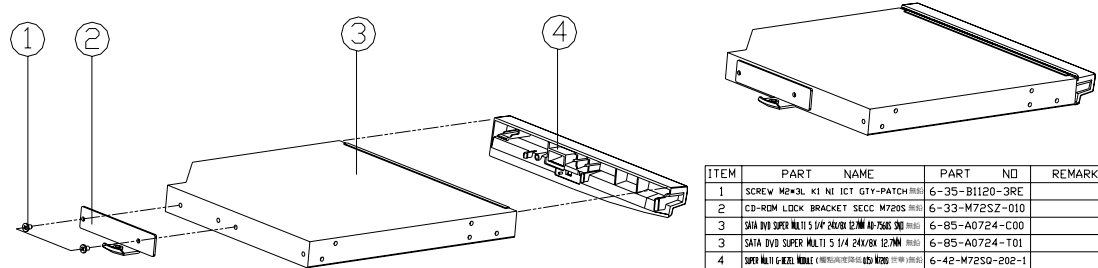


Figure A - 21
DVD-Dual Drive
(M729T)

ITEM	PART NAME	PART NO	REMARK
1	SCREW M2x3L K1 NI ICT GTY-PATCH	6-35-B1120-3RE	
2	CD-ROM LOCK BRACKET SECC M7205	6-33-M72SZ-010	
3	SATA DVD SUPER MULTI 5 1/4 24X/8X 12.7MM	6-85-A0724-C00	
3	SATA DVD SUPER MULTI 5 1/4 24X/8X 12.7MM	6-85-A0724-T01	
4	SUPER MULTI 6 HEAD 16MBIT (48X/24X/18X/12X/9X/8X)	6-42-M72SQ-202-1	

A.Part Lists

Top with Fingerprint (M730T)

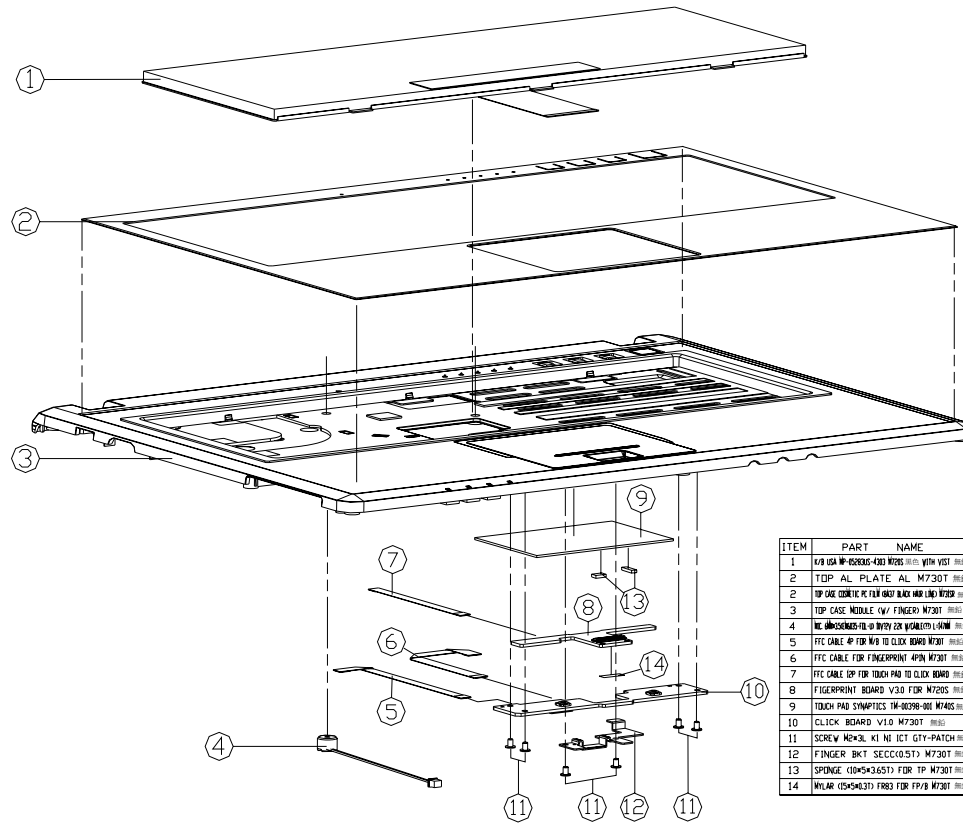


Figure A - 22
Top with
Fingerprint
(M730T)

ITEM	PART NAME	PART NO	REMARK
1	VIA USA M6-05005-000 NUTS (1) WITH VST (1) (1)	6-00-M7250-011-1	
2	TOP AL PLATE AL M730T (1) (1)	6-33-M7312-022	FOR M730T/SR
3	TOP CASE MIDDLE (W/ FINGER) M730T (1) (1)	6-40-M73R2-011	FOR M731SR
4	TOP CASE MIDDLE (W/ FINGER) M730T (1) (1)	6-39-M7312-112	
5	FTC CABLE # FOR M6 TO CLICK BOARD (1) (1)	6-23-EM731T-011	
6	FTC CABLE # FOR M6 TO CLICK BOARD (1) (1)	6-43-M731T-030	
7	FTC CABLE # FOR FINGERPRINT (1) (1) (1)	6-43-M731T-010	
8	FTC CABLE # FOR TOUCH PAD TO CLICK BOARD (1) (1)	6-43-M731T-021	
9	FINGERPRINT BOARD V3.0 FOR M730T (1) (1)	6-77-M725F-003	
10	TOUCH PAD SWAPFITS (1) (1) (1) (1) (1)	6-49-M74S2-010	
11	CLICK BOARD V1.0 M730T (1) (1)	6-77-M7312-001	
12	SCREW M2X4 KI IN ICT CITY PATCH (1) (1)	6-35-B1120-3RE	
13	FINGER BKT SECC(0.5T) M730T (1) (1)	6-33-M7312-012	
14	SPONGE (10x5x3.65T) FOR TP M730T (1) (1)	6-47-0019A-10D	
15	W/LAR (15x4x3.7) FR83 FOR TP/B M730T (1) (1)	6-40-M731S-000	

Top without Fingerprint (M730T)

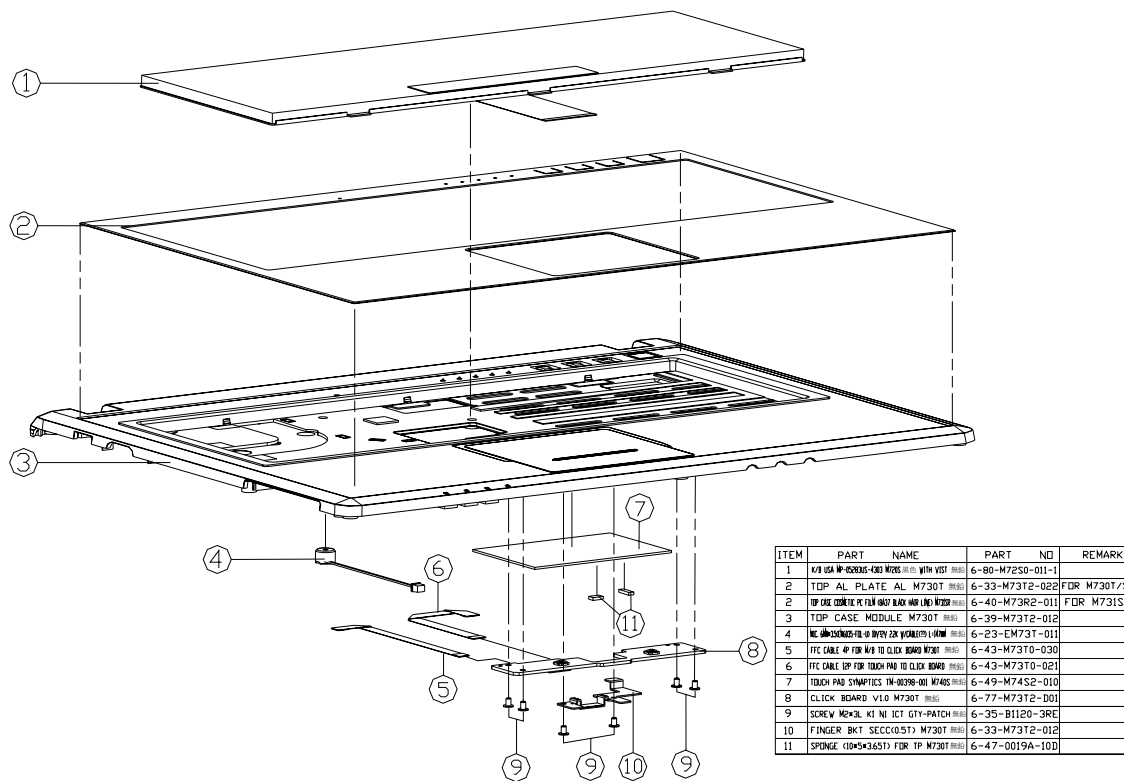


Figure A - 23
Top without Fingerprint (M730T)

A.Part Lists

LCD (M730T)

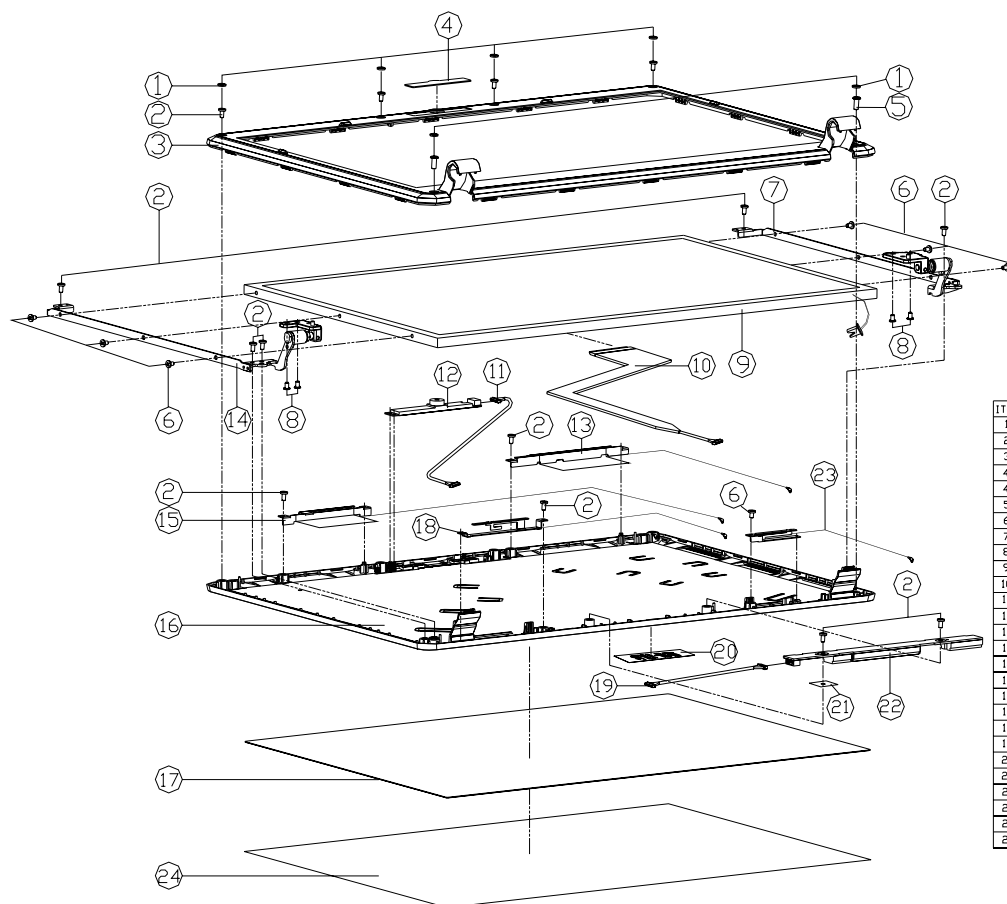



Figure A - 25
LCD
(M730T)

ITEM	PART NAME	PART NO	REMARK
1	LCD FRONT COVER SCREW HOLE RUBBER WEDGE	6-47-M72S1-021	
2	SCREW NYLON L RZ XT DTY-PATCH (F-H) D=4	6-35-C6120-4RB	
3	LCD FRONT COVER MODULE M730T	6-39-M7311-012	
4	CCD COSMETIC PLATE PMMA M730T	6-42-M7311-010	W/CCD
4	CCD MYLAR FR700 M730T	6-40-M7311-010	W/D CCD
5	SCREW M2.5*5L K1 BK/2 ICT NY	6-35-B6125-5RA	
6	SCREW NYLON L RZ XT DTY-PATCH (F-H) D=4	6-35-C6120-4RB	
7	LCD HINGE R SECC-SKT7ZN M730T	6-33-M7311-021	
8	SCREW M2.5*6L K BZ ICT	6-35-B2125-6R0	
9	LCD TYP WGA IN BEEHIVE V3 GLASS TYP0 SSM	6-50-G8255-G00	
10	WIRE CABLE FOR LCD BY W/BEHIVE V3 GLASS TYP0 SSM	6-43-M7311-011	
11	WIRE CABLE W/B TO CCD M730T	6-43-M7311-011	
12	LVC CAMERA BRACKET FOR M730T-001 ON W/PART	6-08-M740C-4921	
12	LVC CAMERA BRACKET FOR M730T-001 ON W/PART	6-08-M740C-4911	
13	HINGE L M730T-050	6-23-7M731-050	(OPTION)
14	LCD HINGE L SECC-SKT7ZN M730T	6-33-M7311-032	
15	HINGE R M730T-031	6-23-7M731-031	(OPTION)
16	LCD BACK COVER MODULE M730T	6-39-M7311-022	
17	BACK COVER COSMETIC PLATE AL M730T	6-33-M7311-011	
18	HINGE R M730T-021	6-23-7M731-021	
19	CABLE FOR INVERTER M730T	6-43-M731R-011	
20	ETYLE-NOTE-11000	6-45-M7451-012-1	
21	MYLAR FOR INVERTER (SH4040) M65N	6-40-M66NS-060	
22	INVERTER MODULE FOR M730T	6-76-M66R-011	
22	INVERTER MODULE FOR M730T	6-76-M66R-010	
23	HINGE L M730T-011	6-23-7M731-011	
24	BACK COVER PROTECT MYLAR (B85) M730T	6-40-M7311-020	

A.Part Lists


HDD (M730T)

Figure A - 26
HDD
(M730T)

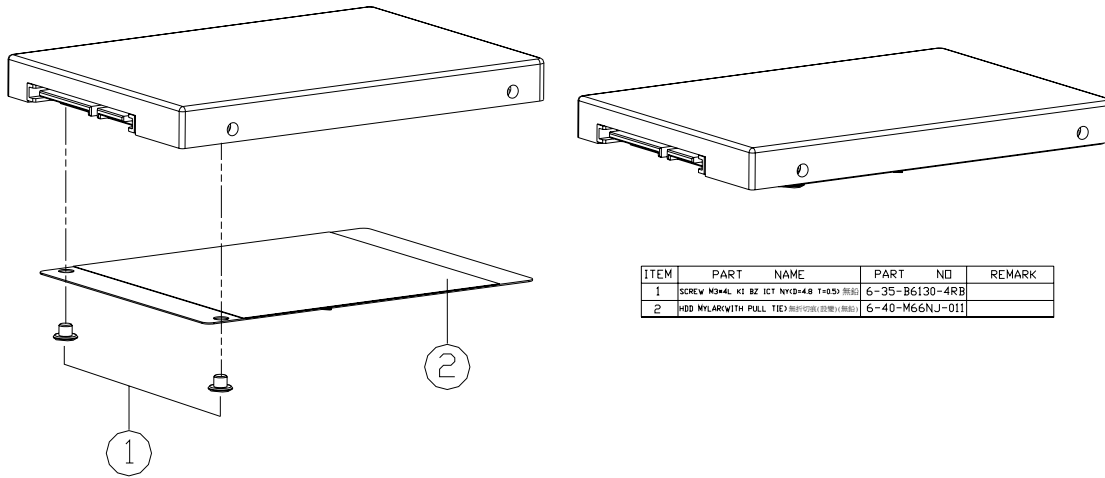

ITEM	PART NAME	PART NO	REMARK
1	SCREW M3*4L KI BZ ICT NYD#48 T=0.55 REEG	6-35-B6130-4RB	
2	HDD MYLAR(WITH PULL TIE) REEF7070L(BEHE) REEG	6-40-M66NJ-011	

COMBO (M730T)

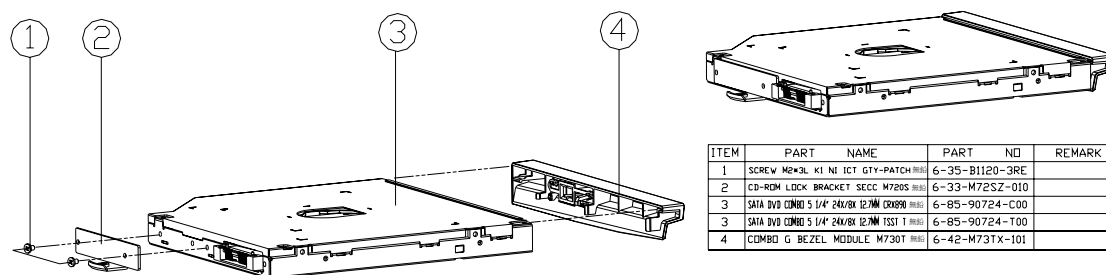


ITEM	PART NAME	PART NO	REMARK
1	SCREW M2*3L KI NI ICT GTY-PATCH (R)(E)	6-35-B1120-3RE	
2	CD-ROM LOCK BRACKET SECC M720S (R)(E)	6-33-M72SZ-010	
3	SATA DVD COMBO 5 1/4" 24X/8X 12.7MM (R)(E)	6-B5-90724-C00	
3	SATA DVD COMBO 5 1/4" 24X/8X 12.7MM TSST 1 (R)(E)	6-B5-90724-T00	
4	COMBO G BEZEL MODULE M730T (R)(E)	6-42-M73TX-101	

Figure A - 27
COMBO
(M730T)

DVD-Dual Drive (M730T)

Figure A - 28
DVD-Dual Drive
(M730T)

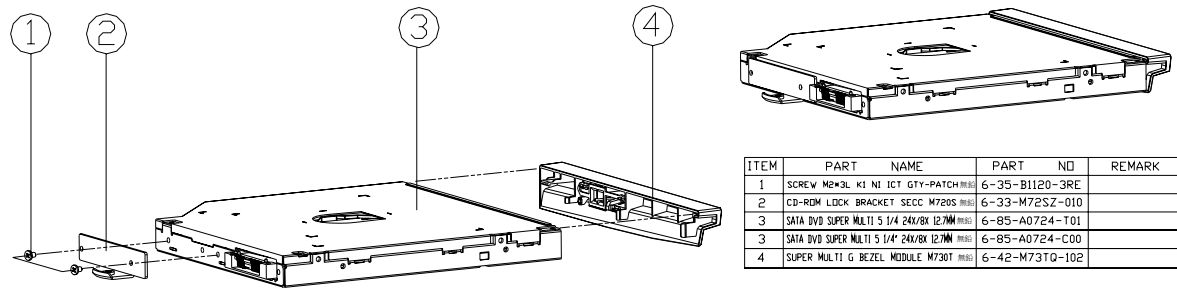

ITEM	PART NAME	PART NO	REMARK
1	SCREW M2x3L K1 NI 1CT GY-PATCH (REF)	6-35-B1120-3RE	
2	CD-ROM LOCK BRACKET SECC M720S (REF)	6-33-M72SZ-010	
3	SATA DVD SUPER MULTI 5 1/4 24X/8X 12.7MM (REF)	6-85-A0724-T01	
3	SATA DVD SUPER MULTI 5 1/4 24X/8X 12.7MM (REF)	6-85-A0724-C00	
4	SUPER MULTI G BEZEL MODULE M730T (REF)	6-42-M73T0-102	

Appendix B: Schematic Diagrams

This appendix has circuit diagrams of the *M720T/M728T/M729T/M730T* notebook's PCB's. The following table indicates where to find the appropriate schematic diagram.

Diagram - Page	Diagram - Page	Diagram - Page
<i>System Block Diagram - Page B - 2</i>	<i>ICH9-M 3/5 - GPIO, PWR Management - Page B - 16</i>	<i>Power 1.5VS, 1.05VS, 3.3V, 5V - Page B - 30</i>
<i>Intel Penryn (Socket-P) 1/2 - Page B - 3</i>	<i>ICH9-M 4/5 - Power - Page B - 17</i>	<i>Power 1.8V, 0.9VSM - Page B - 31</i>
<i>Intel Penryn (Socket-P) 2/2 - Page B - 4</i>	<i>ICH9-M 5/5 - GND - Page B - 18</i>	<i>Power V CORE - Page B - 32</i>
<i>Cantiga 1/6 - Host - Page B - 5</i>	<i>Clock Generator - Page B - 19</i>	<i>Power AC-IN, Charger - Page B - 33</i>
<i>Cantiga 2/6 - VGA, CRT - Page B - 6</i>	<i>Multi I/O, ODD, CCD, BT, TPM - Page B - 20</i>	<i>Multi I/O Board 1/2 - Page B - 34</i>
<i>Cantiga 3/6 - DDR - Page B - 7</i>	<i>New Card, Mini PCIE - Page B - 21</i>	<i>Multi I/O Board 2/2 - Page B - 35</i>
<i>Cantiga 4/6 - Power - Page B - 8</i>	<i>LED, FAN, TP, FP, USB - Page B - 22</i>	<i>Finger Printer Board - Page B - 36</i>
<i>Cantiga 5/6 - Power - Page B - 9</i>	<i>JMB385 Card Reader - Page B - 23</i>	<i>Click Board - Page B - 37</i>
<i>Cantiga 6/6 - GND - Page B - 10</i>	<i>PCI-E LAN RTL8111C - Page B - 24</i>	<i>M730T ODD Bridge Board - Page B - 38</i>
<i>DDRII CHANNEL A - Page B - 11</i>	<i>Audio Codec ALC662 - Page B - 25</i>	<i>M730T Audio Board - Page B - 39</i>
<i>DDRII CHANNEL B - Page B - 12</i>	<i>Audio AMP2056 - Page B - 26</i>	<i>Power Sequence Diagram - Page B - 40</i>
<i>Panel, Inverter, CRT - Page B - 13</i>	<i>KBC-ITE IT8512E - Page B - 27</i>	<i>Power Sequence v3.0 - Page B - 41</i>
<i>ICH9-M 1/5 - SATA - Page B - 14</i>	<i>System Power, LED BKLT - Page B - 28</i>	
<i>ICH9-M 2/5 - PCIE, PCI, USB - Page B - 15</i>	<i>Power VDD3, VDD5 - Page B - 29</i>	


Table B - 1
Schematic Diagrams



Version Note

The schematic diagrams in this chapter are based upon version 6-7P-M72T6-005. If your mainboard (or other boards) are a later version, please check with the Service Center for updated diagrams (if required).

System Block Diagram

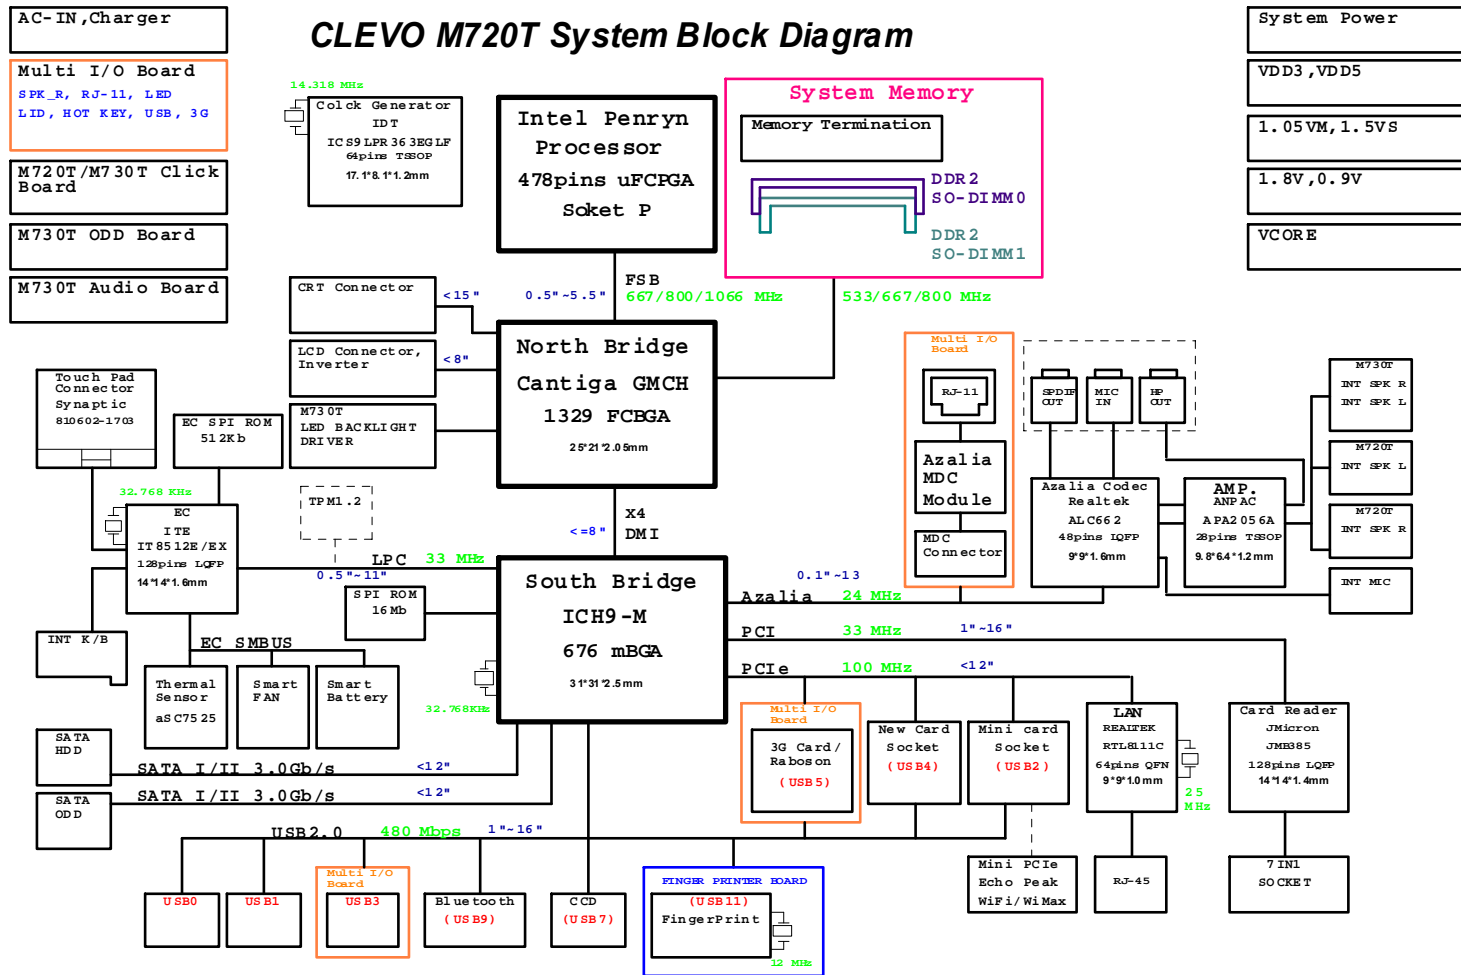


Sheet 1 of 40
System Block
Diagram

B.Schematic Diagrams

Intel Penryn (Socket-P) 1/2

CPU ONLY SUPPORT TO 35W



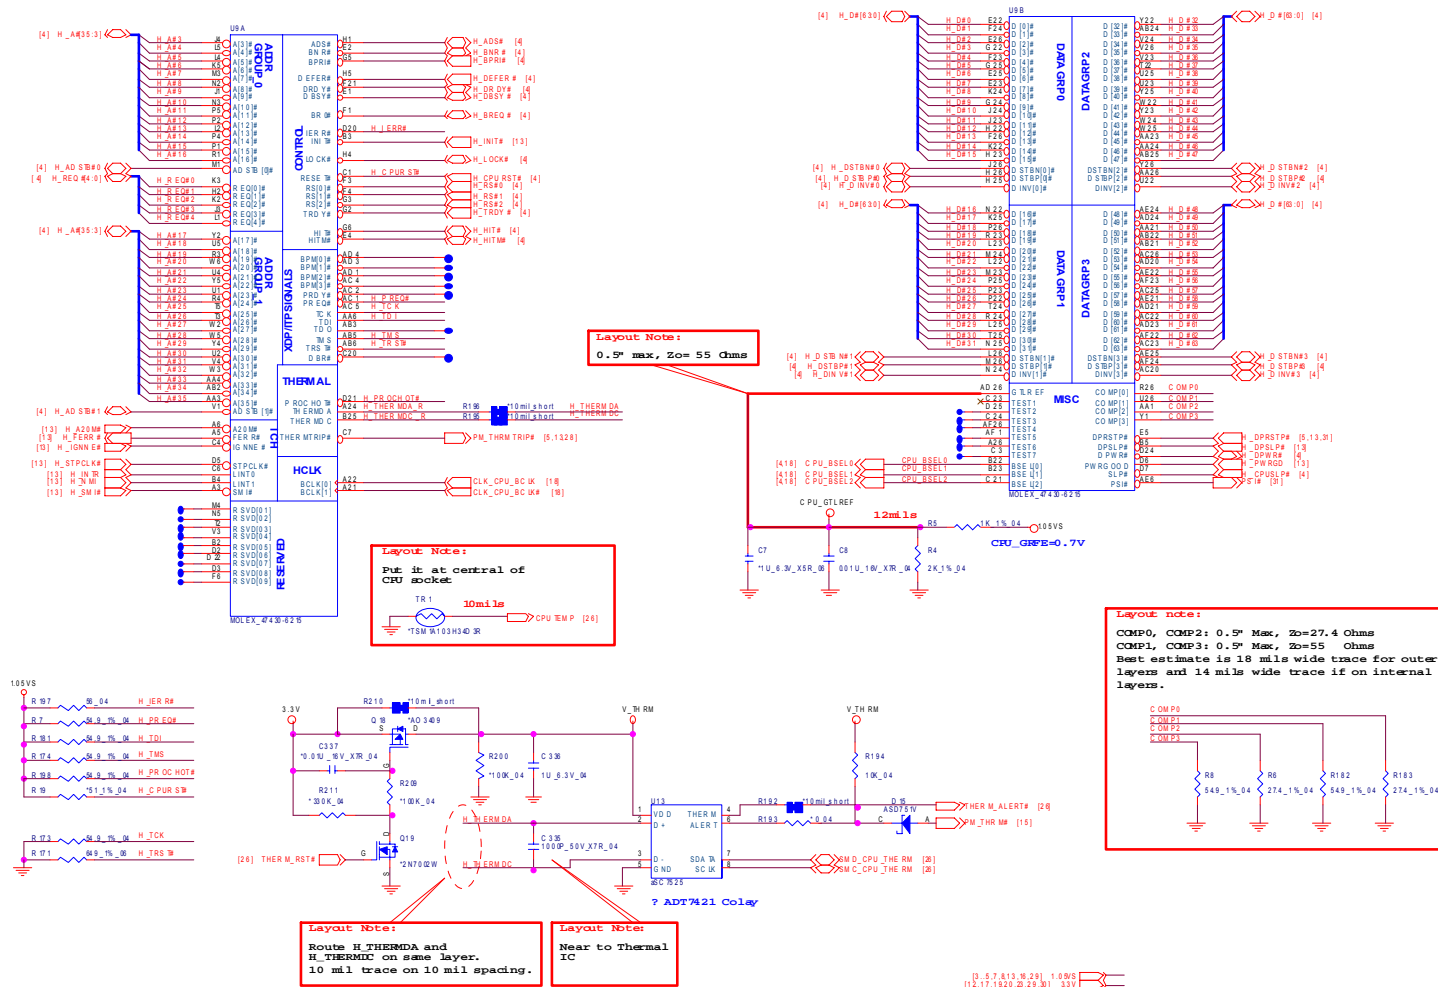


Sheet 2 of 40
Intel Penryn
(Socket-P) 1/2


B. Schematic Diagrams

Intel Penryn (Socket-P) 2/2

Sheet 3 of 40
Intel Penryn
(Socket-P) 2/2

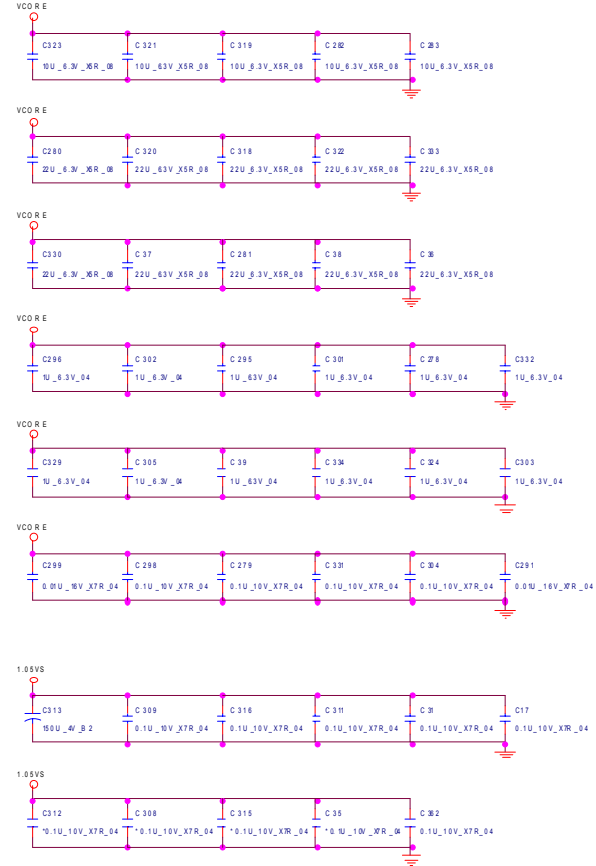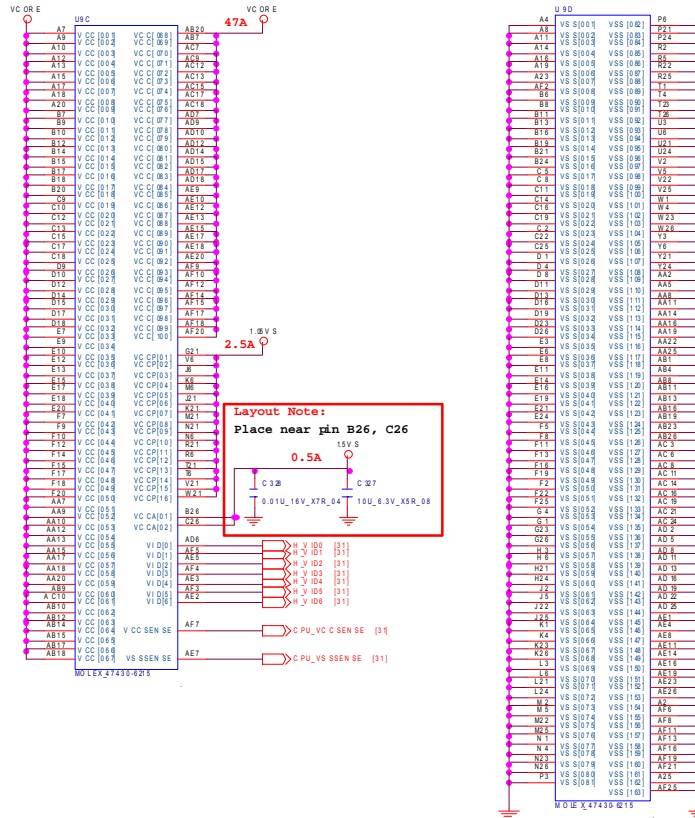


Cantiga 1/6 - Host

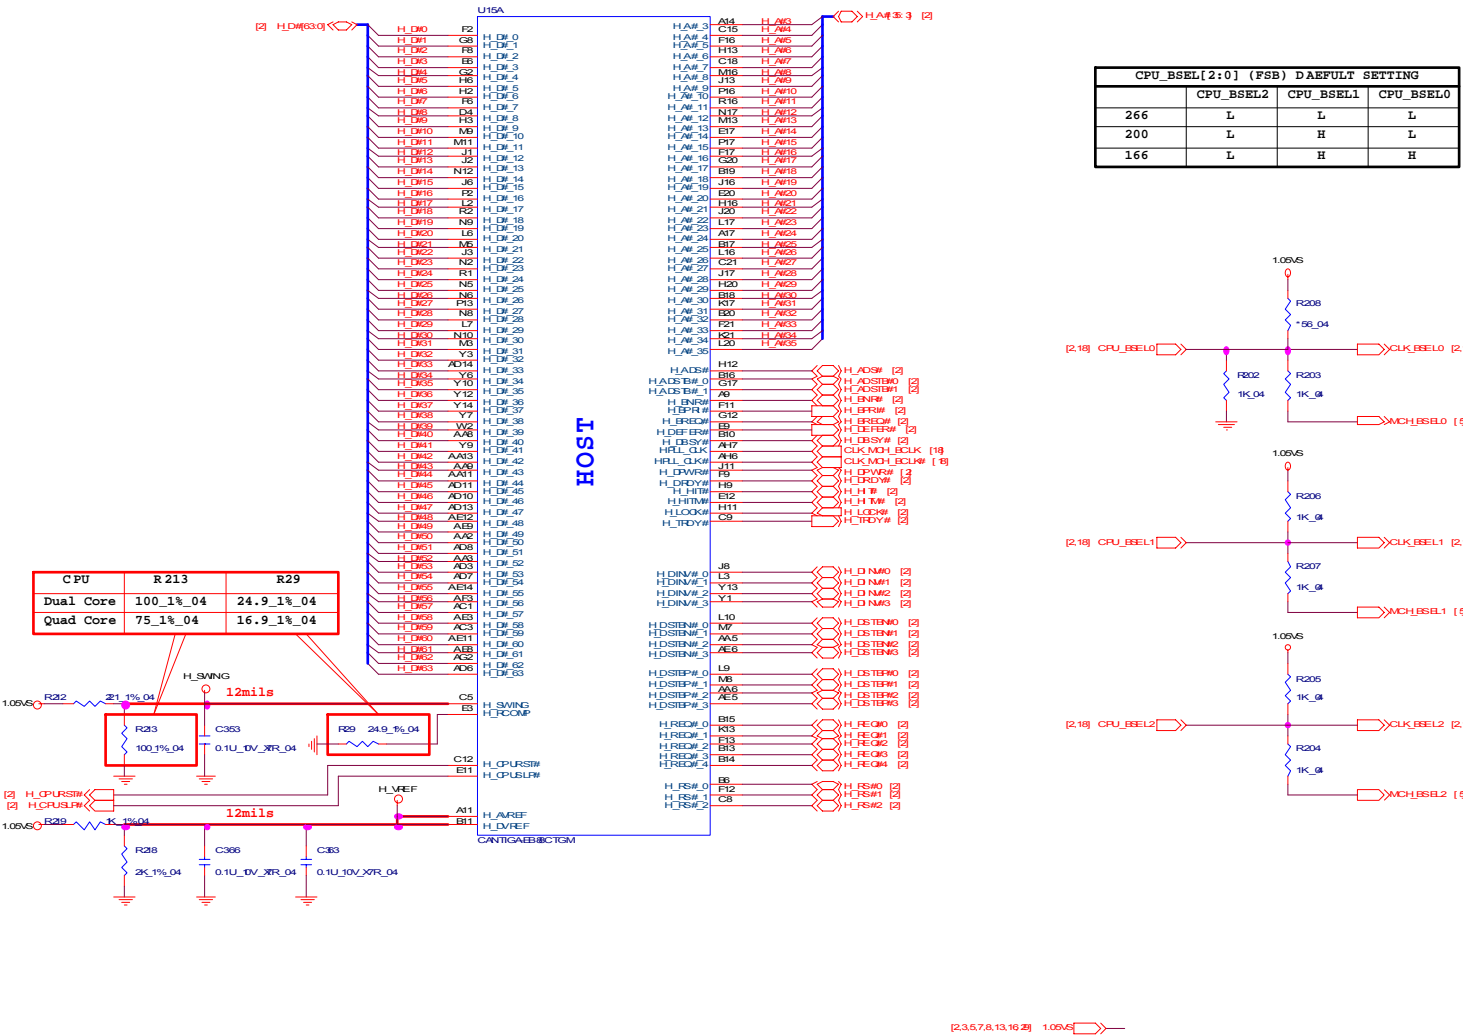

B.Schematic Diagrams


Sheet 4 of 40
Cantiga 1/6 - Host

Cantiga 3/6 - DDR

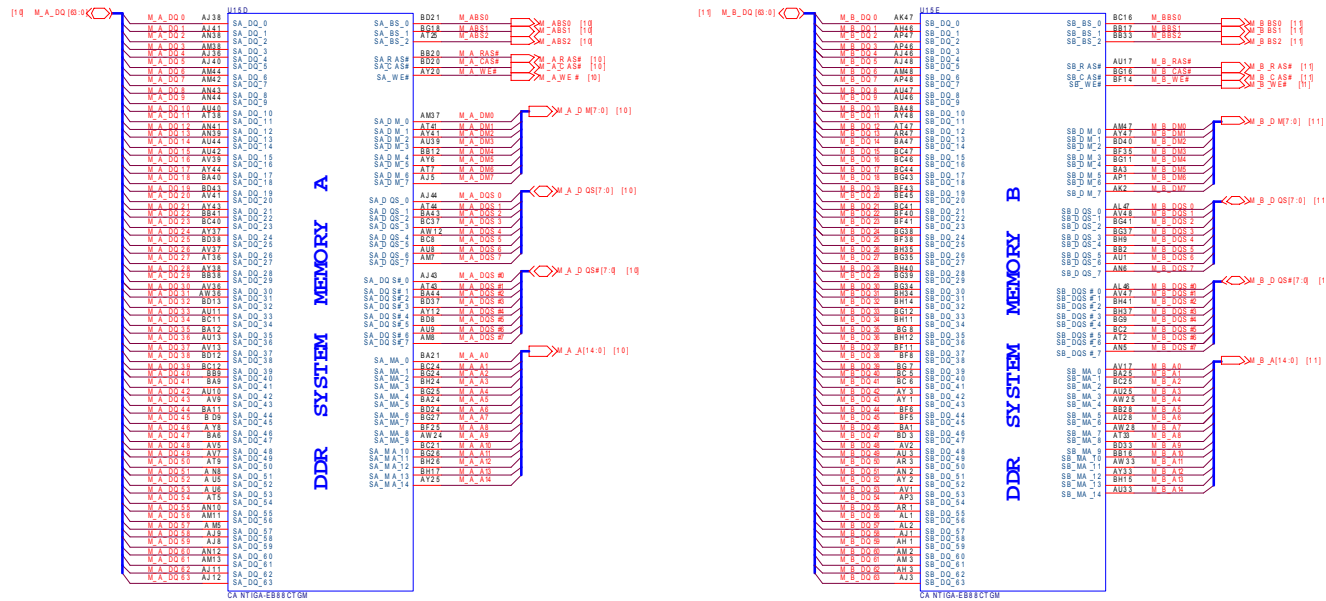


Sheet 6 of 40
Cantiga 3/6 -DDR

B.Schematic Diagrams

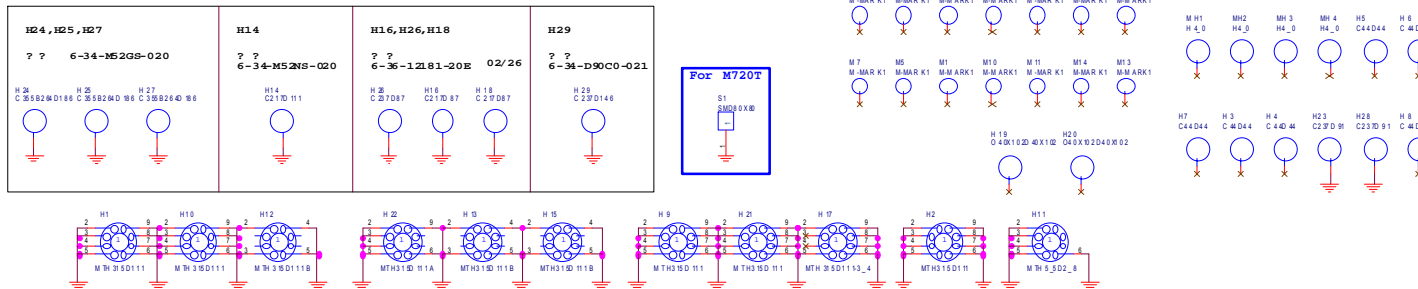

Cantiga 4/6 - Power


Sheet 7 of 40
Cantiga 4/6 - Power

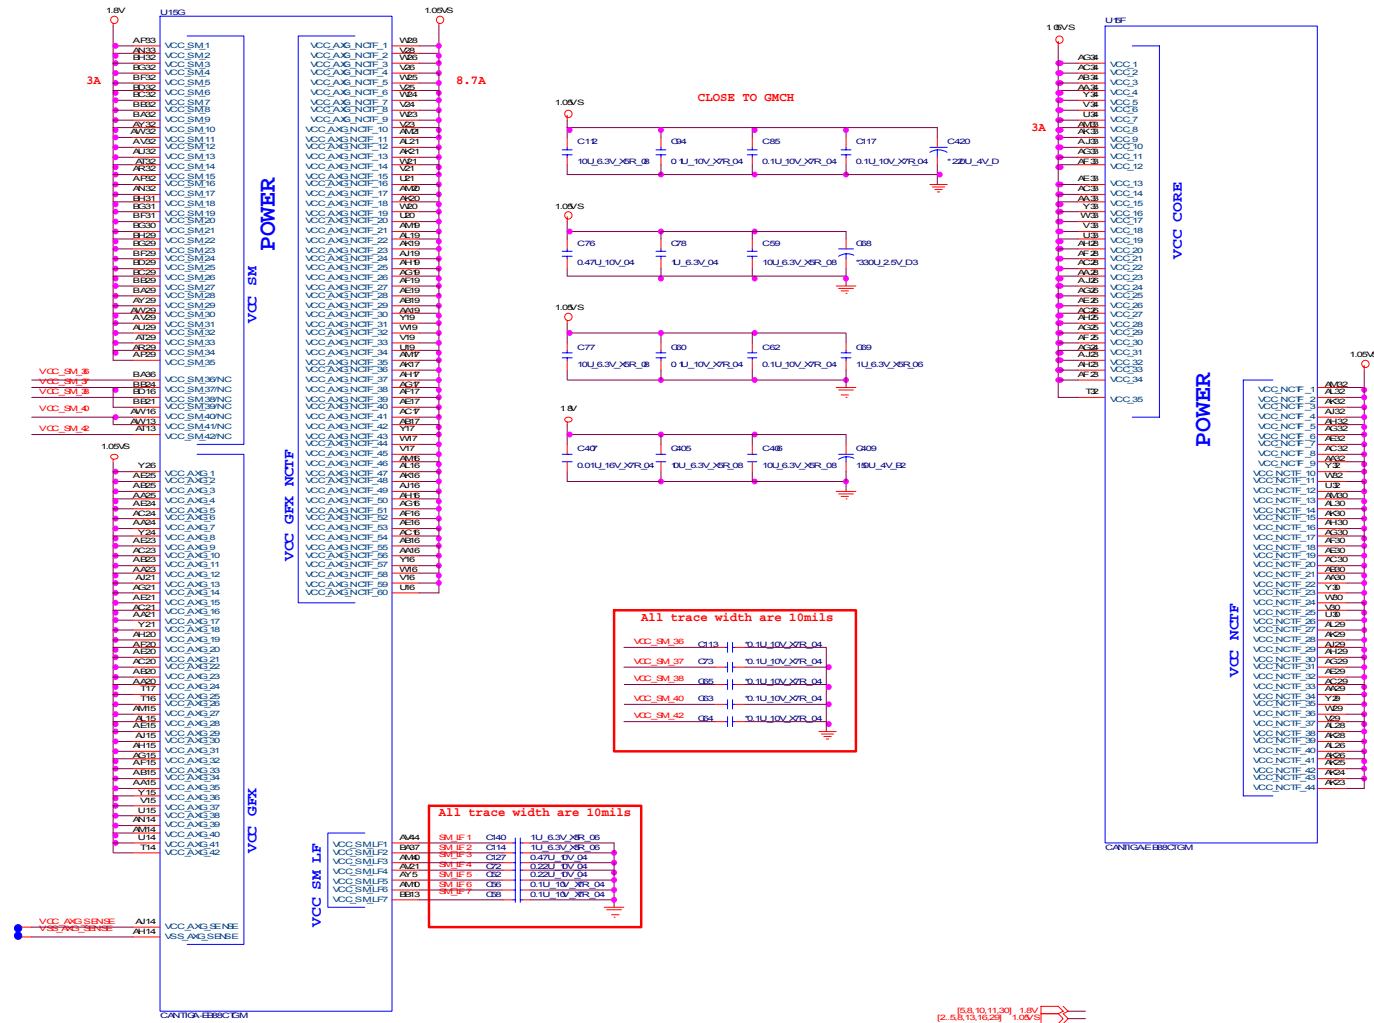

(5,8,10,11,30) 1.8V
(2,3,13,16,26) 1.05V/5



Cantiga 5/6 - Power

Sheet 8 of 40
Cantiga 5/6 - Power

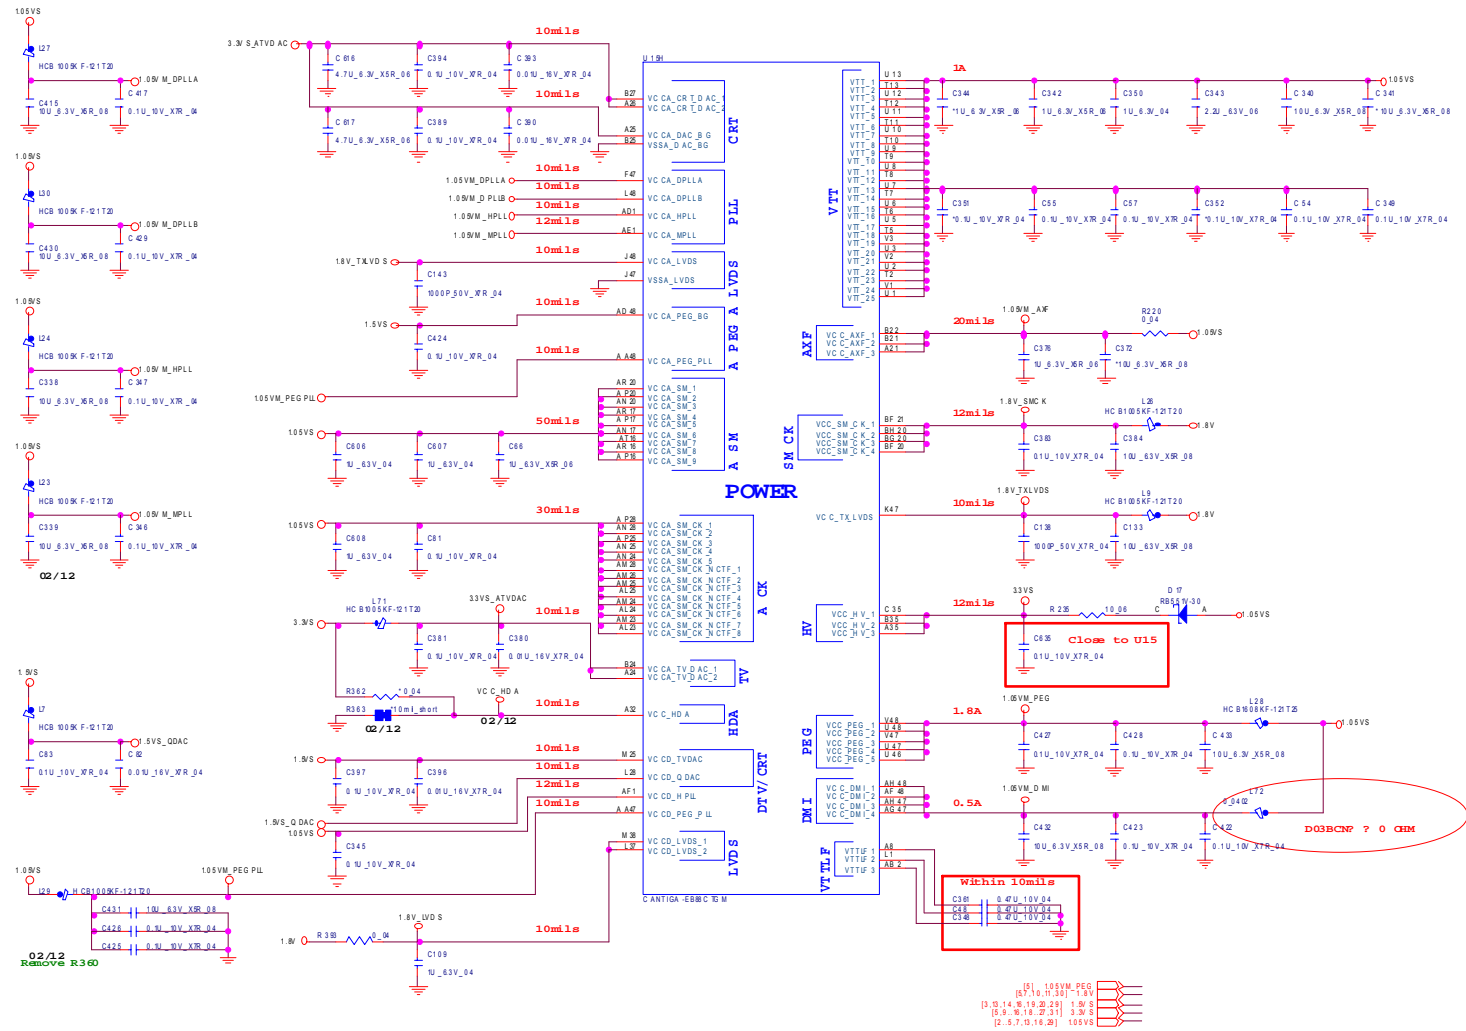

Cantiga 6/6 - GND



Sheet 9 of 40
Cantiga 6/6 - GND

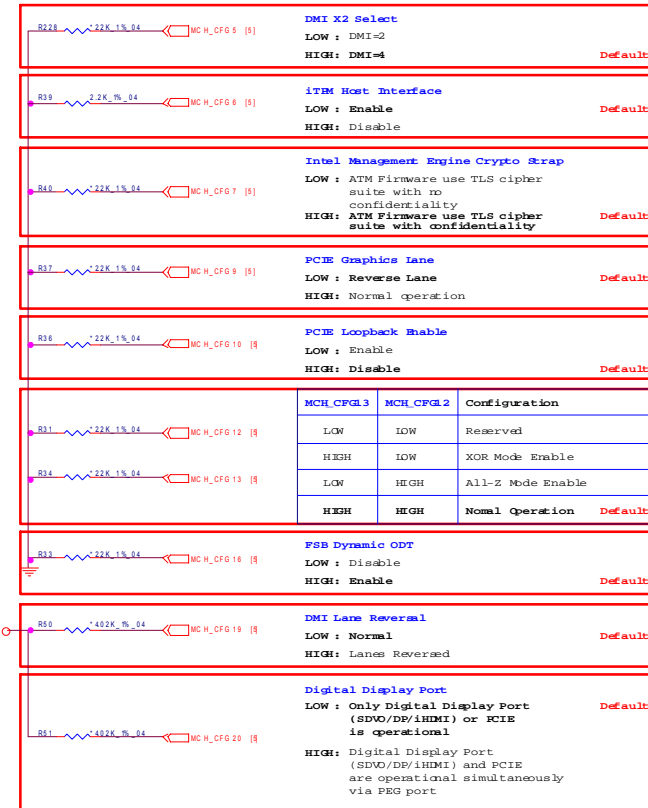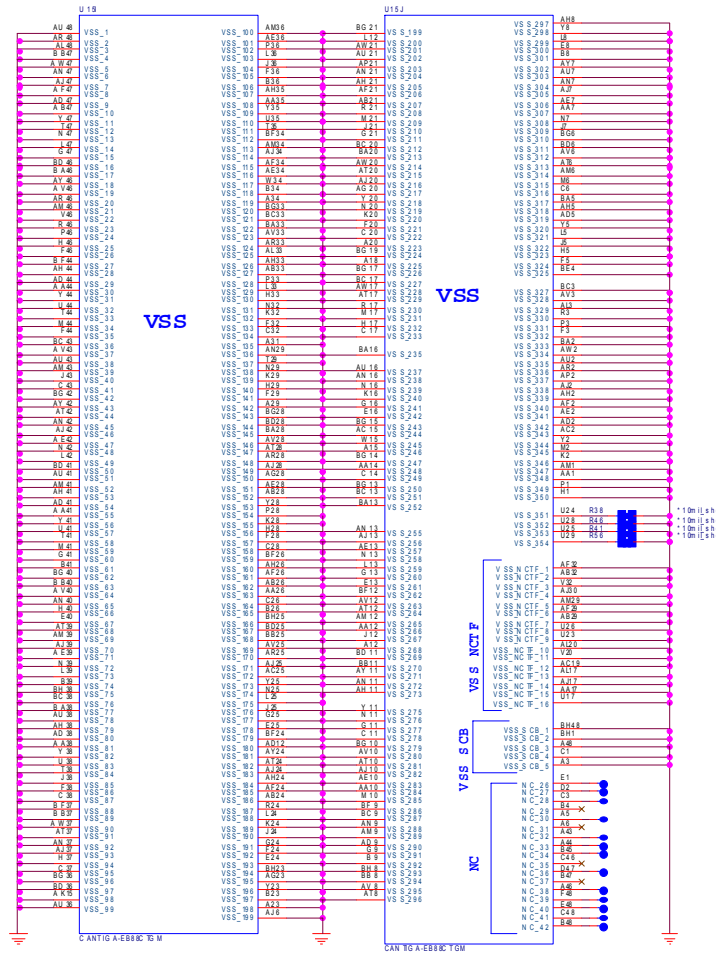



[58,10, 0,18, 2,30] 3,3V S

DDRII CHANNEL A

SO-DIMM 1

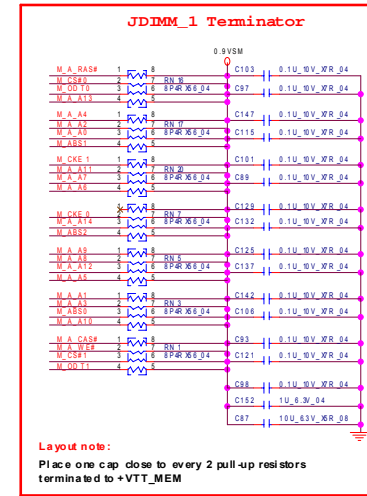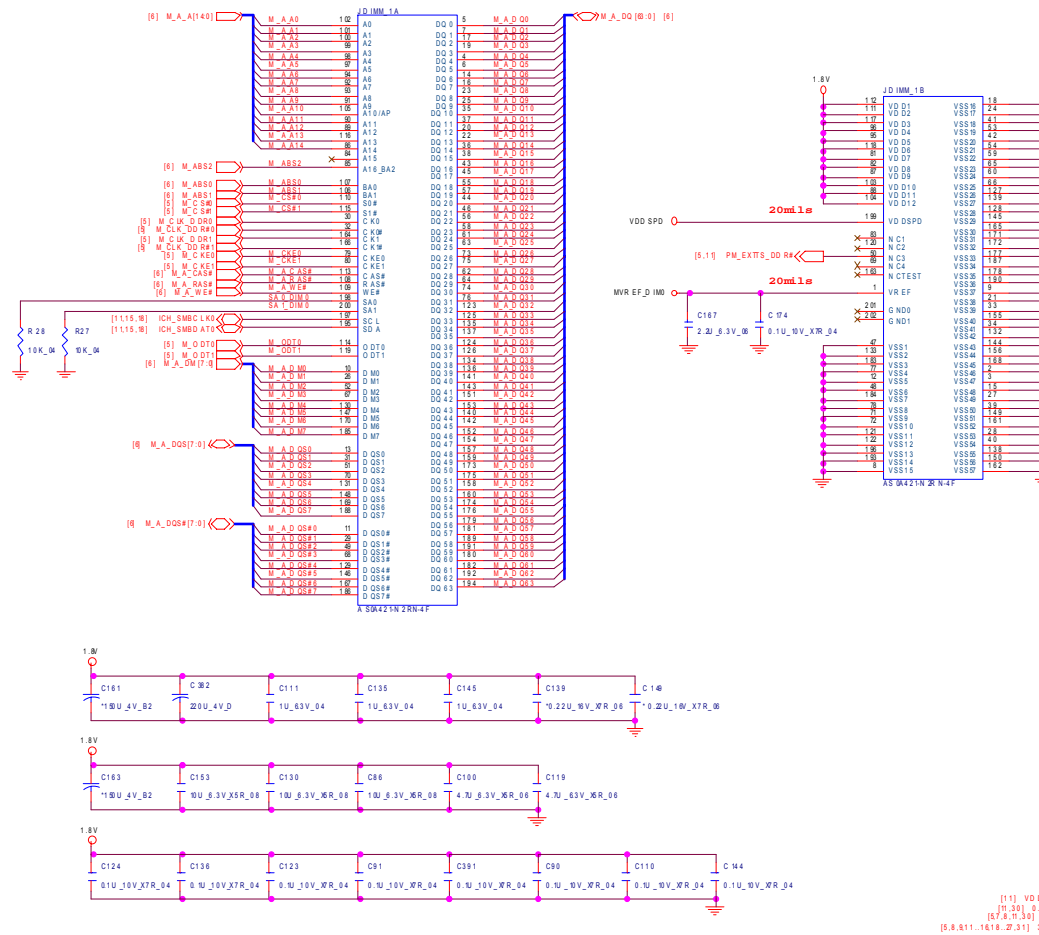

Layout note:
Place one cap close to every 2 pull-up resistors terminated to +VTT_MEM

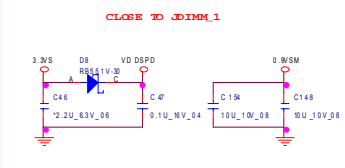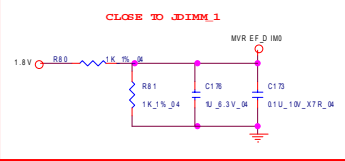

[11] VD DSPD
[11,30] 0.9VSM
[5,8,9,11,16,18,21,31] 3.3V





B.Schematic Diagrams

Sheet 10 of 40
DDRII CHANNEL A

DDRII CHANNEL B


SO-DIMM 2

Layout note:
JDIMM_2 is placed farther from the GMCH than JDIMM_1

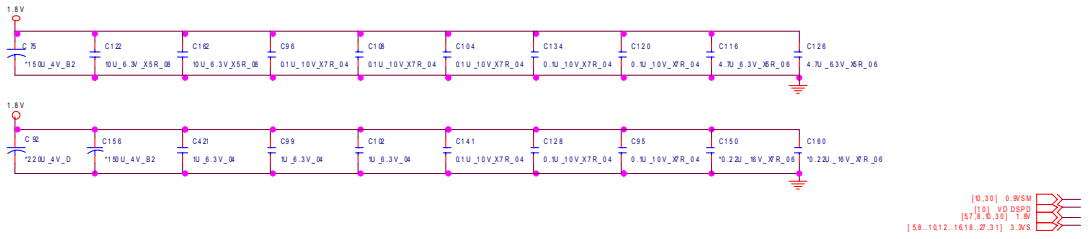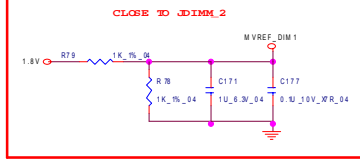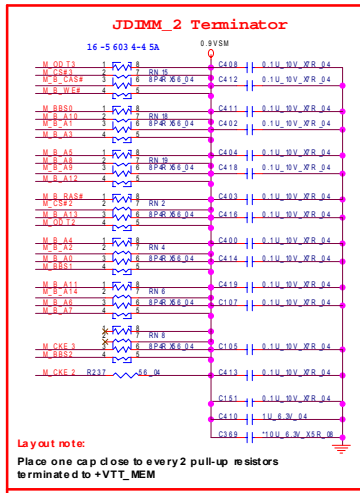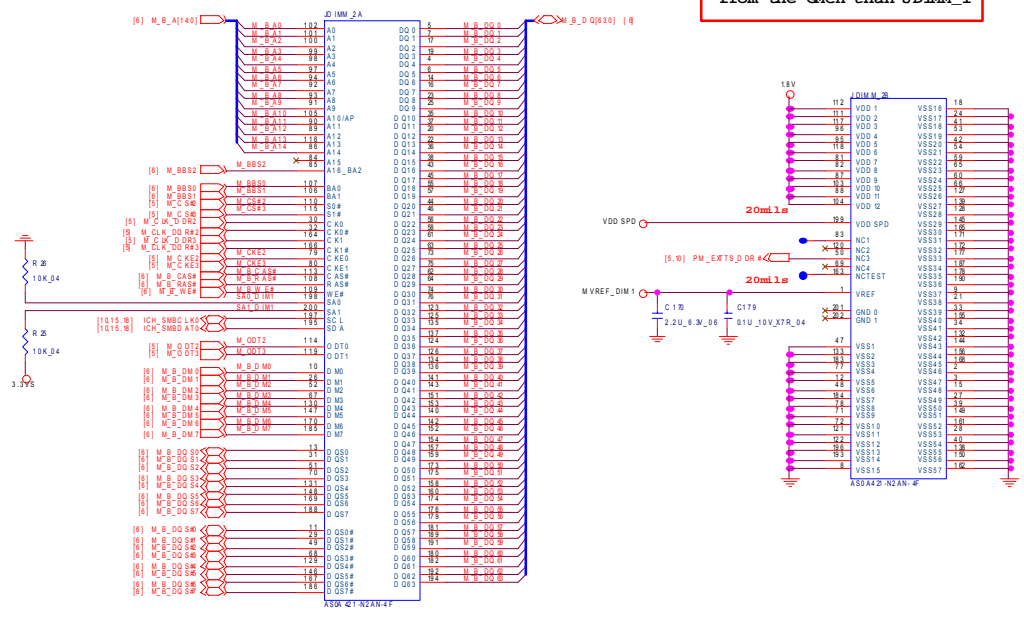

Panel, Inverter, CRT


CRT

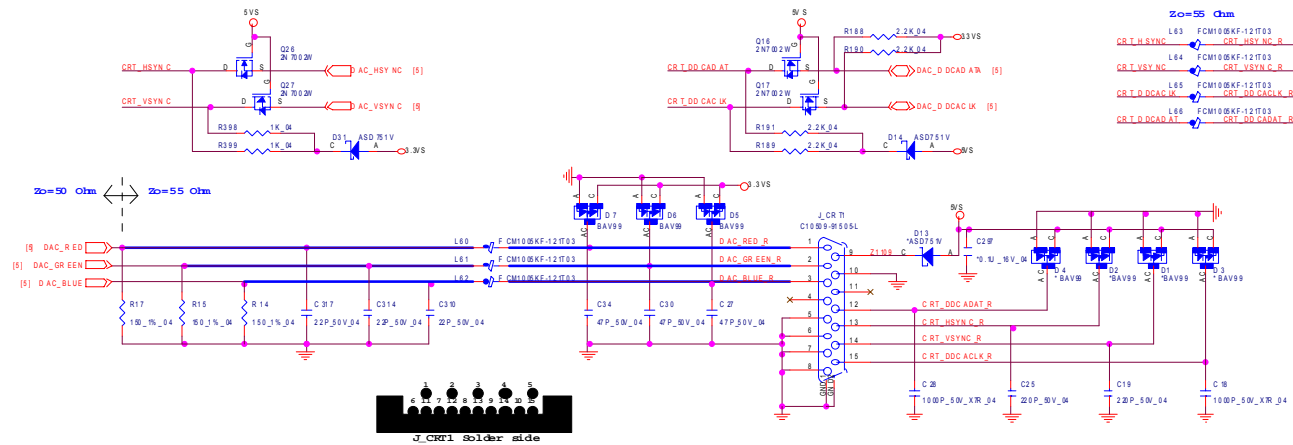


Sheet 12 of 40
Panel, Inverter,
CRT

B.Schematic Diagrams

PANEL

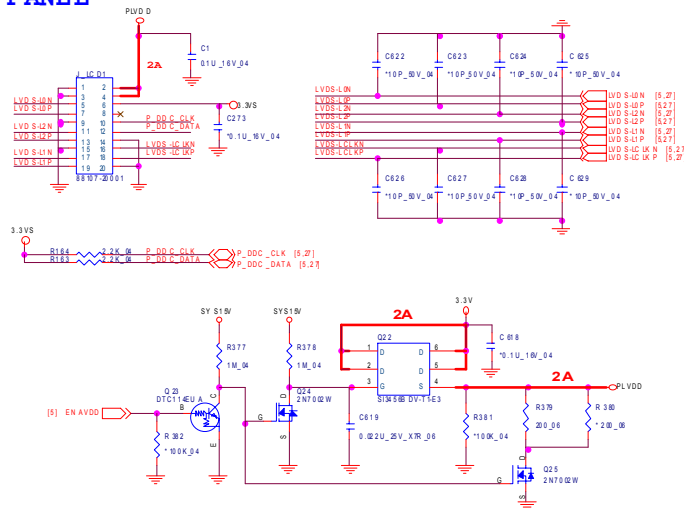

INVERTER CONNECTOR



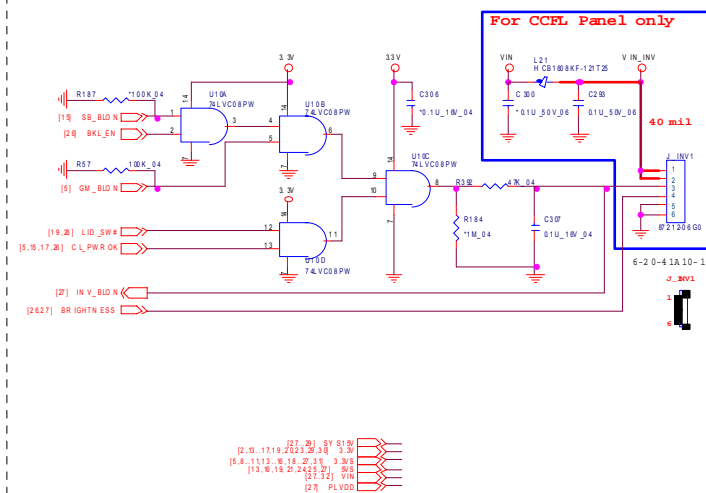


Schematic Diagrams


ICH9-M 1/5 - SATA

B.Schematic Diagrams




Sheet 13 of 40
ICH9-M 1/5 - SATA

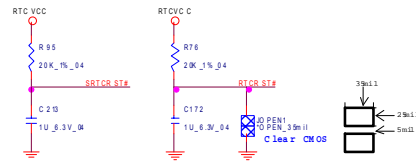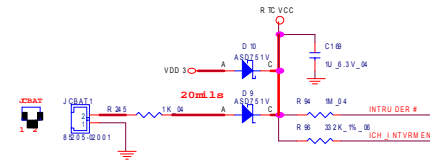

Zo= 550? 5%
zdiff= 1000? 0%

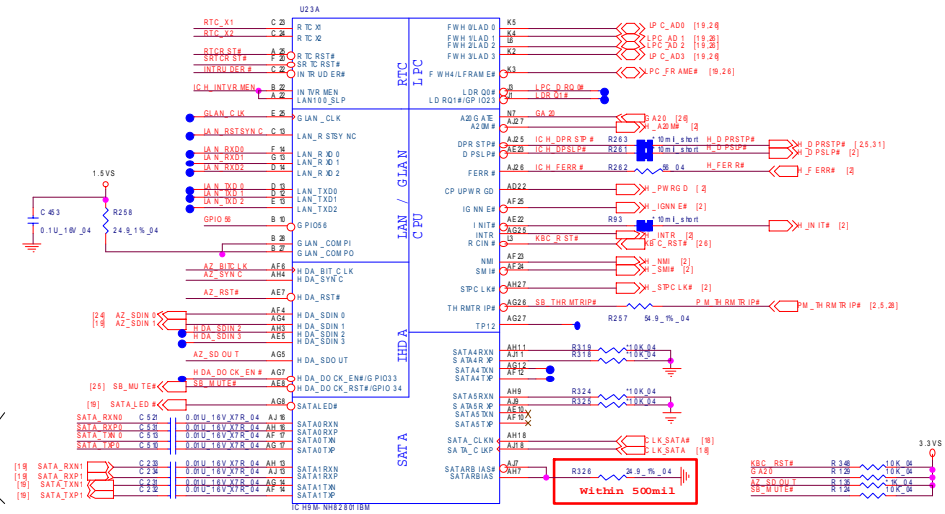

SATA HDD

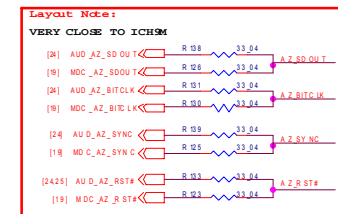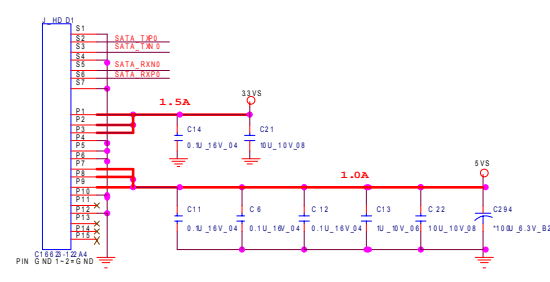

ICH9-M 2/5 - PCIE, PCI, USB

Bot BIG Strap			
	Strap	PCI_GNT#0	SPI_CS1#
SPI	01	Stuff	No stuff
PCI	10	No stuff	Stuff
IPC(default)	11	No stuff	No stuff

R148 1K_04 PCI_GNT#0





PCI_GNT#1 A16 swap override Strap		
Stuff	Enable	Default
No stuff	Disable	Default

R132 *K_04 PCI_GNT#0

SPI_SI ITM Enable		
Stuff	Enable	Default
No stuff	Disable	Default





R86 *K_04 SPI_SI

CLGPEOS ITM Enable		
HEIGH	Enable	Default
LOW	Disable	

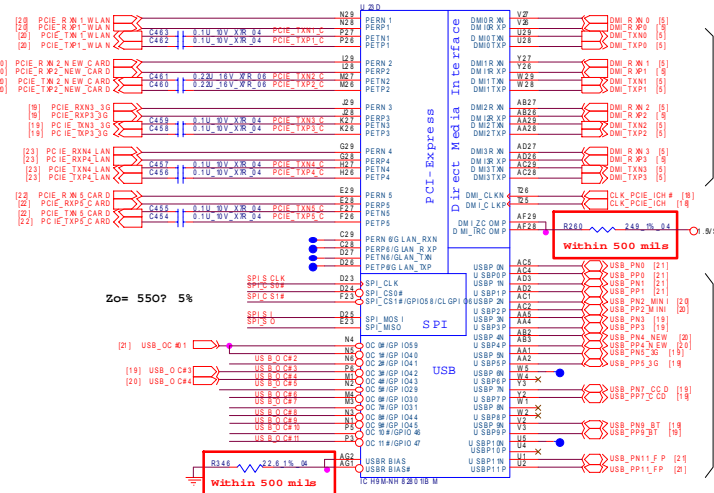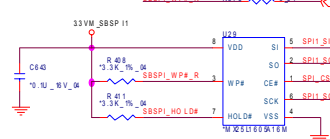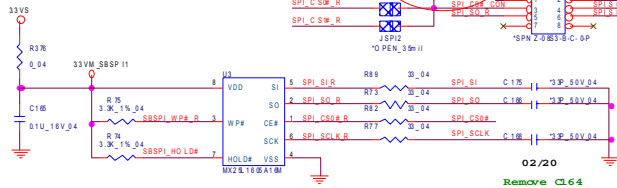

Zdiff= 1000? 5%


Zdiff= 900? 5%

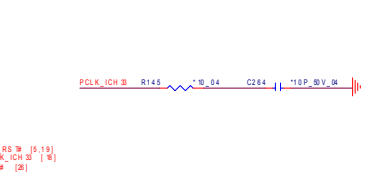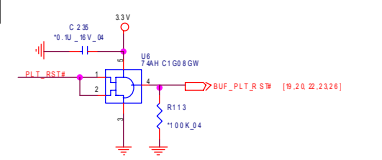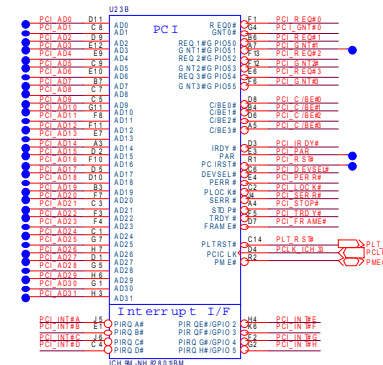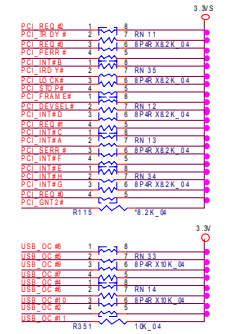


Sheet 14 of 40
ICH9-M 2/5 - PCIE,
PCI, USB

ICH9-M 3/5 - GPIO, PWR Management

Sheet 15 of 40
ICH9-M 3/5 - GPIO,
PWR Management

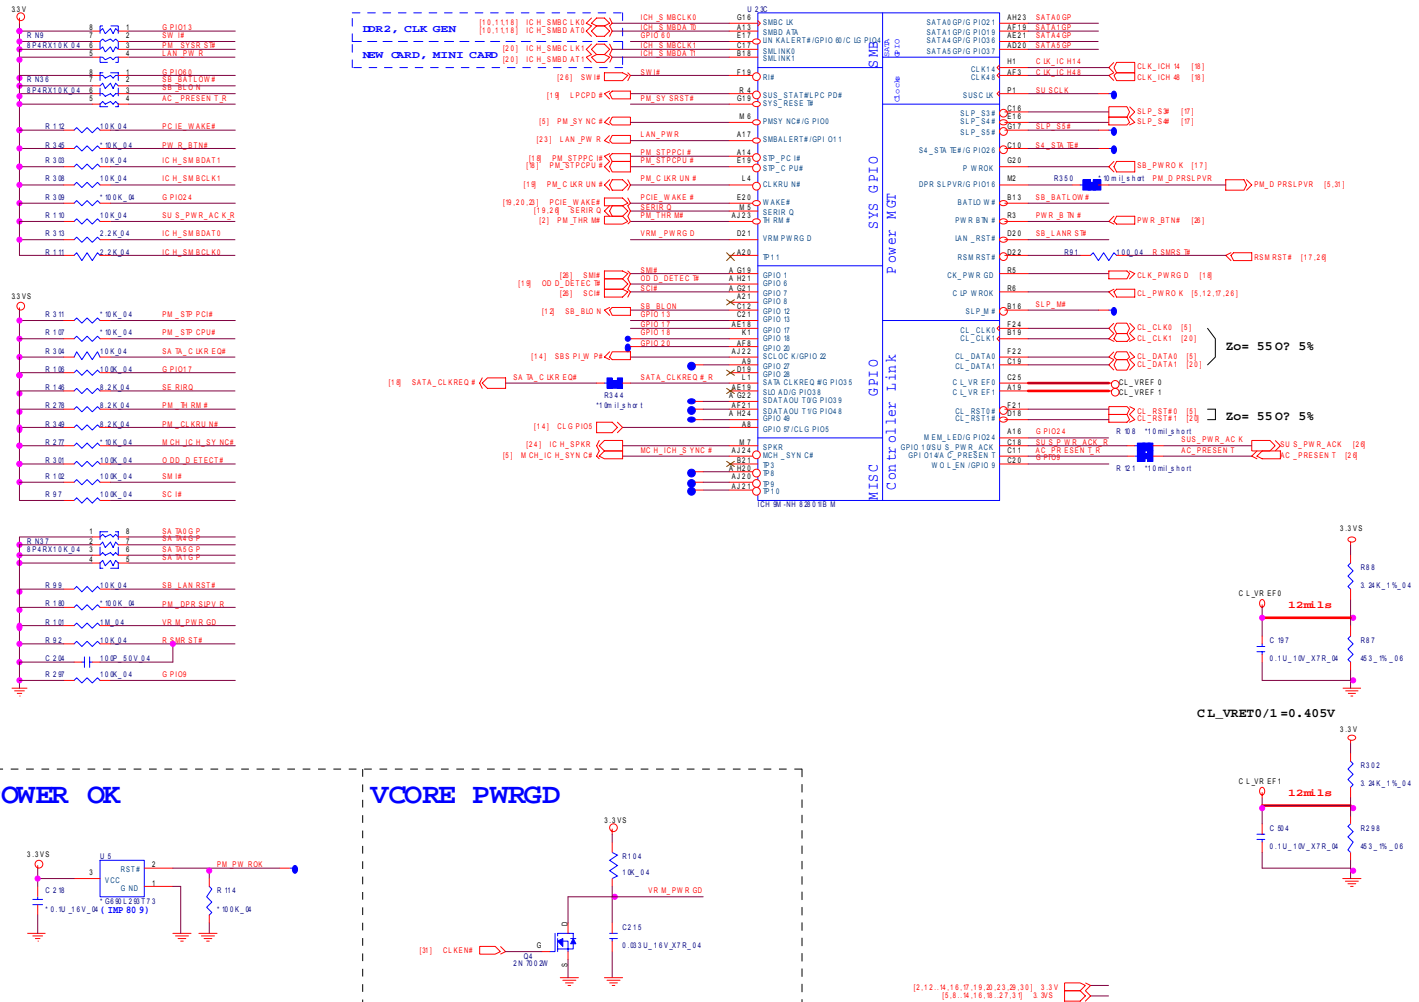

ICH9-M 4/5 - Power

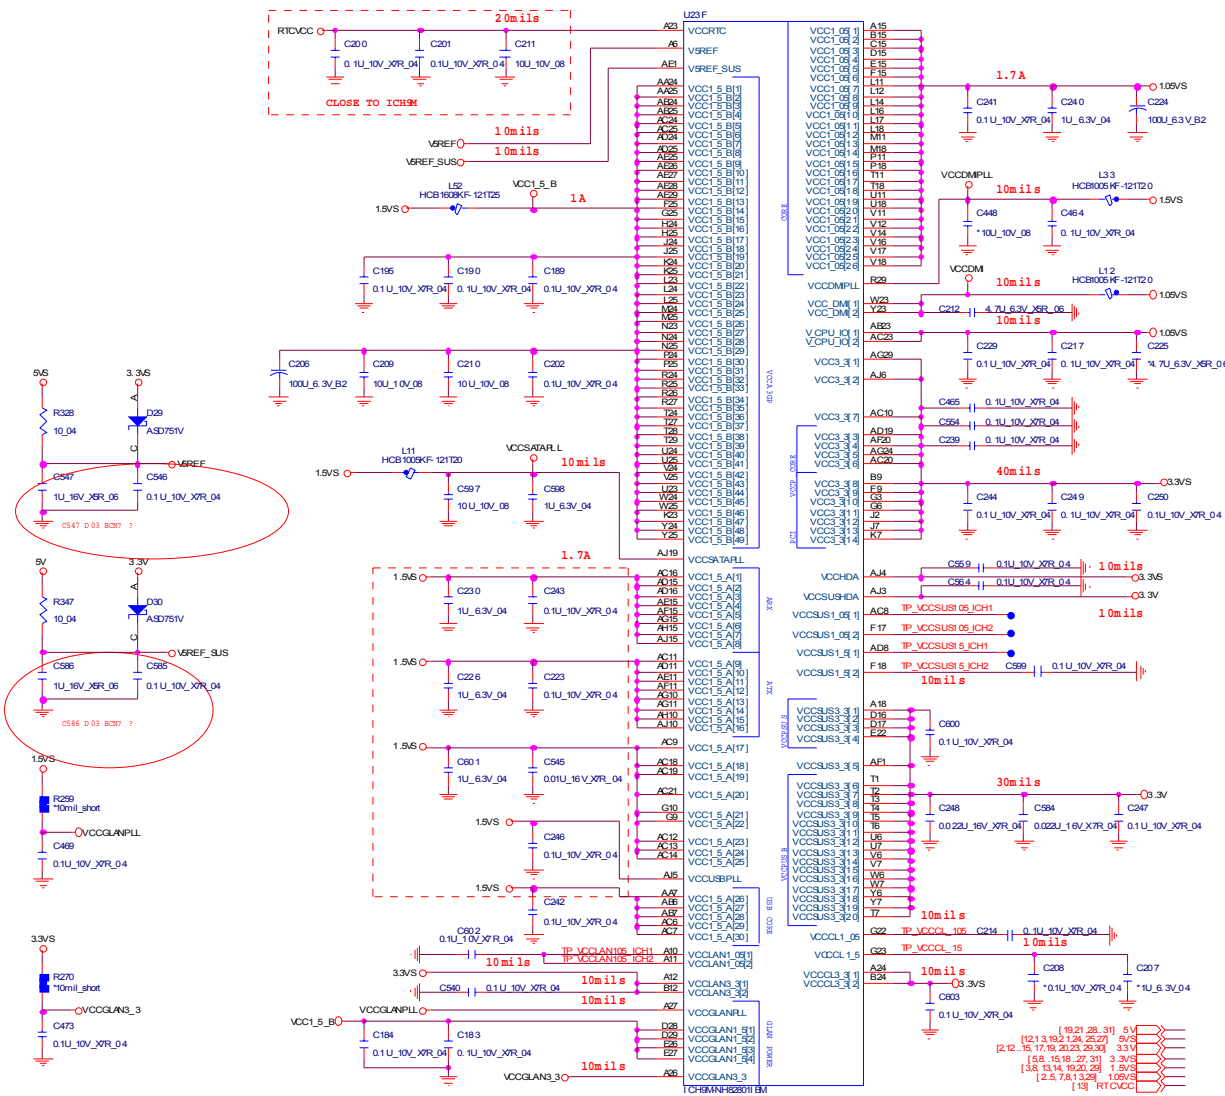

Sheet 16 of 40
ICH9-M 4/5 - Power

B.Schematic Diagrams








Schematic Diagrams

ICH9-M 5/5 - GND

B.Schematic Diagrams


Sheet 17 of 40
ICH9-M 5/5 - GND

U23E				
AK6	VSS10	VSS107	U3	
AK7	VSS9	VSS108	U6	
AK8	VSS5	VSS109	U7	
AK9	VSS4	VSS110	AC22	
AK21	VSS6	VSS111	K26	
AK22	VSS8	VSS112	K28	
AK81	VSS7	VSS113	K29	
AK91	VSS6	VSS114	L15	
AK5	VSS10	VSS115	L2	
AK17	VSS10	VSS116	U8	
AK25	VSS11	VSS117	U9	
AK27	VSS12	VSS118	U5	
AK31	VSS9	VSS119	U7	
AC3	VSS14	VSS120	U7	
AD1	VSS15	VSS121	M3	
AD10	VSS16	VSS122	M4	
AD11	VSS17	VSS123	M5	
AD12	VSS18	VSS124	M6	
AD17	VSS19	VSS125	M7	
AD19	VSS20	VSS126	M8	
AD21	VSS21	VSS127	M9	
AD23	VSS22	VSS128	M9	
AD24	VSS23	VSS129	M9	
AD3	VSS24	VSS130	N12	
AD5	VSS25	VSS131	N13	
AD6	VSS26	VSS132	N14	
AD7	VSS27	VSS133	N15	
AD9	VSS28	VSS134	N15	
AD20	VSS29	VSS135	N17	
AD31	VSS30	VSS136	N18	
AD4	VSS31	VSS137	N26	
AD5	VSS32	VSS138	N27	
AD7	VSS33	VSS139	N27	
AD2	VSS34	VSS140	P3	
AD20	VSS35	VSS141	P4	
AD4	VSS36	VSS142	P5	
AD5	VSS37	VSS143	P6	
AE3	VSS38	VSS144	P7	
AE6	VSS39	VSS145	P8	
AE7	VSS40	VSS146	P8	
AF3	VSS41	VSS147	P8	
AF5	VSS42	VSS148	P9	
AF3	VSS43	VSS149	P9	
AF2	VSS44	VSS150	P9	
AG2	VSS45	VSS151	R11	
AG6	VSS46	VSS152	R12	
AG7	VSS47	VSS153	R13	
AF5	VSS48	VSS154	R14	
AF7	VSS49	VSS155	R15	
AF3	VSS50	VSS156	R16	
AG13	VSS51	VSS157	R18	
AG14	VSS52	VSS158	R28	
AG15	VSS53	VSS159	R28	
AG20	VSS54	VSS160	R28	
AG23	VSS55	VSS161	R3	
AG3	VSS56	VSS162	R4	
AG8	VSS57	VSS163	R5	
AG9	VSS58	VSS164	R6	
AH12	VSS59	VSS165	R7	
AH14	VSS60	VSS166	R8	
AH17	VSS61	VSS167	R8	
AH19	VSS62	VSS168	R12	
AK2	VSS63	VSS169	R12	
AH24	VSS64	VSS170	U14	
AH25	VSS65	VSS171	U15	
AH26	VSS66	VSS172	U16	
AH9	VSS67	VSS173	U17	
AH5	VSS68	VSS174	AC23	
AH7	VSS69	VSS175	U6	
AH14	VSS70	VSS176	U7	
AH7	VSS71	VSS177	U3	
AH9	VSS72	VSS178	V1	
BT1	VSS73	VSS179	V13	
BT4	VSS74	VSS180	V5	
BT7	VSS75	VSS181	V5	
BT2	VSS76	VSS182	V8	
BT0	VSS77	VSS183	V9	
BT3	VSS78	VSS184	V8	
BT9	VSS79	VSS185	V8	
BT8	VSS80	VSS186	V26	
CB6	VSS81	VSS187	W27	
CB7	VSS82	VSS188	Y3	
E11	VSS83	VSS189	Y1	
E14	VSS84	VSS190	Y28	
E18	VSS85	VSS191	Y28	
E19	VSS86	VSS192	Y28	
E2	VSS87	VSS193	Y4	
E1	VSS88	VSS194	Y5	
E4	VSS89	VSS194	AG28	
E5	VSS90	VSS195	AG16	
E8	VSS91	VSS197	AG2	
F16	VSS92	VSS198	AG5	
F25	VSS93	VSS199		
F29	VSS94	VSS200		
CF12	VSS_N_CTF[1]	A3		
CF14	VSS_N_CTF[2]	A8		
CF19	VSS_N_CTF[3]	A9		
CF1	VSS_N_CTF[4]	A11		
CF4	VSS_N_CTF[5]	A28		
CF6	VSS_N_CTF[6]	AJ1		
CF7	VSS_N_CTF[7]	AJ2		
CF9	VSS_N_CTF[8]	AJ2		
CF10	VSS_N_CTF[9]	AJ2		
CF10.2	VSS_N_CTF[9]	AJ2		
CF10.3	VSS_N_CTF[10]	BJ		
CF10.4	VSS_N_CTF[11]	BJ9		
CF10.5	VSS_N_CTF[12]			
CF10.6	VSS_N_CTF[12]			

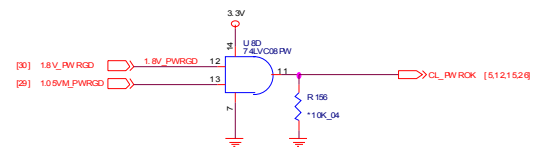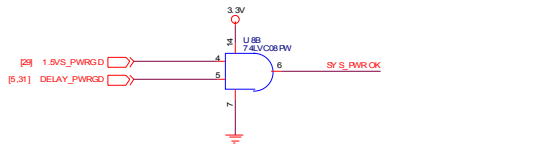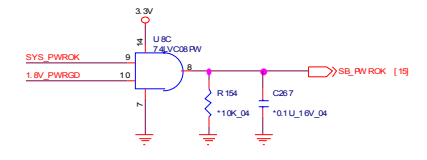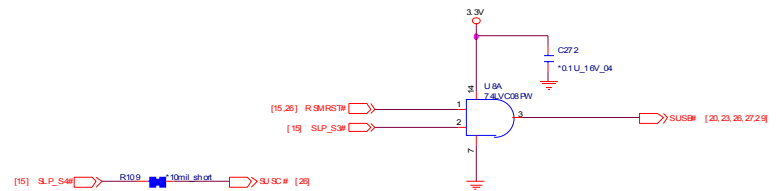

Clock Generator

CLOCK GENERATOR

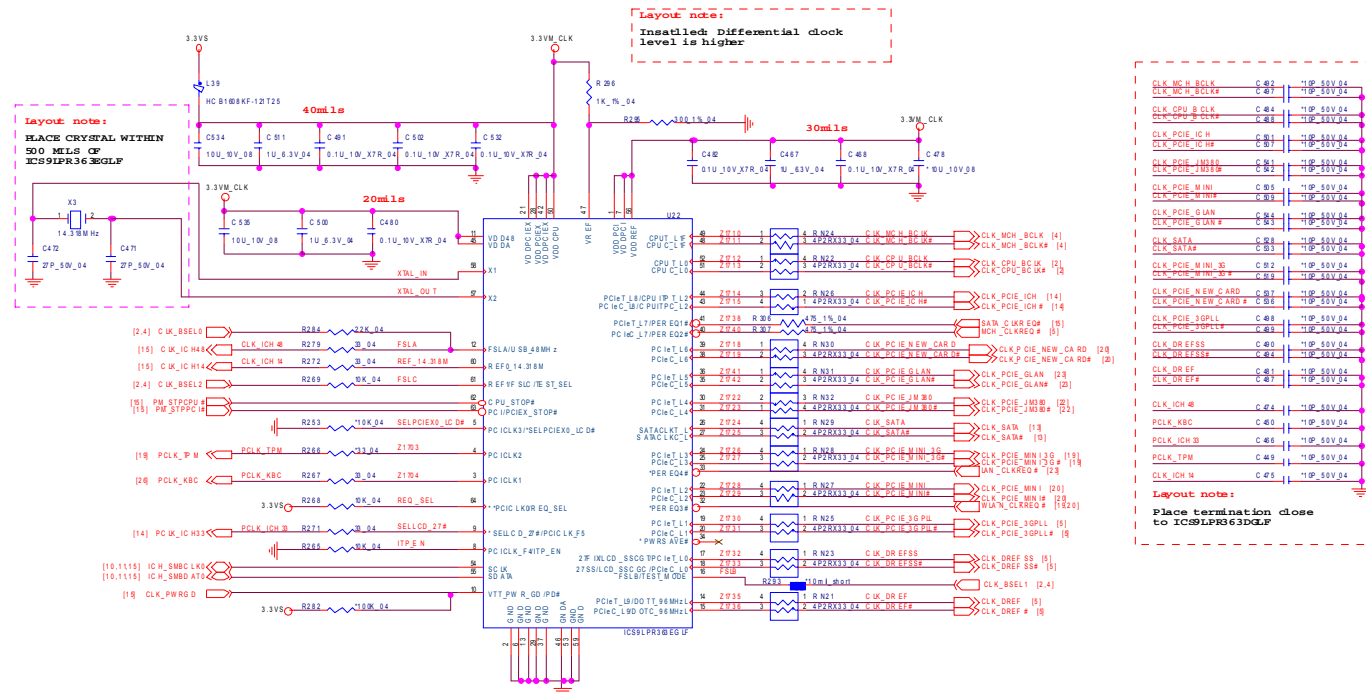

FS LC	FS LB	FSLA	CS 05	
BS RL2	BS RL1	B SEL0	B SEL1	B OR C CLK PE eq used cy
0	0	0	0	26.6 MHz 106.6 MHz
0	1	0	0	20.0 MHz 800 MHz
0	1	1	1	16.6 MHz 667 MHz

Red words must be controlled by BIOS			
SATA_CLKREQ# (PEREQ1#)	PCI ECLK 6 (NEW CARD) SATACLK	MCH_CLKREQ# (PEREQ2#)	PCI ECLK 1 (3GP LL) PCI ECLK 8 (ICH)
LAN_CLKREQ# (PEREQ3#)	PCI ECLK 2 (MINI) PCI ECLK 4 (JM85)	LAN_CLKREQ# (PEREQ4#)	PCI ECLK 3 (MINI_3G) PCI ECLK 5 (GLAN)

Pin5	Pin9	Pin4/15	Pin7/18
SELPCIEBK_ICD#/ PCIE3 = 0 (low)	SELICD_27# = 0 SELICD_27# = 1	PCIE39 DDT96	27FLX/SS LCID(96MHz)
SELPCIEBK_ICD#/ PCIE3 = 1 (high)	SELICD_27# = 0 SELICD_27# = 1	PCIE39 DDT96	PCIEX0 PCIEX0


(0, 1, 10, 2, 3) 3.3V5

Sheet 18 of 40
Clock Generator


Multi I/O, ODD, CCD, BT, TPM

Sheet 19 of 40
Multi I/O, ODD,
CCD, BT, TPM

SATA ODD

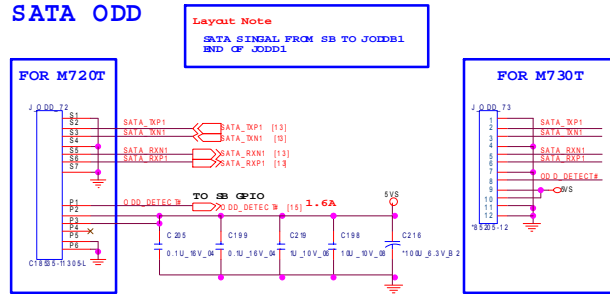


TPM 1.2

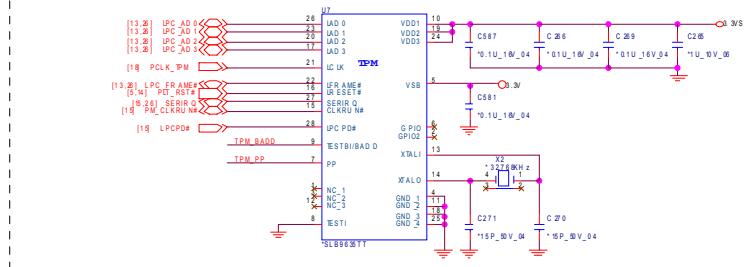


Asserted before entering S3
LRC reset timing:
LPCPD# inactive to IRS# inactive 32-96us


TPM_PP	HI : AOCBS
	LOW : NORMAL (Default)
TPM_BADD	HI : 48 / 4F h (Default)
	LOW : 2E / 2F h





Bluetooth

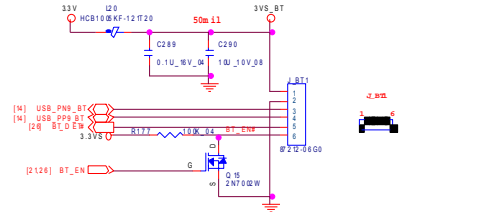

MULTI I/O CONN

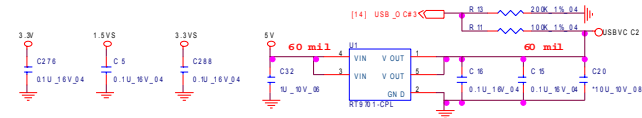


CCD

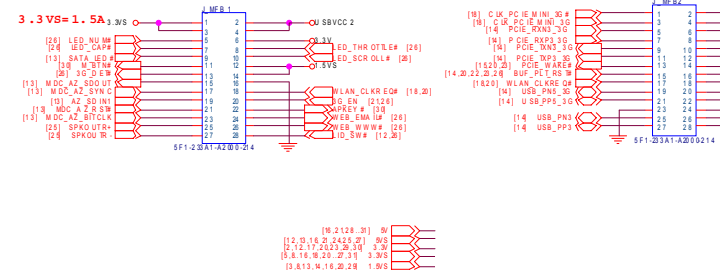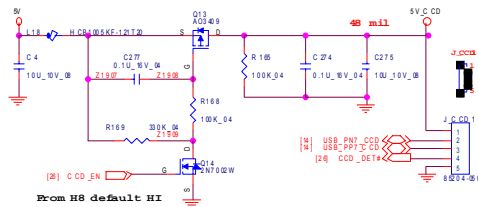


New Card, Mini PCIE

NEW CARD

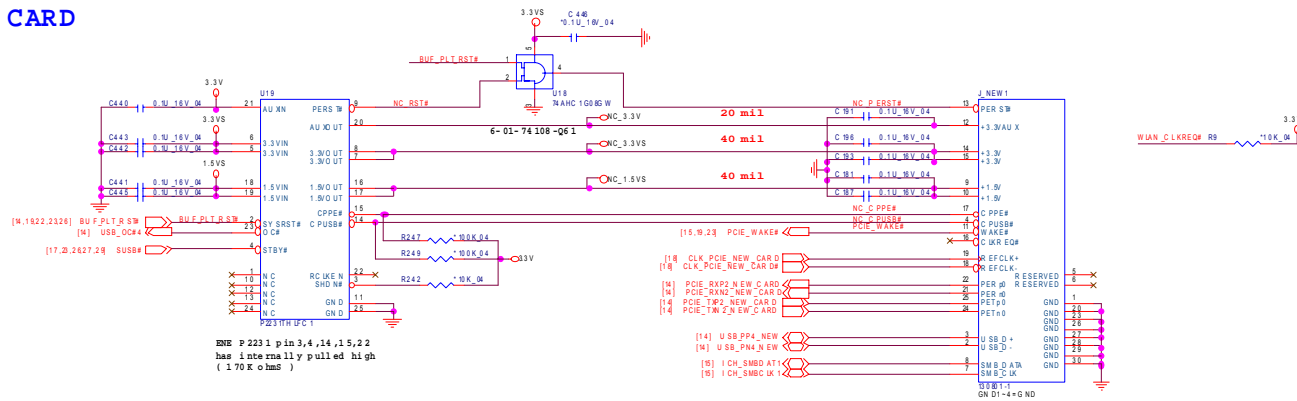

MINI CARD

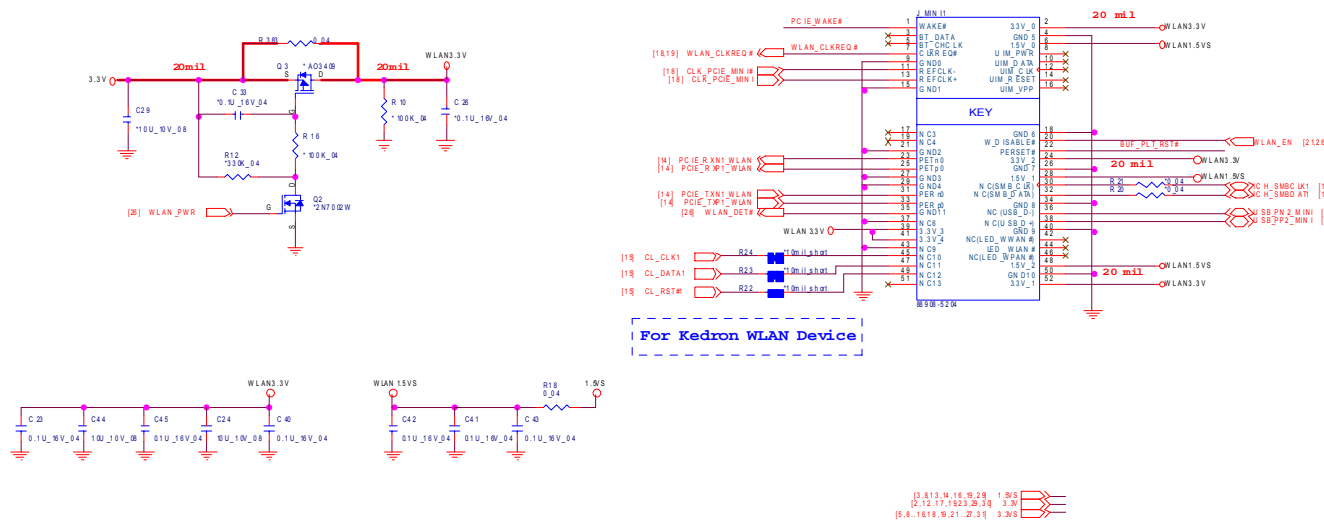


Sheet 20 of 40
New Card,
Mini PCIE


B.Schematic Diagrams

LED, FAN, TP, FP, USB


LED

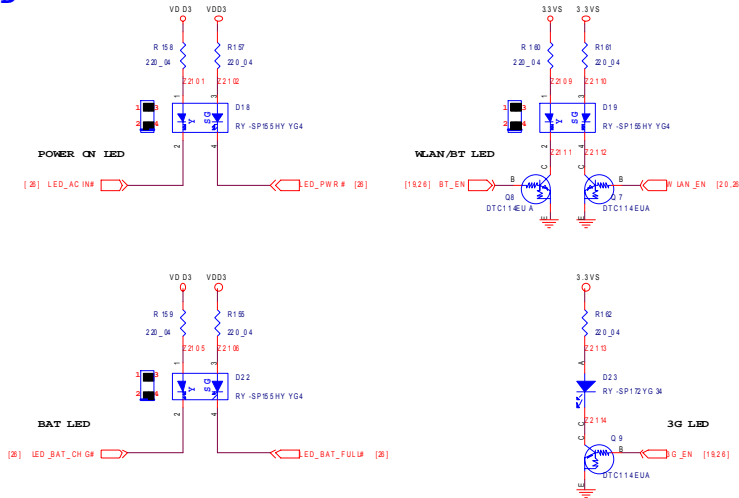


FAN CONTROL

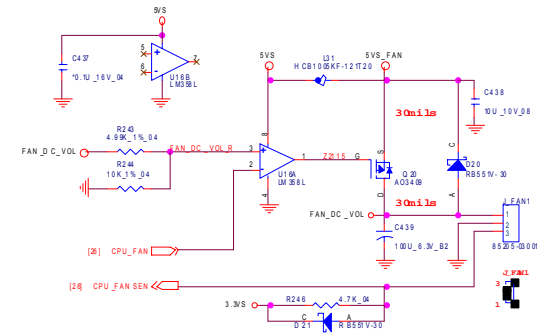


FP CONN

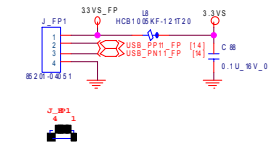

CLICK CONN

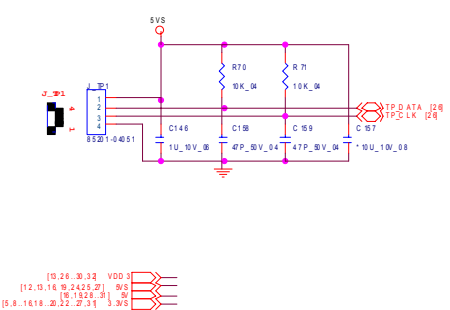

USB PORT

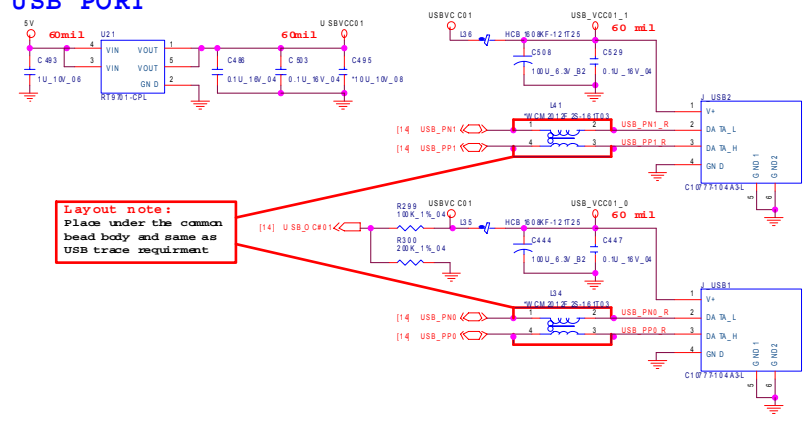


B.Schematic Diagrams



Sheet 21 of 40
LED, FAN, TP, FP,
USB

JMB385 Card Reader

JMB385 CARD READER

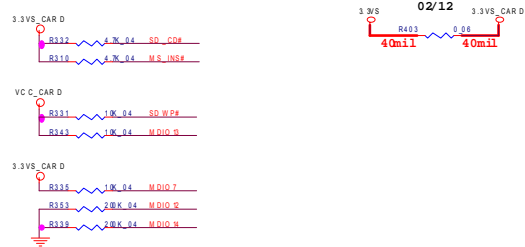


	HIGH	LOW
MDIO7	On Board	Adi-in Card
MDIO1 2	CR1_PCTLN High Active	CR1_PCTLN Low Active
MDIO1 4	CR1_LEIN High Active	CR1_LEIN Low Active



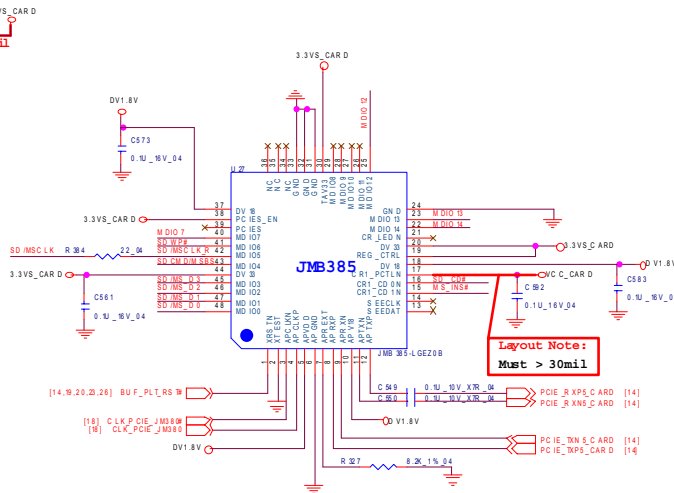



Near Cardreader CON

M720T Card Reader Connector

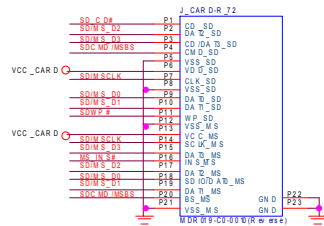

M730T Card Reader Connector

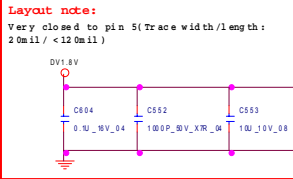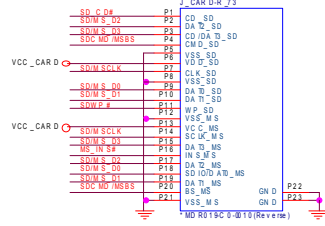


[5, 8, 16, 18, 20, 23, 27, 31] 3.3VS

Sheet 22 of 40
JMB385 Card Reader


PCI-E LAN RTL8111C

Sheet 23 of 40
PCI-E LAN
RTL8111C

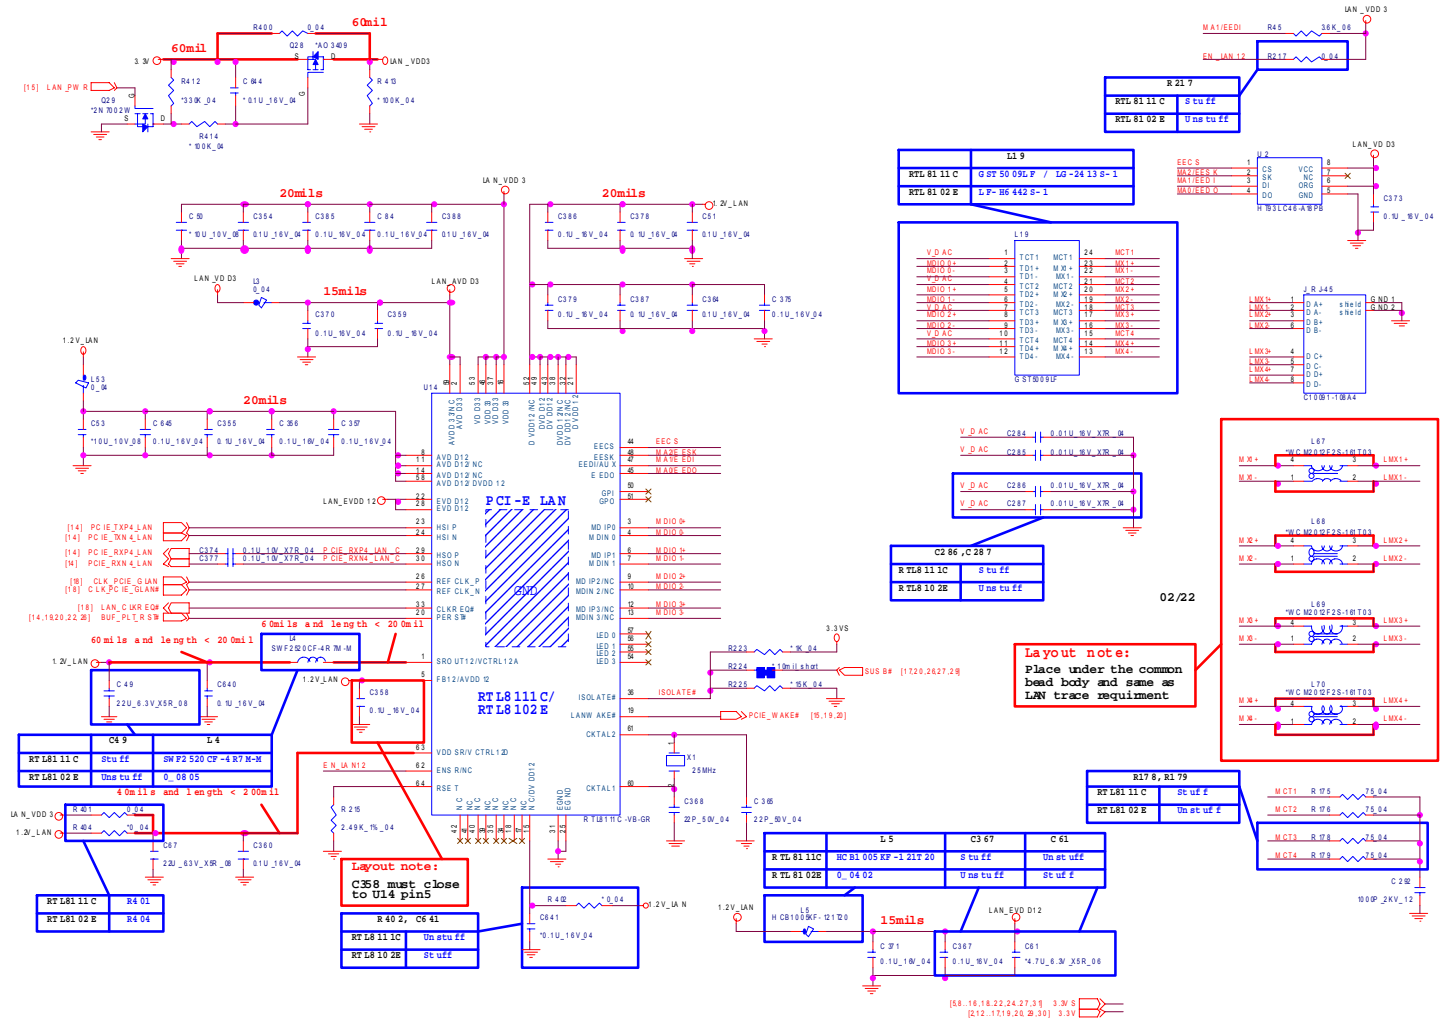

Audio Codec ALC662


Sheet 24 of 40
 Audio Codec
 ALC662

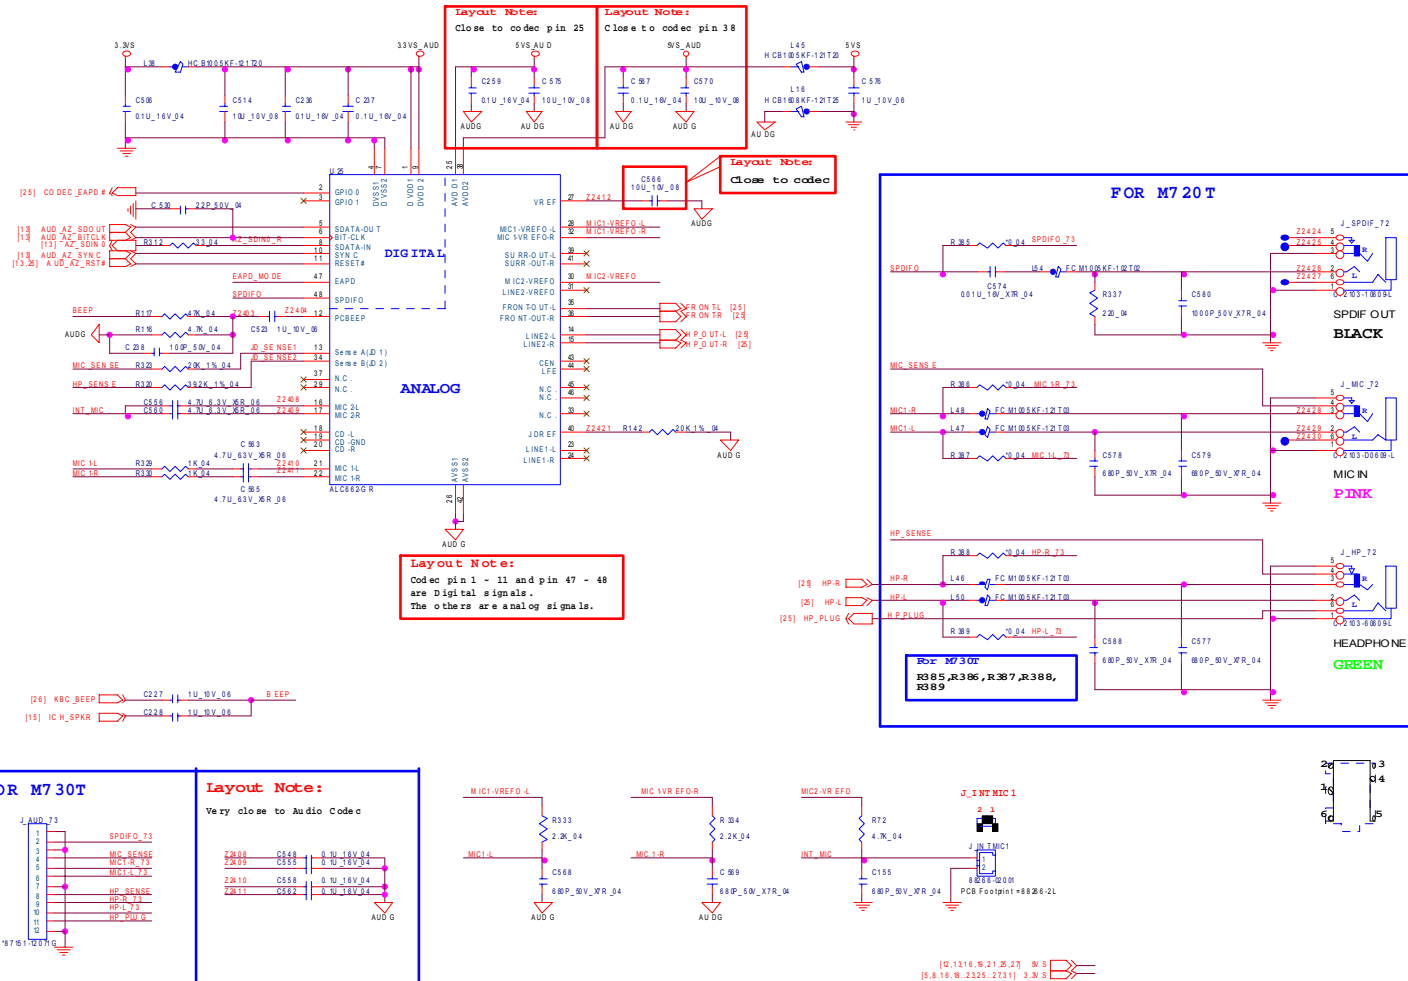


Audio AMP2056

Sheet 25 of 40
Audio AMP2056



	M720T	M730T
R144	3.01K_1%_04	6.2K_1%_04
R141	3.01K_1%_04	5.6K_04

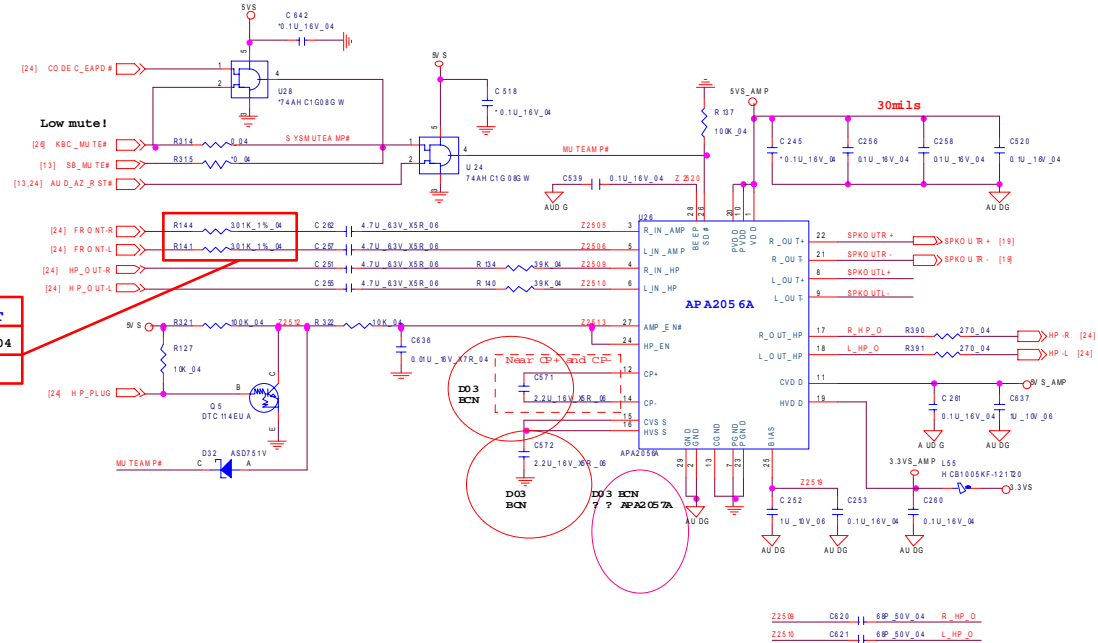


For M720T

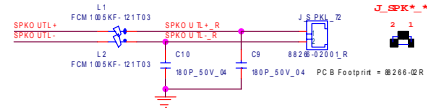

For M730T

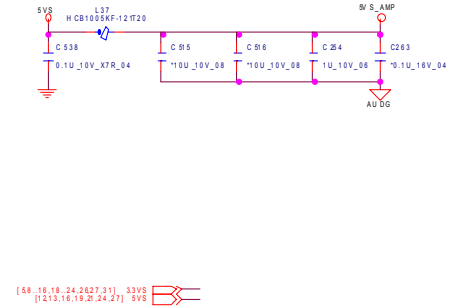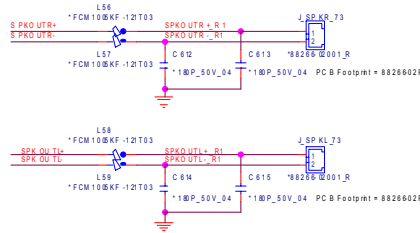

KBC-ITE IT8512E

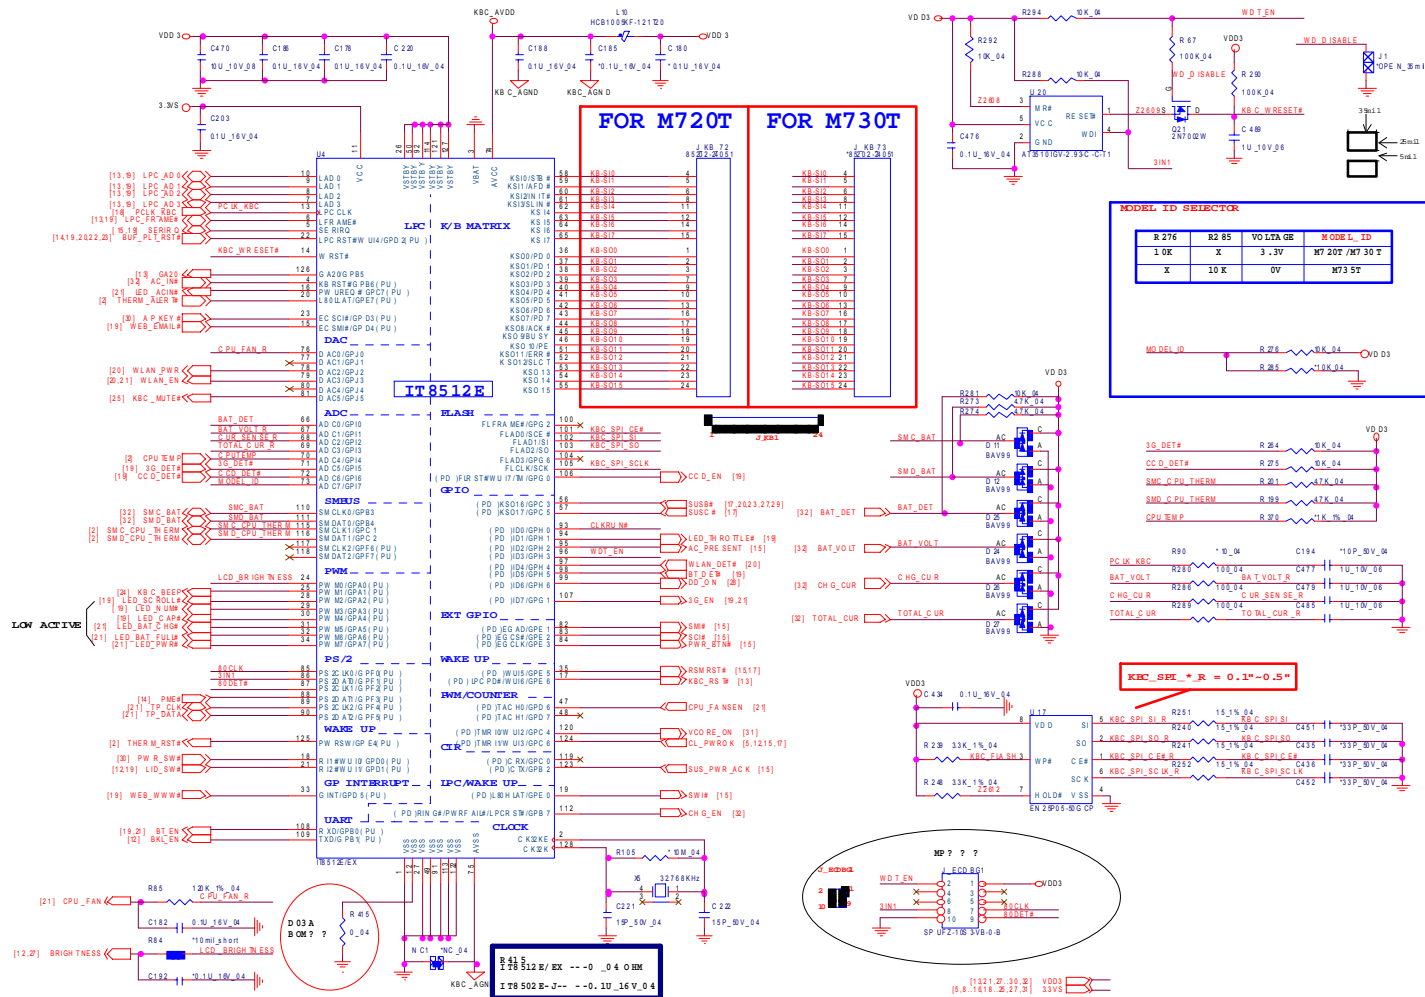



MODEL ID SELECTOR

R 276	R 285	VOLTA GE	MODE L_ID
1 0K	X	3.3V	M7 20T /M7 30T
X	10 K	0V	M73 T

MODEL ID


Sheet 26 of 40
KBC-ITE IT8512E

B.Schematic Diagrams

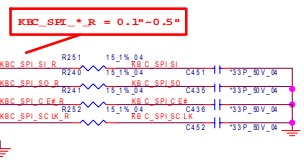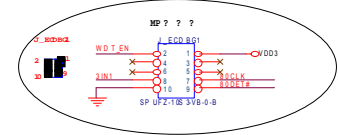


System Power, LED BKLT



5VS, 3.3VS

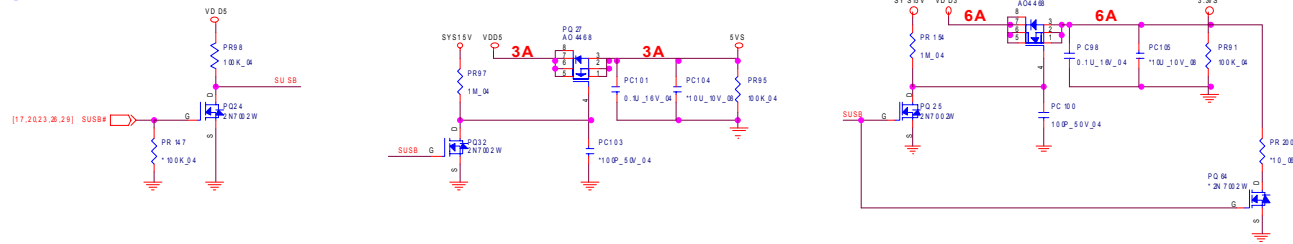

M735T LED PANEL BACKLIGHT DRIVER

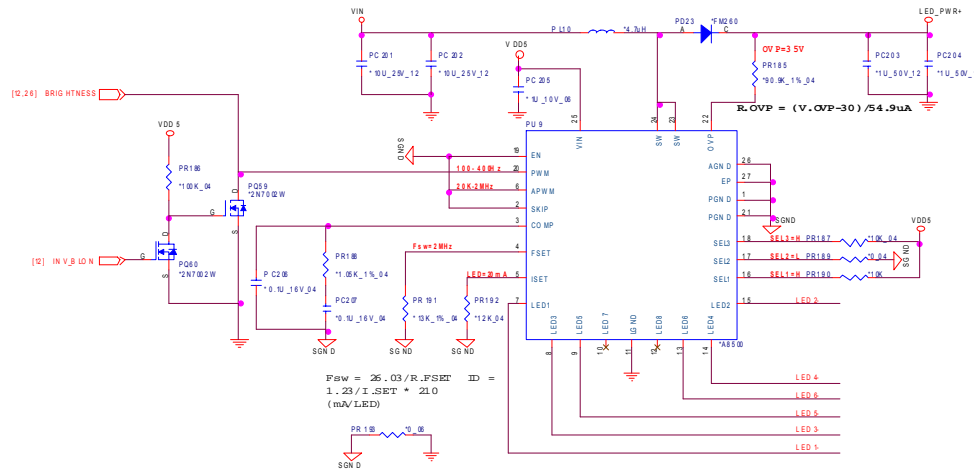


SEL1	SEL2	SEL3	LEDx Output
0	0	0	Only LED1 on
1	0	0	LED1 through LED2 on
0	1	0	LED1 through LED3 on
1	1	0	LED1 through LED4 on
0	0	1	LED1 through LED5 on
1	0	1	LED1 through LED6 on
0	1	1	LED1 through LED7 on
1	1	1	LED1 through LED8 on

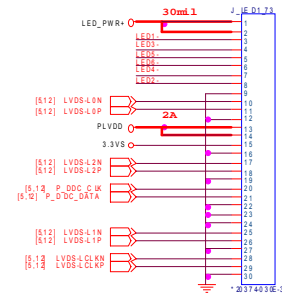

Sheet 27 of 40
System Power,
LED BKLT

Power VDD3, VDD5

VDD3, VDD5

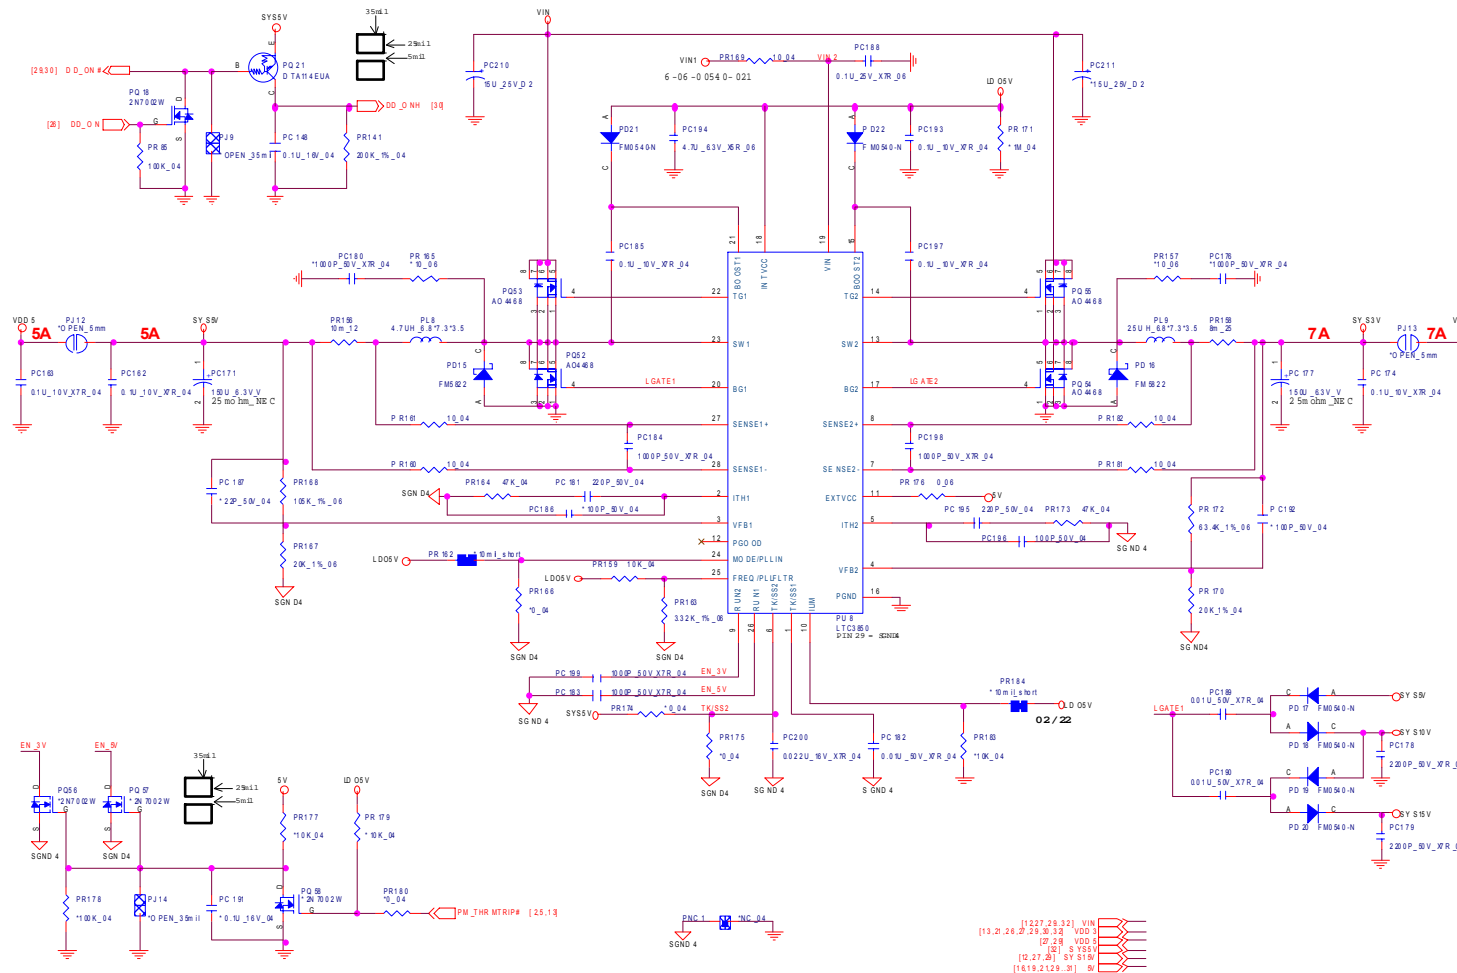


Sheet 28 of 40
Power VDD3, VDD5

B.Schematic Diagrams

Schematic Diagrams


Power 1.5VS, 1.05VS, 3.3V, 5V

1.05VS

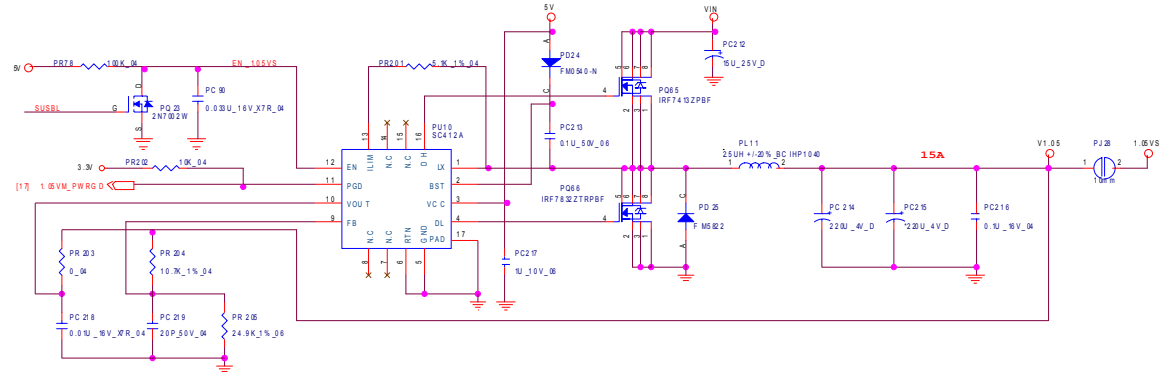


Sheet 29 of 40
Power 1.5VS,
1.05VS, 3.3V, 5V

1.5V

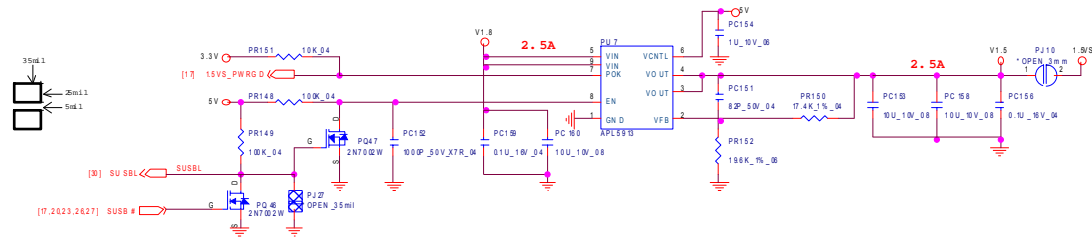


3.3V, 5V

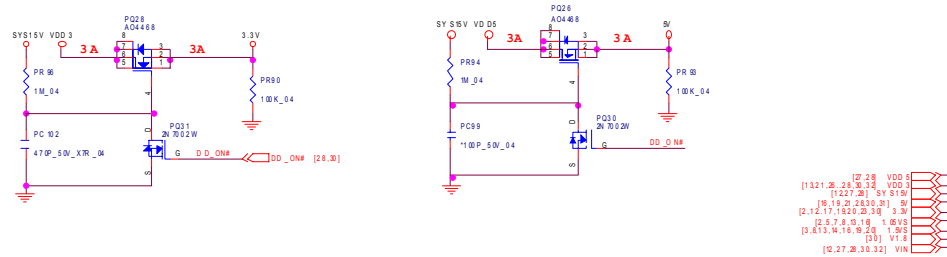

Power 1.8V, 0.9VSM

1.8V, 0.9VSM

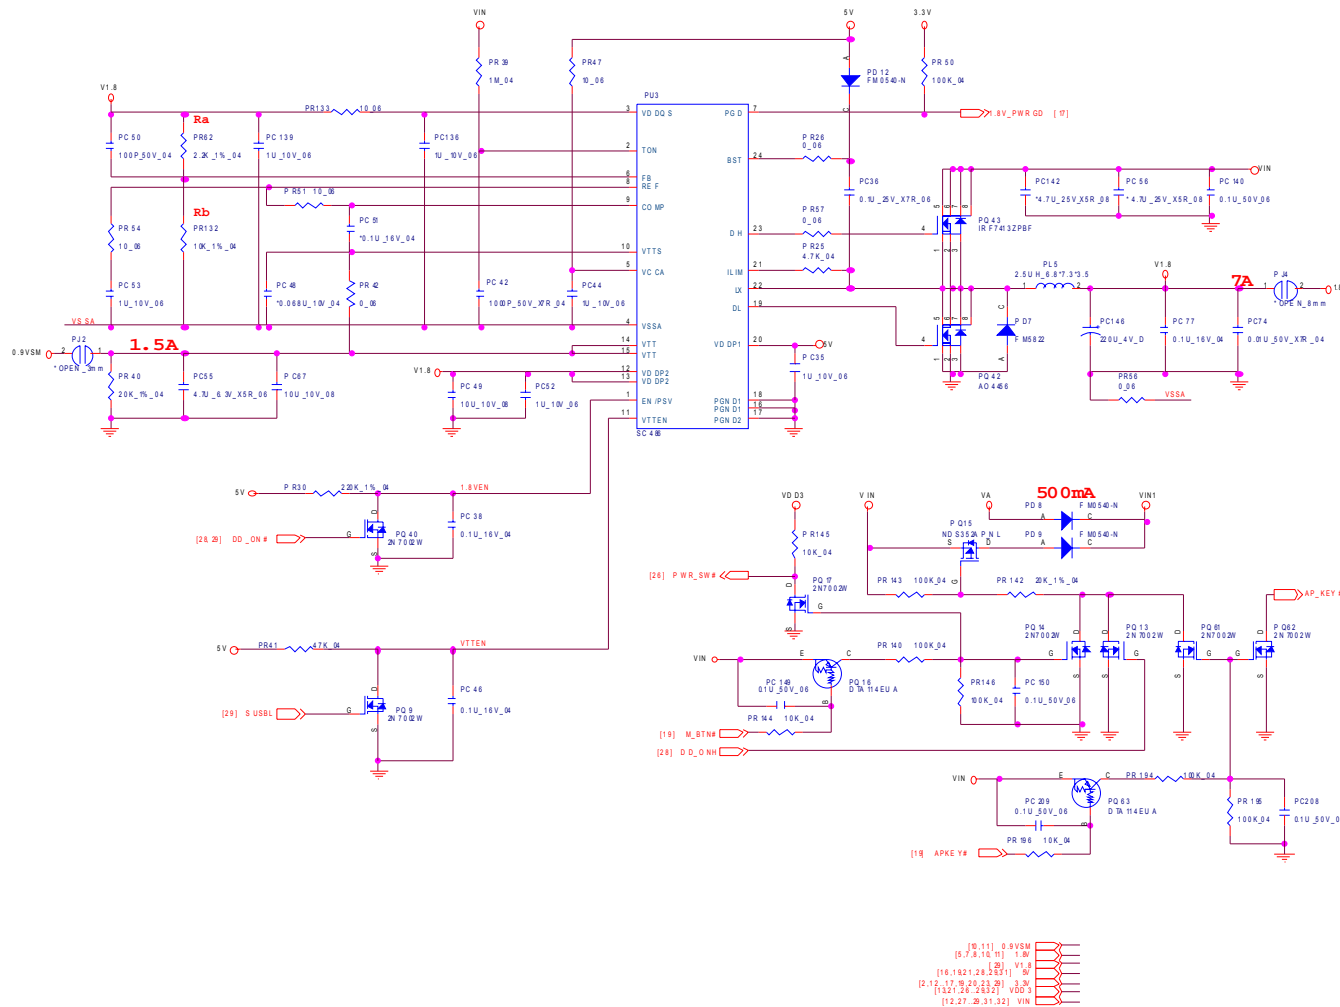


Sheet 30 of 40
Power 1.8V,
0.9VSM

B.Schematic Diagrams

Power VCORE

VCORE


Sheet 31 of 40
Power VCORE

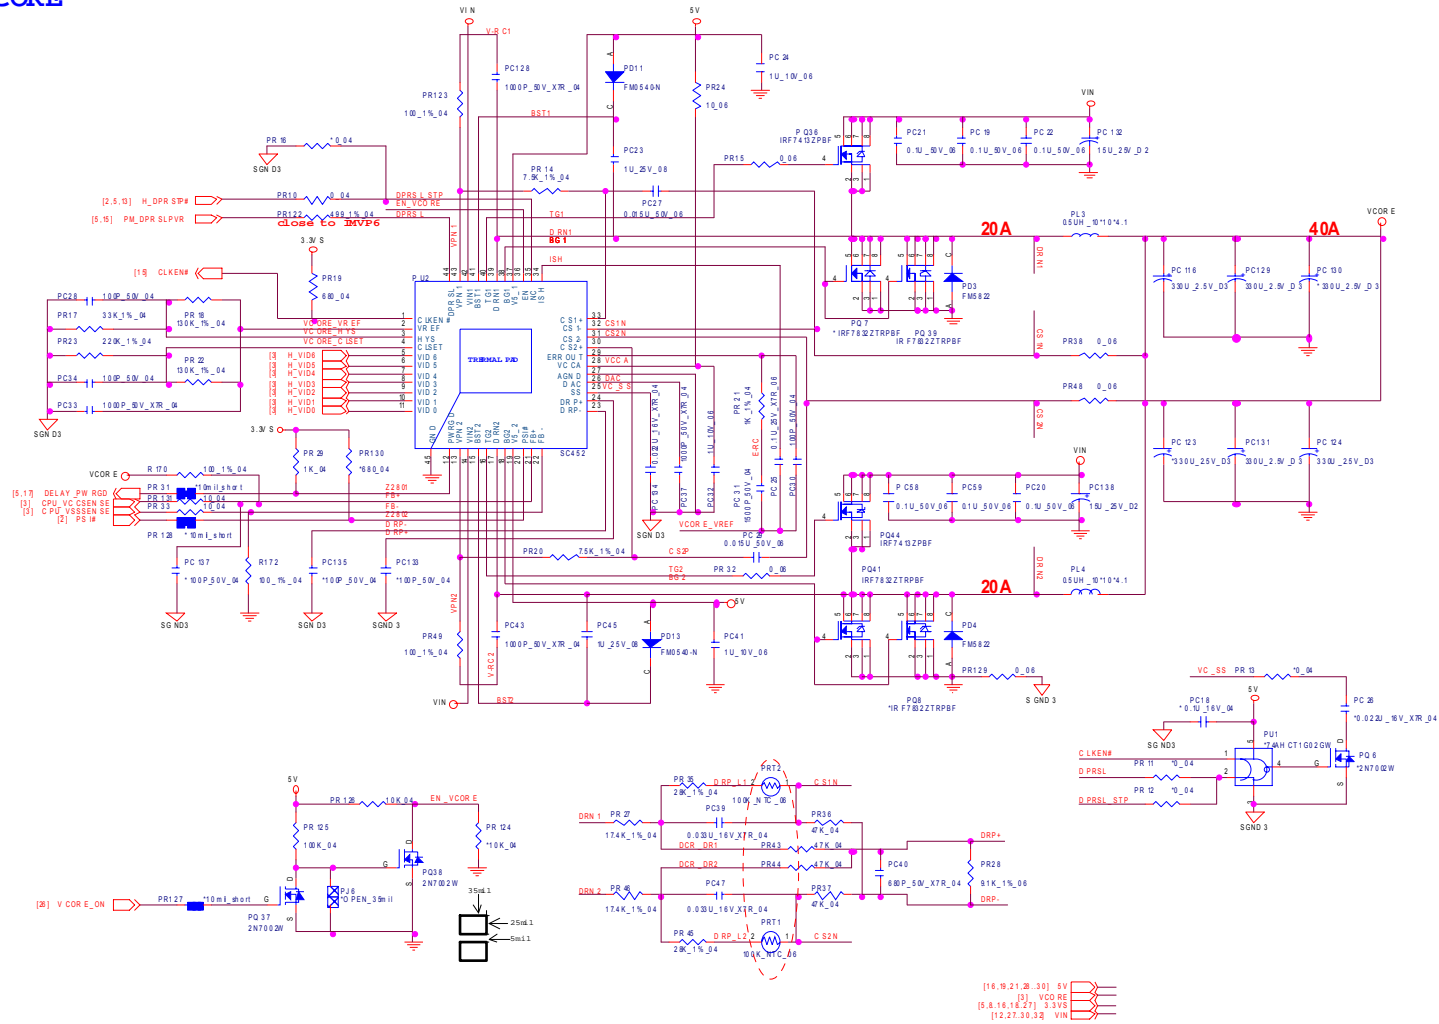

B.Schematic Diagrams

Power AC-IN, Charger

AC IN & CHARGER

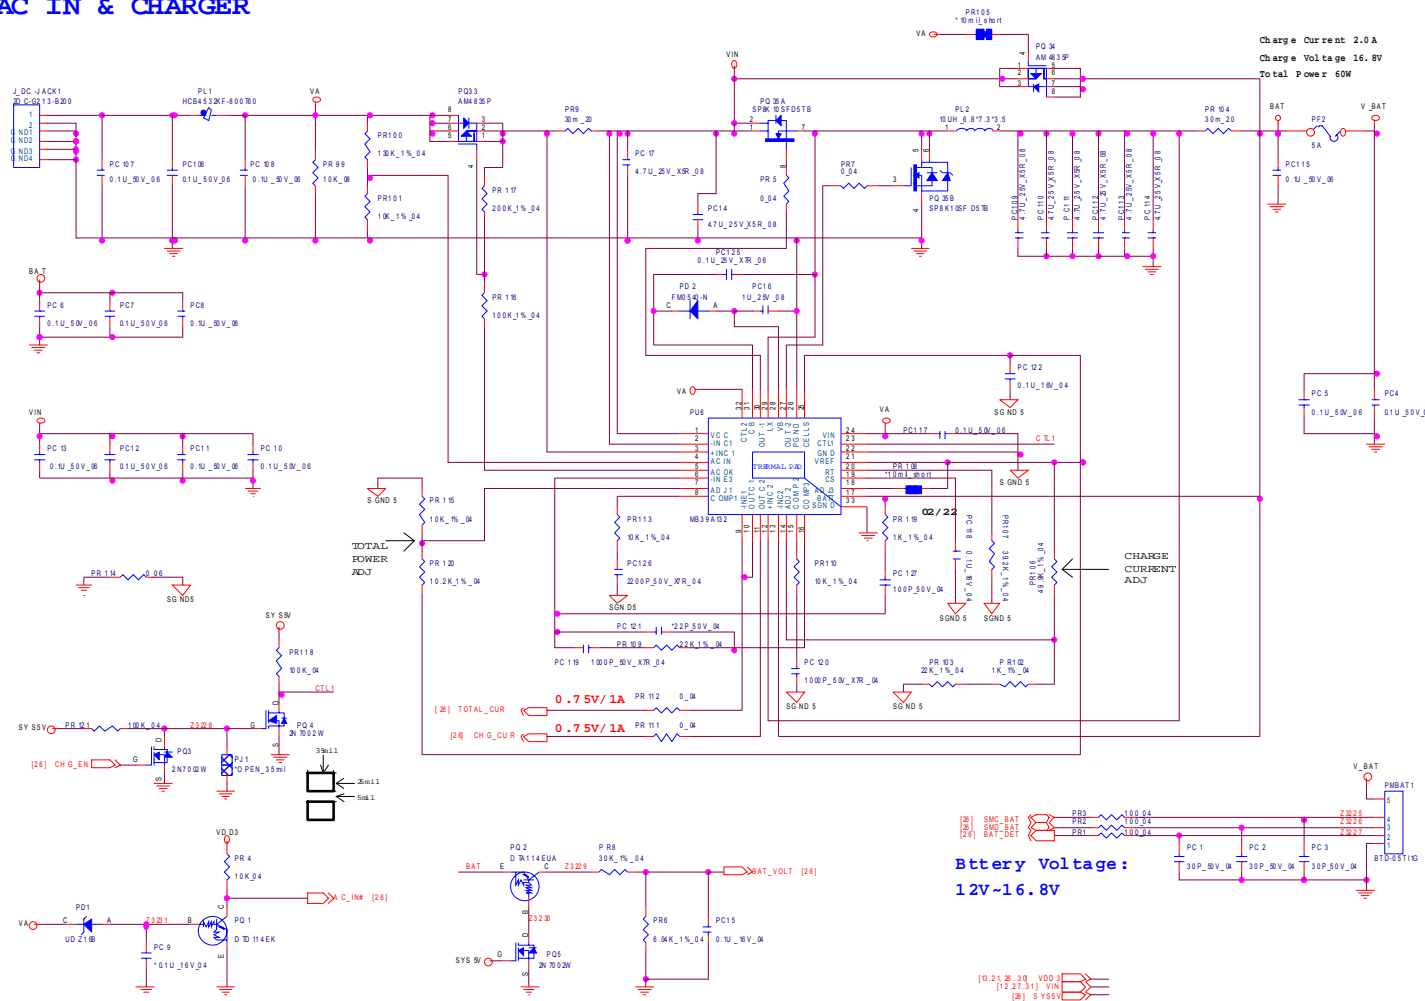


Sheet 32 of 40
Power AC-IN,
Charger

B.Schematic Diagrams

Schematic Diagrams


Multi I/O Board 1/2

Sheet 33 of 40
Multi I/O Board 1/2

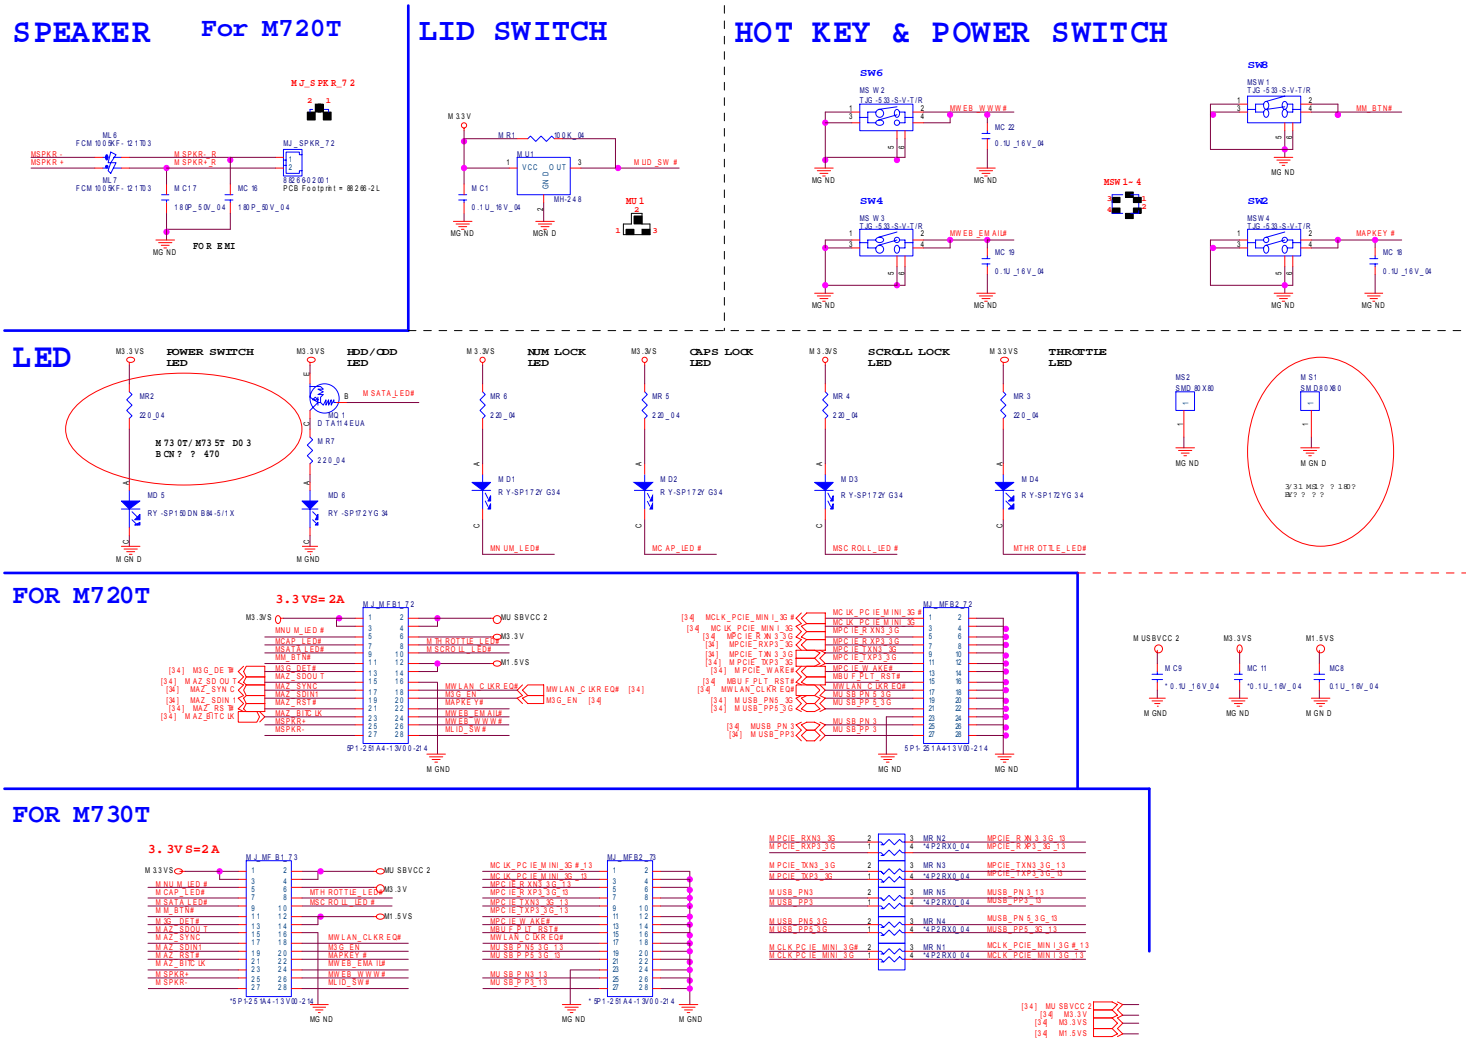


Multi I/O Board 2/2


3G/Raboson

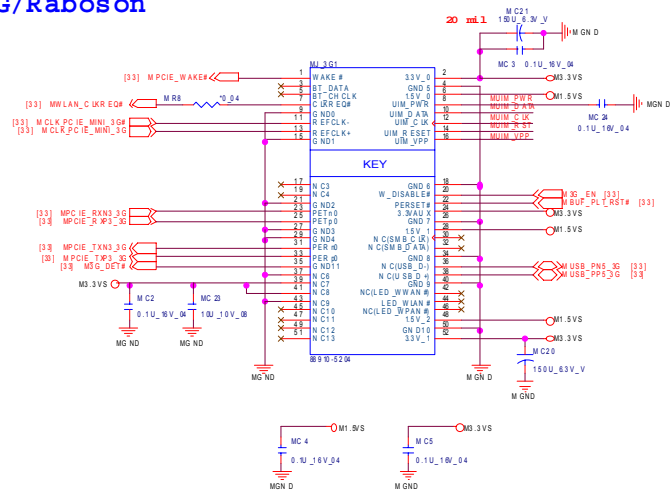

- La you t?
1. SIM? ? ? ? ? ? (10m1)
 2. ? ? ? ? ? ? ? ? GND
 3. SIM hold? ? ? ? ? GND? ?
 4. SIM CDNN ? ? NE NE CAR D CONN

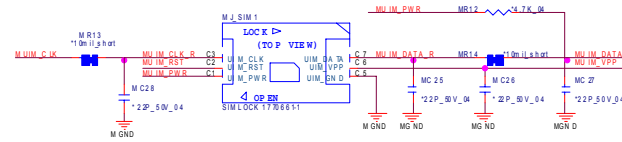


USB PORT


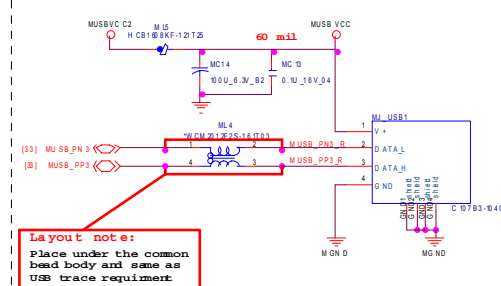


RJ-11

?????????
?? 2.5mm ??

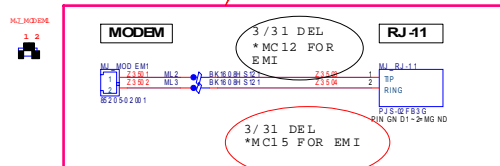


MDC MODULE

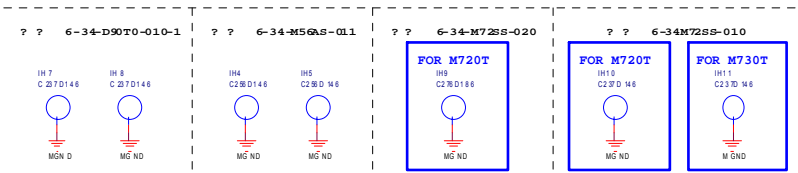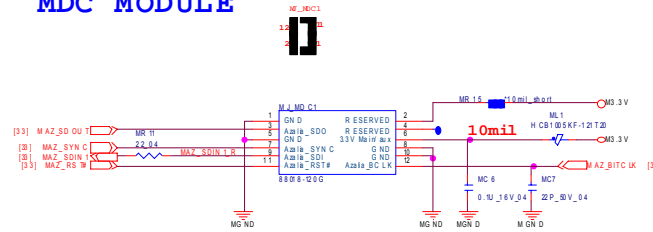

Schematic Diagrams

Finger Printer Board

Finger Printer

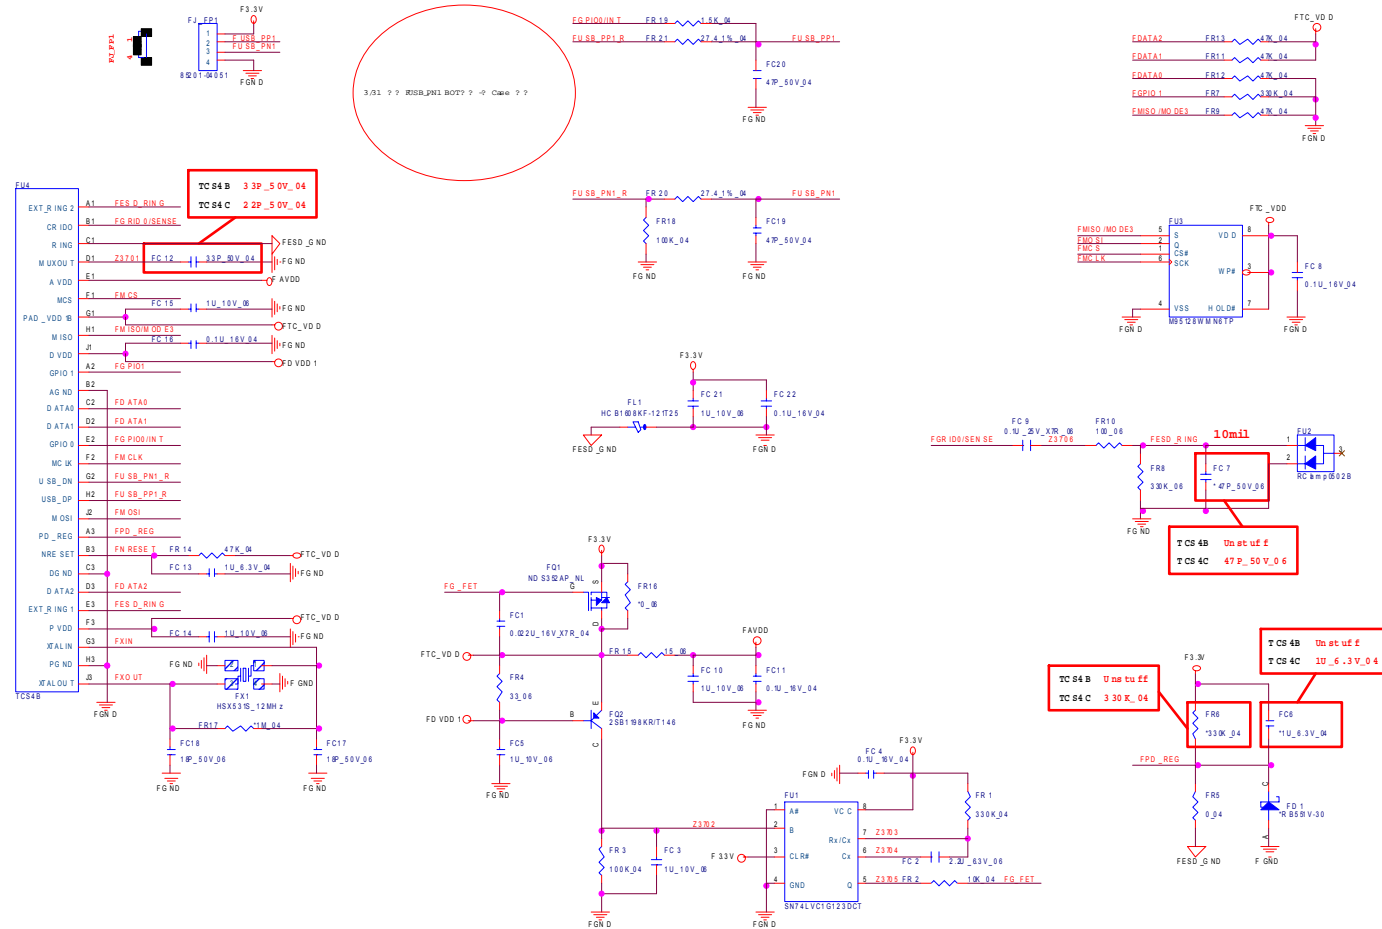


Sheet 35 of 40
Finger Printer
Board

B.Schematic Diagrams

M730T ODD Bridge Board




Sheet 37 of 40
M730T ODD Bridge
Board

M730T ODD BRIDGE BOARD

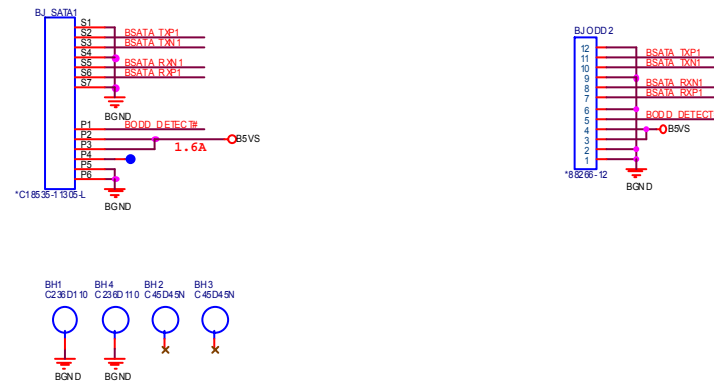

M730T Audio Board

M730T AUDIO BRIDGE BOARD

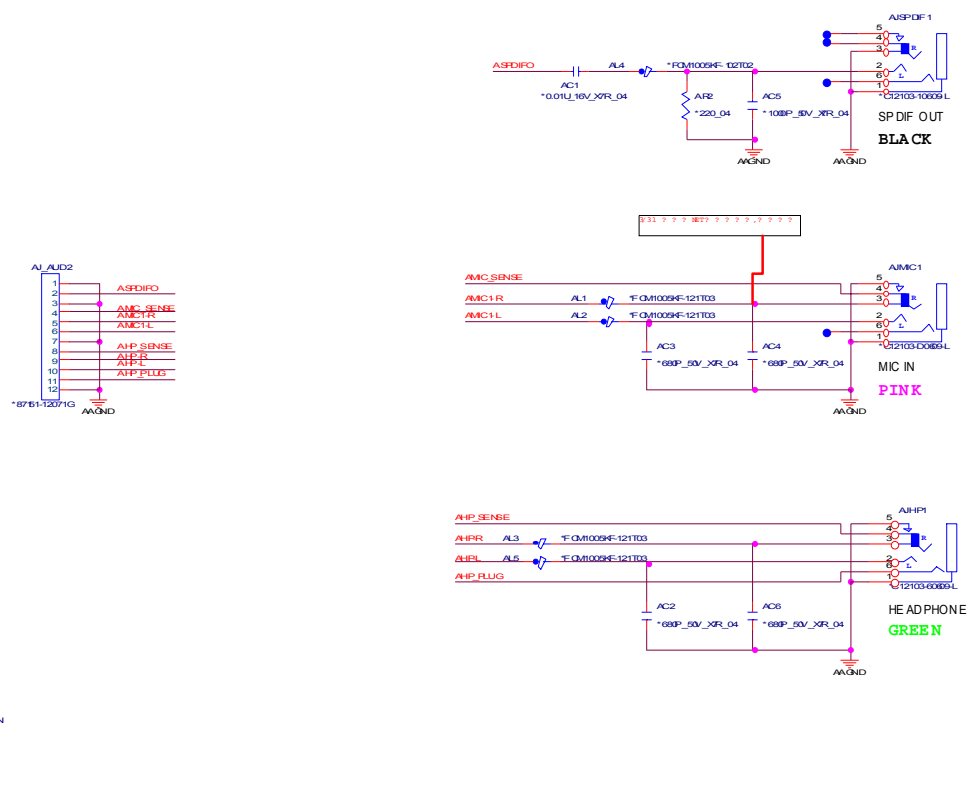


Sheet 38 of 40
M730T Audio Board

B.Schematic Diagrams

Power Sequence Diagram


M720T V0.0 BOOT BLOCK DIAGRAM

Sheet 39 of 40
Power Sequence
Diagram

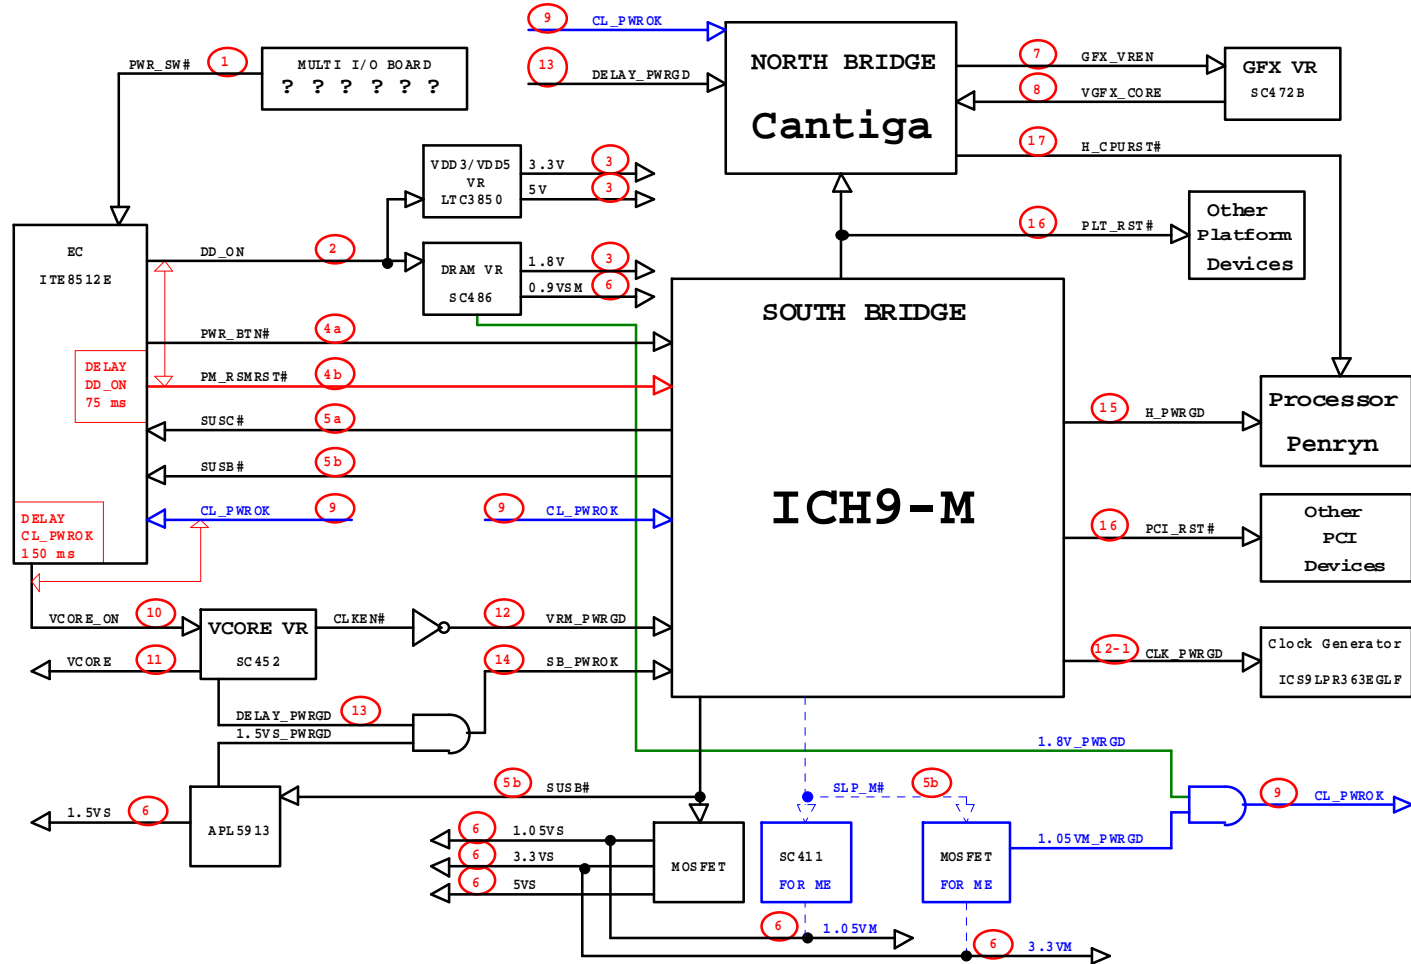

Power Sequence v3.0

M720T V3.0 POWER ON SEQUENCE

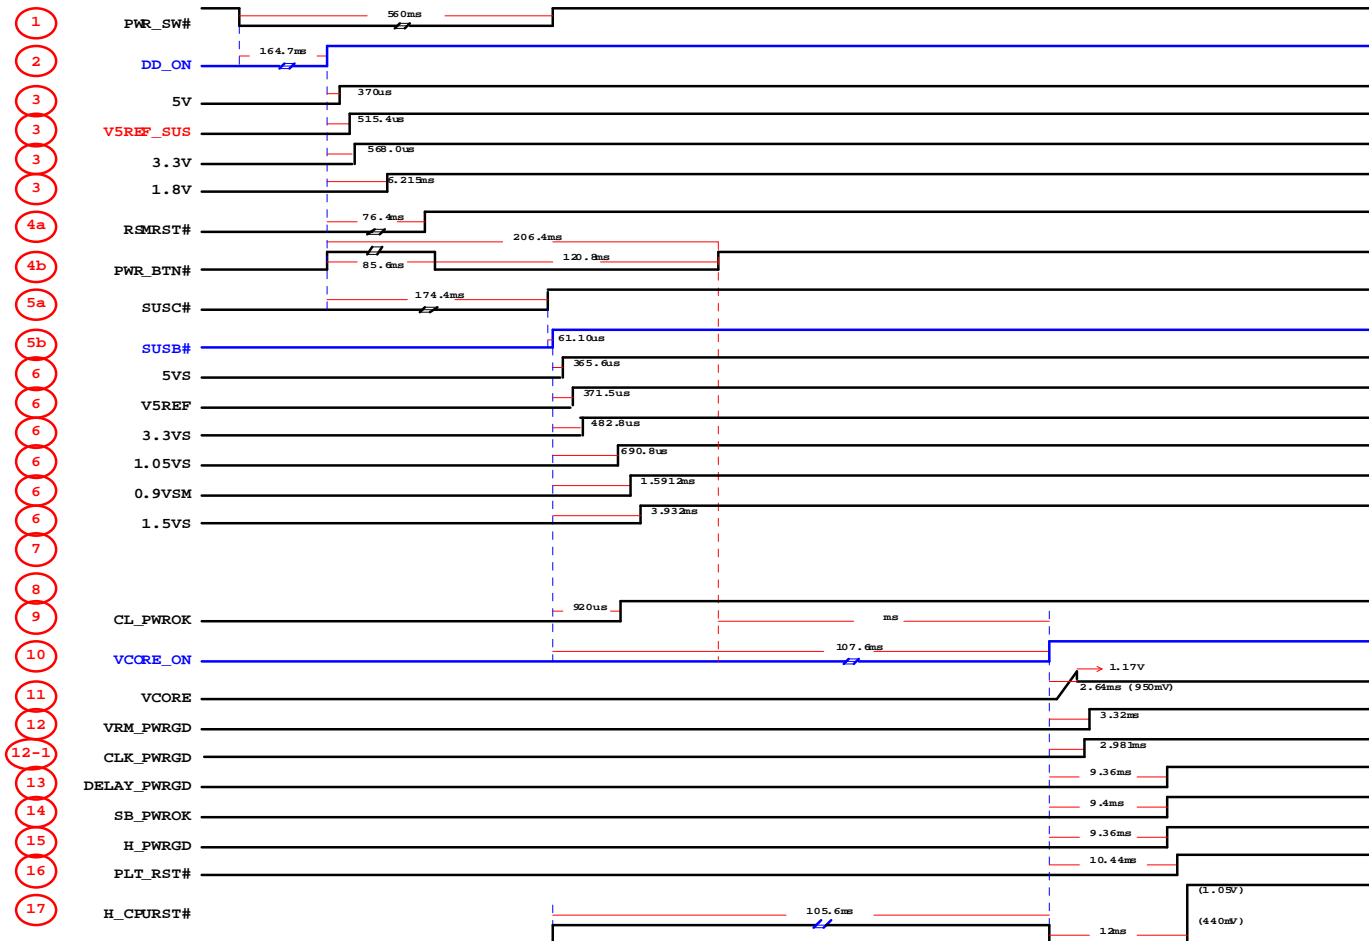

Sheet 40 of 40
Power Sequence
v3.0

Schematic Diagrams

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>