



REACH-INS

REFRIGERATORS

KCBM180R

KCBM23R

KCBM48R

KCBM72R

FREEZERS

KCBM180F

KCBM23F

KCBM48F

KCBM72F

FOOD PREP
TABLES

SANDWICH

KCST27.8

KCST48.12

KCST60.16

KCST70.16

KCST70.18

MEGA

KCMT27.12

KCMT48.18

KCMT60.24

KCMT70.27

KCMT70.30

PIZZA

KCPT50.6

KCPT72.9

KCPT92.12

UNDER COUNTERS

REFRIGERATORS

KCUC27R

KCUC48R

FREEZERS

KCUC27F

KCUC48F

GLASS DOOR MERCHANDISERS

REFRIGERATORS

KCGM10R

KCGM180R

KCGM24R

KCGM47R

FREEZERS

KCGM9F

KCGM24F

KCGM27F

BAR EQUIPMENT

SOLID DOOR

KCBB48S

KCBB60S

KCBB72S

GLASS DOOR

KCBB48G

KCBB60G

KCBB72G

BOTTLE COOLERS

KCBC50

KCBC65

Download from Www.Somanuals.com. All Manuals Search And Download.

MILK COOLERS

KCMC34R

KCMC49R

KCMC58R

CHEST FREEZERS

SOLID TOP

KCCF070Q

KCCF160Q

KCCF180Q

KCCF220Q

NOVELTY FREEZER

KCNF070Q

KCNF160Q

KCNF180Q

DISCONTINUED MODELS

KRS220R

KFS220R

KGM220R

KCS070G

KCS150L

KCS200G

KCG070G

KCG150L

KCG200G





REACH-INS



KCBM180RQY



Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/4 HP Compressor

Mechanical Control

Internal Temperature Display

Adjustable Shelves

Spring-Assisted Hinge with 90-degree stay-open feature

Lock & Key protects the contents

of the unit **Heavy Duty Casters**

Reversible Door

Interior Lighting









Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

NSF®-Certified Temperature


Durable and reliable for safety in food storage.


Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.


TECHNICAL SPECIFICATIONS

MODEL	KCBM180RQY
Product Line	Refrigerator
Capacity (Cu. Ft.)	17.89
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/4
Exterior Finish	Textured Painted Steel
Interior Finish	Smooth Painted Steel
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	32 to 44°F
Voltage Rating	115V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	275
Warranty	3 Year/5 Year



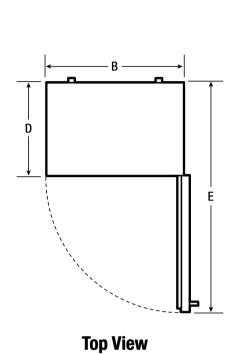

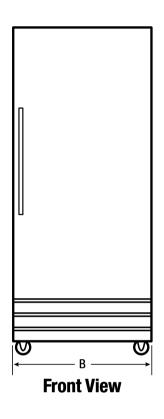

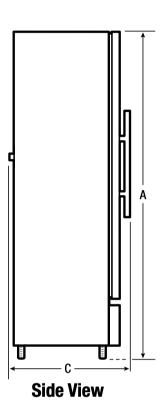



EXTERIOR DIMENSIONS		
Height A (Including Casters)	75"	
Width B	32"	
Overall Depth (Including Door & Handle) C	30-1/2"	
Cabinet Depth D	26-1/2"	
Depth (with Door 90° Open) E	57"	
CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES	
Deep shelf (Fits all except top position, white finish)	216384002
Shallow top shelf (Only fits top position, white finish)	216386202
Trivet, white finish	216331802
Shelf support clips (Sold as singles , requires 4 per shelf)	297121900
Pan slide kit (Includes 2 racks/4 clips, holds 8 pans 18' x 26")	PANRACKKIT
Casters, Front	297206600
Casters, Back	297206500
Caster hardware kit	297256300
Key for lock	216362800
Upright locks	216362700

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBM180RQ 06/15

© 2015 Electrolux Home Products, Inc.





KCBM23R

Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gasket

Adjustable Shelves

Self-Closing Door with 90-degree stay-open feature

Lock & Key protects the contents of the unit

Heavy Duty Casters
Reversible Door









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.



Durable and easy to clean for daily commercial use.


Vinyl Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS

MODEL	KCBM23R
Product Line	Refrigerator
Capacity (Cu. Ft.)	23.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	3/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	7.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	350
Warranty	3 Year/5 Year





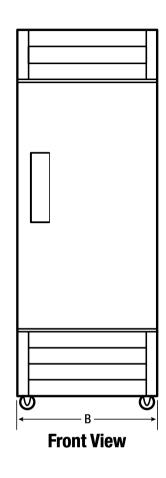

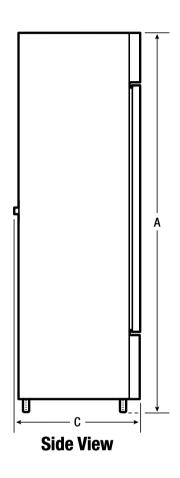



EXTERIOR DIMENSIONS		
Height A (Including Casters)	82"	
Width B	29"	
Overall Depth (Including Door & Handle) C	34"	
Cabinet Depth D	32"	
Depth (with Door 90° Open) E	58-1/2"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	ETL	
Sanitation Certification	ETL	

ACCESSORIES	
Shelf	5304492224
Shelf Rail	5304492223
Door Lock	5304492260
Key	5304492341

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBM23R 06/15

© 2015 Electrolux Home Products, Inc.



DECE

KCBM48R



Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/2 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gaskets

Adjustable Shelves

Self-Closing Doors with 90-degree stay-open feature

Lock & Key protects the contents of the unit

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.


Vinyl Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS

MODEL	KCBM48R
Product Line	Refrigerator
Capacity (Cu. Ft.)	48.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/2
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	6/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	9.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	542
Warranty	3 Year/5 Year



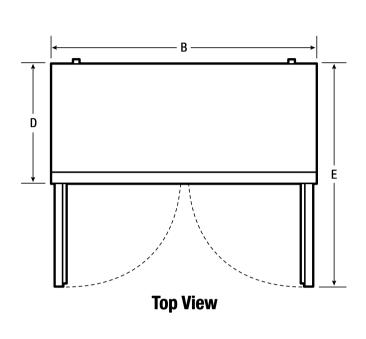

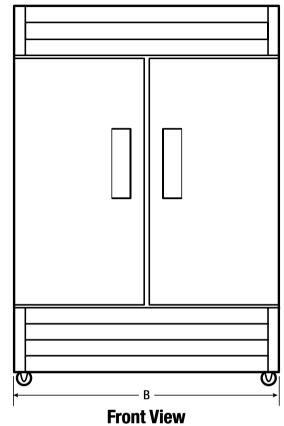

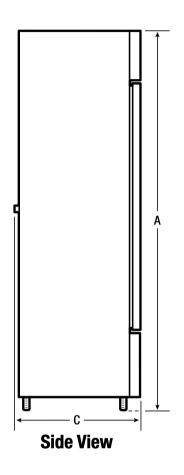



EXTERIOR DIMENSIONS		
Height A (Including Casters)	82"	
Width B	54"	
Overall Depth (Including Door & Handle) C	34"	
Cabinet Depth D	32"	
Depth (with Door 90° Open) E	57"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	ETL	
Sanitation Certification	ETL	

ACCESSORIES	
Shelf	5304492224
Shelf Rail	5304492223
Door Lock	5304492260
Key	5304492341

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBM48R 06/15

© 2015 Electrolux Home Products, Inc.



KCBM72R



Fin & Tube Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gaskets

Adjustable Shelves

Self-Closing Doors with 90-degree stay-open feature

Lock & Key protects the contents of the unit

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.


Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

TECHNICAL SPECIFICATIONS

MODEL	KCBM72R
Product Line	Refrigerator
Capacity (Cu. Ft.)	72.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	9/Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	10.5
Plug Type	NEMA 5-20P
Shipping Weight (Lbs.)	659
Warranty	3 Year/5 Year



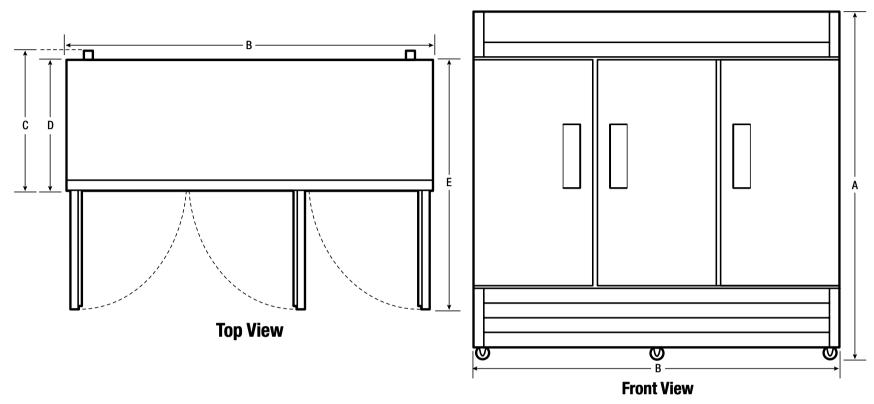



EXTERIOR DIMENSIONS		
Height A (Including Casters)	82"	
Width B	81"	
Overall Depth (Including Door & Handle) C	34"	
Cabinet Depth D	32"	
Depth (with Door 90° Open) E	57-1/4"	

CERTIFICATIONS AND APPROVALS		
Safety Certification	ETL	
Sanitation Certification	ETL	

ACCESSORIES	
Shelf	5304492224
Shelf Rail	5304492223
Door Lock	5304492260
Kev	5304492341

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBM72R 06/15

 $\ensuremath{\texttt{©}}$ 2015 Electrolux Home Products, Inc.



KCBM180FQY





Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/2 HP Compressor

Mechanical Control

Internal Temperature Display

Adjustable Shelves

Spring-Assisted Hinge with 90-degree stay-open feature

Lock & Key protects the contents

of the unit

Heavy Duty Casters

Reversible Door

Interior Lighting









Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

NSF®-Certified Temperature


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.


TECHNICAL SPECIFICATIONS


MODEL	KCBM180FQY
Product Line	Freezer
Capacity (Cu. Ft.)	18
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/2
Exterior Finish	Textured Painted Steel
Interior Finish	Smooth Painted Steel
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-10 to 10°F
Voltage Rating	115V/5A
Run Amps	2.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	275
Warranty	3 Year/5 Year





Top View

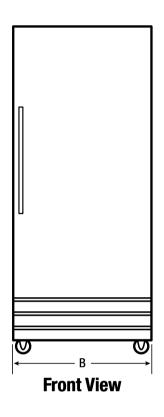

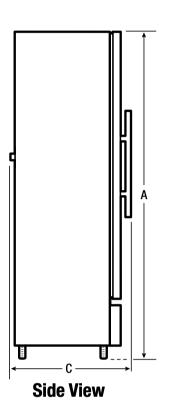



EXTERIOR DIMENSIONS		
Height A (Including Casters)	75"	
Width B	32"	
Overall Depth (Including Door & Handle) C	30-1/2"	
Cabinet Depth D	26-1/2"	
Depth (with Door 90° Open) E	57"	
CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES	
Deep shelf (Fits all except top position, white finish)	216384002
Shallow top shelf (Only fits top position, white finish)	216386202
Trivet, white finish	216331802
Shelf support clips (Sold as singles , requires 4 per shelf)	297121900
Pan slide kit (Includes 2 racks/4 clips, holds 8 pans 18' x 26")	PANRACKKIT
Casters, Front	297206600
Casters, Back	297206500
Caster hardware kit	297256300
Key for lock	216362800
Upright locks	216362700

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBM180FQ 06/15

© 2015 Electrolux Home Products, Inc.









Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

3/4 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gasket

Adjustable Shelves

Self-Closing Door with 90-degree stay-open feature

Lock & Key protects the contents of the unit

Heavy Duty Casters Reversible Door









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.


Vinyl Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS

MODEL	KCBM23F
Product Line	Freezer
Capacity (Cu. Ft.)	23.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	3/4
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	3/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	-7 to 10°F
Voltage Rating	115V/60Hz
Run Amps	8.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	358
Warranty	3 Year/5 Year





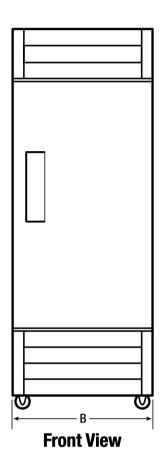

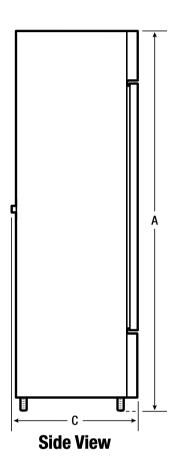



EXTERIOR DIMENSIONS		
Height A (Including Casters)	82"	
Width B	29"	
Overall Depth (Including Door & Handle) C	34"	
Cabinet Depth D	32"	
Depth (with Door 90° Open) E	58-1/2"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	ETL	
Sanitation Certification	ETL	

ACCESSORIES	
Shelf	5304492224
Shelf Rail	5304492223
Door Lock	5304492260
Key	5304492341

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBM23F 06/15

© 2015 Electrolux Home Products, Inc.



KCBM48F





Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gaskets

Adjustable Shelves

Self-Closing Doors with 90-degree stay-open feature

Lock & Key protects the contents of the unit

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.


Vinyl Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS

MODEL	KCBM48F
Product Line	Freezer
Capacity (Cu. Ft.)	48.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	6/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	-7 to 10°F
Voltage Rating	115V/60Hz
Run Amps	10.5
Plug Type	NEMA 5-20P
Shipping Weight (Lbs.)	559
Warranty	3 Year/5 Year



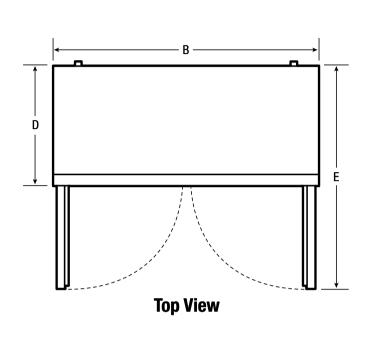

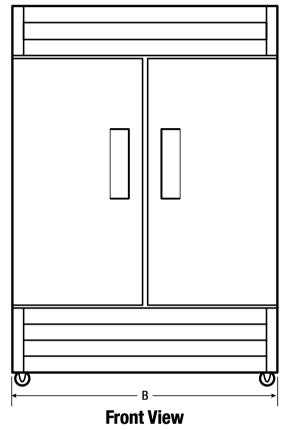

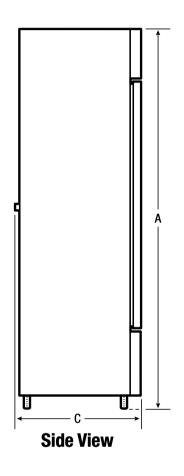



EXTERIOR DIMENSIONS	
Height A (Including Casters)	82"
Width B	54"
Overall Depth (Including Door & Handle) C	34"
Cabinet Depth D	32"
Depth (with Door 90° Open) E	57"

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	ETL	
Sanitation Certification	ETL	

ACCESSORIES	
Shelf	5304492224
Shelf Rail	5304492223
Door Lock	5304492260
Key	5304492341

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBM48F 06/15

© 2015 Electrolux Home Products, Inc.



KCBM72F



Fin & Tube Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gaskets

Adjustable Shelves

Self-Closing Doors with 90-degree stay-open feature

Lock & Key protects the contents of the unit

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.


Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

TECHNICAL SPECIFICATIONS

MODEL	KCBM72F
Product Line	Freezer
Capacity (Cu. Ft.)	72.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	9/Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	-7 to 10°F
Voltage Rating	115V/60Hz
Run Amps	10.5
Plug Type	NEMA 5-20P
Shipping Weight (Lbs.)	659
Warranty	3 Year/5 Year



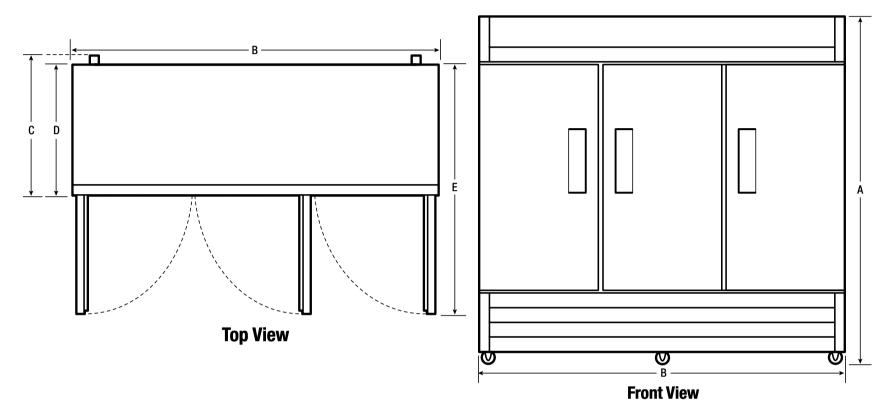



EXTERIOR DIMENSIONS		
Height A (Including Casters)	82"	
Width B	81"	
Overall Depth (Including Door & Handle) C	34"	
Cabinet Depth D	32"	
Depth (with Door 90° Open) E	57-1/2"	

CERTIFICATIONS AND APPROVALS		
Safety Certification	ETL	
Sanitation Certification	ETL	

ACCESSORIES	
Shelf	5304492224
Shelf Rail	5304492223
Door Lock	5304492260
Key	5304492341

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBM72F 06/15

© 2015 Electrolux Home Products, Inc.





FOOD PREP
TABLES



KCST27.8

Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/5 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

Removable Door Gasket

Holds 1/6 & 1/9 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Door with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCST27.8
Product Line	Sandwich/Salad Prep Table
Capacity (Cu. Ft.)	6.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/5
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79×27.40×9.50
Pan Allocation	(6) 1/6 & (2) 1/9
Shelves (Number/Type)	1/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	5.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	220
Warranty	3 Year/5 Year



KCST27.8

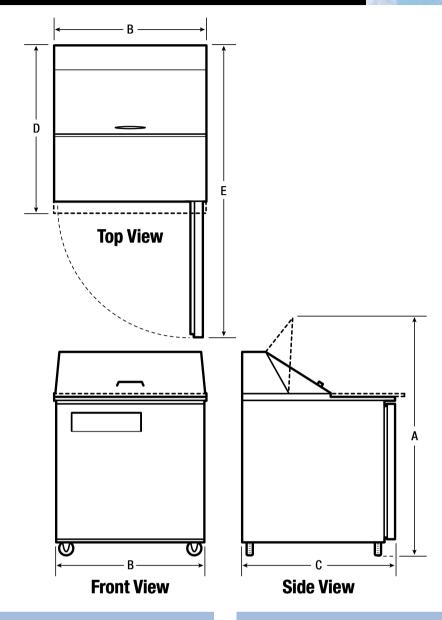



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	47"
Width B	27"
Depth (Including Door & Handle) C	30"
Overall Depth (Including Cutting Board) D	30-5/8"
Depth (with Door 90° Open) E	54-1/2"

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304486368
Shelf Clip	297121900
Pan Divider	5304486624
Cutting Board	5304486625

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCST27.8 06/15

 $\ensuremath{\texttt{©}}$ 2015 Electrolux Home Products, Inc.



KCST48.12

Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

Removable Door Gasket

Holds 1/6 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCST48.12
Product Line	Sandwich/Salad Prep Table
Capacity (Cu. Ft.)	12.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79×46.69×10.55
Pan Allocation	(12) 1/6
Shelves (Number/Type)	2/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	7.8
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	297
Warranty	3 Year/5 Year



KCST48.12

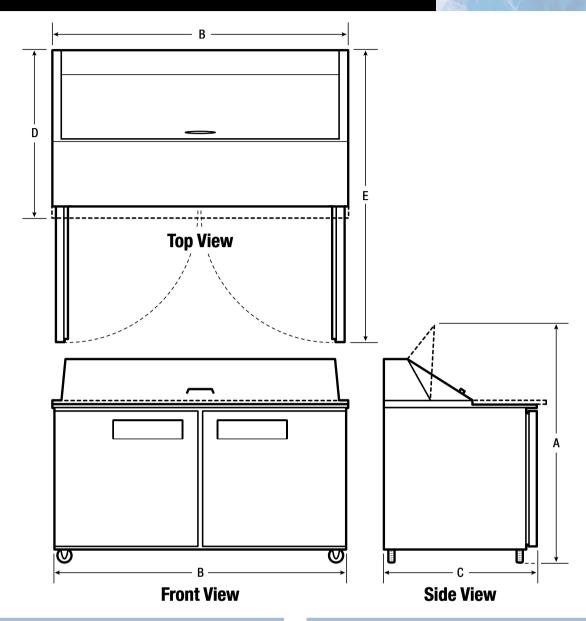



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	51"	
Width B	47"	
Depth (Including Door & Handle) C	30"	
Overall Depth (Including Cutting Board) D	30-5/8"	
Depth (with Door 90° Open) E	54-1/2"	

CERTIFICATIONS AND APPROVALS	
Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304486498
Shelf Clip	297121900
Pan Divider	5304486624
Cutting Board	5304486626

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCST48.12 06/15

© 2015 Electrolux Home Products, Inc.



KCST60.16

Fin & Tube Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/5 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

Removable Door Gaskets

Holds 1/6 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Board


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCST60.16
Product Line	Sandwich/Salad Prep Table
Capacity (Cu. Ft.)	12.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/5
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79 x60x8
Pan Allocation	(16) 1/6
Shelves (Number/Type)	2/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	5.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	364
Warranty	3 Year/5 Year



KCST60.16

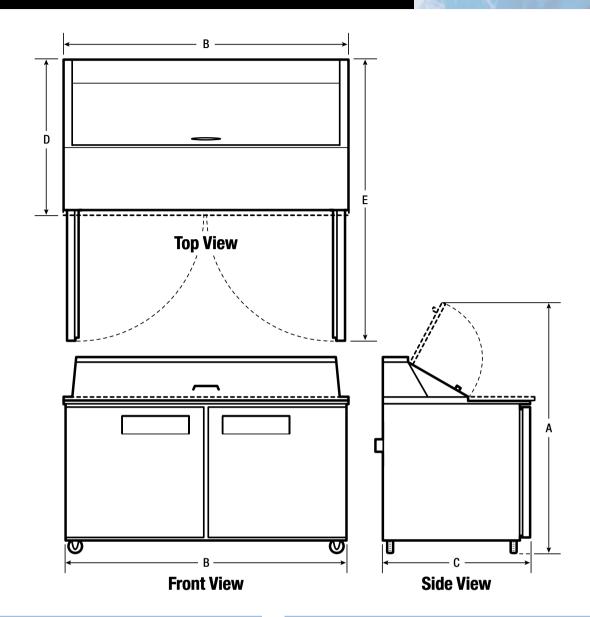



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	47-3/4"
Width B	61-1/4"
Depth (Including Door & Handle) C	30"
Overall Depth (Including Cutting Board) D	29-1/4"
Depth (with Door 90° Open) E	55"

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304497357
Shelf Clip	297121900
Pan Divider (End)	5304493460
Pan Divider (Middle)	5304493451
Cutting Board	5304497355

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCST60.16 06/15

© 2015 Electrolux Home Products, Inc.



KCST70.16

Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/2 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

Removable Door Gaskets

Holds 1/6 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters











Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCST70.16
Product Line	Sandwich/Salad Prep Table
Capacity (Cu. Ft.)	18.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/2
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79×70.28×10.55
Pan Allocation	(16) 1/6
Shelves (Number/Type)	3/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	8.8
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	388
Warranty	3 Year/5 Year



KCST70.16

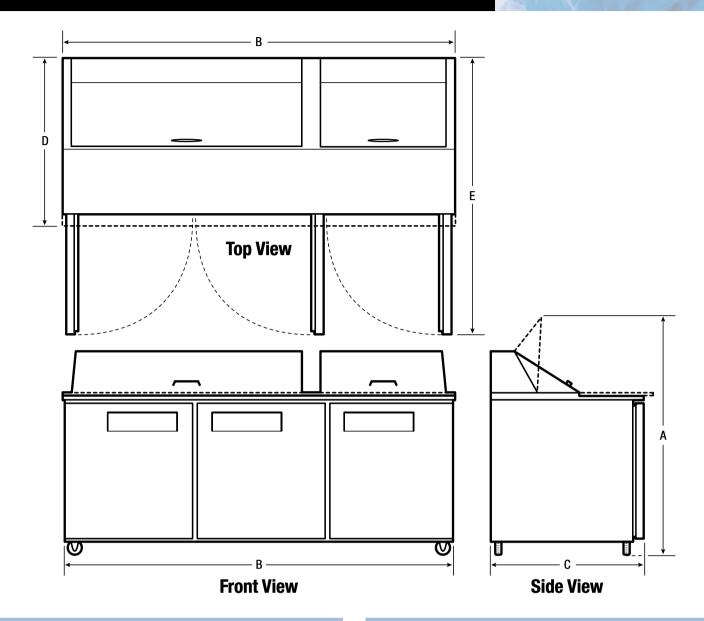



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	47-1/4"
Width B	70"
Depth (Including Door & Handle) C	30"
Overall Depth (Including Cutting Board) D	30-5/8"
Depth (with Door 90° Open) E	54-1/2"

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304486545
Shelf Clip	297121900
Pan Divider	5304486624
Cutting Board	5304486627

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCST70.16 06/15

© 2015 Electrolux Home Products, Inc.



KCST70.18

Fin & Tube Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/2 HP Compressor

Stainless Steel Exterior & Interior

Electronic Controls


Removable Door Gaskets

Holds 1/6 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









8.8

Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCST70.18
Product Line	Sandwich/Salad Prep Table
Capacity (Cu. Ft.)	18.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/2
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79×70×8
Pan Allocation	(18) 1/6
Shelves (Number/Type)	3/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	8.8
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	388
Warranty	3 Year/5 Year



KCST70.18

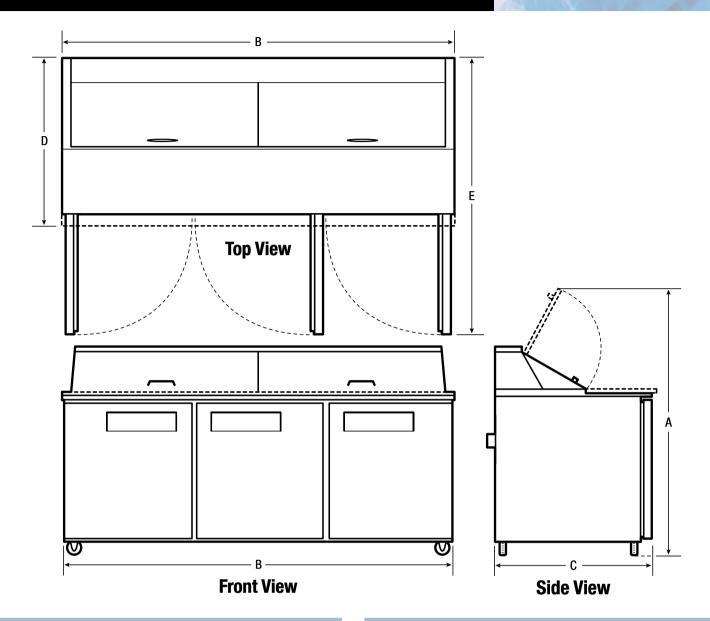



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	47-3/4"
Width B	70-1/4"
Depth (Including Door & Handle) C	29-1/4"
Overall Depth (Including Cutting Board) D	30-1/2"
Depth (with Door 90° Open) E	55"

CF	RT	IFIC	ΊΤΔ΄	ONS	ΔND	ΔΡΡ	ROVALS	

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304493593
Shelf Clip	297121900
Pan Divider (End)	5304493460
Pan Divider (Middle)	5304493451
Cutting Board	5304493521

Kelvinator



KCMT27.12

Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/4 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

Removable Door Gasket

Holds 1/6 & 1/9 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Door with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCMT27.12
Product Line	Mega Top Prep Table
Capacity (Cu. Ft.)	6.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/4
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79×27.40×6.97
Pan Allocation	(9) 1/6 & (3) 1/9
Shelves (Number/Type)	1/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	5.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	242
Warranty	3 Year/5 Year



KCMT27.12

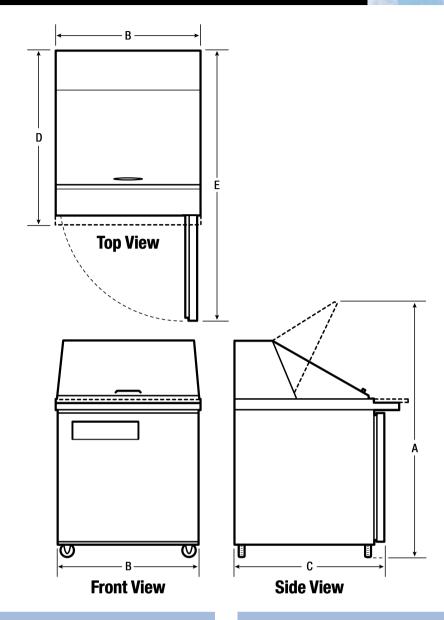



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	47"	
Width B	27"	
Depth (Including Door & Handle) C	34"	
Overall Depth (Including Cutting Board) D	34-5/16"	
Depth (with Door 90° Open) E	54-1/2"	

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304486368
Shelf Clip	297121900
Pan Divider	5304486624
Cutting Board	5304486628

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCMT27.12 06/15

 $\ensuremath{\texttt{©}}$ 2015 Electrolux Home Products, Inc.



KCMT48.18



Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Stainless Steel Exterior & Interior Electronic Control

Removable Door Gaskets

Holds 1/6 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCMT48.18
Product Line	Mega Top Prep Table
Capacity (Cu. Ft.)	12.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79 x 46.69 x 6.97
Pan Allocation	(18) 1/6
Shelves (Number/Type)	2/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	7.8
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	341
Warranty	3 Year/5 Year



KCMT48.18

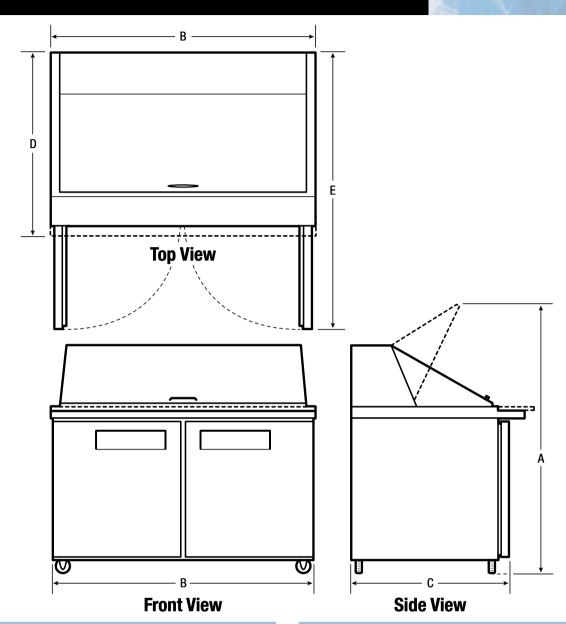



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	47"
Width B	47"
Depth (Including Door & Handle) C	34"
Overall Depth (Including Cutting Board) D	34-5/16"
Depth (with Door 90° Open) E	54-1/2"

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304486498
Shelf Clip	297121900
Pan Divider	5304486624
Cutting Board	5304486629

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCMT48.18 06/15

 $\ensuremath{\texttt{©}}$ 2015 Electrolux Home Products, Inc.



KCMT60.24



Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

Removable Door Gaskets

Holds 1/6 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.




Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCMT60.24
Product Line	Mega Top Prep Table
Capacity (Cu. Ft.)	12.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79 x 60x11.5
Pan Allocation	(24) 1/6
Shelves (Number/Type)	2/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	5.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	386
Warranty	3 Year/5 Year



KCMT60.24

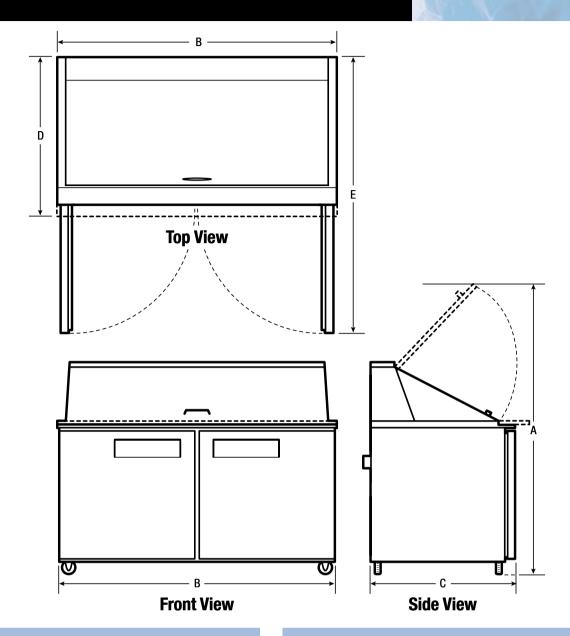



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	52"
Width B	60"
Depth (Including Door & Handle) C	29-1/4"
Overall Depth (Including Cutting Board) D	35"
Depth (with Door 90° Open) E	55"

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304497357
Shelf Clip	297121900
Pan Divider	5304493390
Cutting Board	5304497356

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCMT60.24 06/15

© 2015 Electrolux Home Products, Inc.



KCMT70.27



Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

Removable Door Gaskets

Holds 1/6 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









KG.

Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCMT70.27
Product Line	Mega Top Prep Table
Capacity (Cu. Ft.)	18.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79×70.28×6.97
Pan Allocation	(27) 1/6
Shelves (Number/Type)	2/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	9.2
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	484
Warranty	3 Year/5 Year



KCMT70.27

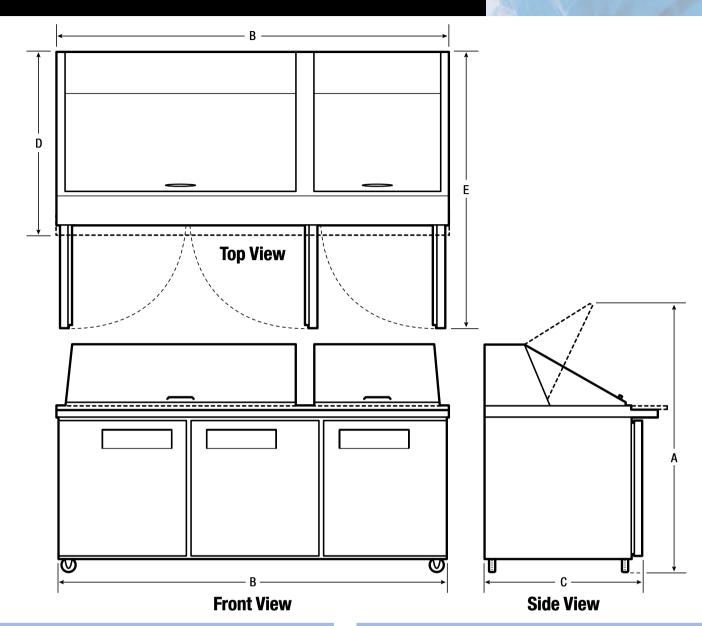



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	51-1/4"	
Width B	70"	
Depth (Including Door & Handle) C	34"	
Overall Depth (Including Cutting Board) D	34-5/16"	
Depth (with Door 90° Open) E	54-1/2"	

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304486545
Shelf Clip	297121900
Pan Divider	5304486624
Cutting Board	5304486630

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCMT70.27 06/15

© 2015 Electrolux Home Products, Inc.



KCMT70.30



Automatic Defrost Cooling System provides worry-free performance

1/2 HP Compressor

Stainless Steel Exterior & Interior Electronic Control

Removable Door Gaskets

Holds 1/6 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCMT70.30
Product Line	Mega Top Prep Table
Capacity (Cu. Ft.)	18.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/2
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79×70×8
Pan Allocation	(30) 1/6
Shelves (Number/Type)	3/Vinyl-Coated Steel
Control	Electronic
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	9.2
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	484
Warranty	3 Year/5 Year



KCMT70.30

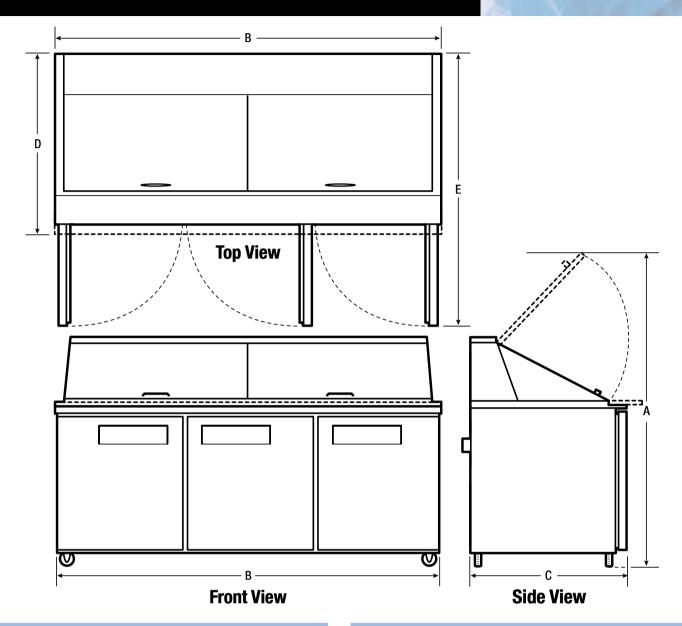



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	52"
Width B	70-1/4"
Depth (Including Door & Handle) C	29-1/4"
Overall Depth (Including Cutting Board) D	35"
Depth (with Door 90° Open) E	55"

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304493593
Shelf Clip	297121900
Pan Divider	5304493390
Cutting Board	5304493522

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCMT70.30 06/15

© 2015 Electrolux Home Products, Inc.



KCPT50.6



Automatic Defrost Cooling System provides worry-free performance

1/4 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

Removable Door Gaskets

Holds 1/3 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCPT50.6
Product Line	Pizza Prep Table
Capacity (Cu. Ft.)	9.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/4
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79x50x19.5
Pan Allocation	(6) 1/3
Shelves (Number/Type)	1/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	9.8
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	331
Warranty	3 Year/5 Year



KCPT50.6

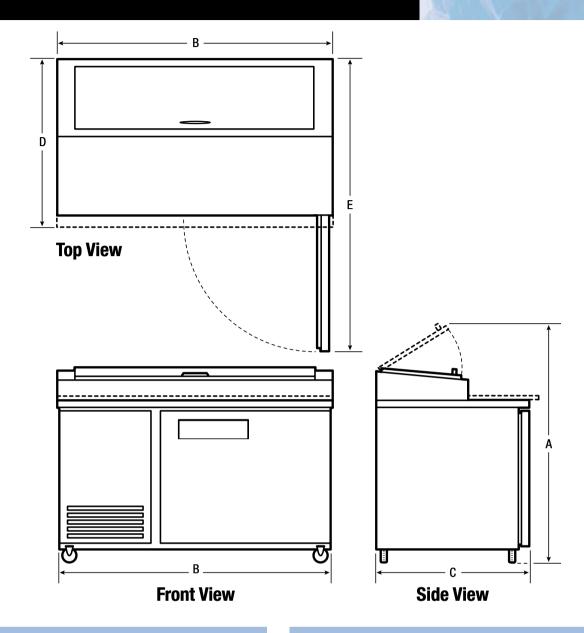



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	56-3/4"
Width B	60"
Depth (Including Door & Handle) C	31-1/4"
Overall Depth (Including Cutting Board) D	37-3/4"
Depth (with Door 90° Open) E	54"

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304493484
Shelf Clip	297121900
Pan Divider (End)	5304493482
Pan Divider (Middle)	5304493481
Cutting Board	5304497353

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCPT50.6 06/15

© 2015 Electrolux Home Products, Inc.



KCPT72.9

Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

Removable Door Gaskets

Holds 1/3 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCPT72.9
Product Line	Pizza Prep Table
Capacity (Cu. Ft.)	16.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79 x 70.79 x 19.53
Pan Allocation	(9) 1/3
Shelves (Number/Type)	2/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	9.8
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	453
Warranty	3 Year/5 Year





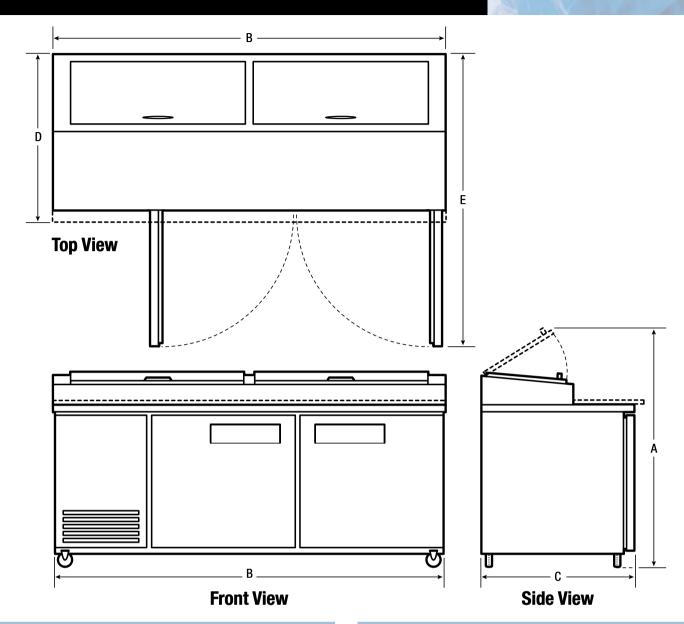



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	57-1/2"	
Width B	71"	
Depth (Including Door & Handle) C	32"	
Overall Depth (Including Cutting Board) D	37-13/16"	
Depth (with Door 90° Open) E	54-15/16"	

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETI

ACCESSORIES

Shelf	5304486796
Shelf Clip	297121900
Pan Divider	5304486621
Cutting Board	5304486622

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCPT72.9 06/15 © 2015 Electrolux Home Products, Inc.



KCPT92.12



Automatic Defrost Cooling System provides worry-free performance

1/2 HP Compressor

Stainless Steel Exterior & Interior Electronic Control

External Temperature Display Removable Door Gaskets

Holds 1/3 Pans

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Full-Depth Cutting Boards


Preparation area designed for work station convenience and safe food handling.

TECHNICAL SPECIFICATIONS

MODEL	KCPT92.12
Product Line	Pizza Prep Table
Capacity (Cu. Ft.)	24.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/2
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Cutting Board Dimensions (HxWxD)	.79 x 91.81 x 19.53
Pan Allocation	(12) 1/3
Shelves (Number/Type)	3/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	10.5
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	489
Warranty	3 Year/5 Year



KCPT92.12

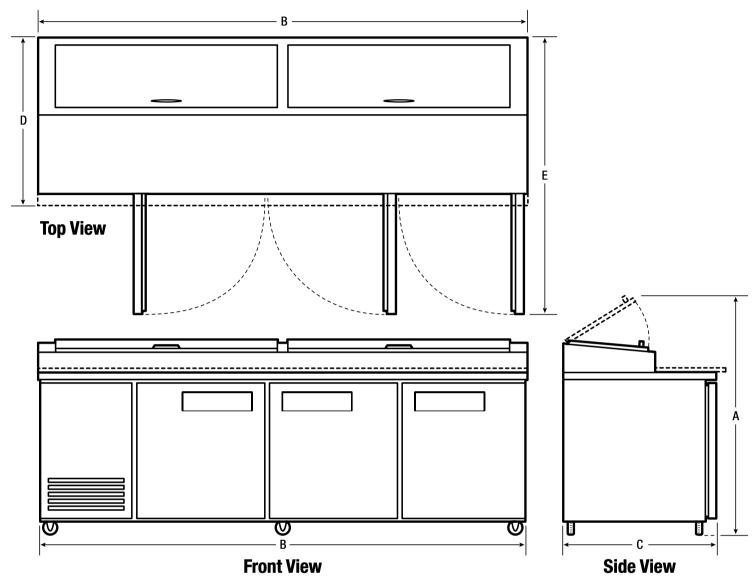



EXTERIOR DIMENSIONS

Height with Lid Open (w/ Casters) A	57-1/2"	
Width B	92"	
Depth (Including Door & Handle) C	32"	
Overall Depth (Including Cutting Board) D	37-13/16"	
Depth (with Door 90° Open) E	54-15/16"	

CF	RT	IFIC	ΊΤΔ΄	ONS	ΔND	ΔΡΡ	ROVALS	

Safety Certification	ETL
Sanitation Certification	FTI

ACCESSORIES

Shelf	5304486826
Shelf Clip	297121900
Pan Divider	5304486621
Cutting Board	5304486623

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCPT92.12 06/15

© 2015 Electrolux Home Products, Inc.





UNDER-COUNTERS



KCUC27R



Automatic Defrost Cooling System provides worry-free performance

1/5 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gasket

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Door with 90-degree stay-open feature

Heavy Duty Casters Reversible Door









Electronic Digital Temperature Control

1900 B

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.


Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

TECHNICAL SPECIFICATIONS

MODEL	KCUC27R
Product Line	Refrigerator
Capacity (Cu. Ft.)	6.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/5
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	1/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	5.0
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	207
Warranty	3 Year/5 Year



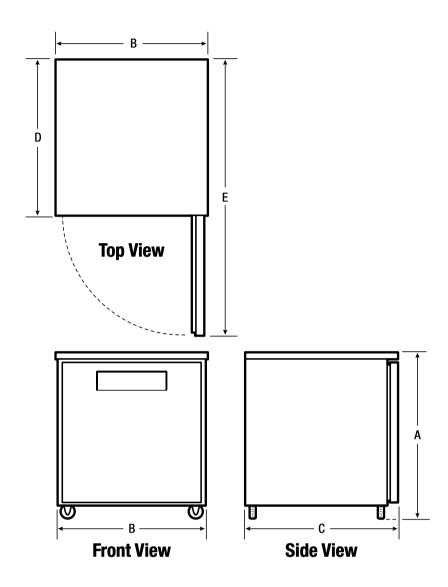



EXTERIOR DIMENSIONS				
Height A (Including Casters)	35"			
Width B	27"			
Overall Depth (Including Door & Handle) C	30"			
Cabinet Depth D	27-1/16"			
Depth (with Door 90° Open) E	54-1/2"			
CERTIFICATIONS AND APPROVALS				

ETL

ETL

Shelf	5304486887
Shelf Clip	297121900

Kelvinator

Safety Certification

Sanitation Certification

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCUC27R 06/15

© 2015 Electrolux Home Products, Inc.



KCUC48R



Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gaskets

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Vinyl Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.

TECHNICAL SPECIFICATIONS

MODEL	KCUC48R
Product Line	Refrigerator
Capacity (Cu. Ft.)	12.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	2/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	5.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	299
Warranty	3 Year/5 Year





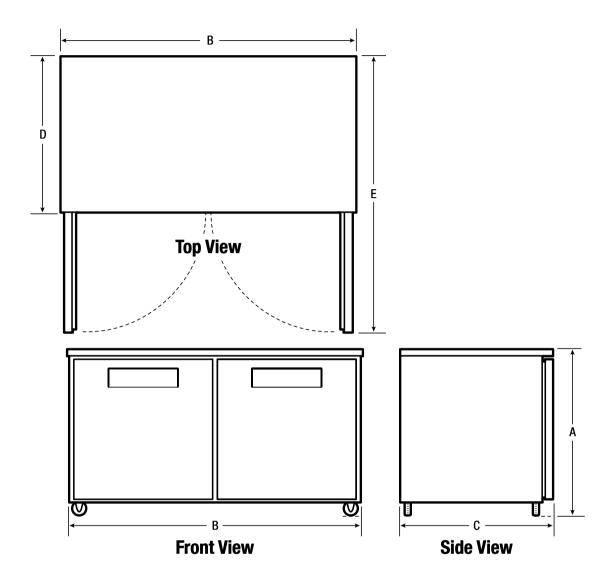

Shelf Clip



EXTERIOR DIMENSIONS		
Height A (Including Casters)	35"	
Width B	47"	
Overall Depth (Including Door & Handle) C	30"	
Cabinet Depth D	27-1/16"	
Depth (with Door 90° Open) E	54-1/2"	

CERTIFICATIONS AND APPROVALS		
Safety Certification	ETL	
Sanitation Certification	ETL	

ACCESSORIES	
Shelf	5304486998

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCUC48R 06/15

© 2015 Electrolux Home Products, Inc.

High standards of quality at Electrolux Home Products, Inc. mean we are constantly working to improve our products. We reserve the right to change specifications or discontinue models without notice.

297121900



6 CU. FT. UNDER-COUNTER FREEZER

KCUC27F

Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gasket

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Door with 90-degree stay-open feature

Heavy Duty Casters

Reversible Door









Electronic Digital Temperature Control

THE R

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.


Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

TECHNICAL SPECIFICATIONS

MODEL	KCUC27F
Product Line	Freezer
Capacity (Cu. Ft.)	6.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	1/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	-7 to 10°F
Voltage Rating	115V/60Hz
Run Amps	5.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	216
Warranty	3 Year/5 Year



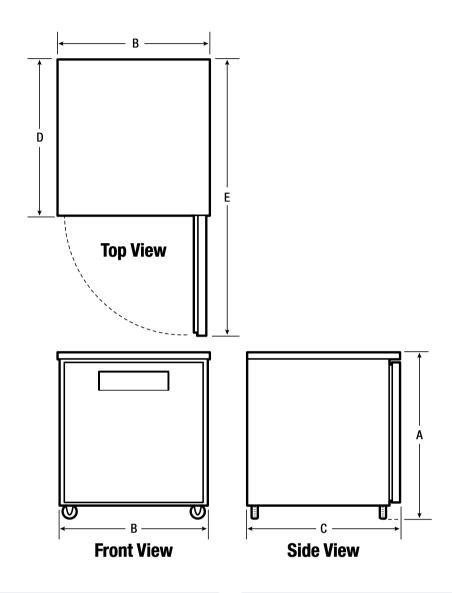



EXTERIOR DIMENSIONS		
Height A (Including Casters)	35"	
Width B	27"	
Overall Depth (Including Door & Handle) C	30"	
Cabinet Depth D	27-1/16"	
Depth (with Door 90° Open) E	54-1/2"	
CERTIFICATIONS AND APPROVALS		

ETL

ETL

ACCESSORIES	
half	F304496997

Shelf	5304486887
Shelf Clip	297121900

Kelvinator

Safety Certification

Sanitation Certification

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCUC27F 06/15

© 2015 Electrolux Home Products, Inc.



12 CU. FT. UNDER-COUNTER FREEZER

KCUC48F



Automatic Defrost Cooling System provides worry-free performance

1/2 HP Compressor

Stainless Steel Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gaskets

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Doors with 90-degree stay-open feature

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.

Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS

MODEL	KCUC48F
Product Line	Freezer
Capacity (Cu. Ft.)	12.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/2
Exterior Finish	Stainless Steel (430)
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	2/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	-7 to 10°F
Voltage Rating	115V/60Hz
Run Amps	8.7
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	313
Warranty	3 Year/5 Year



12 CU. FT. UNDER-COUNTER FREEZER



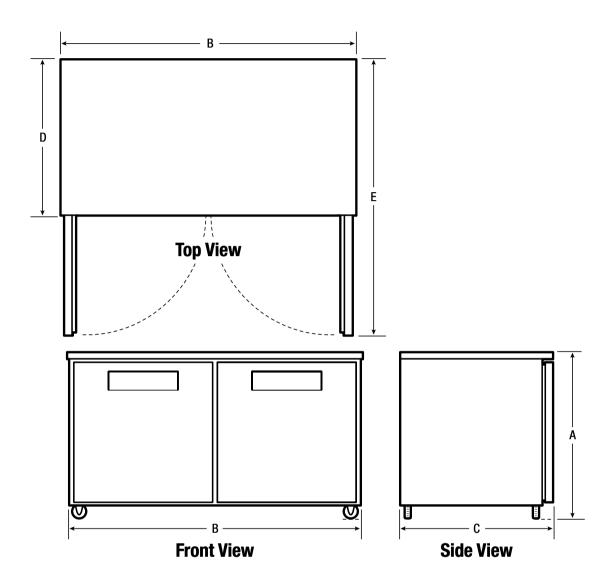



EXTERIOR DIMENSIONS		
Height A (Including Casters)	35"	
Width B	47"	
Overall Depth (Including Door & Handle) C	30"	
Cabinet Depth D	27-1/16"	
Depth (with Door 90° Open) E	54-1/2"	

CERTIFICATIONS AND APPROVALS	
Safety Certification	ETL
Sanitation Certification	ETL

	CC	ES	5	O I	ΚI	E:)
--	----	----	---	-----	----	----	---

Shelf	5304486998
Shelf Clip	297121900

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCUC48F 06/15

© 2015 Electrolux Home Products, Inc.





GLASS DOOR MERCHANDISERS



10 CU. FT. GLASS DOOR MERCHANDISER

KCGM10R

REFRIGERATOR



Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/4 HP Compressor

Painted Steel/Painted Aluminum Exterior & Interior

Mechanical Control

External Temperature Display

Removable Door Gasket

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Swing Door









Electronic Digital Temperature Display

Quick set digital display for easy monitoring.

Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

Removable Door Gasket


User replaceable door gasket for easy replacement and cleaning.


TECHNICAL SPECIFICATIONS


MODEL	KCGM10R
Product Line	Refrigerator
Door(s)/Type	1 Door Swing
Capacity (Cu. Ft.)	10.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/4
Exterior Finish	Painted Steel
Interior Finish	Painted Aluminum
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	3.1
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	245
Warranty	3 Year/5 Year



REFRIGERATOR



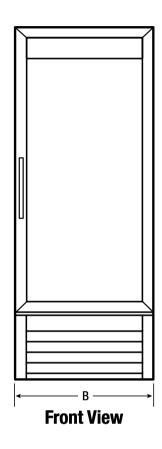

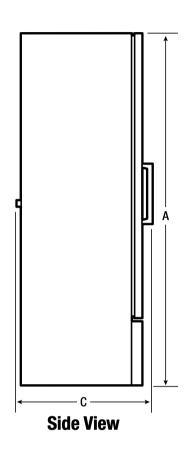



EXTERIOR DIMENSIONS			
Height A (Including Leveling Legs)	63"		
Width B	22"		
Overall Depth (Including Door & Handle) C	23"		
Cabinet Depth D	19-3/4"		
Depth (with Door 90° Open) E	41-1/2"		
CERTIFICATIONS AND APPROVALS			

ETL

ETL

ACCESSORIES				
Shelf	5304487063			
	5504467065			
Shelf Clip	297121900			

Kelvinator

Safety Certification
Sanitation Certification

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCGM10R 06/15

© 2015 Electrolux Home Products, Inc.



18 CU. FT. GLASS DOOR MERCHANDISER

KCGM180RQY

REFRIGERATOR





Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/4 HP Compressor

Painted Steel Exterior & Interior

Mechanical Control

Internal Temperature Display

Adjustable Shelves Vinyl-Coated Steel

Heavy Duty Casters

Interior Lighting









Shelves that are easy to handle and keep clean.



NSF®-Certified Temperature

Durable and reliable for safety in food storage.


Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.


TECHNICAL SPECIFICATIONS


MODEL	KCGM180RQY
Product Line	Refrigerator
Door(s)/Type	1 Door Swing
Capacity (Cu. Ft.)	18
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/4
Exterior Finish	Textured Painted Steel
Interior Finish	Smooth Painted Steel
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	32 to 44°F
Voltage Rating	115V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	275
Warranty	3 Year/5 Year



REFRIGERATOR

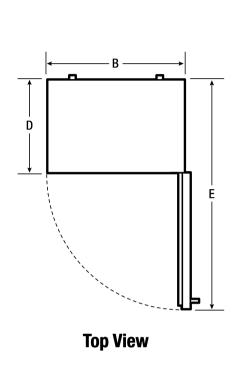

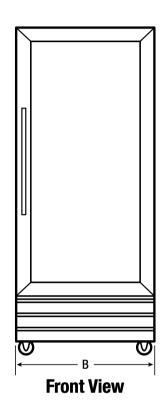

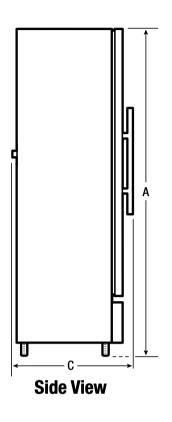



EXTERIOR DIMENSIONS		
Height A (Including Casters)	75"	
Width B	32"	
Overall Depth (Including Door & Handle) C	29-1/2"	
Cabinet Depth D	26-1/2"	
Depth (with Door 90° Open) E	57"	

CERTIFICATIONS AND APPROVALS					
ENERGY STAR® Qualified	Yes				
Safety Certification	CSA				
Sanitation Certification NSF®					

ACCESSORIES		
Deep shelf, fits all except top position	216384002	
Shelf support clips (Sold as singles, requires 4 per shelf)	297121900	
Shallow top shelf (Only fits top position, white finish)	216386202	
Trivet (White finish)	216681802	

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCGM180RQ 06/15

© 2015 Electrolux Home Products, Inc.



24 CU. FT. GLASS DOOR MERCHANDISER

KCGM24R

REFRIGERATOR



Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel/Painted Aluminum Exterior & Interior

Mechanical Control

External Temperature Display

Removable Door Gasket

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Swing Door









Electronic Digital Temperature Display

Quick set digital display for easy monitoring.

Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

Removable Door Gasket


User replaceable door gasket for easy replacement and cleaning.


TECHNICAL SPECIFICATIONS


MODEL	KCGM24R
Product Line	Refrigerator
Door(s)/Type	1 Door Swing
Capacity (Cu. Ft.)	24.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Painted Steel
Interior Finish	Painted Aluminum
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	8.6
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	363
Warranty	3 Year/5 Year



REFRIGERATOR



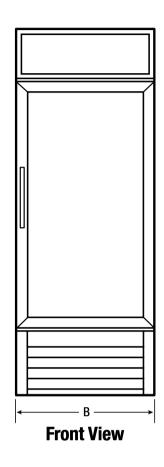

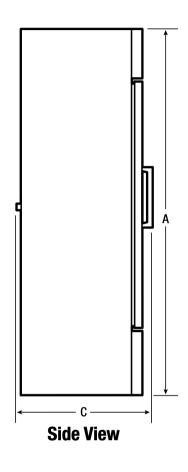



EXTERIOR DIMENSIONS	
Height A (Including Leveling Legs)	79"
Width B	28"
Overall Depth (Including Door & Handle) C	33-5/16"
Cabinet Depth D	31-5/16"
Depth (with Door 90° Open) E	58-1/2"
CERTIFICATIONS AND APPROVALS	S

ETL

ETL

ACCESSORIES	
Shelf	5304487114
Shelf Clip	297121900

Kelvinator

Safety Certification

Sanitation Certification

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCGM24R 06/15

© 2015 Electrolux Home Products, Inc.



47 CU. FT. GLASS DOOR MERCHANDISER

KCGM47R

REFRIGERATOR



Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/2 HP Compressor

Painted Steel/Painted Aluminum Exterior & Interior

Mechanical Control

External Temperature Display

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Sliding Doors Heavy Duty Casters









Electronic Digital Temperature Display

Quick set digital display for easy monitoring.

Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.


Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCGM47R
Product Line	Refrigerator
Door(s)/Type	2 Door Slide
Capacity (Cu. Ft.)	47.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/2
Exterior Finish	Painted Steel
Interior Finish	Painted Aluminum
Shelves (Number/Type)	8/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	External
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	9.2
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	486
Warranty	3 Year/5 Year



REFRIGERATOR

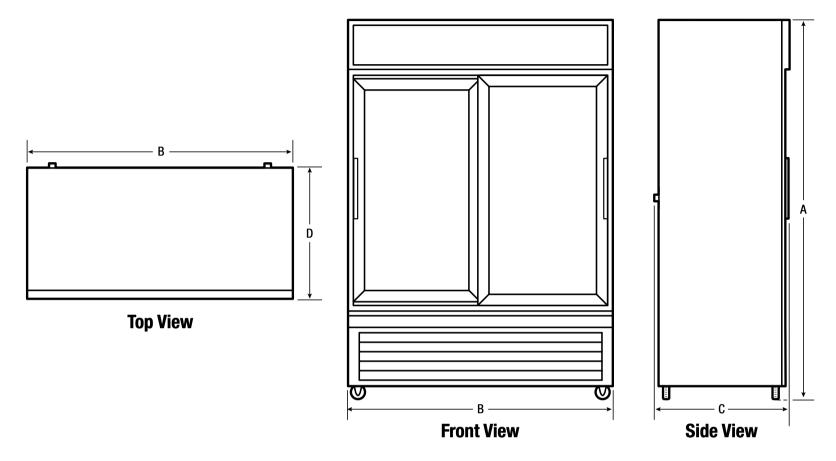



EXTERIOR DIMENSIONS		ACCESSOI
EXTERIOR DIMENSIONS		ACCESSOI
Height A (Including Casters)	83"	Shelf
Width B	53"	Shelf Clip
Overall Depth (Including Door & Handle) C	30-11/16"	
Cabinet Depth D	30-1/2"	
CERTIFICATIONS AND APPROVALS		
Safety Certification	ETL	
Sanitation Certification	ETL	

ACCESSORIES	
Shelf	5304487245
Shelf Clip	297121900

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCGM47R 06/15

© 2015 Electrolux Home Products, Inc.



9 CU. FT. GLASS DOOR MERCHANDISER

KCGM9F

FREEZER



Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

7/8 HP Compressor

Painted Steel/Painted Aluminum Exterior & Interior

Electronic Control

External Temperature Display

Removable Door Gasket

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Swing Door









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

Removable Door Gasket


User replaceable door gasket for easy replacement and cleaning.


TECHNICAL SPECIFICATIONS


MODEL	KCGM9F
Product Line	Freezer
Door(s)/Type	1 Door Swing
Capacity (Cu. Ft.)	9.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	7/8
Exterior Finish	Painted Steel
Interior Finish	Painted Aluminum
Shelves (Number/Type)	2/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	-7 to 10°F
Voltage Rating	115V/60Hz
Run Amps	5.2
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	251
Warranty	3 Year/5 Year



FREEZER



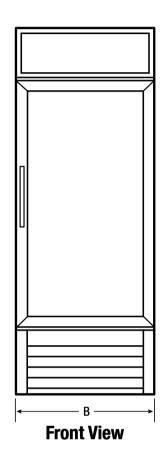

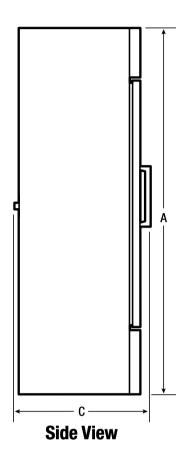



EXTERIOR DIMENSIONS		
Height A (Including Leveling Legs)	59"	
Width B	27"	
Overall Depth (Including Door & Handle) C	27-1/4"	
Cabinet Depth D	24-1/16"	
Depth (with Door 90° Open) E	51"	

CERTIFICATIONS AND APPROVALS	
Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES	
Shelf	5304487262
Shelf Clip	297121900

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com

CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCGM9F 06/15

© 2015 Electrolux Home Products, Inc.



24 CU. FT. GLASS DOOR MERCHANDISER

KCGM24FB

FREEZER



Fin & Tube Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1 HP Compressor

Painted Steel/Painted Aluminum Exterior & Interior

Electronic Controls

External Temperature Display

Removable Door Gasket

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Swing Door









Electronic Digital Temperature Display

Quick set digital display for easy monitoring.

Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

Removable Door Gasket


User replaceable door gasket for easy replacement and cleaning.


TECHNICAL SPECIFICATIONS


MODEL	KCGM24FB
Product Line	Freezer
Door(s)/Type	1 Door Swing
Capacity (Cu. Ft.)	24.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1
Exterior Finish	Painted Steel
Interior Finish	Painted Aluminum
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	-7 to 10°F
Voltage Rating	115V/60Hz
Run Amps	9.6
Plug Type	NEMA 5-20P
Shipping Weight (Lbs.)	407
Warranty	3 Year/5 Year



FREEZER



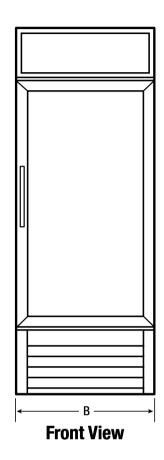

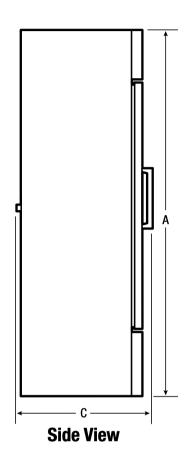



EXTERIOR DIMENSIONS		
Height A (Including Leveling Legs)	83"	
Width B	28"	
Overall Depth (Including Door & Handle) C	32"	
Cabinet Depth D	30"	
Depth (with Door 90° Open) E	58-1/2"	
CERTIFICATIONS AND APPROVALS		

CERTIFICATIONS AND APPROVALS		
Safety Certification	ETL	
Sanitation Certification	ETL	

ACCESSORIES	
Shelf	5304493131
Shelf Clip	297121900

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCGM24F 06/15

© 2015 Electrolux Home Products, Inc.



27 CU. FT. GLASS DOOR MERCHANDISER

KCGM27F

FREEZER



Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1-1/3 HP Compressor

Painted Steel/Painted Aluminum Exterior & Interior

Electronic Controls

External Temperature Display

Removable Door Gaskets

Adjustable Shelves Vinyl-Coated Steel

Self-Closing Swing Doors

Heavy Duty Casters









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

Removable Door Gaskets


User replaceable door gaskets for easy replacement and cleaning.


TECHNICAL SPECIFICATIONS


MODEL	KCGM27F
Product Line	Freezer
Door(s)/Type	2 Door Swing
Capacity (Cu. Ft.)	27.0
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1-1/3
Exterior Finish	Painted Steel
Interior Finish	Painted Aluminum
Shelves (Number/Type)	8/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	External
Temperature Range	-7 to 10°F
Voltage Rating	115V/60Hz
Run Amps	9.6
Plug Type	NEMA 5-20P
Shipping Weight (Lbs.)	442
Warranty	3 Year/5 Year



FREEZER

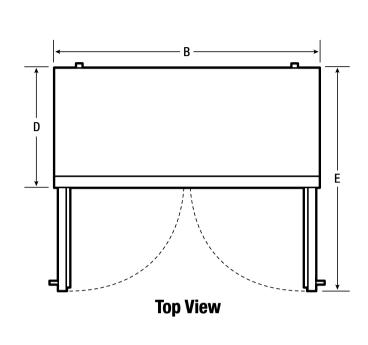

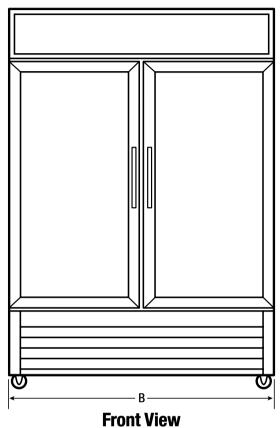

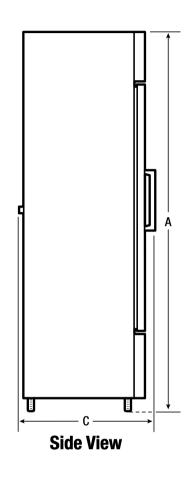



EXTERIOR DIMENSIONS		
Height A (Inglishing Costors)	2011	
Height A (Including Casters)	80"	
Width B	49"	
Overall Depth (Including Door & Handle) C	28"	
Cabinet Depth D	26"	
Depth (with Door 90° Open) E	49"	
CERTIFICATIONS AND APPROVALS		

ETL

ETL

ACCESSORIES	
Shelf	5304487387
Shelf Clip	297121900

Kelvinator

Safety Certification

Sanitation Certification

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCGM27F 06/15

© 2015 Electrolux Home Products, Inc.

Kelvinator 3



BAR **EQUIPMENT**



11.8 CU. FT. BACK BAR REFRIGERATOR

KCBB48SB



Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel Exterior/ Stainless Steel Interior

Mechanical Control

Adjustable Shelves Vinyl-Coated Steel

Stay-Open Self-Closing Doors

Locking Doors & Key protect the contents of the unit









Mechanical Control

Select temperatures as required.



Locking Doors

Secure the inventory.




Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS

MODEL	KCBB48SB
Product Line	Refrigerator
Capacity (Cu. Ft.)	11.8
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Painted Steel
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	External
Temperature Range	32 to 38°F
Voltage Rating	115V/60Hz
Run Amps	6.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	350
Warranty	3 Year/5 Year



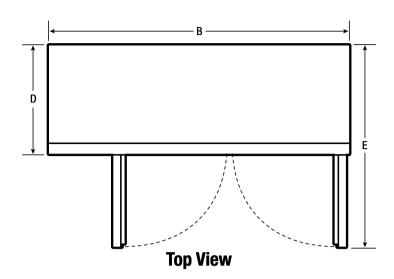

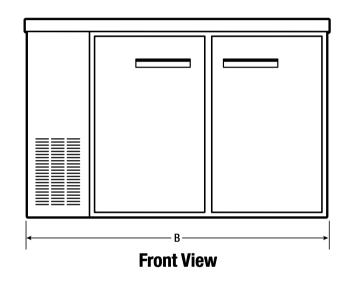





EXTERIOR DIMENSIONS

Height A	36"
Width B	48-3/4"
Overall Depth (Including Door & Handle) C	24-1/2"
Cabinet Depth D	24-1/2"
Depth (with Door 90° Open) E	42"

CERTIFICATIONS AND APPROVALS		
Safety Certification	FTI	
Sanitation Certification	ETL	

ACCESSORIES

Shelf	5304497341
Shelf Clip	297121900

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBB48S 06/15

 $\ensuremath{\texttt{©}}$ 2015 Electrolux Home Products, Inc.



KCBB60SB

Fin & Tube Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel Exterior/ Stainless Steel Interior

Mechanical Control

Adjustable Shelves Vinyl-Coated Steel

Stay-Open Self-Closing Doors

Locking Doors & Key protect the contents of the unit











Mechanical Control

Select temperatures as required.



Locking Doors

Secure the inventory.



Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS


MODEL	KCBB60SB
Product Line	Refrigerator
Capacity (Cu. Ft.)	15.8
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Painted Steel
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	External
Temperature Range	32 to 38°F
Voltage Rating	115V/60Hz
Run Amps	6.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	380
Warranty	3 Year/5 Year



KCBB60SB

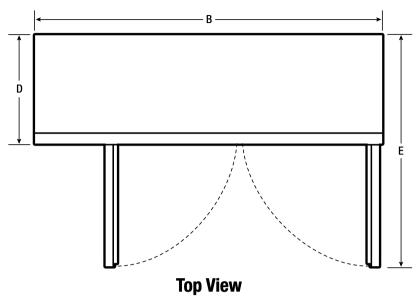

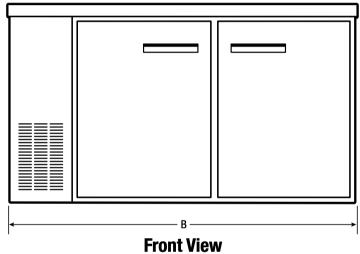





EXTERIOR DIMENSIONS

Height A	36"
Width B	60-7/8"
Overall Depth (Including Door & Handle) C	24-1/2"
Cabinet Depth D	24-1/2"
Depth (with Door 90° Open) E	47-1/2"

CERTIFICATIONS AND APPROVALS	5
Safatu Cautification	CT!
Safety Certification	ETL
Sanitation Certification	FTL

ACCESSORIES

Shelf	5304497342
Shelf Clip	297121900

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBB60S 06/15

© 2015 Electrolux Home Products, Inc.



KCBB72SB

Fin & Tube Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel Exterior/ Stainless Steel Interior

Mechanical Control

Adjustable Shelves Vinyl-Coated Steel

Stay-Open Self-Closing Doors

Locking Doors & Key protect the contents of the unit









Mechanical Control

Select temperatures as required.



Locking Doors

Secure the inventory.




Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS


MODEL	KCBB72SB
Product Line	Refrigerator
Capacity (Cu. Ft.)	19.6
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Painted Steel
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	6/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	External
Temperature Range	32 to 38°F
Voltage Rating	115V/60Hz
Run Amps	6.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	410
Warranty	3 Year/5 Year





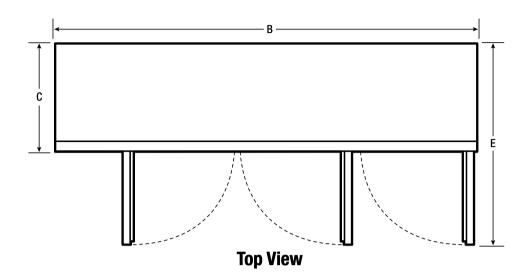

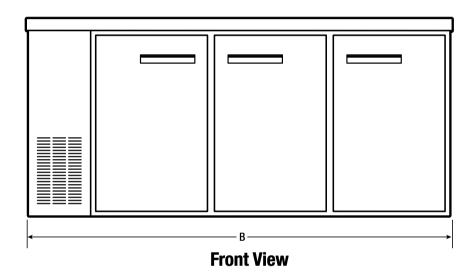





EXTERIOR DIMENSIONS

Height A	36"
Width B	72-7/8"
Overall Depth (Including Door & Handle) C	24-1/2"
Cabinet Depth D	24-1/2"
Depth (with Door 90° Open) E	43"

CERTIFICATIONS AND APPROVALS		
Safety Certification	FTI	
Sanitation Certification	FTI	

ACCESSORIES

Shelf	5304497343
Shelf Clip	297121900

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBB72S 06/15

© 2015 Electrolux Home Products, Inc.



KCBB48GB



Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel Exterior/ Stainless Steel Interior

Mechanical Control

Adjustable Shelves Vinyl-Coated Steel

Stay-Open Self-Closing Doors

Locking Doors & Key protect the contents of the unit









3

Mechanical Control

Select temperatures as required.

Locking Doors

Secure the inventory.


Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS

MODEL	KCBB48GB
Product Line	Refrigerator
Door(s)/Type	2 Door Swing
Capacity (Cu. Ft.)	11.8
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Painted Steel
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	External
Temperature Range	32 to 38°F
Voltage Rating	115V/60Hz
Run Amps	6.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	350
Warranty	3 Year/5 Year



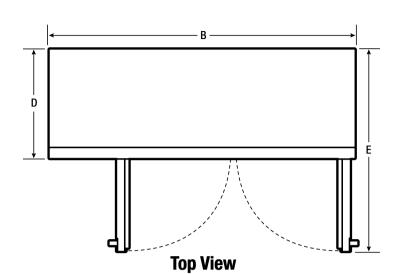







EXTERIOR DIMENSIONS

Height A	36"
Width B	48-7/8"
Overall Depth (Including Door & Handle) C	24-1/2"
Cabinet Depth D	24-1/2"
Depth (with Door 90° Open) E	42"

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304497341
Shelf Clip	297121900

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBB48G 06/15

 $\ensuremath{\texttt{@}}$ 2015 Electrolux Home Products, Inc.



KCBB60GB

Fin & Tube Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel Exterior/ Stainless Steel Interior

Mechanical Control

Adjustable Shelves Vinyl-Coated Steel

Stay-Open Self-Closing Doors

Locking Doors & Key protect the contents of the unit









Mechanical Control

Select temperatures as required.



Locking Doors

Secure the inventory.



Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.

TECHNICAL SPECIFICATIONS

MODEL	KCBB60GB
Product Line	Refrigerator
Door(s)/Type	2 Door Swing
Capacity (Cu. Ft.)	15.8
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Painted Steel
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	External
Temperature Range	32 to 38°F
Voltage Rating	115V/60Hz
Run Amps	6.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	380
Warranty	3 Year/5 Year



KCBB60GB

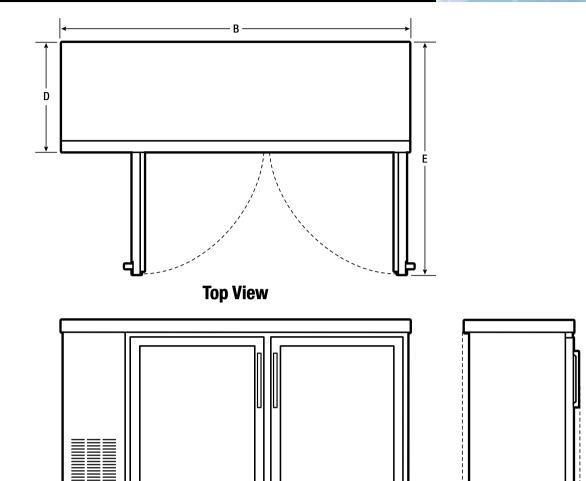



EXTERIOR DIMENSIONS

Height A	36"	
Width B	60-7/8"	
Overall Depth (Including Door & Handle) C	24-1/2"	
Cabinet Depth D	24-1/2"	
Depth (with Door 90° Open) E	47-1/2"	

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	FTL

ACCESSORIES

Shelf	5304497342
Shelf Clip	297121900

Side View

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBB60G 06/15

© 2015 Electrolux Home Products, Inc.

Front View



KCBB72GB

Fin & Tube Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel Exterior/ Stainless Steel Interior

Mechanical Control

Adjustable Shelves Vinyl-Coated Steel

Stay-Open Self-Closing Doors

Locking Doors & Key protect the contents of the unit











Mechanical Control

Select temperatures as required.

Locking Doors

Secure the inventory.

Heavy Duty Adjustable Shelves


Shelves that are easy to handle and keep clean.


TECHNICAL SPECIFICATIONS


MODEL	KCBB72GB
Product Line	Refrigerator
Door(s)/Type	3 Door Swing
	19.6
Capacity (Cu. Ft.)	
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Painted Steel
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	6/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	External
Temperature Range	32 to 38°F
Voltage Rating	115V/60Hz
Run Amps	6.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	410
Warranty	3 Year/5 Year





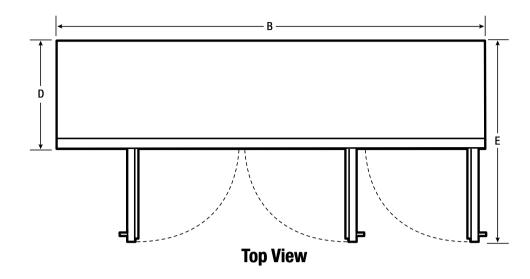

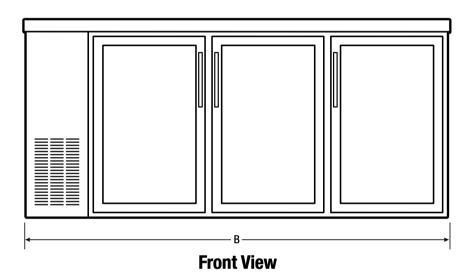





EXTERIOR DIMENSIONS

Height A	36"	
Width B	72-7/8"	
Overall Depth (Including Door & Handle) C	24-1/2"	
Cabinet Depth D	24-1/2"	
Depth (with Door 90° Open) E	43"	

CERTIFICATIONS AND APPROVALS

Safety Certification	ETL
Sanitation Certification	ETL

ACCESSORIES

Shelf	5304497343
Shelf Clip	297121900

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBB72G 06/15

© 2015 Electrolux Home Products, Inc.



13 CU. FT. BOTTLE COOLER

KCBC50



Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel Exterior/
Painted Aluminum Interior

Mechanical Control

Adjustable Dividers Vinyl-Coated Steel

Locking Lids & Key protect the contents of the unit









Mechanical Control

Select temperatures as required.



Locking LidsSecure the inventory.




Adjustable DividersCustomize bottle storage effortlessly.

TECHNICAL SPECIFICATIONS

MODEL	KCBC50
Product Line	Bottle Cooler
Capacity (Cu. Ft.)	13.0
Capacity (Cases)	18 Cases (12 oz. Cans)
Condenser Type	Dynamic
Automatic Defrost Cooling Syste	em Yes
Compressor Horsepower	1/3
Exterior Finish	Painted Steel
Interior Finish	Painted Aluminum
Dividers (Number/Type)	3/Vinyl-Coated Steel
Control	Mechanical
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	8.0
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	223
Warranty	3 Year/5 Year



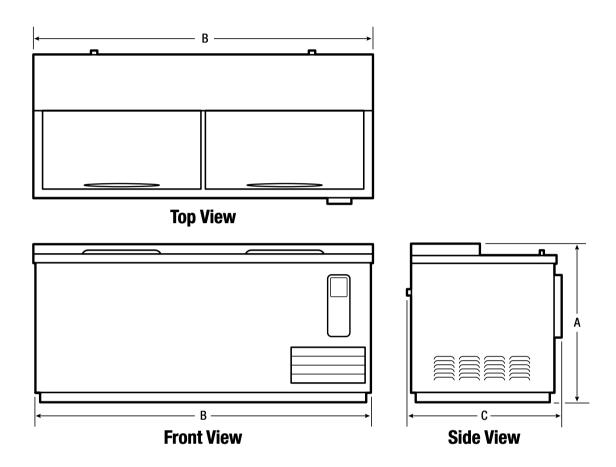

ACCESSORIES



EXTERIOR DIMENSIONS		
Height A	34"	Lo
Width B	50"	Div
Overall Depth (Including Door & Handle) C	28"	

Lock	5304486631
Divider Shelf	5304486632

CERTIFICATIONS AND APPROVAL	5	
Safety Certification	ETL	
Sanitation Certification	ETL	

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBC50 07/14

© 2015 Electrolux Home Products, Inc.



18 CU. FT. BOTTLE COOLER

KCBC65



Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel Exterior/
Painted Aluminum Interior

Mechanical Control

Adjustable Dividers Vinyl-Coated Steel

Locking Lids & Key protect the contents of the unit









Mechanical Control

Select temperatures as required.



Locking LidsSecure the inventory.




Adjustable Dividers

Customize bottle storage effortlessly.

TECHNICAL SPECIFICATIONS

MODEL	KCBC65
Product Line	Bottle Cooler
Capacity (Cu. Ft.)	18.0
Capacity (Cases)	22 Cases (12 oz. Cans)
Condenser Type	Dynamic
Automatic Defrost Cooling Syster	n Yes
Compressor Horsepower	1/3
Exterior Finish	Painted Steel
Interior Finish	Painted Aluminum
Dividers (Number/Type)	3/Vinyl-Coated Steel
Control	Mechanical
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	8.5
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	296
Warranty	3 Year/5 Year



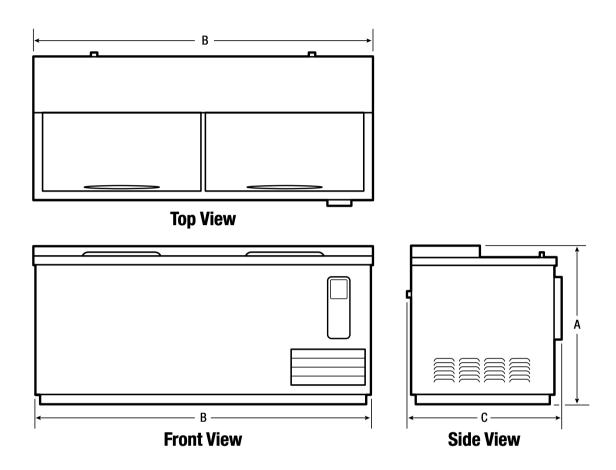

ACCESSORIES



24#	
.	
	34" 65" 28"

Lock	5304486631
Divider Shelf	5304486632

CERTIFICATIONS AND APPROVALS		
Safety Certification	ETL	
Sanitation Certification	ETL	

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCBC65 07/14

© 2015 Electrolux Home Products, Inc.







13.6 CU. FT. SCHOOL MILK COOLER

KCMC34RW



1/5 HP Compressor
Stainless Steel Interior
Electronic Controls
External Temperature Display
Removable Door Gasket

Locking Lid & Key protect the contents of the unit

Heavy Duty Casters
Interior Drain









Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.


Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.


TECHNICAL SPECIFICATIONS

MODEL	KCMC34RW
Product Line	Refrigerator
Capacity (Cu. Ft.)	13.6
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/5
Exterior Finish	Painted Steel
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	1/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	Back Side
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	6.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	253
Warranty	3 Year/5 Year



13.6 CU. FT. SCHOOL MILK COOLER



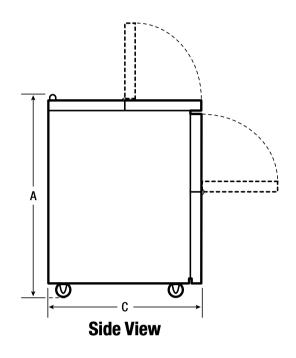



EXTERIOR DIMENSIONS	
Height A (Including Casters)	42"
Width B	34"
Cabinet Depth C	34"

CERTIFICATIONS AND APPROV	ALS	
Safety Certification	ETL	
Sanitation Certification	ETL	

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCMC34R 06/15

© 2015 Electrolux Home Products, Inc.



20.0 CU. FT. SCHOOL MILK COOLER

KCMC49RW

1/5 HP Compressor
Stainless Steel Interior
Electronic Controls
External Temperature Display

Removable Door Gasket

Locking Lid & Key protect the contents of the unit

Heavy Duty Casters Interior Drain











Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.


Stainless Steel Interior


Durable and easy to clean for daily commercial use.


Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCMC49RW
Product Line	Refrigerator
Capacity (Cu. Ft.)	20.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/5
Exterior Finish	Painted Steel
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	1/Vinyl-Coated Wire
Control	Electronic
Temperature Display Location	Back Side
Temperature Range	32 to 38°F
Voltage Rating	115V/60Hz
Run Amps	6.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	364
Warranty	3 Year/5 Year

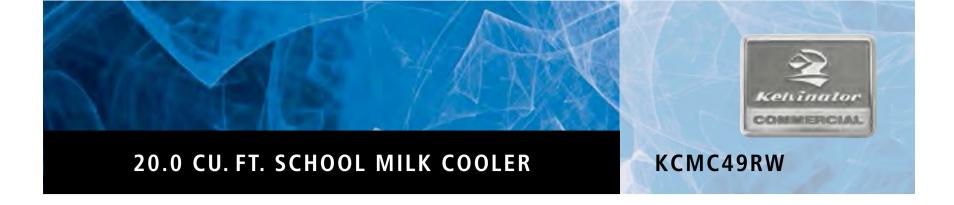



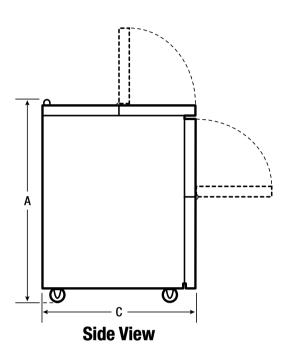



42"	
49"	
34"	
	49"

CERTIFICATIONS AND APPROVA	LS	
Safety Certification	ETL	
Sanitation Certification	ETL	

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCMC49R 06/15

© 2015 Electrolux Home Products, Inc.



24.0 CU. FT. SCHOOL MILK COOLER

KCMC58RW



External Temperature Display

Removable Door Gasket

Locking Lid & Key protect the contents of the unit

Heavy Duty Casters

Interior Drain











Electronic Digital Temperature Control

Quick set digital control and display for easy monitoring.

Stainless Steel Interior

Durable and easy to clean for daily commercial use.


Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCMC58RW
Product Line	Refrigerator
Capacity (Cu. Ft.)	24.0
Condenser Type	Fin & Tube
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/5
Exterior Finish	Painted Steel
Interior Finish	Stainless Steel (304)
Shelves (Number/Type)	1/Vinyl-Coated Steel
Control	Electronic
Temperature Display Location	Back Side
Temperature Range	32 to 50°F
Voltage Rating	115V/60Hz
Run Amps	6.4
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	407
Warranty	3 Year/5 Year



24.0 CU. FT. SCHOOL MILK COOLER

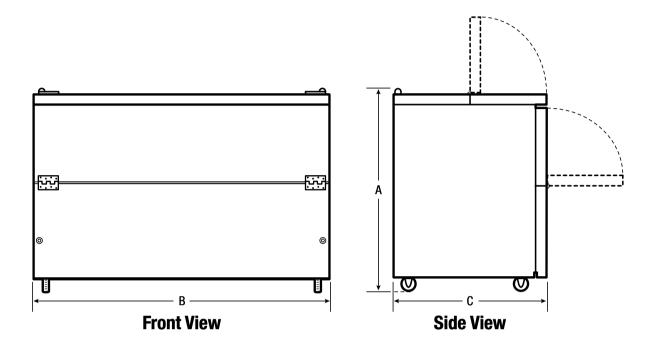



EXTERIOR DIMENSIONS		
Height A (Including Casters)	42"	
Width B	58"	
Cabinet Depth C	34"	

CERTIFICATIONS AND APPROVALS		
Safety Certification	ETL	
Sanitation Certification	ETL	

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCMC58R 06/15

© 2015 Electrolux Home Products, Inc.







7 CU. FT. CHEST FREEZER

KCCF070QW



Static Condenser

1/6 HP Compressor

Painted Steel Exterior & Interior

Mechanical Control

Internal Temperature Display

Freezer Basket

Locking Lids & Key Protect the contents of the unit

Heavy Duty Casters









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCCF070QW
Product Line	Chest Freezer
Capacity (Cu. Ft.)	7.35
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/6
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-15 to 10°F
Interior Lighting	No
Voltage Rating	115V/5A
Run Amps	1.0
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	82
Warranty	3 Year/5 Year



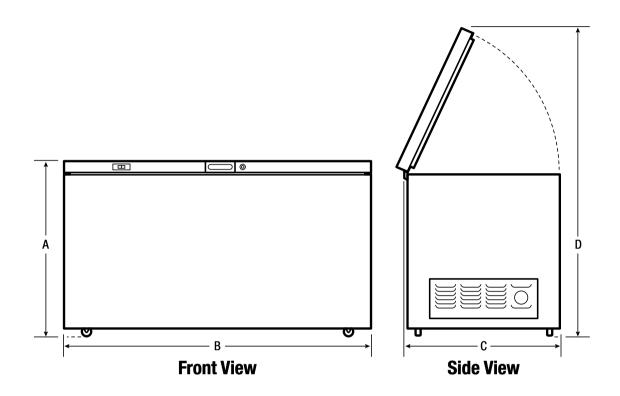



EXTERIOR DIMENSIONS		
Height A (Including Casters & Lid)	37"	
Width B	37"	
Cabinet Depth C	23-1/2"	
Height (with Lid Open) D	55-5/16"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES	
Lock & Key	297090100
NSF® wire basket	297404901
Basket divider	296506200
NSF® thermometer	297070100

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCCF070Q 06/15

© 2015 Electrolux Home Products, Inc.



16 CU. FT. CHEST FREEZER

KCCF160QW



Static Condenser

1/5 HP Compressor

Painted Steel Exterior & Interior

Mechanical Control

Internal Temperature Display

Freezer Basket

Locking Lids & Key Protect the contents of the unit

Heavy Duty Casters









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

KCCF160QW
Chest Freezer
16
Static
No
1/5
Textured Painted Steel
Painted Steel
1/Wire
Mechanical
Internal
-15 to 10°F
No
115V/5A
1.3
NEMA 5-15P
179
3 Year/5 Year



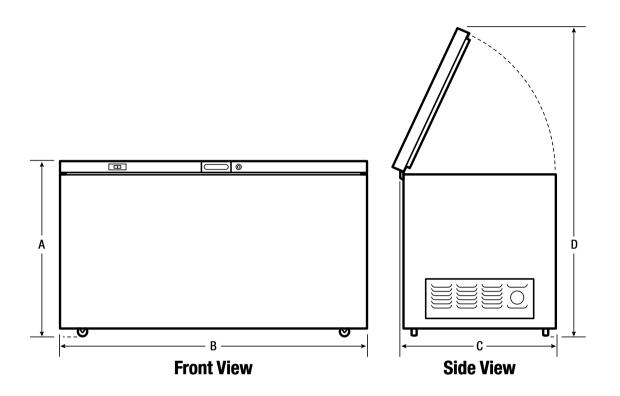



EXTERIOR DIMENSIONS		
Height A (Including Casters & Lid)	37"	
Width B	56"	
Cabinet Depth C	27-1/2"	
Height (with Lid Open) D	62"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES	
Lock & Key	297090100
NSF® wire basket	297404901
Basket divider	296506200
NSF® thermometer	297070100

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCCF160Q 06/15

© 2015 Electrolux Home Products, Inc.



18 CU. FT. CHEST FREEZER





Static Condenser

1/5 HP Compressor

Painted Steel Exterior & Interior

Mechanical Control

Internal Temperature Display

Freezer Basket

Locking Lids & Key Protect the

contents of the unit

Heavy Duty Casters
Interior Lighting









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCCF180QW
Product Line	Chest Freezer
Capacity (Cu. Ft.)	18
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/5
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-15 to 10°F
Interior Lighting	Yes
Voltage Rating	115V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	200
Warranty	3 Year/5 Year



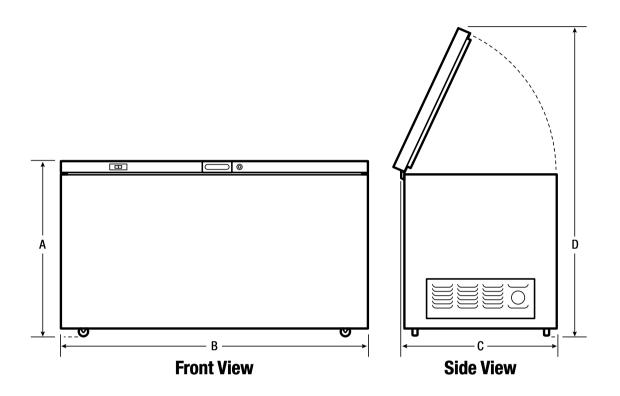



EXTERIOR DIMENSIONS		
Height A (Including Casters & Lid)	37"	
Width B	61-1/2"	
Cabinet Depth C	27-1/2"	
Height (with Lid Open) D	62"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES	
Lock & Key	297090100
NSF® wire basket	297404901
Basket divider	296506200
NSF® thermometer	297070100

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCCF180Q 06/15

© 2015 Electrolux Home Products, Inc.



22 CU. FT. CHEST FREEZER



Interior Lighting



Static Condenser

1/4 HP Compressor

Painted Steel Exterior & Interior

Mechanical Control

Internal Temperature Display

Freezer Basket

Locking Lids & Key Protect the contents of the unit









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCCF220QW
Product Line	Chest Freezer
Capacity (Cu. Ft.)	22
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/4
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-15 to 10°F
Interior Lighting	Yes
Voltage Rating	115V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	221
Warranty	3 Year/5 Year



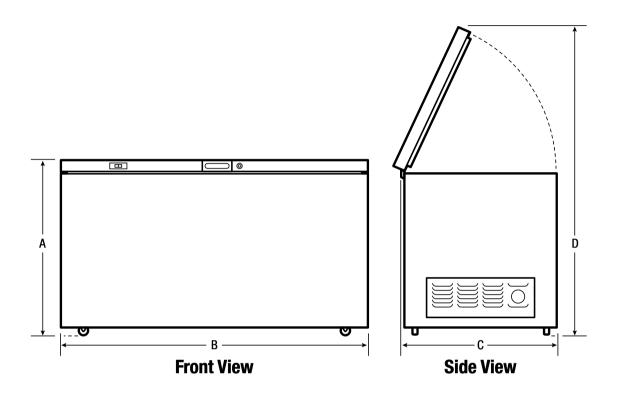



EXTERIOR DIMENSIONS		
Height A (Including Casters & Lid)	37"	
Width B	73-1/2"	
Cabinet Depth C	27-1/2"	
Height (with Lid Open) D	62"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES	
Lock & Key	297090100
NSF® wire basket	297404901
Basket divider	296506200
NSF® thermometer	297070100

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCCF220Q 06/15

© 2015 Electrolux Home Products, Inc.



7 CU. FT. NOVELTY FREEZER

KCNF070QW

Static Condenser

1/6 HP Compressor

Painted Steel Exterior & Interior

Mechanical Control

Internal Temperature Display

Freezer Basket

Locking Lids & Key Protect the

contents of the unit

Heavy Duty Casters









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCNF070QW
Product Line	Novelty Freezer
Capacity (Cu. Ft.)	7.37
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/6
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-10 to 10°F
Voltage Rating	115V/5A
Run Amps	1.0
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	127
Warranty	3 Year/5 Year



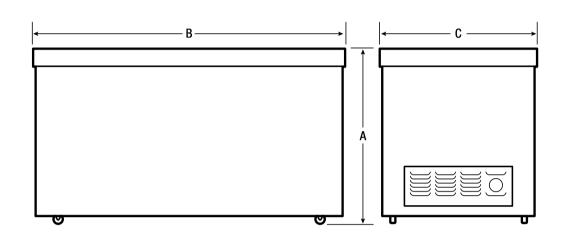



EXTERIOR DIMENSIONS	
Height A (Including Casters)	38"
Width B	37"
Cabinet Depth C	23-1/2"

CERTIFICATIONS AND APPROVALS	
ENERGY STAR® Qualified	Yes
Safety Certification	CSA

NSF®

ACCESSORIES	
Lock Assembly	245524200
Lock Assembly	216621200
Key	297147700
NSF® wire basket	297405000
NSF® thermometer	297070100

Kelvinator

Sanitation Certification

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCNF070Q 06/15

© 2015 Electrolux Home Products, Inc.



16 CU. FT. NOVELTY FREEZER

KCNF160QW





Static Condenser

1/5 HP Compressor

Painted Steel Exterior & Interior

Mechanical Control

Internal Temperature Display

Freezer Basket

Locking Lids & Key protect the contents of the unit

Heavy Duty Casters









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCNF160QW
Product Line	Novelty Freezer
Capacity (Cu. Ft.)	16
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/5
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-10 to 10°F
Voltage Rating	115V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	182
Warranty	3 Year/5 Year



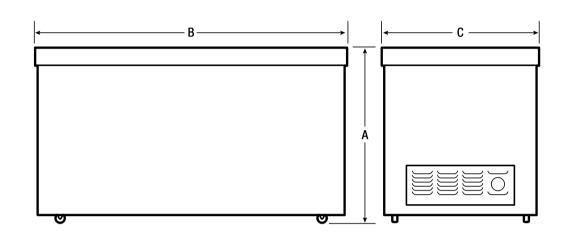



EXTERIOR DIMENSIONS	
Height A (Including Casters)	38"
Width B	56"
Cabinet Depth C	27-1/2"

ACCESSORIES	
Lock Assembly	216621200
Key	297147700
NSF® wire basket	297405000
NSF® thermometer	297070100

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCNF160Q 06/15

© 2015 Electrolux Home Products, Inc.



17 CU. FT. NOVELTY FREEZER

KCNF180QW





Static Condenser

1/5 HP Compressor

Painted Steel Exterior & Interior

Mechanical Control

Internal Temperature Display

Freezer Basket

Locking Lids & Key protect the contents of the unit

Heavy Duty Casters









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCNF180QW
Product Line	Novelty Freezer
Capacity (Cu. Ft.)	17.47
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/5
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-10 to 10°F
Voltage Rating	115V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	217
Warranty	3 Year/5 Year



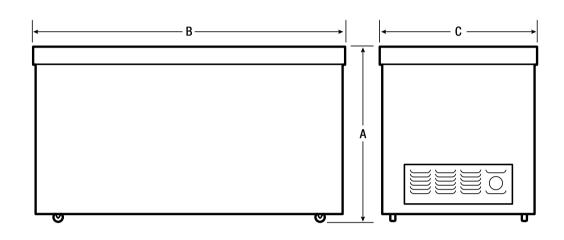



EXTERIOR DIMENSIONS	
Height A (Including Casters)	38"
Width B	61-1/4"
Cabinet Depth C	27-1/2"

CERTIFICATIONS AND APPRO	VALS
ENERGY STAR® Qualified	Yes
Safety Certification	CSA
Sanitation Certification	NSF®

ACCESSORIES	
Lock Assembly	216621200
Key	297147700
NSF® wire basket	297405000
NSF® thermometer	297070100

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCNF180Q 06/15

© 2015 Electrolux Home Products, Inc.

DISCONTINUED MODELS



18 CU. FT. REACH-IN REFRIGERATOR





Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Mechanical Control

Internal Temperature Display

Adjustable Shelves

Self-Closing Doors with 90-degree stay-open feature

Lock & Key protects the contents of the unit

Heavy Duty Casters Reversible Door









Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

NSF®-Certified Temperature

Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.


TECHNICAL SPECIFICATIONS


MODEL	KRS220RH
Product Line	Refrigerator
Capacity (Cu. Ft.)	18.4
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Textured Painted Steel
Interior Finish	Smooth Painted Steel
Shelves (Number/Type)	3/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	32 to 44°F
Voltage Rating	120V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	275
Warranty	3 Year/5 Year




18 CU. FT. REACH-IN REFRIGERATOR



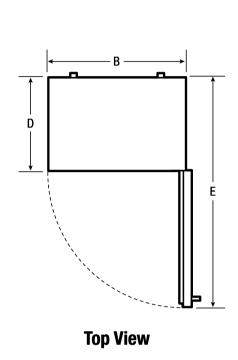

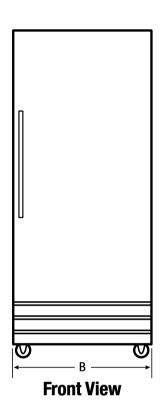





EXTERIOR DIMENSIONS		
Height A (Including Casters)	75-7/8"	
Width B	32"	
Overall Depth (Including Door & Handle) C	31-1/8	
Cabinet Depth D	26-3/8"	
Depth (with Door 90° Open) E	59-3/8"	
CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES	
Deep shelf (Fits all except top position, white finish)	216384002
Shallow top shelf (Only fits top position, white finish)	216386202
Trivet, white finish	216331802
Shelf support clips (Sold as singles , requires 4 per shelf)	297121900
Pan slide kit (Includes 2 racks/4 clips, holds 8 pans 18' x 26")	PANRACKKIT
Casters, Front	297206600
Casters, Back	297206500
Caster hardware kit	297256300
Key for lock	216362800
Upright locks	216362700

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KRS220RH 06/15

© 2015 Electrolux Home Products, Inc.



18 CU. FT. REACH-IN FREEZER

KFS220RH



Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/2 HP Compressor

Mechanical Control

Internal Temperature Display

Adjustable Shelves

Self-Closing Doors with 90-degree stay-open feature

Lock & Key protects the contents of the unit

Heavy Duty Casters Reversible Door









Vinyl Heavy Duty Adjustable Shelves

Shelves that are easy to handle and keep clean.

NSF®-Certified Temperature

Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.


TECHNICAL SPECIFICATIONS


MODEL	KFS220RH
Product Line	Freezer
Capacity (Cu. Ft.)	18.4
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/2
Exterior Finish	Textured Painted Steel
Interior Finish	Smooth Painted Steel
Shelves (Number/Type)	3/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-10 to 10°F
Voltage Rating	120V/5A
Run Amps	2.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	275
Warranty	3 Year/5 Year




18 CU. FT. REACH-IN FREEZER



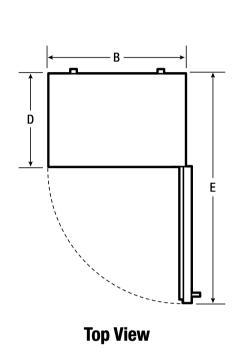

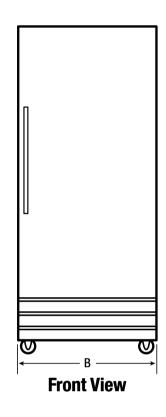

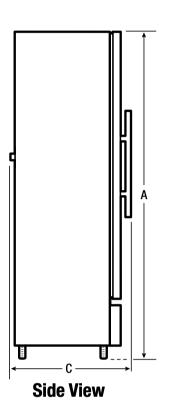



EXTERIOR DIMENSIONS	
Height A (Including Casters)	75-7/8"
Width B	32"
Overall Depth (Including Door & Handle) C	31-1/8"
Cabinet Depth D	26-3/8"
Depth (with Door 90° Open) E	59-3/8"
CERTIFICATIONS AND APPROVALS	
ENERGY STAR® Qualified	Yes
Safety Certification	CSA
Sanitation Certification	NSF®

ACCESSORIES		
Deep shelf (Fits all except top position, white finish)	216384002	
Shallow top shelf (Only fits top position, white finish)	216386202	
Trivet, white finish	216331802	
Shelf support clips (Sold as singles , requires 4 per shelf)	297121900	
Pan slide kit (Includes 2 racks/4 clips, holds 8 pans 18' x 26")	PANRACKKIT	
Casters, Front	297206600	
Casters, Back	297206500	
Caster hardware kit	297256300	
Key for lock	216362800	
Upright locks	216362700	

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KFS220RH 06/15

© 2015 Electrolux Home Products, Inc.



20 CU. FT. GLASS DOOR MERCHANDISER

KGM220RH

REFRIGERATOR





Dynamic Condenser improves performance in high temperature environments

Automatic Defrost Cooling System provides worry-free performance

1/3 HP Compressor

Painted Steel Exterior & Interior Mechanical Control

Internal Temperature Display

Adjustable Shelves Vinyl-Coated Steel

Heavy Duty Casters









Shelves that are easy to handle and keep clean.



NSF®-Certified Temperature

Durable and reliable for safety in food storage.




Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.


TECHNICAL SPECIFICATIONS


MODEL	KGM220RH
Product Line	Refrigerator
Door(s)/Type	1 Door Swing
Capacity (Cu. Ft.)	19.7
Condenser Type	Dynamic
Automatic Defrost Cooling System	Yes
Compressor Horsepower	1/3
Exterior Finish	Textured Painted Steel
Interior Finish	Smooth Painted Steel
Shelves (Number/Type)	4/Vinyl-Coated Steel
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	32 to 44°F
Voltage Rating	120V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	275
Warranty	3 Year/5 Year



REFRIGERATOR

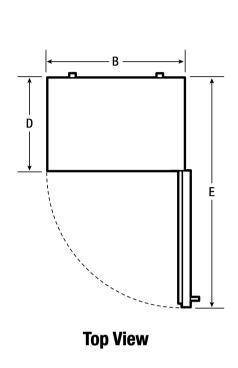

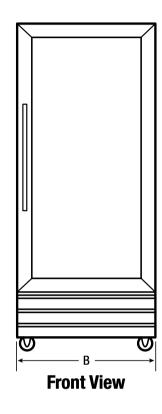

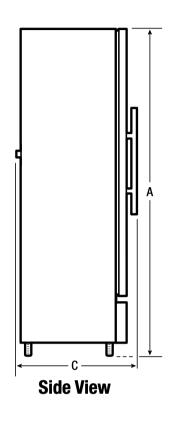



EXTERIOR DIMENSIONS		
Height A (Including Casters)	74-3/4"	
Width B	32"	
Overall Depth (Including Door & Handle) C	31-1/8"	
Cabinet Depth D	26-3/8"	
Depth (with Door 90° Open) E	59-3/8"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES		
Deep shelf, fits all except top position	216384002	
Shelf support clips (Sold as singles, requires 4 per shelf)	297121900	
Shallow top shelf (Only fits top position, white finish)	216386202	
Trivet (White finish)	216681802	

Kelvinator

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KGM220RH 06/15

© 2015 Electrolux Home Products, Inc.



7 CU. FT. CHEST FREEZER

KCS070G



Static Condenser
1/5 HP Compressor
Painted Steel Exterior & Interior
Mechanical Control
Internal Temperature Display
Freezer Basket
Locking Lids & Key Protect the

contents of the unit

Heavy Duty Casters









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCS070G
Product Line	Chest Freezer
Capacity (Cu. Ft.)	7.2
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/5
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-15 to 10°F
Interior Lighting	No
Voltage Rating	120V/5A
Run Amps	1.0
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	113
Warranty	3 Year/5 Year



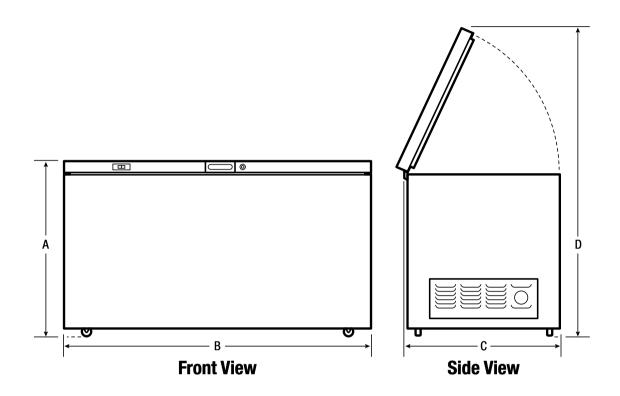



EXTERIOR DIMENSIONS		
Height A (Including Casters & Lid)	36-11/16"	
Width B	35"	
Cabinet Depth C	21-1/2"	
Height (with Lid Open) D	55-5/16"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES	
Lock & Key	297090100
NSF® wire basket	297118501
Basket divider	296506200
NSF® thermometer	297070100

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCS070G 06/15

© 2015 Electrolux Home Products, Inc.



15 CU. FT. CHEST FREEZER

KCS150L



Static Condenser
1/3 HP Compressor
Painted Steel Exterior & Interior
Mechanical Control
Internal Temperature Display
Freezer Basket

Locking Lids & Key Protect the contents of the unit

Heavy Duty Casters
Interior Lighting









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCS150L
Product Line	Chest Freezer
Capacity (Cu. Ft.)	14.9
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/3
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-15 to 10°F
Interior Lighting	Yes
Voltage Rating	120V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	169
Warranty	3 Year/5 Year



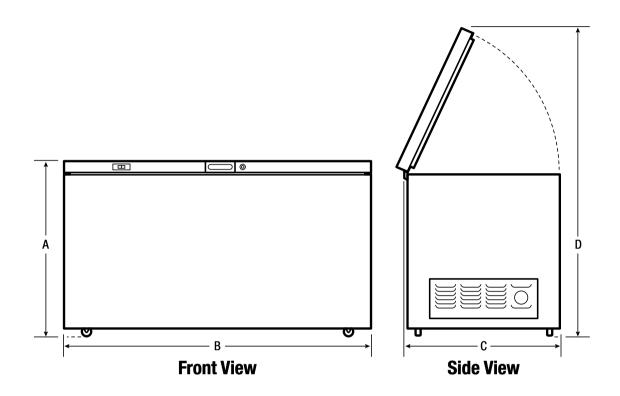



EXTERIOR DIMENSIONS	
Height A (Including Casters & Lid)	37-1/2"
Width B	48"
Cabinet Depth C	27-1/2"
Height (with Lid Open) D	60-13/16"

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

ACCESSORIES	
	_
Lock & Key	297090100
NSF® wire basket	297118601
Basket divider	296506200
NSF® thermometer	297070100

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCS150L 06/15

© 2015 Electrolux Home Products, Inc.



20 CU. FT. CHEST FREEZER





Static Condenser

1/3 HP Compressor

Painted Steel Exterior & Interior

Mechanical Control

Internal Temperature Display

Freezer Basket

Locking Lids & Key Protect the contents of the unit

Heavy Duty Casters
Interior Lighting









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCS200G
Product Line	Chest Freezer
Capacity (Cu. Ft.)	19.9
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/3
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-15 to 10°F
Interior Lighting	Yes
Voltage Rating	120V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	200
Warranty	3 Year/5 Year



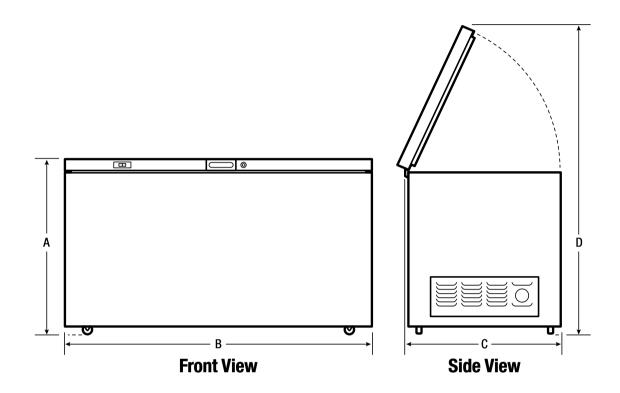



EXTERIOR DIMENSIONS		
Height A (Including Casters & Lid)	37-1/2"	
Width B	61-1/4"	
Cabinet Depth C	27-1/2"	
Height (with Lid Open) D	60-13/16"	

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	
Sanitation Certification	NSF®	

4	C	CE	ES	S	0	R	ΙE	S	

Lock & Key	297090100
NSF® wire basket	297118601
Basket divider	296506200
NSF® thermometer	297070100

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCS200G 06/15

© 2015 Electrolux Home Products, Inc.



7 CU. FT. NOVELTY FREEZER

KCG070G



Locking Lids & Key Protect the contents of the unit

Heavy Duty Casters









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCG070G
Product Line	Novelty Freezer
Capacity (Cu. Ft.)	7.2
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/5
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-10 to 10°F
Voltage Rating	120V/5A
Run Amps	1.0
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	127
Warranty	3 Year/5 Year



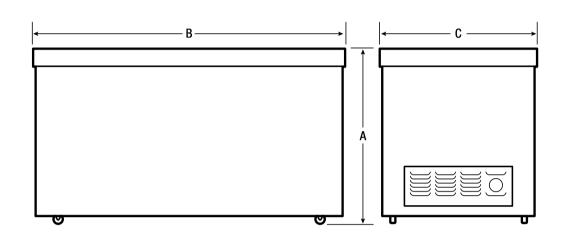



EXTERIOR DIMENSIONS				
Height A (Including Casters)	36-11/16"			
Width B	35-3/4"			
Cabinet Depth C	21-3/4"			

CERTIFICATIONS AND APPROVALS				
ENERGY STAR® Qualified	Yes			
Safety Certification	CSA			
Sanitation Certification	NSF®			

ACCESSORIES	
Lock Assembly	216621200
Key	297147700
NSF® wire basket	297118401
NSF® thermometer	297070100

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCG070G 06/15

© 2015 Electrolux Home Products, Inc.



15 CU. FT. NOVELTY FREEZER

KCG150L





Static Condenser
1/3 HP Compressor
Painted Steel Exterior & Interior
Mechanical Control
Internal Temperature Display
Freezer Basket

Locking Lids & Key protect the contents of the unit

Heavy Duty Casters









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCG150L
Product Line	Novelty Freezer
Capacity (Cu. Ft.)	14.8
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/3
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-10 to 10°F
Voltage Rating	120V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	182
Warranty	3 Year/5 Year



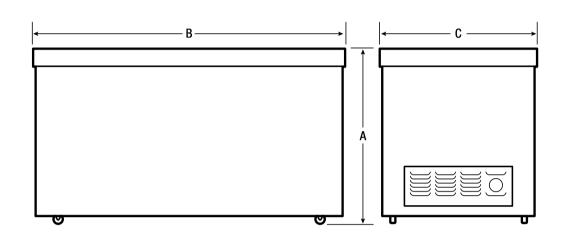



EXTERIOR DIMENSIONS				
Height A (Including Casters)	37-1/2"			
Width B	48-3/4"			
Cabinet Depth C	27-3/4"			

ACCESSORIES	
Lock Assembly	216621200
Key	297147700
NSF® wire basket	297117901
NSF® thermometer	297070100

CERTIFICATIONS AND APPROVALS	
ENERGY STAR® Qualified	Yes
Safety Certification	CSA
Sanitation Certification	NSF®

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • kelvinator.com CANADA • 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCG150L 06/15

© 2015 Electrolux Home Products, Inc.



20 CU. FT. NOVELTY FREEZER

KCG200G





Static Condenser
1/3 HP Compressor
Painted Steel Exterior & Interior
Mechanical Control
Internal Temperature Display
Freezer Basket

Locking Lids & Key protect the contents of the unit

Heavy Duty Casters









NSF®-Certified Basket

Durable and reliable for safety in food storage.

NSF®-Certified Temperature Gauge


Durable and reliable for safety in food storage.

Heavy-Duty, Locking Casters Keeps unit in place but allows position adjusting.

TECHNICAL SPECIFICATIONS

MODEL	KCG200G
Product Line	Novelty Freezer
Capacity (Cu. Ft.)	19.8
Condenser Type	Static
Automatic Defrost Cooling System	No
Compressor Horsepower	1/3
Exterior Finish	Textured Painted Steel
Interior Finish	Painted Steel
Freezer Baskets (Number/Type)	1/Wire
Control	Mechanical
Temperature Display Location	Internal
Temperature Range	-10 to 10°F
Voltage Rating	120V/5A
Run Amps	1.3
Plug Type	NEMA 5-15P
Shipping Weight (Lbs.)	212
Warranty	3 Year/5 Year



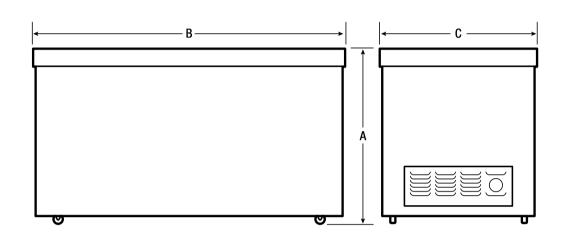



EXTERIOR DIMENSIONS	
Height A (Including Casters)	37-1/2"
Width B	62"
Cabinet Depth C	27-3/4"

CERTIFICATIONS AND APPROVALS		
ENERGY STAR® Qualified	Yes	
Safety Certification	CSA	

NSF®

ACCESSORIES	
Lock Assembly	216621200
Key	297147700
NSF® wire basket	297117901
NSF® thermometer	297070100

Kelvinator

Sanitation Certification

USA • 10200 David Taylor Drive • Charlotte, NC 28262 • 1-866-738-1640 • **kelvinator.com CANADA •** 5855 Terry Fox Way • Mississauga, ON L5V 3E4

KCG200G 06/15

© 2015 Electrolux Home Products, Inc.

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com