

# KENWOOD

PEAK POWER  
**330W**



**Flush Mount Speaker**

HAUT-PARLEUR ENCASTRABLE  
ALTAVOZ DE MONTAJE A NIVEL  
ALTIFALANTE DE MONTAGEM NIVELADA

**KFC-1795PS**

**17cm**  
**6-3/4in**

**3way**  
SPEAKER

**80W**  
RMS POWER






ACOUSTIC SOUND  
HARMONIZER

PERFORMANCE SERIES



TEMPLATE GABARIT PLANTILLA GABARITO

# FLUSH MOUNT SPEAKER HAUT-PARLEUR ENCASTRABLE KFC-1795PS INSTALLATION INSTRUCTIONS PROCÉDURES D'INSTALLATION

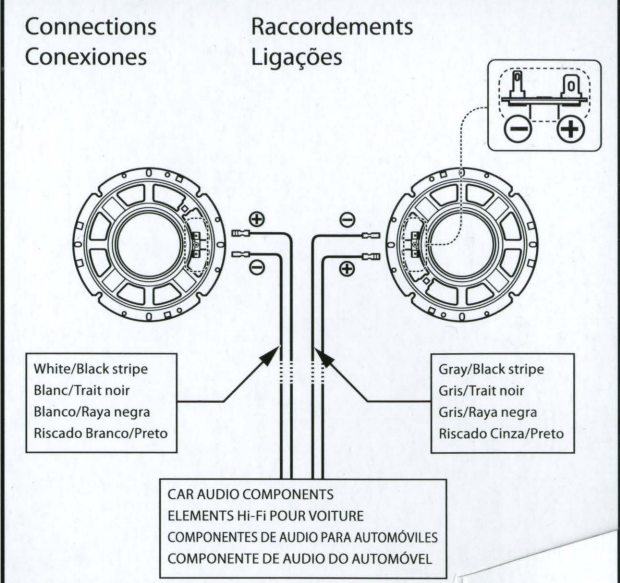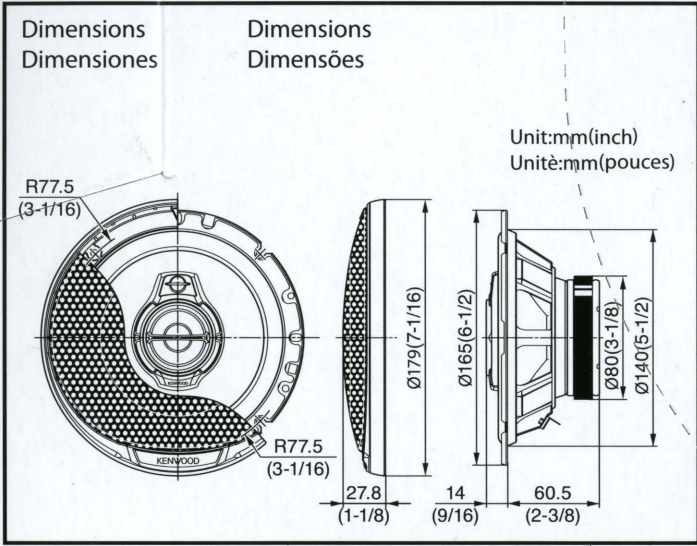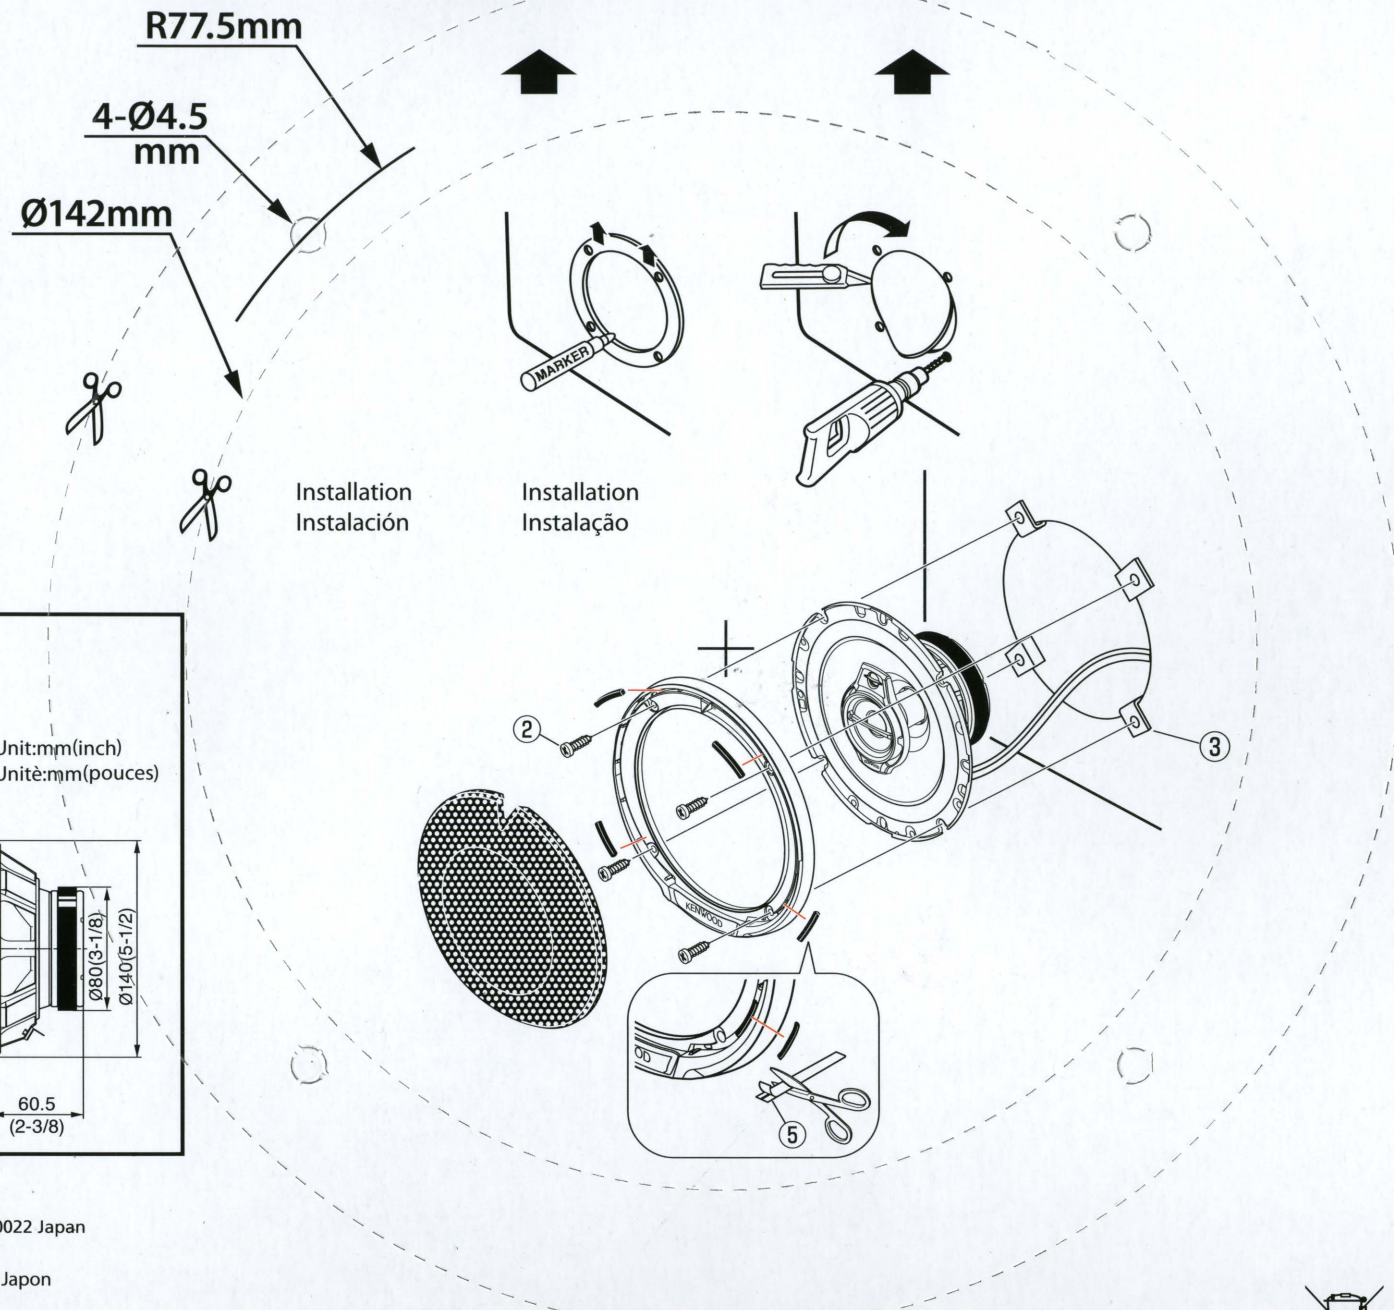

- | Parts included<br>Partes incluidas | Pieces comprises<br>Peças inclusas |
|------------------------------------|------------------------------------|
| ① Mesh grille .....X2              | ② Screw Ø4X25 mm ..... X8          |
| ④ Cables 0.5 m (1.5 ft).....X2     | ③ Trim ring .....X8                |
|                                    | ⑤ Trim ring .....X2                |

- Do not use the provided speaker cords for other purposes (such as a power cord). Otherwise malfunction or fire hazard could result.
- Ne pas utiliser les cordons de liaison aux enceintes pour une destination autre que celle prévue (par exemple, pour alimenter un appareil). Faute de quoi, un défaut de fonctionnement ou un incendie pourraient en résulter.
- No utilice los cables de altavoces suministrados para otros propósitos (tales como los de un cable de alimentación). Si no, podrían producirse averías o peligros de incendio.
- Não utilize os fios fornecidos para altifalantes para outros propósitos (p.ex. como cabo de alimentação). Caso contrário, poderá resultar em mau funcionamento ou risco de incêndio.

JVCKENWOOD Corporation Yokohama 221-0022 Japan

Designed and Engineered in Japan / Design et Conception au Japon  
Made in China / Fabriqué en Chine

VOLUME 0.0073 m<sup>3</sup>/0.26 ft<sup>3</sup> WEIGHT/POIDS 2.0 kg/4.4 lb



# KENWOOD

1 pair



PEAK POWER  
**330W**

Flush Mount Speaker  
**KFC-1795PS**

**17cm**  
**6-3/4in**

**3way**  
SPEAKER

**80W**  
RMS POWER



**SPECIFICATIONS**  
■ Speakers  
Woofer..... 170 mm [6-3/4 in.] Cone  
Tweeter..... 40 mm [1-9/16 in.] Cone  
Super Tweeter..... 12 mm [1/2 in.] Ceramic

■ 80 Watts RMS  
■ Impedance..... 4 Ω  
■ Sensitivity..... 88 dB / W at 1 m  
■ Frequency Response..... 70 Hz ~ 20,000 Hz  
■ Cutout Diameter..... 5-1/2 in. [14.0 cm] Circle  
■ Mounting Depth..... 2-3/8 in. [6.05 cm]



**PERFORMANCE SERIES**

## IMPORTANT SAFETY INSTRUCTIONS



**To avoid the risk of human injury or property damage, be sure to read and observe the following safety cautions.**

**Have a specialist install and connect the speaker.** — Incorrect installation may lead to vehicle accident or malfunction.

**Avoid unstable installation.** — Make sure that the speaker will not rattle or displace. Otherwise, a displaced speaker may cause injury.

**Do not modify the speaker.** — Otherwise, smoke or fire may result.

**Do not touch the speaker.** — The speaker becomes hot after extended operation. Touching it in such a condition may cause burns.

**Control listening volume at an optimum level.** — If the sound outside the vehicle is inaudible, a traffic accident may result.

**In case of abnormality, stop the use and disconnect the speaker.** — If operation is continued, smoke or fire may result. Disconnect the speaker and ask servicing.











## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>