




ETA
SYSTEMS™
Leading by Design.™

ETA-PD8 Power Conditioner & Distribution Unit




1601 Jack McKay Blvd. • Ennis, Texas 75119 U.S.A.
Telephone: 800-321-6699 • Fax: 800-996-3821

TABLE OF CONTENTS

Important Safety Instructions	3
Introduction	5
Key Features	5
Applications	5
Front Panel	6
Rear Panel	6
Installation	6
AC Power Cord Retainer System	7
Specifications	8
Warranty	12



IMPORTANT SAFETY INSTRUCTIONS



The lightning flash with arrowhead symbol within an equilateral triangle, is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance (servicing) instructions in the literature accompanying the product.



1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this device near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other device (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the device.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the device. When a cart is used, use caution when moving the cart/device combination to avoid injury from tip-over.
13. This product is equipped with a three-wire grounding-type plug, a plug having a third (grounding) pin. This plug will only fit into a grounding-type power outlet. This is a safety feature. If you are unable to insert the plug into the outlet, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the grounding-type plug.
14. Unplug this device during lightning storms or when unused for long periods of time.
15. Refer all servicing to qualified service personnel. Servicing is required when the device has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled, or objects have fallen into the device, the device has been exposed to rain or moisture, does not operate normally, or has been dropped.
16. **WARNING:** To reduce the risk of fire or electric shock, this device should not be exposed to rain or moisture and objects filled with liquids, such as a vase, should not be placed on this device.
17. To completely disconnect this equipment from the mains, disconnect the power supply cord plug from the receptacle.
18. The mains plug of the power supply cord shall remain readily operable.





WARNING – WHEN THE DEVICE IS IN USE

- To prevent electric shock, do not remove the product cover as there are high voltage components inside. Refer all servicing to ETA Systems.
- Should any of the following irregularities occur during use, immediately switch off the power, disconnect the power cord from the AC outlet and contact ETA Systems. Do not attempt to continue operation with the product as this may cause fire or electric shock:
 - Smoke or strange smell coming from the unit.
 - If the product falls or the case is damaged.
 - If water or any metallic objects falls into the product.
 - If the power supply cord is damaged in any way.
 - If the unit is malfunctioning.
- Do not insert or drop metallic objects or flammable materials into the ventilation holes of the product's cover, as this may result in electric shock or fire.
- Do not place any containers with liquid or metallic objects on the top of the product. If any liquid spills into the unit, fire or electric shock may result.
- Never operate this product or touch the power supply cord during an electrical storm, electric shock may result.
- Never exceed the power rating on the product when connecting equipment. Fire and/or property damage may result.
- Operate the product only with the voltage specified on the unit. Fire and/or electric shock may result if a higher voltage is used.
- Do not modify, kink, or cut the power cord. Do not place the power cord in close proximity to heaters and do not place heavy objects on the power cord, including the product itself, doing so may result in fire or electrical shock.
- Ensure that the safety ground terminal is connected to a proper ground. Never connect the ground to a gas pipe as a catastrophic disaster may result.
- Be sure the installation of the product is stable, avoid slanted surfaces as the product may fall and cause injury or property damage.



CAUTION – WHEN INSTALLING THE PRODUCT

- Installation of this product must be done by a certified electrician for a permanently connected apparatus provided neither with an all-pole mains switch nor an all-pole circuit breaker. A readily accessible disconnect device shall be incorporated in the building installation power wiring. The installation shall be carried out in accordance with all applicable installation rules in accordance with all applicable federal, state, and local laws, regulations, and safety codes and ordinances.
- Never install this product in humid or dusty locations, nor in direct sunlight, near sources of heat, or in areas where sooty smoke or steam are present. Fire and electric shock may result.
- Keep all sides of the unit at least 3½" away from objects that may obstruct air flow to prevent the unit's internal temperature rise.



CAUTION – WHEN THE DEVICE IS IN USE

- Never place heavy objects on the product, causing it to fall and/or break, resulting in personal injury and property damage. In addition, the product itself may fall and cause injury and property damage.
- Contact ETA Systems for instructions on cleaning the inside of the unit. Large accumulations of dust inside the unit may result in heat buildup and fire.
- Ensure that the power supply plug is securely plugged into the wall outlet. Never allow dust to accumulate on the power plug or inside the wall outlet.
- When cleaning the unit or the unit is not to be operated for an extended period, unplug the power cord from the wall.



INTRODUCTION

Thank you for purchasing the ETA Systems ETA-PD8 AC Power Conditioner & Distribution Unit. The ETA-PD8 has been designed to meet most installation requirements for AC power distribution and equipment power protection.

The ETA-PD8 features noise filtering for unwanted Radio Frequency Interference (RFI) that is commonly introduced into AC lines by nearby radio transmitters or wireless products. EMI filters are incorporated to reduce noise from Electromagnetic Interference (EMI) from such items as electric motors and switching power supplies. The benefit of these filters can be seen on video products or audibly by reducing static pops and external signal interference.

Unstable AC Mains voltage is one of the main reasons for equipment failure. The amount of energy that can be injected into the power system can be immense with voltages reaching 6kV or amperage peaks of 3000A. These spikes are very fast and usually only last for a very short period of time. The ETA-PD8's circuitry is very fast and can suppress unwanted energy within a nanosecond response and sustain the suppression up to 2 milliseconds, thus ensuring virtually trouble free protection.

The ETA-PD8 offers power management control, noise filtering, and spike/surge protection, making it the most compact, effective power management protection system on the market today.

KEY FEATURES

- 9 Total Outlets
- 6 Rear Panel Switched Outlets and 2 Rear Panel Unswitched Outlets
- 1 Front Panel Unswitched Convenience Outlet
- RFI Noise Filtering to Reduce Radio Frequency Interference
- EMI to Reduce Electromagnetic Interference
- Circuit Breaker Protection @ 15A
- Spike Suppression up to 6000V


APPLICATIONS

The ETA-PD8 was designed to be flexible with features that allow it to be used in a variety of applications. The ETA-PD8 can be used solely for protection against voltage surges or for AC distribution. If fuzzy video or frequent static pops occur, the AC power conditioning may eliminate or reduce those inconveniences. The following are just a few examples of applications where the ETA-PD8 can be used:

- Restaurants
- Houses of Worship
- Schools
- Home Theaters
- Office Buildings
- Sports Bars



FRONT PANEL FEATURES

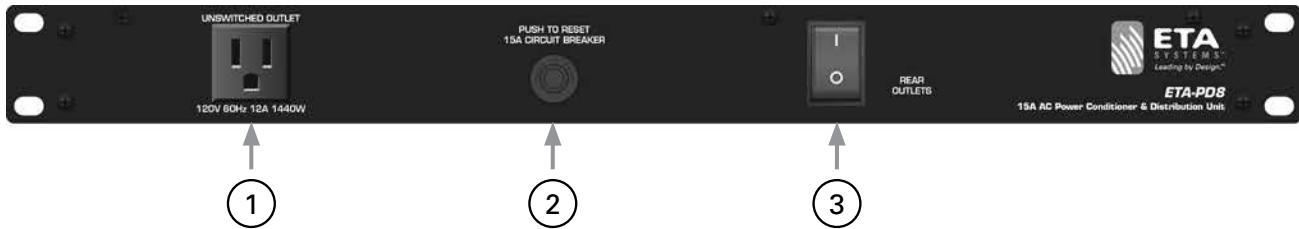

1. **Unswitched AC Outlet** – The 120VAC outlet is always live when the ETA-PD8 power cord is plugged into an AC mains power source and voltage is present. **Note:** The AC mains power switch does not affect the Unswitched AC Outlet. The Unswitched Outlet is protected by the surge protection circuitry.
2. **AC Mains Breaker** – The 15A rated breaker will open if the combined draw of all AC outlets exceeds 15A. **Note:** The breaker is designed to exceed its rating for a short period of time. If the breaker is tripped, you must first remove the load from the ETA-PD8 and then push to reset.
3. **Power Switch** – To turn the ETA-PD8 on or off, press the switch to the ON or OFF position. The power switch will illuminate when in the “On” position.

REAR PANEL FEATURES



1. **AC Mains Input** – Connect the 9' (3m) power cord to a 15A 120VAC outlet to provide power to the ETA-PD8.
2. **AC Switched Power Outlets** – These six outlets are “Live” when the front panel power switch is activated.
3. **AC Unswitched Power Outlets** – These two outlets are always “Live” when the ETA-PD8 is plugged into a 120VAC source.

Installation

Before installing, we strongly suggest you read the entire manual to ensure you benefit from all the features of the ETA-PD8. The ETA-PD8 can be placed on a shelf or rack mounted in a standard 19" width rack. When rack mounting, use Rack Rail type screws which are 1/2" x 1" When rack mounted, placement within the rack is flexible however the ETA-PD8 should be within 6' of a dedicated 15A AC outlet. Always make sure the 15A outlet is properly inspected by a certified electrician prior to connecting the ETA-PD8. Make sure to inspect the equipment that is to be plugged into the ETA-PD8 to ensure it does not exceed 15A total amperage draw.



AC POWER CORD RETAINER SYSTEM



Your ETA Systems product comes with an AC Mains Power Cord Retainer System. This system prevents the power cord from being removed without the use of a screwdriver. Follow these steps for installation.

Note: Installation of this product must be done by a certified electrician for a permanently connected apparatus provided neither with an all-pole mains switch nor an all-pole circuit breaker. A readily accessible disconnect device shall be incorporated in the building installation power wiring. The installation shall be carried out in accordance with all applicable installation rules in accordance with all applicable federal, state, and local laws, regulations, safety codes and ordinances.

1. Locate the 6/32 screw, retainer clip, and zip tie.
2. Locate the AC wall outlet that will be used to power the Atlas Power product. Remove the center screw securing the cover plate to the AC outlet.
4. Wrap the zip tie around the power cord as shown in Figure 4.




Figure 1

3. Place the screw through the retainer clip and insert into the cover plate making sure to securely tighten. Inset the zip tie through the retainer clip slots as shown in Figure 3.



Figure 2



Figure 3




Figure 4

5. Feed the end of the zip tie through the retainer and pull tightly to secure. **Note:** Some adjustment of the retainer may be needed in order to properly align it as shown in Figure 6.



Figure 5




Figure 6

6. Cut the excess zip tie off as shown in Figure 7.



Figure 7

ETA-PD8 SPECIFICATIONS

Type	Power Conditioner & Suppressor
Load Rating	15A
Safety Listing	ETL (UL 60065 Standard)

Front Panel

AC Outlets	1 Unswitched
Activation Switch	Rocker
Circuit Breaker	15A Resettable
Indicators	AC Power On

Rear Panel

AC Outlets	8 Total, 6 Switched, 2 Unswitched
AC Mains Power Cord	9' (3 Meters) 14-gauge

Technical Data

Current Rating	15 amps
Power Consumption	6 watts
Operating Voltage	102 - 132VAC
Min. Spike Clamping Voltage	460 VRMS @ 3,000A
Max. Spike Clamping Voltage	6kV
Max. Spike Clamping Resp. Time	1 nanosecond
Spike Clamping Voltage @ 100A	1250Vp for 20μs
Maximum Surge Current	6,500A
Energy Rating @ 2ms	200 Joules
Noise Attenuation EMI/RFI	10dB @ 10 kHz, 40dB @ 100 kHz, 100dB @ 10 MHz
Temperature Range	5° to 35° C
Humidity Range	5% to 95% R.H.

Mechanical

Chassis Finish	Black
Mounting	Rack Mount, 19", 1 RU
Dimensions	Height 1.75" (44.45mm) x Width 19" (482.6mm) x Depth 5" (127mm)
Weight	5 lbs (2.27kg)



LIMITED WARRANTY

All products manufactured by ETA Systems are warranted to the original dealer/installer, industrial or commercial purchaser to be free from defects in material and workmanship and to be in compliance with our published specifications, if any. This warranty shall extend from the date of purchase for a period of one year. Additionally, fuses and lamps carry no warranty. ETA Systems will solely at its discretion, replace at no charge or repair free of charge defective parts or products when the product has been applied and used in accordance with our published operation and installation instructions. We will not be responsible for defects caused by improper storage, misuse (including failure to provide reasonable and necessary maintenance), accident, abnormal atmospheres, water immersion, lightning discharge, or malfunctions when products have been modified or operated in excess of rated power, altered, serviced or installed in other than a workmanlike manner. The original sales invoice should be retained as evidence of purchase under the terms of this warranty. All warranty returns must comply with our returns policy set forth below. When products returned to ETA Systems do not qualify for repair or replacement under our warranty, repairs may be performed at prevailing costs for material and labor unless there is included with the returned product(s) a written request for an estimate of repair costs before any non-warranty work is performed. In the event of replacement or upon completion of repairs, return shipment will be made with the transportation charges collect.

EXCEPT TO THE EXTENT THAT APPLICABLE LAW PREVENTS THE LIMITATION OF CONSEQUENTIAL DAMAGES FOR PERSONAL INJURY, ETA SYSTEMS SHALL NOT BE LIABLE IN TORT OR CONTRACT FOR ANY DIRECT, CONSEQUENTIAL OR INCIDENTAL LOSS OR DAMAGE ARISING OUT OF THE INSTALLATION, USE OR INABILITY TO USE THE PRODUCTS. THE ABOVE WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

ETA Systems does not assume, nor does it authorize any other person to assume or extend on its behalf, any other warranty, obligation, or liability. This warranty gives you specific legal rights and you may have other rights which vary from state to state.

SERVICE

Should your ETA-PD8 require service, please contact the
ETA Systems warranty department at
1-877-689-8055, ext. 277 to obtain an RA number.

ETA Systems Tech Support can be reached at 1-800-321-6699.

Visit our web site at www.ETAsys.com to see other ETA Systems products.



ETA
SYSTEMS™
Leading by Design.™

©2014 ETA Systems. All rights reserved. All other trademarks are the property of their respective owners. ETA003561 RevD 3/14

1601 Jack McKay Blvd. • Ennis, Texas 75119 U.S.A.
Telephone: 800-321-6699 • Fax: 800-996-3821

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>