




**KINYO**

**Digital 5.1 Home Theater  
Surround System Kit**


**Easy Installation**

**R-655U**

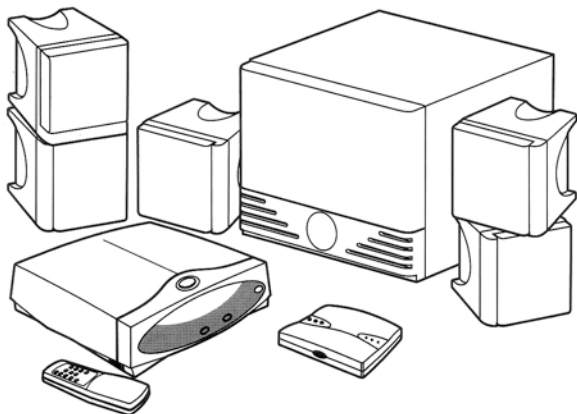

## Quick Start R-655U Installation (Refer to Diagram)

1. Turn off Computer.
- A. Plug USB Decoder into your computer via the USB cable.
- B. Use "3.5(x3) to 9-pin din" cord from Decoder to control box.
- C. Use "RCA (x6) cord from control box to subwoofer.  
Make sure that colored Labels match with colors on back of control box,  
R-Right, L-Left, SR-Surround Right, SL-Surround Left, C-Center, W-subWoofer
- D. Plug USB Decoder into Electrical Outlet via AC/DC Adapter.
- E. Connect Individual speakers to back of subwoofer using same color scheme.
- F. Plug Subwoofer power cord into Electrical Outlet.
2. Switch subwoofer and control box on.
3. Turn on Computer.
4. Use Driver CD to complete installation process of WinDVD.
5. In WinDVD select the "Wrench Icon", The "Audio" tab, and then the  
"6 speaker option" (this will get your computer ready for Dolby Surround  
Sound and DTS)
6. Use the Remote Control to independently control the volume level of each speaker
- G.(Optional) Connect a microphone or another audio source into the 3.5 mini jack on the USB  
decoder marked "Mic/Line"
7. For Q-space, press the "SUR" Button on the USB Decoder.

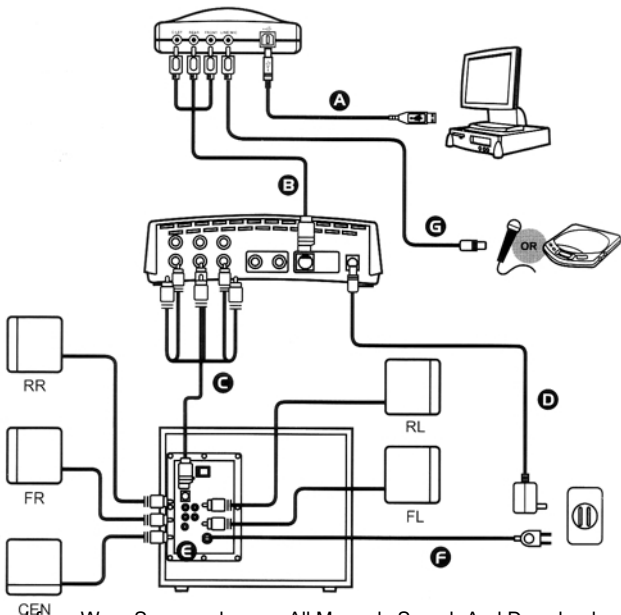

# Important Safety Instructions

1. Read Instructions-All the safety and operating instructions should be read before the speaker is operated.
2. Retain Instructions-The safety and operating instructions should be retained for future reference.
3. Heed Warning-All warnings on the speaker and in the operating instructions should be adhered to.
4. Follow Instructions- All operation and use instructions should be followed.
5. Water and Moisture-The speaker should not be used near water-for example, near a bathtub washbowl, kitchen sink, in a wet basement, or near a swimming pool, and that alike.
6. Ventilation-The speaker should be situated so that it's location or position does not interfere with its proper ventilation. For example, the speaker should not be situated on the bed, sofa, rug, or similar surface that may block the ventilation openings; or placed in a confined area, such as bookcase or cabinet that may impede the flow of air through the ventilation opening.
7. Heat -The speaker should be situated away from heat sources such as radiators, heat registers, stoves, or other speaker (including amplifier) that produce heat.
8. Power Sources-The speaker should be connected to a power supply only of the type described in the operating instructions or as marked on the speaker.
9. Grounding or Polarization- Precaution should be taken so that the grounding or polarization means of the speaker is not defeated.
10. Power Cord- The power supply cord should be routed so that they are not likely to be walked on or pinched by items placed upon or against them. Do not overload wall outlets and extension cords as this can result in risk of fire or electrical shock.
11. Cleaning- The unit should be unplugged from the power outlet before cleaning. Use a dampened cloth to clean the surface of the unit. Do not use liquid cleaners or aerosol cleaner. Never insert object of any kind into the unit through its opening as they may touch dangerous voltage points or short out parts that could result in fire or electrical shock.
12. Object and Liquid Entry- Care should be taken so that objects do not fall and liquids are not spilled into the enclosure through openings.
13. Damage Requiring Service- The speaker should be serviced by qualified service personnel when:
  - A. The power supply cord or the plug has been damaged; or
  - B. Objects have fallen, liquid has been spilled into the speaker; or
  - C. The speaker has been exposed to rain; or
  - D. The speaker has been dropped or the enclosure damaged
  - E. The speaker does not appear to operate normally or exhibits noticeable change in performance.
14. Service- The user should not attempt to service beyond that described in the user's guide. All other servicing should be referred to qualified service personnel.

## FEATURES

### R-655 Speaker System

- G9 DIN jack for 6 CH input.
- Wallmounts
- Easy Cable connection for installation.

### USB Decoder (AS-100)

- Dolby & DTS 5.1 Audio D/A converter via USB interface.
- Hardware (Q-Space) & Software( Win Rip) surround sound simulations for 2 CH audio sources.
- MIC mixer.

### Control Box

- Remote control function.
- Independent channel volume control.

the apparatus shall not be exposed to dripping or splashing and that no objects filled with liquids, such as vases, shall be placed on the apparatus.

## SPECIFICATIONS

### Satellite Speakers (RS-50)

- RMS 5 W × 5
- 3" Full range Magnetically Shielded Speaker Driver
- Frequency Response: 80Hz-18kHz
- Dimensions: (W × H × D): 90 × 90 × 90 mm

### Subwoofer Speaker (SW-5000):

- RMS 20 W
- 5 1/4" woofer driver
- Frequency Response: 40 Hz-3KHz
- Dimensions:(W × H × D) 286 × 230 × 297 mm



**CAUTION**  
RISK OF ELECTRIC SHOCK  
DO NOT OPEN



CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK,  
DO NOT REMOVE COVER OR BACK  
NO USER--SERVICEABLE PARTS INSIDE  
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>