


Extron Electronics

INTERFACING, SWITCHING AND DISTRIBUTION

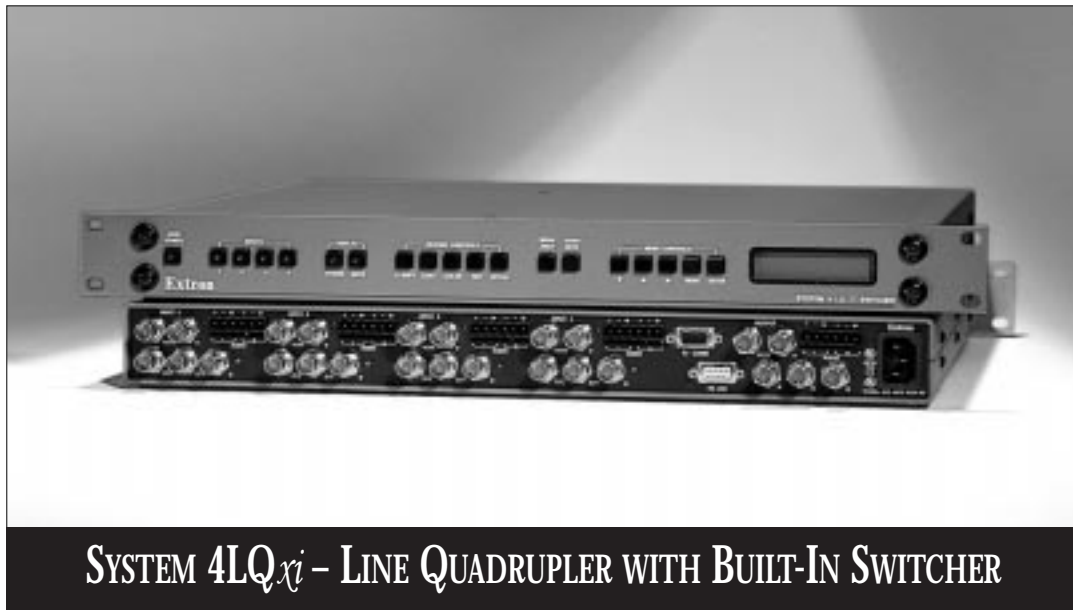

Universal projector control

Video or S-Video line quadrupler

Quad Standard decoder (NTSC 3.58, NTSC 4.43, PAL & SECAM)

Three line adaptive comb filter

Motion mode compensation

RGsB, RGbS or RGBHV outputs

RS-232 control

Sync polarity programming

Triple Action Switching™

300 MHz (-3 dB) video bandwidth


Balanced/unbalanced stereo audio inputs

Rack mountable



APPLICATIONS

APPLICATIONS (Cont.)

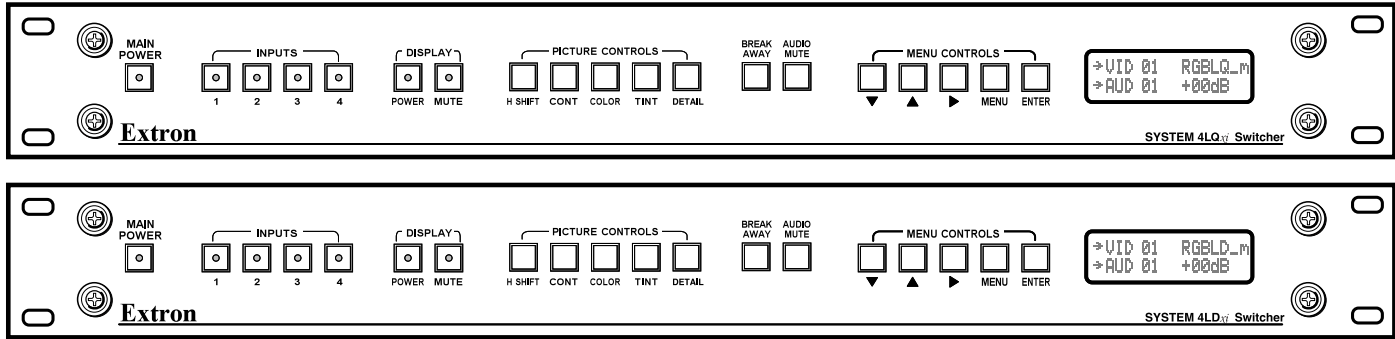

Extron's System 4LQ.xi is a line quadrupler with a built-in, four-input switcher. It provides universal projector control and is compatible with most digitally controlled data grade projectors on the market today. The System 4LQ.xi is also quad-standard compatible with NTSC 3.58, NTSC 4.43, PAL and SECAM for use with all international video formats.

Line quadrupling is similar to line doubling except that the number of horizontal scan lines are increased by a factor of four instead of two. Increasing the horizontal scan rate by a factor of four (to 63 kHz), allows most CRT's to obtain a range of optimum efficiency, maximizing light output with projector light output up to 60% brighter than NTSC, PAL, or SECAM displays. In addition to increased picture brightness, the image becomes smoother and has a "film-like" quality.

Extron's System 4LQ.xi has a high quality three-line adaptive comb filter which provides a crisp, stable image. In addition, an internal TBC (Time Base Corrector) actually cleans-up low quality videotape signals (common to VHS tape players) for a more stable and sharper image. The System 4LQ.xi also provides motion mode compensation to remove the motion "jaggies" typically found in line doubled and line quadrupled video.

In a large-screen venue application, the need for a line quadrupler becomes increasingly apparent. When displaying conventional NTSC, PAL or SECAM video onto a large screen, the spaces between scan lines are obvious and make the picture look dark and diminished. The lack of brightness is caused by displaying a low resolution on the larger screen. With the horizontal scan rate increased by four, the System 4LQ.xi fills in the gaps and the light output is therefore increased. The projector's light output capacity is now more fully utilized and thus, the overall picture is brighter.

Universal Control

The System 4LQ.xi includes universal projector control that will operate with most digitally controlled projectors on the market today such as Ampro, Barco, Electrohome, Hughes/JVC, Mitsubishi, NEC, Panasonic, Runco,

SELECO, Sony and Toshiba, as well as the Mitsubishi XC Series monitors. The System 4LQ.xi has four universal inputs capable of accepting all computer RGB signals, composite video and S-Video (S-VHS) standard signals (NTSC, PAL or SECAM). Any video or 15.75 kHz RGB Signal will be quadrupled.

The universal projector control function allows bi-directional "talk & listen" communication with most large-screen CRT-based projectors. When connected, the System 4LQ.xi will be recognized by the projector as the projector's own brand of switcher. The System 4LQ.xi can turn the connected projector on or off, switch input memory blocks for convergence, and set-up saved configurations by input selection of the connected projector. It will then "talk" as well as "listen" to the projector for continuous update changes, feature changes or input selection changes made by the user.

All this makes the System 4LQ.xi easy to learn, as it works almost identically to the projector-brand switcher. The advantage is one switcher for all projectors; there is no need to learn all the different types of set-up and control functions of each projector-brand switcher that is connected. And it works the same way with all brands—only the internal communications board dip switch settings are different. In fact, the System 4LQ.xi may be controlled via the projector manufacturer's remote control.

Audio Switching & Processing

The System 4LQ.xi is also compatible with balanced and unbalanced, two-channel stereo audio. The System 4LQ.xi has the ability to switch between the four audio inputs. The audio can either follow any video or RGB input signal or be broken away from the video. With "breakaway" switching, the audio signal may be separated from the video signal to switch either the video only or the audio only. For example, in an application where the user wants to show the video only from input source "one" in conjunction with the audio from input source "two", the audio would be broken away from source one and source two would be switched to the final output. This provides increased flexibility for all types of professional A/V applications.

FEATURES

- **Quad-standard decoder**– The System 4LQ χ i is compatible with all standard video formats including NTSC 3.58, NTSC 4.43, PAL and SECAM.
- **Built-in line quadrupler**– The System 4LQ χ i includes a built-in line (scan) quadrupler which eliminates scan lines on video images by quadrupling the number of lines displayed. The input video (15.7 kHz) is converted to a 63 kHz RGB line quadrupled analog signal– especially useful for large screen displays.
- **Three-line adaptive comb filter**– A built-in three-line adaptive comb filter helps provide crisp, stable output from the System 4LQ χ i.
- **Motion mode compensation**– The System 4LQ χ i line quadrupler has motion mode compensation to eliminate the "jaggies" which are commonly associated with enhanced video such as and line quadrupling.
- **Universal inputs**– The System 4LQ χ i has four universal inputs capable of accepting all computer RGB signals, composite video and S-Video standard signals (NTSC, PAL and SECAM). No optional modules are needed for each input signal type. Looping capabilities allow for up to 22 inputs.
- **Balanced/unbalanced stereo audio inputs**– Every System 4LQ χ i is capable of switching up to four balanced or unbalanced stereo audio signals. Input through professional captive screw terminals, audio can be switched to follow any video or RGB input signal or "broken away" for maximum flexibility.
- **Triple Action Switching™ (RGB delay switching)**– Exclusive to Extron, this unique delay switching feature in the System 4LQ χ i makes it possible to have "seamless" switching for all projector models. This is done by a triple-action switch. When an input is selected (either by front panel or RS-232), the RGB video is turned "off" and sync is left on, then sync is switched to the new source and finally, RGB video is turned back "on." This makes "glitch free" switching possible with every projector on the market.
- **LCD menu-driven picture and programming controls**– The System 4LQ χ i has an LCD menu that makes set-up and programming of its many features or functions simple. An alpha-numeric display allows for any of the line quadrupler controls such as color, hue, contrast and detail to be adjusted and stored in memory for each input.
- **Picture control memory**– Each input has a separate memory block for all picture controls of video or RGB signals (including audio switching). These may be set and stored by the System 4LQ χ i.

FEATURES (Cont.)

- **Sync polarity programming**– The output sync polarity of the System 4LQ χ i may be programmed to be either positive or negative going for both horizontal and vertical sync signals, ensuring that any projector will differentiate the line quadrupler's output from that of a 1280 x 1024 SUN or SGI work station.
- **Universal projector control**– Extron's System 4LQ χ i is fully compatible with all digitally controlled projectors. Using the projector-brand remote control, the System 4LQ χ i can be made to switch inputs, power "on" or "off" the projector, mute the audio or video signals and switch the four inputs. This may also be accomplished by using the System 4LQ χ i front panel controls or through a third party control system via RS-232, in order that the switcher is able to "talk" to the projector.
- **Universal compatibility**– The System 4LQ χ i communicates using the projector manufacturer's remote control with all digitally controlled projectors on the market today such as Ampro, Barco, Electrohome, Hughes/JVC, Mitsubishi, NEC, Panasonic, Runco, SELECO, Sony and Toshiba as well as the Mitsubishi XC Series monitors.
- **RS-232 control**– The System 4LQ χ i has built-in RS-232 control for third party control of any of its features or functions. Extron has also developed a free Windows® based control program which allows the 4LQ χ i to be controlled by a remote PC.
- **300 MHz RGB video bandwidth**– The 300 MHz (-3 dB) bandwidth of the System 4LQ χ i allows for the connection of video signals and super high resolution computers such as SUN, Silicon Graphics, VESA, MAC/Quadra, SuperVGA, PowerMAC, Power PC, HP, NCD, Chromatics and DEC workstations. This ensures the highest resolution possible for any application.
- **RGBS or RGBHV output**– The System 4LQ χ i converts all video inputs to an RGB output. This one output (RGBS or RGBHV) makes the System 4LQ χ i easy to connect all video signals to any projector brand through one cable.
- **1U rack-mountable enclosure**– The System 4LQ χ i is housed in a metal 1U high, rack-mountable enclosure, with an internal auto-switchable 100-240 volt auto-switchable power supply. Enclosure includes rack "ears" and hardware.
- **Triple-split screen mode**– Extron's System 4LQ χ i has a triple-split screen mode that displays TSC/PAL/SECAM, line doubled video and line quadrupled video simultaneously on the same display. This provides the opportunity of showing the advantages of image purity and brightness when using a line quadrupler.

SPECIFICATIONS

Inputs

RGB Video
 Bandwidth 300 MHz (-3 dB)
 Return loss at 10 MHz 25 dB
 Crosstalk at 10 MHz -35 dB
 Isolation at 10 MHz -55 dB

Audio

Frequency response 20 Hz to 20 kHz
 Signal to noise ratio 85 dB minimum
 Total harmonic distortion -78 dB
 Peak to peak voltage..... 8 volt p-p

Audio input

Type..... 4 inputs, two channel,
 balanced
 Connectors Captive screw connector,
 6 conductor
 Impedance >10 k ohm, AC coupled
 Maximum level
 (balanced or unbalanced) 11.2 dBu
 CMRR..... >60 dB typical

Audio throughput


Routing 1 of 4 two channel routing
 Response ±.05 dB 20 Hz to 20 kHz
 Gain adjustment -95.5 dB to +31.5 dB, both
 left and right channels
 per input
 THD + Noise 0.002% worst case,
 +10 dBu input, +10 dBu output,
 balanced input and output
 S/N >95 dBu, 0 dBu reference
 Adjacent input crosstalk..... Better than 85 dB from
 20 Hz to 20 kHz
 Stereo channel separation..... 60 dB from 20 Hz to 20 kHz

SPECIFICATIONS (Cont.)

Outputs

RGB and sync
 Frequency 63 kHz horizontal,
 60 Hz vertical
 Resolution 1280 x 1024
 Connectors Female BNC's
 Impedance 75 ohms video, 510 sync
 Audio output
 Type..... 1 output, two channel
 balanced
 Connectors Captive screw connector,
 6 conductor
 Impedance 50 ohms
 capable of driving 600 ohms
 Audio gain
 Output taken single ended..... 0 dB± channel throughput gain
 Output taken differentially ±6 dB channel throughput gain
 Gain error ±0.2 dB channel to channel
 Muting..... >95 dB
 Drive +11.2 dBu into 600 ohms
 Switching speed 5 mS (max)
 Power supply 100 - 240 VAC 50/60 Hz
 (auto-switchable)
 Power consumption 30 watts
 Operating temperature 0° - 50° C
 Storage temperature..... -20° to +70° C
 MTBF (demonstrated) 30,000 hours
 Approved..... UL & CE Listed
 Dimensions 1.74"H x 19"W x 16.2"D
 4.4 H x 48 W x 41 D cm
 Shipping weight 21 lbs. (9.5 kg)
 Warranty Two years, parts & labor
 Part number 60-221-01

APPLICATION DIAGRAM

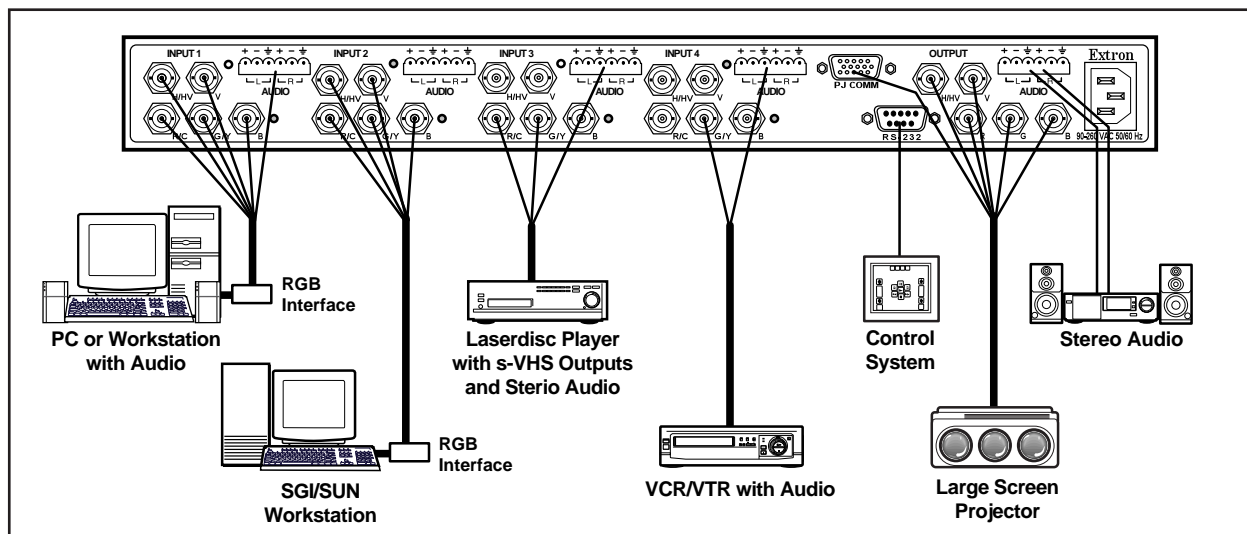

EXTRON ELECTRONICS/RGB SYSTEMS, INC.
 1230 South Lewis Street, Anaheim, CA 92805
 800.633.9876 714.491.1500 FAX 714.491.1517
 U.S.A.

EXTRON ELECTRONICS, EUROPE
 Beeldschermweg 6C, 3821 AH Amersfoort
 +31.33.453.4040 FAX +31.33.453.4050
 The Netherlands

EXTRON ELECTRONICS, ASIA
 41B Kreta Ayer Road, Singapore 089003
 +65.226.0015 FAX +65.226.0019
 Singapore

EXTRON ELECTRONIC INFORMATION
 EXTRONWEB™: www.extron.com
 EXTRONFAX™: 714.491.0192
 24-hour access—worldwide!

89-03
 68-373-01
 REV. A

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>