

Wide open spaces . . .

Time is money to most people. If you're mowing just to keep the grass manicured or you're mowing to eventually harvest the turf, your time is worth a great deal in many ways. Keeping your labor time to a minimum is important, regardless of why you are cutting.

Our 22' All-Flex Mower is ideal for those wide open spaces. Cutting a 22' swath takes a bite out of any workload, while leaving behind a professionally performed job.

AFM45 SERIES

65 - 100 HP — 22'

2 year
Limited
Gearbox Warranty

- Three 90" decks
- 6" Deck overlap allows for tight turns and no skips
- Change deck height with spacer collars in 1/4" increments
- Anti-scalp rollers on each deck reduces turf damage
- 18" Deck tires with foam sealant mean fewer pounds per square inch
- Cat. 4 CV main driveline allows for tight turns and no driveline chatter
- Cat. 3 deck drivelines with slip-clutch protects gearboxes against high torque start-ups
- Single C-section belt per deck with spring loaded belt tensioner
- 4 Gauge wheels per wing for maximum flotation
- Single beam tongue for zero turning radius
- 18,498 fpm Blade tip speed ensures a clean, even cut
- 1/4" Sidewall thickness on gauge wheel arms means a great deal of "hidden" strength
- Wings automatically lock for safe transport
- Rear discharge decks for even dispersal
- Adjustable clevis hitch to fit various draw bar heights
- See page 2 for blade choices
- Our rear discharge decks are designed to be used without chains. Chains collect moist grass that drops off in clumps, which turn brown and unsightly.



Transport width of 9'6" allows for safe transport from site to site.




All AFM's feature 1/4" wall gauge wheel arms.





Gauge wheels feature bolt in spindles for ease of replacement, and 18" tires leaving a light weight footprint.

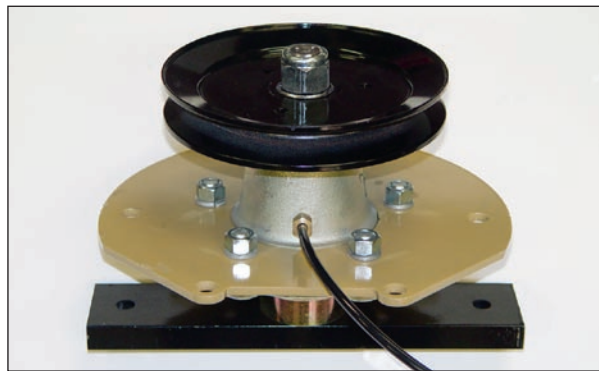

The commercial duty 1 3/8" blade spindle features a cast iron housing, additional steel plate support, a 3/4" thick blade support bar and a remote greasing line.

Easy to use.

22' of mower is a lot to pull behind you. But think of it as 3 - 90" decks, and it doesn't sound so complicated! Each deck performs independently of the others. Each deck can float side to side and front to back. Undulations are easily negotiated by the 18" deck tires and the anti-scalp rollers. The commercial duty 90" wing decks are held in place by the heavy-duty wing arms built specifically for our 22' size.

Getting the 3 big decks going all at once is a big chore. A great deal of torque is transmitted from the tractor to get all the blades in motion. That is why we use drivelines with slip-clutch protection, cast iron gearboxes with high quality seals and bearings, and a 3/8" steel plate to support the gearbox.



All AFM's feature blade spindles and bearings precision fit in a cast iron housing.

- 27" Automotive tires for dependable roading.
- Top and bottom bearings on 1 5/8" stress proof blade spindle.
- 5/16" Blade is attached to a 3/4" x 2 1/4" blade support.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>