



Obesign and specifications are subject to change without notice. P/N:3810-0104C Rev 0 06/03	Well O Main Menu - LENS	Menu [SHUTTER] - SHUTTER AUTO	Main Menu - LANGUAGE	Ain Menu - RESET
Need Help? Call 1.800.796.CCTV for sales, service and customer support. www.honeywellvideo.com	MANUAL < > VIDEO < > DC /.	 1) SHUTTER setup (for LENS MANUAL) 9 Press LEFT or RIGHT button in SHUTTER to select the mode to AUT → FLK → FLK	 1) LANGUAGE setup ① DEFAULT value - ENGLISH ② After selecting LANGUAGE, change setting using LEFT or RIGHT button. ③ Choose the language mode you wish to operate in. ③ Choose the language mode you ④ Choose the language mode you ● Choose t	 1) RESET 9. Select RESET. Press MENU button. The screen on the bottom appears. 9. Select YES or NO. 9. Select YES to reset your camera to default factory condition IDAD DEFAULT IDAD DEFAULT YES NO 333

. User Information		Menu [SHUTTER] - FIXED Mode Setup		Menu [WHI]	TE BAL.] - WHITE BALANCE Mode Setup	3-Axis	SPECIFICATIONS		
<text><section-header><section-header><section-header></section-header></section-header></section-header></text>	<text><text><text><text><text><text><text><text><text><list-item><text></text></list-item></text></text></text></text></text></text></text></text></text>	 FIXED ✓ setup (MANUAL,DC,VIDEO LENS) Press MENU button in FIXED ✓ to display the screen on the right side. Press LEFT or RIGHT button in SHUTTER. Can be set in ([NTSC: 1/60 ~ 1/100,000] [PAL: 1/50 ~ 1/100,000]) range. 	SHUTTER FIXED SHUTTER M : 1/60	 1) WHITE BALANCE setup ① In WHITE BAL., press LEFT, RIGHT button to select the mode you wish to operate ATW → AWB → FIXED / → MANUAL /. 2) FIXED / setup ① Can set from MODE 1 to MODE 4. 3) MANUAL / setup ① As shown on the lower right picture, set Red and Blue color value temperature. ② Press MENU button in RETURN to exit from setup mode. 	AWB FIXED AWB FIXED : MODE 1 Image: Constraint of the state of the stat	MODEL Signal System Image Sensor Effective Pixels Video Output Sync. System Luminance S/N Ratio Horizontal Resolution Min. Illumination (F1.2) Lens Focus Electronic Shutter White Balance Camera ID Language	HD73 HD73X NTSC PAL 2:1 Interlace Transfer 1/3 Inch Super HAD CCD 768(H) x 494(V) 752(H) x 582(V) Composite: 1.0Vp-p, 75Ω, Unbalanced Internal Sync More than 50dB (AGC OFF) 530 TV Lines 0.3 Lux(30IRE, AGC ON), 0 Lux(IR LED) DC Auto IRIS Vari-focal (f=3.8~9.5mm) Manual 1/60~1/100,000 1/60~1/100,000 ATW (1,800°K~10,500°K) / AWB / Fixed / Manual ON / OFF English / Korean / Chinese 1 / Chinese 2 / Japanese	BLC, AGCDay & NightPrivacyMirrorGammaMotion DetectionContrastSharpnessApplicable LensSupply VoltagePower ConsumptionOperating TemperatureStorage TemperatureDome Size (Ø)Weight	ON / OFF (Level Adjustable) Auto (ICR) ON / OFF (4 Programmable Zone) ON / OFF (Horizontal) User / 0.5 ~ 1.0 Adjustable ON / OFF (64 Programmable Zone) 0 ~ 255 (Level Adjustable) 0 ~ 31 (Level Adjustable) DC Iris 12VDC (10V~15V) Max. 4.5W / 360mA -10°C~+50°C (Recommendation: -5°C~+40°C) -20°C~+60°C 100 mm Approx. 844g

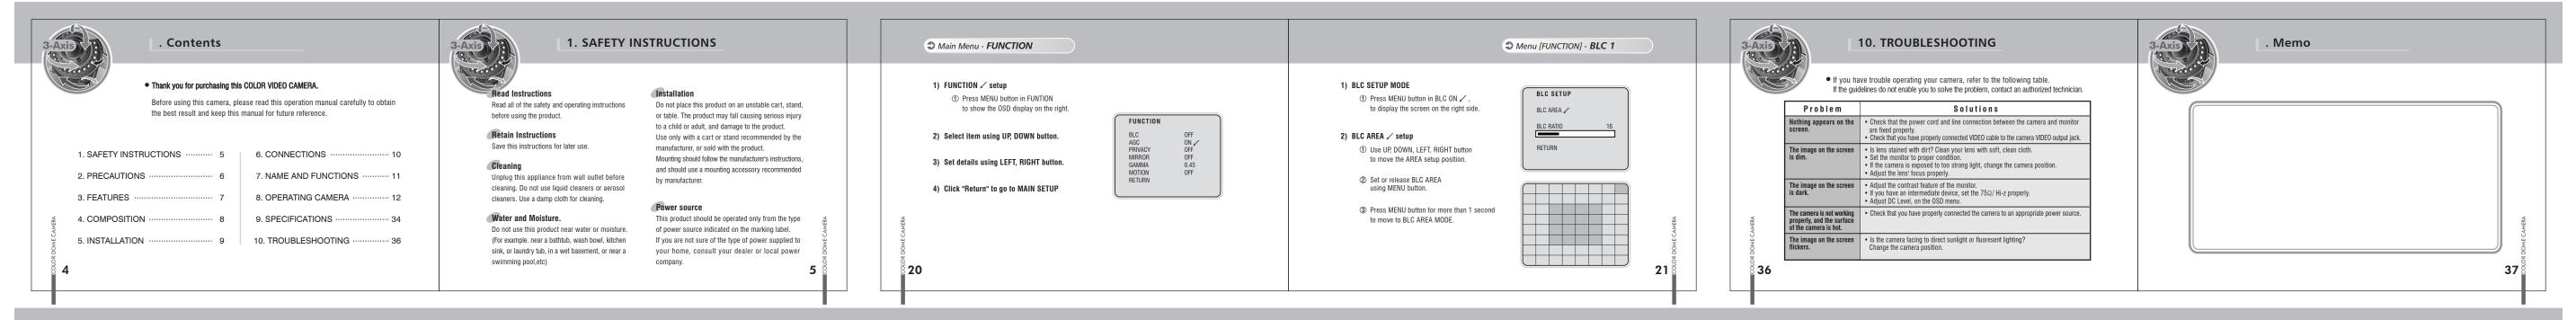


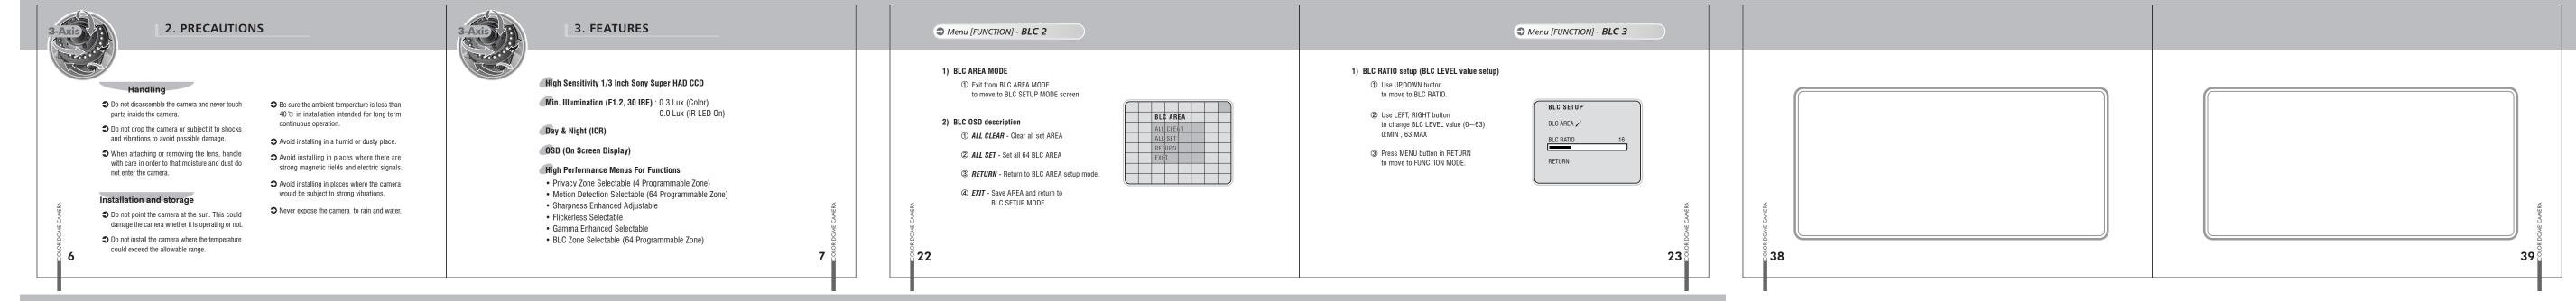


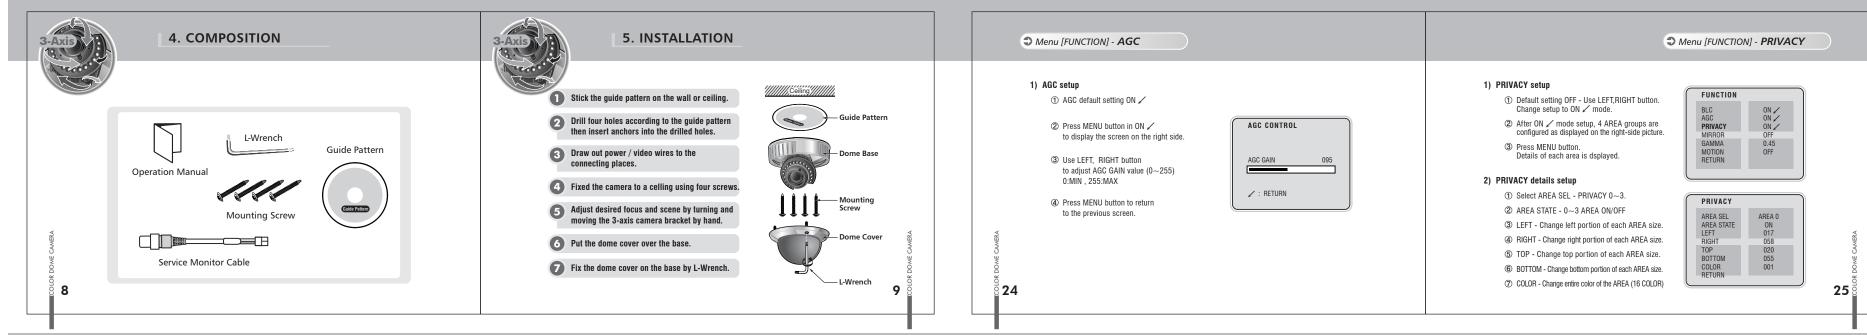

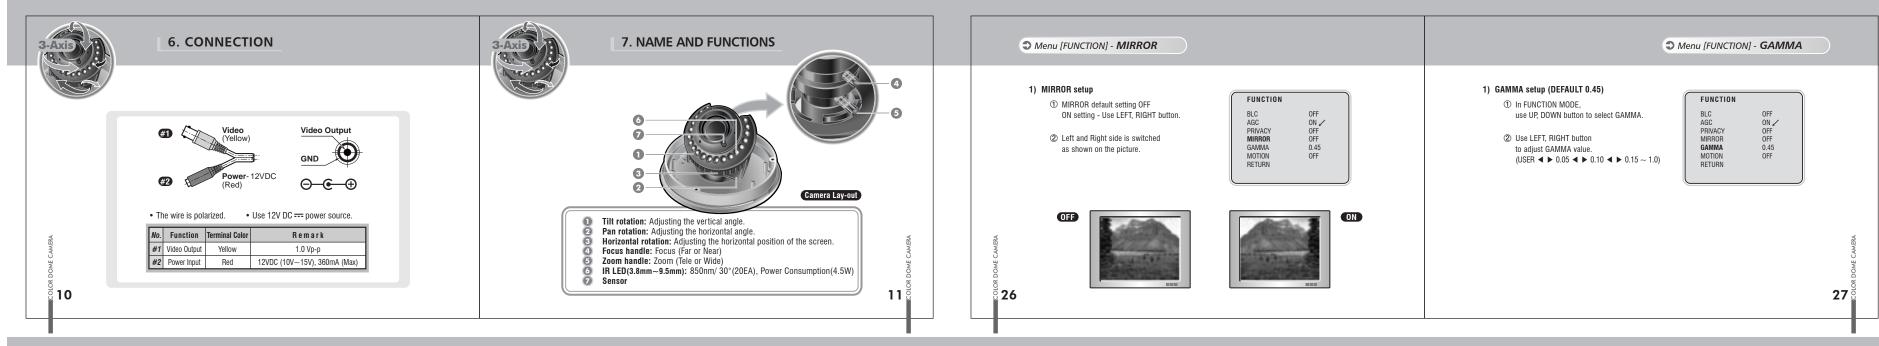

8. OPERATING CAMERA				6	Setting up the Menu	Menu [FUNCTION] - MOTION		Menu [FUNCTION] - MOTION AREA 1		
CAMERA ID	• ON	SETUP MEN	U OFF		 Push the Joy stick for one second, and the OSD appears on the screen. Move the Joy Stick up, down, left & right to control the OSD functions. 	SETUP - Push and hold MENU button 1 second	 MOTION DETECTION setup ① DEFAULT value OFF ② In ON ✓, press MENU button. 	FUNCTION BLC OFF AGC ON	 MOTION AREA setup Use UP, DOWN, LEFT, RIGHT button to move AREA setting position. 	
LENS	MANUAL		VIDEO	• DC		to access the setup mode. Select the status using the 	③ Display MOTION details.	PRIVACY OFF MIRBOR OFF	O Use MENU button to set and release AREA.	
SHUTTER	• AUTO	• FLK	FIXED	MANUAL	MENU(SET):	joystick. (up, down, left, right)	2) AREA ✓ setup	GAMMA 0.45 MOTION OFF RETURN	③ Press MENU button for more than 1 second	
WHITE BAL.	• ATW	• AWB	FIXED	MANUAL	LEFT RIGHT SET BY JOY STICK		① In AREA ∠, press MENU button. (see p.29)	RETURN	to move to MOTION AREA MODE	
FUNCTION	BLC MIRROR		AGC GAMMA	PRIVACY MOTION		CAMERA ID OFF LENS DC	3) MOTION TH. Setup		2) MOTION AREA MODE	

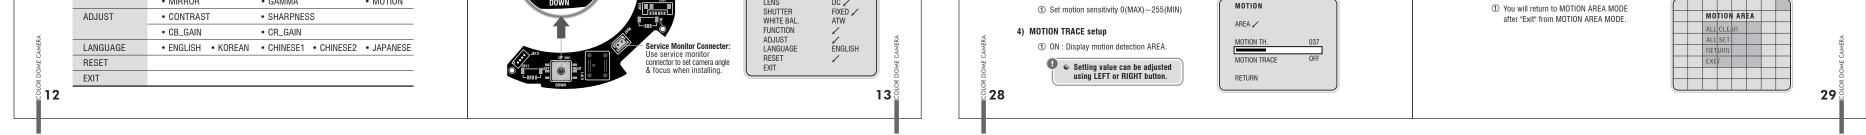

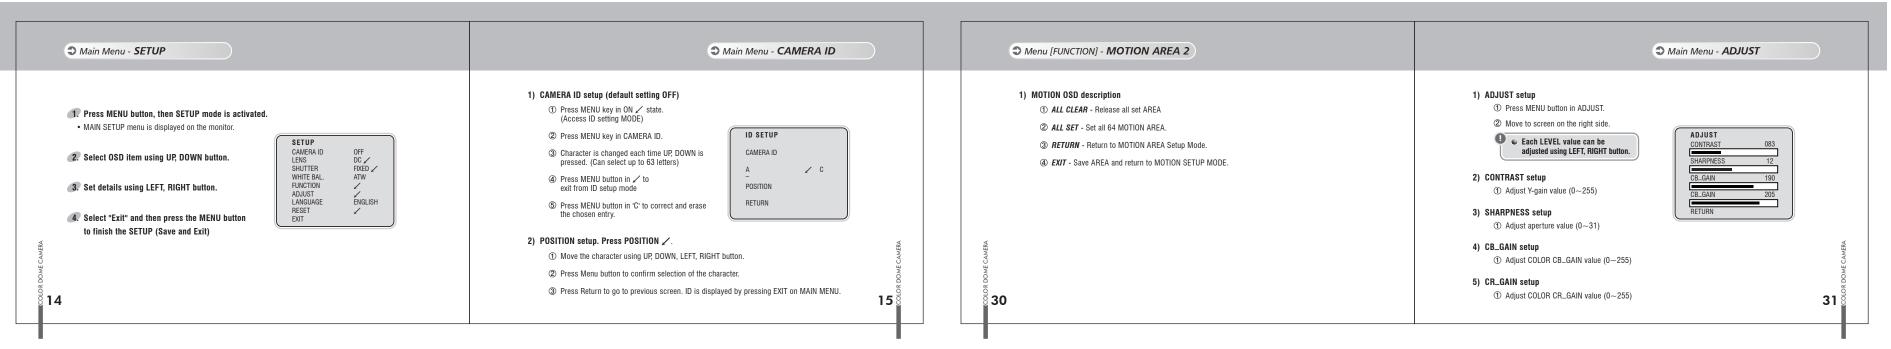

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com