

INSTALLATION INSTRUCTIONS FOR PART 99-9107B



T1-800-221-0932 🔲 www.metraonline.com

© COPYRIGHT 2004-09 METRA ELECTRONICS CORPORATION



99-9107B

TABLE OF CONTENTS

Dash Disassembly

- Audi A4 / S4 2002-2008 w/Symphony Radio 1

Kit Assembly

-	DIN Head Unit Provision with Pocket	2
-	ISO DIN Head Unit Provision with Pocket	. 3
-	Double DIN Head Unit Provision	. 4

Final Assembly					5
----------------	--	--	--	--	---



KNOWLEDGE IS POWER Enhance your installation and fabrication skills by

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.




Metra recommends MECP certified technicians..



AUDI A4 / 54 2002-2008 W/SYMPHONY RADIO

- 1 Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2 Insert Metra's 86-9001 into the slots in the factory head unit and pull the unit out. (Figure A)
- **3** Disconnect the wiring.

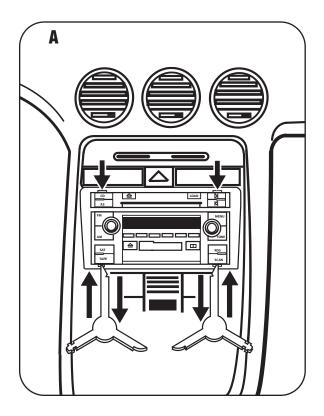








- 1 Snap the DIN cage into the Radio Housing and secure by bending the metal locking tabs down. (Figure A)
- 2 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
- **3** Snap radio assembly into factory radio opening.
- 4 Slide the aftermarket radio into the cage and secure. (Figure B)
- **5** Snap the pocket into the Radio Housing until secure. (Figure C)

NOTE: Once the dash kit is snapped in, it cannot be removed without dash panel removal














ISO DIN HEAD UNIT PROVISION

- 1 Mount the ISO Brackets to the head unit with the screws supplied with the unit. (Figure A)
- 2 Slide the head unit into the radio opening until the slide clips engage. (Figure B)
- **3** Snap the ISO Trim Plate into the Radio Housing. (Figure B)
- 4 Snap the pocket into the Radio Housing. (Figure C)
- 5 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
- **6** Snap the radio assembly into the factory radio opening.

NOTE: Once the dash kit is snapped in, it cannot be removed without dash panel removal














DOUBLE DIN HEAD UNIT PROVISION

- 1 Cut and remove center divider from radio housing. (Figure A)
- 2 Snap the DDIN brackets to the inside edge of the radio housing. (Figure B)
- 3 Slide the DDIN radio unit into the DDIN bracket/radio housing assembly and secure the unit to the kit using the screws supplied with the head unit. (Figure C)
- **4** Snap the DDIN trim-plate onto the housing/radio assembly. (Figure C)
- **5** Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
- 6 Snap radio assembly into factory radio opening.

NOTE: Once the dash kit is snapped in, it cannot be removed without dash panel removal











99-9107B

NOTES





Download from Www.Somanuals.com. All Manuals Search And Download.

Free Manuals Download Website <u>http://myh66.com</u> <u>http://usermanuals.us</u> <u>http://www.somanuals.com</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.cc</u> <u>http://www.4manuals.com</u> <u>http://www.404manual.com</u> <u>http://www.luxmanual.com</u> <u>http://aubethermostatmanual.com</u> Golf course search by state

http://golfingnear.com Email search by domain

http://emailbydomain.com Auto manuals search

http://auto.somanuals.com TV manuals search

http://tv.somanuals.com