

## **INSTALLATION INSTRUCTIONS FOR PART 99-8225G**

## **APPLICATIONS**

# **Toyota Venza 2009-2010**

## 99-8225G


#### KIT FEATURES

- DIN Head Unit Provision With Pocket
- ISO DIN Head Unit Provision With Pocket
- Painted to match factory dash G=Gray



## KIT COMPONENTS

• A) Single DIN Radio Housing • B) ISO Brackets • C) Trim Plate

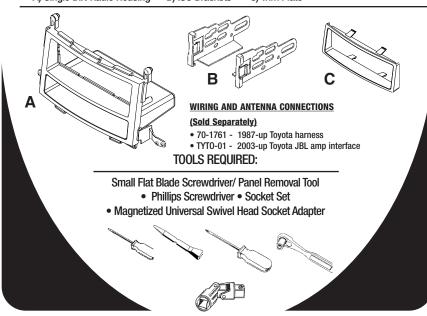



1-800-221-0932



www.metraonline.com

© COPYRIGHT 2010 METRA ELECTRONICS CORPORATION



## 99-8225G

## **TABLE OF CONTENTS**

<u>Dash Disassembly</u>				
- Toyota Venza 2009-2010	 	 	 	. 1
Kit Assembly				
- DIN Head Unit Provision With Pocket	 	 	 	2
- ISO Din Head Unit Provision With Pocket	 	 	 	. 3

## \*Note:

Refer also to the instructions included with the aftermarket radio.



#### KNOWLEDGE IS POWER

Enhance your installation and fabrication skills by enrolling in the most recognized and respected mobile electronics school in our industry. Log onto www.installerinstitute.com or call 800-354-6782 for more information and take steps toward a better tomorrow.



Metra recommends MECP certified technicians.








## **Toyota Venza 2009-2010**


- Disconnect the negative battery terminal to prevent an accidental short circuit.
- 2 Unclip and remove the trim panel to the right of the shifter. (Figure A)
- 3 Remove (1) Phillips screw from the bottom of the climate control then unclip and remove the climate control. (Figure B)
- 4 Remove (4)10 MM bolts securing the radio. Note: You will need a universal swivel head socket adapter to get to the bottom left bolt.
  (Figure C)
- 5 Remove (4) Phillips screws securing the factory radio to the a/c vent panel. (Figure D)

Continue to kit assembly.
















## **DIN HEAD UNIT PROVISION WITH POCKET**


\*Note: Refer also to the instructions included with the aftermarket radio.

- 1 Secure the Radio Housing into the factory a/c vent panel using the factory hardware. (Figure A)
- 2 Locate the factory wiring harness in the dash. Metra recommends using the proper mating adapter from Metra or AXXESS. Re-connect the negative battery terminal and test the unit for proper operation.
- 3 Slide the DIN cage into the Radio Housing and secure by bending the metal locking tabs down. (Figure B)
- 4 Slide the aftermarket head unit into the cage and secure. (Figure C)
- 5 Snap the factory vent panel/Radio Housing over dash cavity. (Figure D)
- 6 Reassemble remaining radio and dash assemblies in reverse order of disassembly.













## 99-8225G KIT ASSEMBLY


#### **ISO DIN HEAD UNIT PROVISION WITH POCKET**


\*Note: Refer also to the instructions included with the aftermarket radio.

- 1 Secure the Radio Housing into the factory a/c vent panel using the factory hardware. (Figure A)
- 2 Mount the ISO Brackets to the head unit with the screws supplied with the unit. (Figure B)
- Slide the head unit into the radio opening until the side clips engage. (Figure C)
- 4 Snap the Trim Plate into the Radio Housing. (Figure C)
- 5 Snap the factory vent panel/Radio Housing over dash cavity. (Figure D)
- 6 Reassemble remaining radio and dash assemblies in reverse order of disassembly.











## 99-8225G

## **NOTES**



## 99-8225G

## **NOTES**

## 99-8225G INSTRUCTIONS



**1**-800-221-0932



www.metraonline.com

REV. 05/20/10 © COPYRIGHT 2010 METRA ELECTRONICS CORPORATION INST99-8225G

Free Manuals Download Website

http://myh66.com

http://usermanuals.us

http://www.somanuals.com

http://www.4manuals.cc

http://www.manual-lib.com

http://www.404manual.com

http://www.luxmanual.com

http://aubethermostatmanual.com

Golf course search by state

http://golfingnear.com

Email search by domain

http://emailbydomain.com

Auto manuals search

http://auto.somanuals.com

TV manuals search

http://tv.somanuals.com