


KENWOOD

For the Users of the HM-682MD

Model HM-682MD is a special version of the HM-582MD. For the installation, connection, operation and other instructions, refer to the HM-582MD INSTRUCTION MANUAL. This booklet pertains only to the functions proper to the HM-682MD.

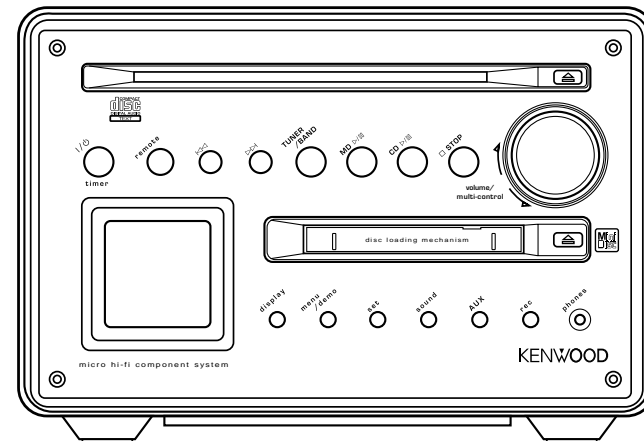


***HM-682MD
Main unit***

Special features

Frosty cover with interior design considerations

The main unit is provided with a removable cover. The cover does not only protect the system from damage and dirt but also suits the interior of many listening rooms.



KENWOOD

For your records

Record the serial number, found on the back of the unit, in the spaces designated on the warranty card, and in the space provided below. Refer to the model and serial numbers whenever you call upon your dealer for information or service on this product.

Model _____ Serial Number _____




B60-4825-00 00 (CH) (T) AP 0005

Front cover


Removing the front cover

- ÷ Pull the ring-shaped handle to remove the front cover.

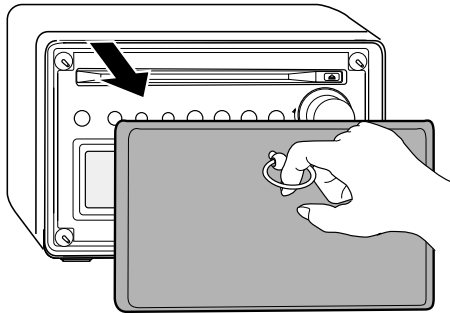

Attaching the front cover

- ÷ Align the projections on the top edge of the main unit with the holes on the back of the front cover, and push in gently to attach the front cover to the main unit.

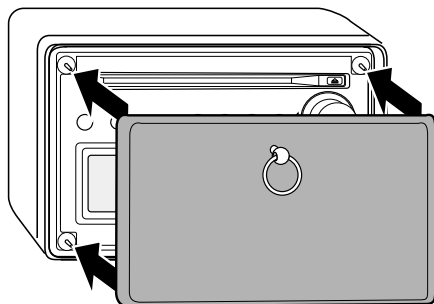

Specifications

Main unit

[Amplifier section]

Rated output power during STEREO operation
1 kHz, 1.0 % T.H.D., at 6 Ω 15 W + 15 W
Effective output power during STEREO operation
1 kHz, 10 % T.H.D., at 6 Ω 20 W + 20 W
Frequency response
AUX 50 Hz~50 kHz (0 dB ~ -3dB)

[Tuner section]

FM tuner section
Tuning frequency range 87.5 MHz ~ 108 MHz
MW (AM) tuner section
Tuning frequency range 531 kHz ~ 1,602 kHz

[MD recorder section]

Laser wave length 765 to 805 nm
Laser power class Class 3A
Laser Semiconductor laser
Recording method Field modulation overwrite method
Audio compression
ATRAC (Adaptive TRansform Acoustic Coding)
D/A Conversion 1 Bit
Wow & flutter Less than unmeasurable limit

[CD player section]

Laser wave length 760 to 800 nm
Laser power class Class 3A
Laser Semiconductor laser
D/A Conversion 1 Bit
Oversampling 8 fs (352.8 kHz)
Frequency response 20 Hz~20 kHz, \pm 1 dB
Wow and flutter Less than unmeasurable limit

[General]

Power consumption 60 W

Dimensions

(Horizontal installation)

..... W : 220 mm (8-11/16")
H : 150 mm (5-7/8")
D : 368 mm (14-1/2")

(Vertical installation)

..... W : 142 mm (5-9/16")
H : 228 mm (9")
D : 368 mm (14-1/2")

Weight (net) 6 kg (13.2 lb)

Speakers

Enclosure BASS RE-FREX type

Speaker configuration

Woofer 100 mm, cone type

Tweeter 19 mm, dome type

Impedance 6 Ω

Maximum input level 30 W

Dimensions

(Horizontal installation)

..... W : 220 mm (8-11/16")

H : 150 mm (5-7/8")

D : 252 mm (9-15/16")

(Vertical installation)

..... W : 142 mm (5-9/16")

H : 228 mm (9")

D : 252 mm (9-15/16")

Weight (net) 2.8 kg (6.2 lb) (1 piece)



KENWOOD follows a policy of continuous advancements in development. For this reason specifications may be changed without notice.

+ Sufficient performance may not be exhibited at extremely cold locations (where water freezes).

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>