



Installation Instructions

1. Prepare a workspace for the Orbit II. The dimensions required for the Orbit II are shown in Fig. A.

2. Remove the Power Cord, Output Bin, 3 Input Rods, and Starter Kit from the box. The Starter Kit includes the Documentation CD, Warranty Card, and Quick Reference Guides. Position the Orbit II in the prepared space.

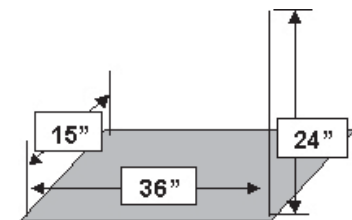


Fig. A - Workspace Dimensions

3. Make sure the switch on the back of the Orbit II is in the OFF position.

4. Plug the power cord into the back of the Orbit II, then into the nearest power outlet.

NOTE: It is recommended that you do not use an outlet that is already powering other equipment.

5. Install the Output Bin on the left side. Extend the bin out to the left until it snaps into position.

6. Install the Input Rods as shown in Fig. B.

7. Turn on the Orbit II.

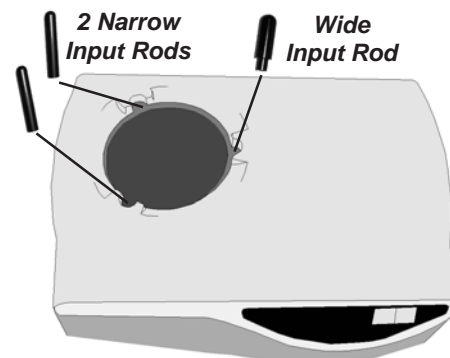


Fig. B - Input Rod Positions

Please save all packing materials from your Orbit II!

Basic Duplication

This is a reference for basic operation and duplication only. Please read the manual for more detailed instructions on the advanced features of the Orbit II.

1. Load discs into the Input Hopper. The first 5-6 should lay flat, the rest should lean against the short input hopper rod. See Fig. C.
2. Press "Yes" when the display reads "Copy?"
3. Place the Master Disc in the tray when the reader drive opens. See Fig. D below.
4. Press the "Yes" key again to start duplication.
5. When the input hopper is empty, either add more discs and press "Yes" to continue, or press "No" to end the duplication.
6. Once the duplication has been completed, the reader drive will eject. Remove the master.
7. Remove the copies from the Accept bin on the left. Rejected discs, if any, will be to the right of the Orbit II.

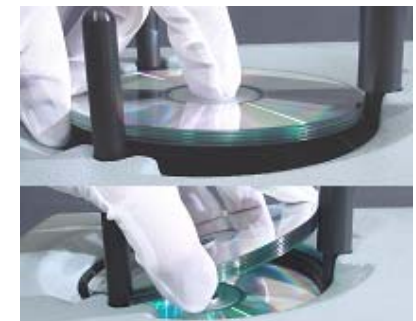


Fig. C - Loading Procedure

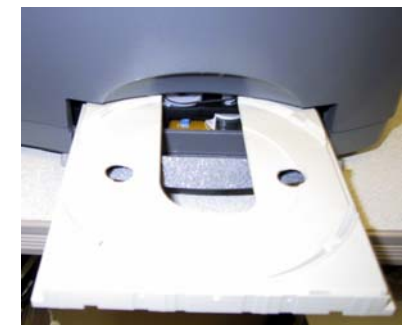



Fig. D - Reader Drive Ejected

Please refer to the Operator's Manual for information on the advanced duplication features of the Orbit II.

Orbit II Stand-Alone CD Copier

Operating Instructions

Menu Tree

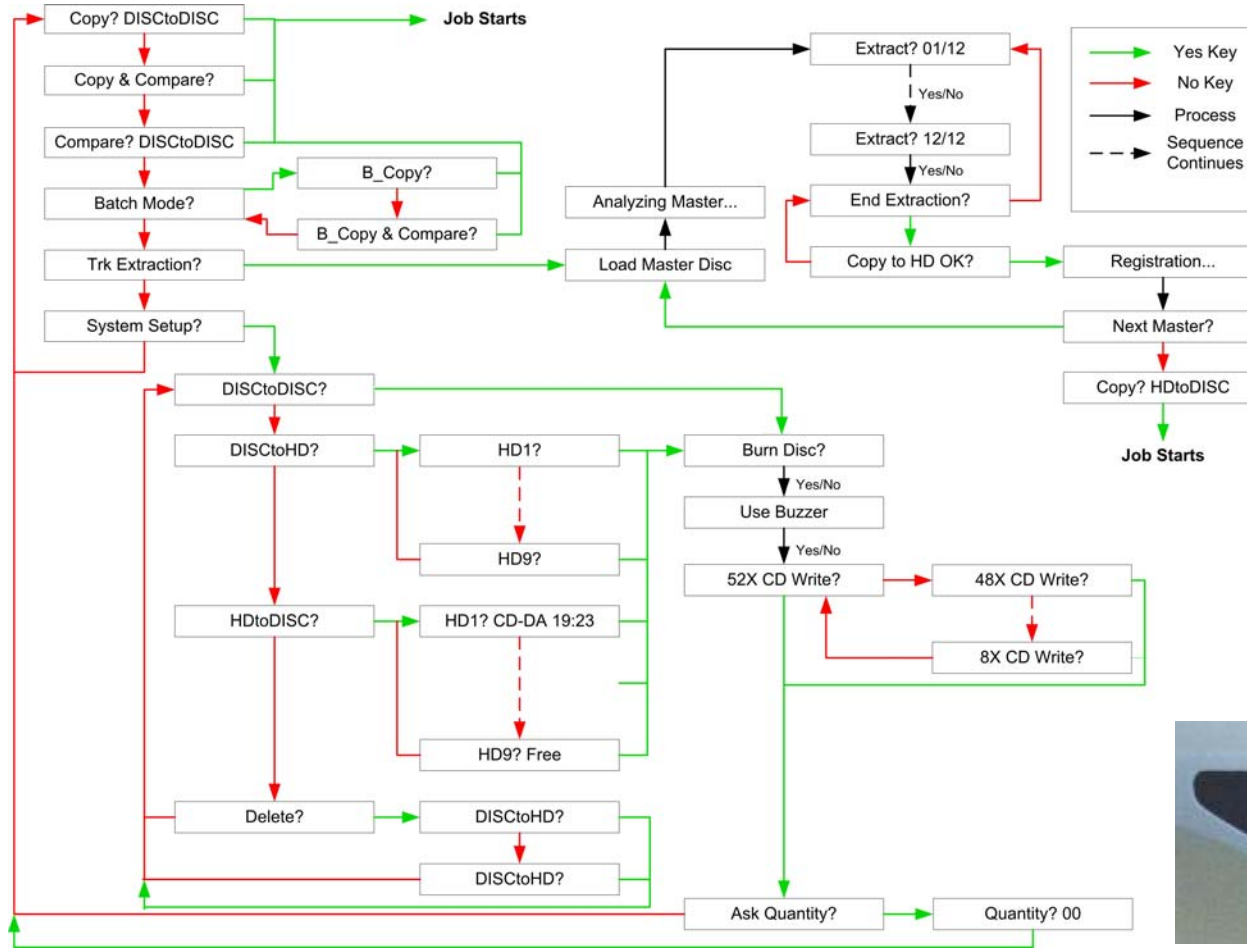

The **Yes** key accepts the current display question, or underlined character in the Quantity? display.



The **No** key declines the current display question, or increments the underlined character in the Quantity? display.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>