





# VANDAL PROOF B&W POLYCARBONATE DOME CAMERA WITH 3 BOARD LENS

## Owners Manual

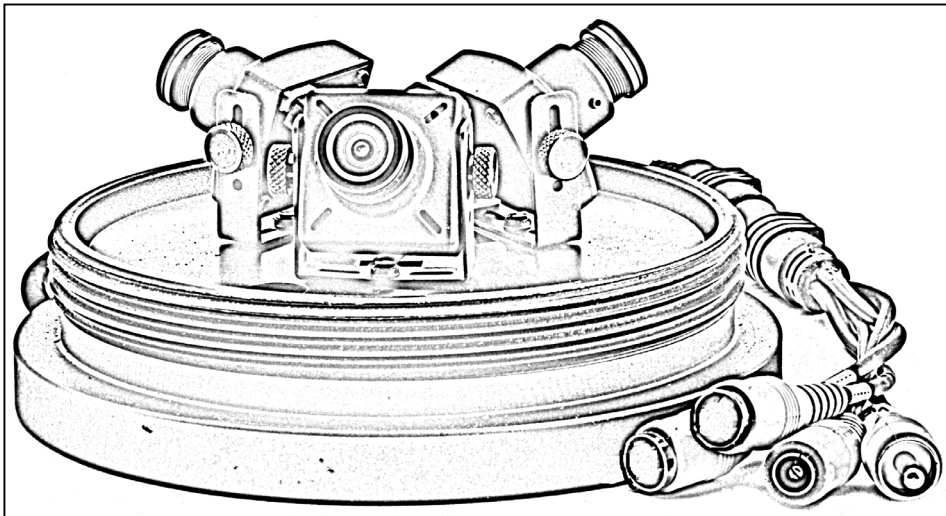

***Please read the manual thoroughly before operating this unit.***

**VQ1232**

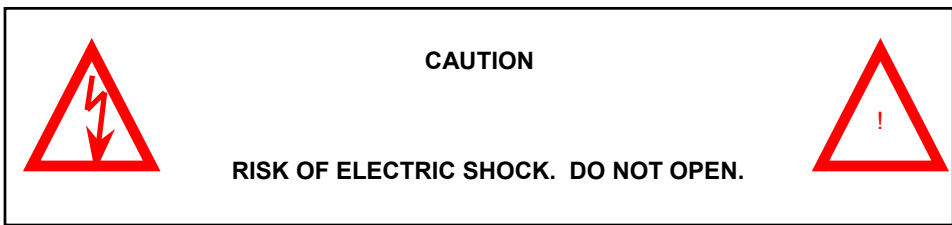

**CAUTION! TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER (OR BACK). NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO QUALIFIED SERVICE PERSONNEL.**

### EXPLANATION OF TWO SYMBOLS



The lightning flash with arrowhead symbol, within an equilateral triangle, is intended to alert the user to the presence of un-insulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



The exclamation point within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance- (servicing) instructions in the literature accompanying the appliance.

THE GRAPHIC SYMBOLS WITH SUPPLEMENTAL MARKING ARE ON THE BOTTOM OF THE SYSTEM.


"WARNING – TO PREVENT FIRE OR SHOCK HAZARD, DO NOT EXPOSE THE UNIT TO RAIN OR MOSITURE"

### IMPORTANT SAFETY INSTRUCTIONS


This wireless A/V equipment is provided with a polarized alternating-current line plug (a plug having one blade wider than the other). This plug will fit into the power outlet only one way. This is a safety feature. If you are unable to insert the plug fully into the outlet, try reversing the plug. If the plug still fail to fit, contact your electrician to replace your obsolete outlet. Do not defeat the safety purpose of the polarized plug.

### CONTENTS AND PARTS IDENTIFICATION:

This Package Contains:



1 – Vandal Proof Polycarbonate Dome with 3 - 1/3" CCD B&W Cameras



12V DC Power Supply




3 RCA/BNC Couplers

## INTRODUCTION:

Congratulations on your purchase of this Vision Q Vandal Proof B&W Dome Camera. This Dome camera comes with a Polycarbonate construction to provide high impact protection. The heavy duty all metal base with swivel bracket and tamper proof hardware adds extra protection against possible vandalism. This Dome camera can be tilted 90° for optimum angle selection.


## CONNECTING VISION Q CAMERA TO A 2 PAGE / 8 CHANNEL QUAD OBSERVATION SYSTEM

1. Mount the camera to the ceiling.
2. Connect the video extension cable (not included) from the camera to the monitor.
3. Connect the power extension cable (not included) to the supplied power 12V DC adaptor.
4. Attach the video extension cable to the monitor's camera inputs (see diagram below).
5. Attach the supplied 12V DC power supply to the power extension cable (not included) and plug into an electrical outlet.
6. Turn your monitor ON and select the desired channel to see the picture.
7. Repeat above procedures for connecting all 3 cameras to the monitor.

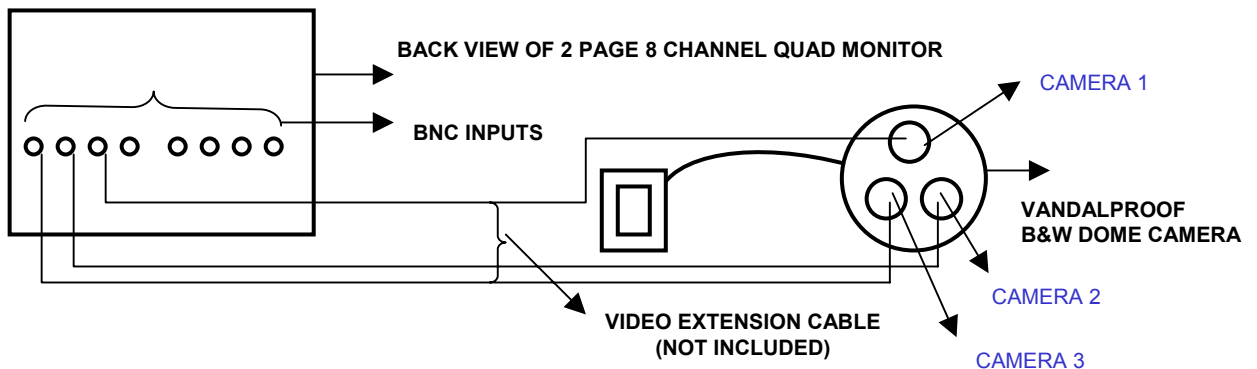

## CONNECTING CAMERA TO A SINGLE PAGE QUAD OBSERVATION SYSTEM

1. Mount the camera to the ceiling.
2. Connect the video extension cable (not included) from the camera to the monitor.
3. Connect the power extension cable (not included) to the supplied power 12V DC adaptor.
4. Attach the video extension cable to the monitor's camera inputs (see diagram below).
5. Attach the supplied 12V DC power supply to the power extension cable (not included) and plug into an electrical outlet.
6. Turn your monitor ON and select the desired channel to see the picture.
7. Repeat above procedures for connecting all 3 cameras to the monitor.

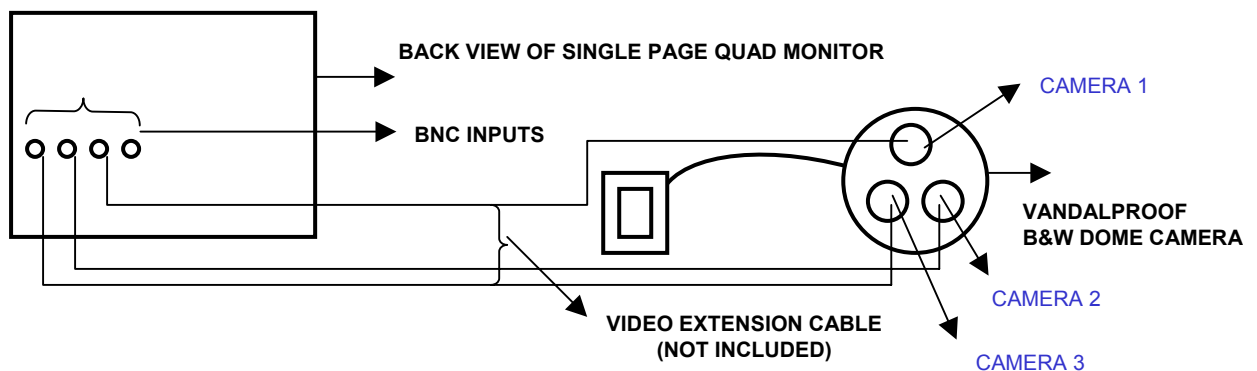

## **TROUBLE SHOOTING:**

If the camera does not function properly, check the following points. If you continue to have problems, please call our Toll Free Customer Support line for assistance.

<b><u>PROBLEMS</u></b>	<b><u>CAUSE AND REMEDIES</u></b>
NO PICTURE	DC ADAPTOR NOT PLUGGED IN MONITOR NOT TURNED TO CORRECT MODE OR CHANNEL
POOR PICTURE QUALITY	CLEAN THE CAMERA LENS ADJUST THE CONTRAST OR BRIGHTNESS CONTROL OF YOUR MONITOR

**FOR MORE INFORMATION  
OR TO SEE THE COMPLETE RANGE OF LOREX PRODUCTS  
PLEASE VISIT OUR WEBSITE:  
[WWW.STRATEGICVISTA.COM](http://WWW.STRATEGICVISTA.COM)**

<b>TECHNICAL SPECIFICATIONS</b>	
Image Sensor	1/3" CCD B&W
Pixels	510 x 492
Scanning System	525 lines, 60 field/sec
Resolution	380 lines
Min Illumination	0.5 lux
S/N Ratio	More than 48 db
White Balance	Auto White Balance
Electronic Shutter	1/60 – 1/100,000 sec
Lens	2.9mm
Power Consumption	12 V DC, 500mA
Operational Temp.	-26° - 122°F
Dimensions	4 7/8" Dia x 3 1/2" H
Weight	17.6 oz

**ALWAYS USE DISCRETION WHEN INSTALLING VIDEO AND/OR AUDIO SURVEILLANCE EQUIPMENT WHEN THERE IS PERCEIVED PRIVACY. INQUIRE REGARDING FEDERAL, STATE AND/OR LOCAL REGULATIONS APPLICABLE TO THE LAWFUL INSTALLATION OF VIDEO AND OR AUDIO RECORDING OR SURVEILLANCE. PARTY CONSENT MAY BE REQUIRED.**

BECAUSE OUR PRODUCTS ARE SUBJECT TO CONTINUOUS IMPROVEMENT, SVC RESERVES THE RIGHT TO MAKE PRODUCT MODIFICATION WITHOUT NOTICE AND WITHOUT INCURRING ANY OBLIGATION. E&OE

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>