

RJ31X ADAPTER

FOR USE WITH
THE PERS CONSOLES

installation instructions

Linear®

(760) 438-7000
USA & Canada (800) 421-1587 & (800) 392-0123
Toll Free FAX (800) 468-1340
www.linearcorp.com

To provide proper telephone line seizure this cable must be connected to an 8-position telephone jack installed per FCC Universal Service Order Code RJ-31X or RJ-38X. See Figure 1 for details of the telephone jack wiring.



A single ended 8-conductor modular line cord is used to connect the PERS console to the telephone jack. Plug the LINE and PHONE plugs into the appropriate jacks on the PERS console. See Figure 2. Route the cable away from the jacks via the internal raceway. Then install the 8-position plug into the telephone company jack.

Testing

Test the PERS console by first calling the central station and informing them that a test is going to be performed.

Trigger an alarm via the remote control or from the large EMERGENCY/HELP button on the console. The house phones will be disconnected and the central station will receive the emergency message. If the console is equipped with two-way voice capability the central station may talk via the console to verify proper operation of the two-way voice system.

After the PERS console goes offline, the house phones will be restored to normal operation.

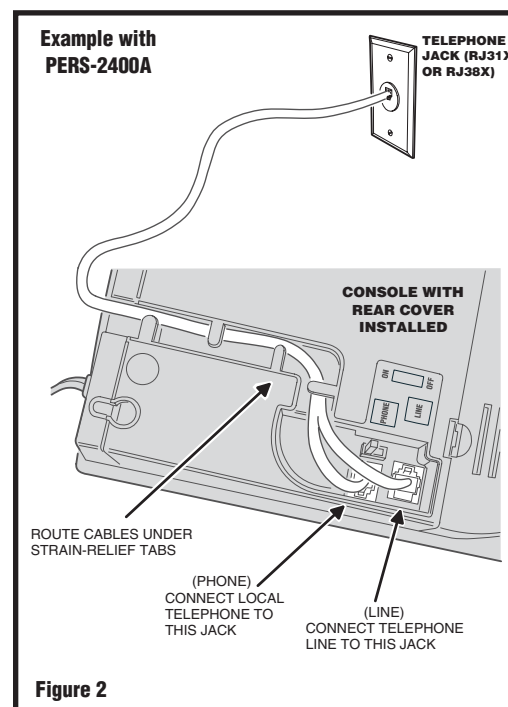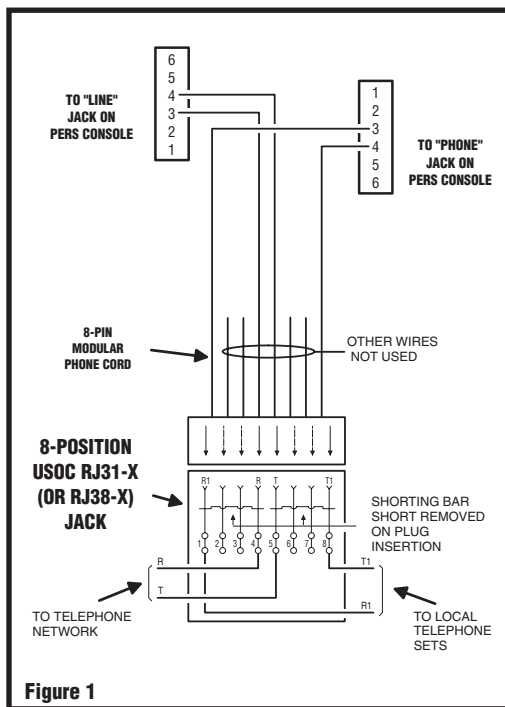

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>