




# Breathe easy

## Lifebreath Electric Furnace

- High efficiency 3-speed direct drive ECM blower motor is standard on all models.
- 2 stage heating\* & 2 stage cooling.
- Add on cooling capacity 2 to 5 tons.
- Heating output 17,000 to 75,000 BTUH.
- Heat pump compatible.
- 36 airflow combinations available on each unit.

\* 2nd stage heating is standard on all units except the 5kW

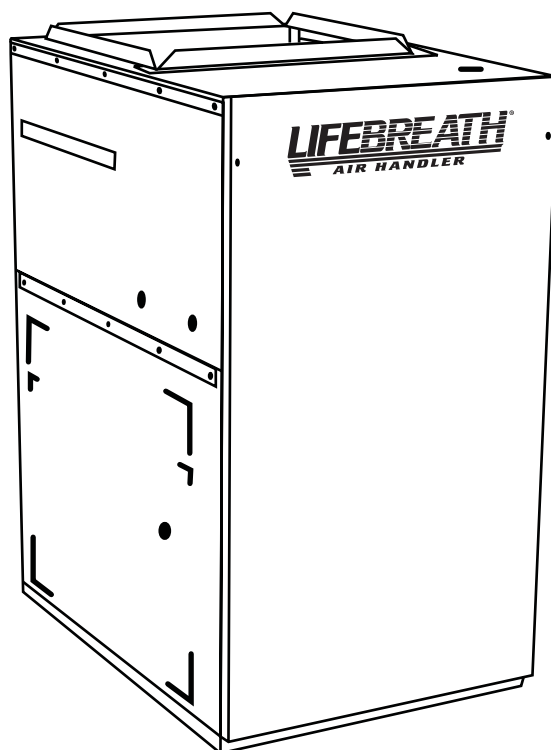

### Output

**Model AH-ELE-5KW-24-E16 (17,000 BTUH)**

Install up to 2 tons of add on air conditioning

**Model AH-ELE-9KW-30-E16 (30,000 BTUH)**

Install up to 2.5 tons of add on air conditioning

**Model AH-ELE-15KW-36-E16 (51,000 BTUH)**

Install up to 3 tons of add on air conditioning

**Model AH-ELE-18KW-48-E16 (60,000 BTUH)**

Install up to 4 tons of add on air conditioning

**Model AH-ELE-22KW-60-E16 (75,000 BTUH)**

Install up to 5 tons of add on air conditioning

**Models**

AH-ELE-5KW-24-E16  
 AH-ELE-9KW-30-E16  
 AH-ELE-15KW-36-E16

Model AH-ELE-5KW-24-E16	
Voltage	240 VAC 60 Hz
Hp	1/2
Amps (total)	30
Breaker Amps	40
Stages	1 stage Heat/2 stage Cool
Return Air Opening	14.25" x 23.25" 362 mm x 591 mm
Supply Air Opening	17.25" x 16" 438 mm x 406 mm

Net Weight 140 lbs. Shipping Weight 155lbs.

Model AH-ELE-9KW-30-E16	
Voltage	240 VAC 60 Hz
Hp	1/2
Amps (total)	60
Breaker Amps	60
Stages	2 stage Heat/2 stage Cool
Return Air Opening	14.25" x 23.25" 362 mm x 591 mm
Supply Air Opening	17.25" x 16" 438 mm x 406 mm


Net Weight 140 lbs. Shipping Weight 155lbs.

Model AH-ELE-15KW-36-E16	
Voltage	240 VAC 60 Hz
Hp	1/2
Amps (total)	80
Breaker Amps (Feeder 1)	40
Breaker Amps (Feeder 2)	60
Stages	2 stage Heat/2 stage Cool
Return Air Opening	14.25" x 23.25" 362 mm x 591 mm
Supply Air Opening	17.25" x 16" 438 mm x 406 mm

Net Weight 140 lbs. Shipping Weight 155lbs.


**Note:**  
 All connections to be made by qualified contractors.

5 year replacement parts warranty on all components.

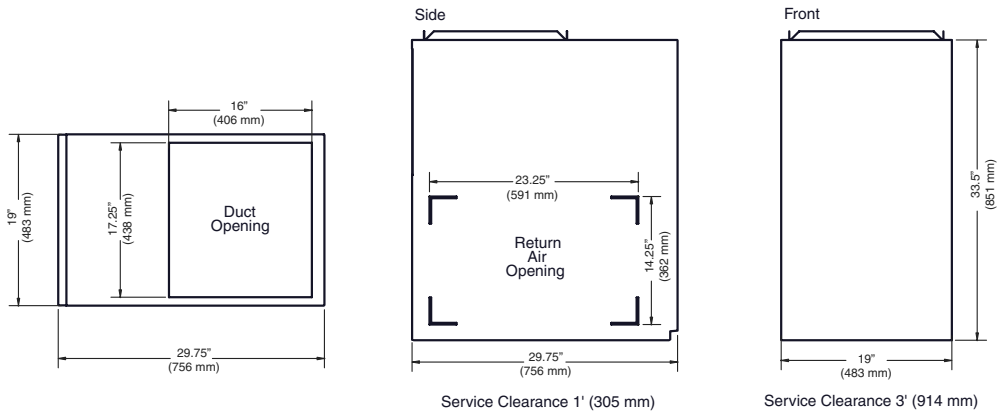

**Models**

AH-ELE-18KW-48-E16  
 AH-ELE-22KW-60-E16

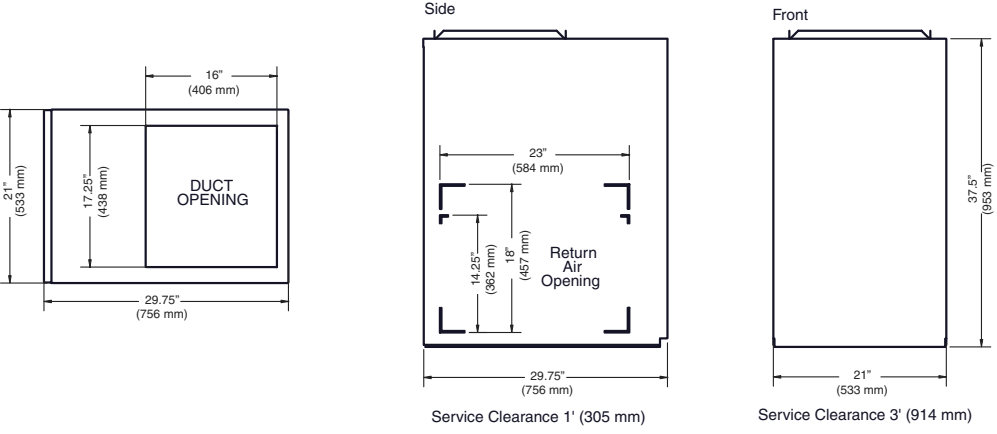

Model AH-ELE-18KW-48-E16	
Voltage	240 VAC 60 Hz
Hp	3/4
Amps (total)	100
Breaker Amps (Feeder 1)	60
Breaker Amps (Feeder 2)	60
Stages	2 stage Heat/2 stage Cool
Return Air Opening	23" x 18" or 23" x 14.25" 584 mm x 457 mm or 584 mm x 362 mm
Supply Air Opening	17.25" x 16" 438 mm x 406 mm

Net Weight 165 lbs. Shipping Weight 180 lbs.

Model AH-ELE-22KW-60-E16	
Voltage	240 VAC 60 Hz
Hp	1
Amps (total)	120
Breaker Amps (Feeder 1)	60
Breaker Amps (Feeder 2)	60
Breaker Amps (Feeder 3)	20
Stages	2 stage Heat/2 stage Cool
Return Air Opening	23" x 18" or 23" x 14.25" 584 mm x 457 mm or 584 mm x 362 mm
Supply Air Opening	17.25" x 16" 438 mm x 406 mm

Net Weight 165 lbs. Shipping Weight 180 lbs.



511 McCormick Blvd. London, Ontario N5W 4C8  
 T (519) 457-1904 F (519) 457-1676  
 Email: nutech@lifebreath.com Website: www.lifebreath.com

270 Regency Ridge, Suite 210 Dayton, Ohio 45459  
 T (937) 439-6676 F (937) 439-6685



## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>