

Breathe
Easy

TRV TOTAL RECOVERY VENTILATOR

Today's homes require controlled ventilation to improve the Indoor Air Quality and maximize energy efficiency.

**The TRV is specifically designed for moderate/temperate geographies with winter temperatures below freezing and summer conditions that are hot and humid.
(Typically >75°F and 65% R.H.)**

The TRV is a new concept in ventilation that provides the compounded benefits of moisture transfer with unmatched heat recovery in a single unit.
This new configuration is the only way to ensure year round temperature and moisture transfer.



LIFEBREATH[®]
THE ULTIMATE AIR EXCHANGER

- **ASHRAE 62.2 Ventilation Standards**
- **Sensible and Latent transfer for all 12 months**
- **Adjustable ventilation rates with ControlAir 15 - 5 selectable speeds**
- **Automatic damper defrost**
- **Intermittent operation**





ENGINEERING DATA

MOTORS AND BLOWERS - Each air stream has one centrifugal blower driven by a common PSC motor. 5 speed fan operation. 120 VAC, 1.5 Amps.

FILTERS - Washable air filters in exhaust and supply air streams.

MOUNTING THE TRV - Four threaded inserts at corners of case designed to accept four reinforced polyester straps that are supplied with the unit.

DEFROST - Damper defrost system.



DEHUMIDISTAT - Adjustable Internal Dehumidistat.

CASE - Twenty gauge prepainted galvanized steel (G60) for superior corrosion resistance. Insulated to prevent exterior condensation. Drain connections 2 - 1/2" (12 mm) OD.


CONTROLS - ControlAir 15 - Standby/ON mode, 20 ON/ 40 OFF mode, Recirculation mode (on compatible units), (each mode has 5 speeds). Control pad can be removed from HRV and remotely mounted.

WEIGHT 106 lbs. (48 kg) **SHIPPING WEIGHT** 108 lbs. (49 kg)

PERFORMANCE				
<i>Net supply airflow in cfm (L/s) against external static pressure</i>				
	195TRV		300TRV	
<i>E.S.P</i>	<i>cfm</i>	<i>L/s</i>	<i>cfm</i>	<i>L/s</i>
@ 0.1" (25 Pa)	203	(96)	265	(125)
@ 0.2" (50 Pa)	191	(90)	260	(123)
@ 0.3" (75 Pa)	182	(86)	250	(118)
@ 0.4" (100 Pa)	167	(79)	235	(111)
@ 0.5" (125 Pa)	155	(73)	220	(104)
VAC @ 60HZ	120		120	
WATTS / Low speed	100		150	
WATTS / High speed	173		333	
Amp rating	1.5		2.9	

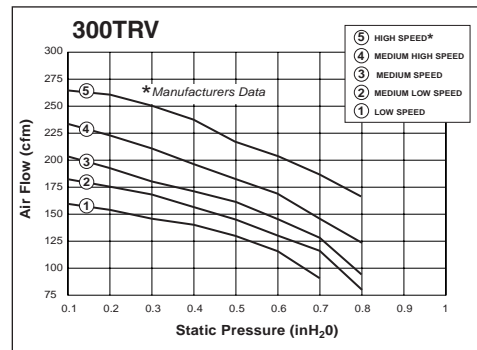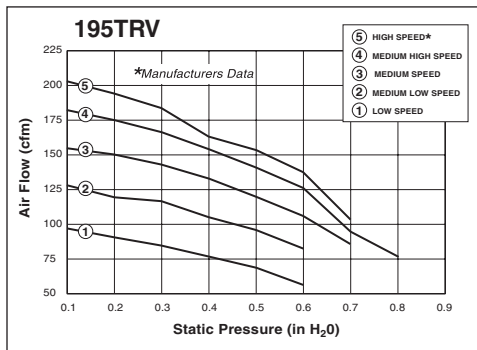

DIMENSIONS 195TRV/300TRV inches (mm)

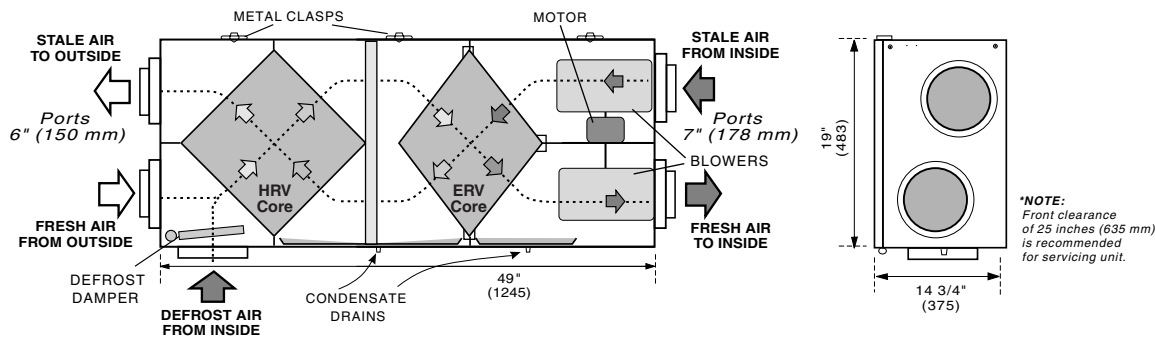

OPTIONS

- 99-104 **Digital Electronic Timer** - 20/40/60 min.
- 99-350 **Lifestyles Ventilation Control** includes Programmable Time Clock and Dehumidistat
- 99-109 **Air Sentry™** Air Quality Monitor designed to accept remotely mounted Control Pad
- 99-250 **Ventilation Dehumidistat** - Dehumidistat designed to accept remotely mounted Control Pad.

- 99-160 **Duct Heater** w/ Electronic SCR Thermostat, 1 Kw, 7" (178 mm)
- 99-161 **Duct Heater** w/ Electronic SCR Thermostat, 2 Kw, 7" (178 mm)
- 99-186 **Weatherhoods**, Two - 6" (150 mm) c/w 1/4" (6mm) mesh screen

WARRANTY Units carry a LIFETIME warranty on the heat recovery core, a five year warranty on the ERV core and a 5 year replacement parts warranty.

All units conform to CSA and UL standards.



511 McCormick Blvd.
London, Ontario N5W 4C8
T (519) 457-1904
F (519) 457-1676
Email: nutech@lifebreath.com

270 Regency Ridge, Suite 210
Dayton, Ohio 45459
T (937) 439-6676
F (937) 439-6685
Website: www.lifebreath.com



Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>