

Battery Chargers – Sentry and Guardian Models



Features


- High-quality constructed stainless steel cases, suitable for wall mounting
- Auto boost operation provides increased output voltage when batteries are below a preset point
- Remote temperature compensation provides control of output voltage based on temperature
- Current limiting will only output the rated current of the charger

The Sentry and Guardian battery chargers provide automatic, current limited and voltage controlled charging to vented lead acid batteries. They may be used in a wide range of industrial charging applications, including standby engines, pumps and generators.

Each unit consists of a transformer, rectifier and thyristor control circuit. The control circuit ensures that the charger maintains a battery voltage at the pre-calibrated float level, while supplying any additional load current up to the specified maximum.

Sentry Model


- CE and UL approvals
- Float Charging 5A at 12v
- Auto boost operation
- Electronic self-resetting output fuse protection
- Temperature compensation
- Charge fail relay output
- Stainless steel enclosure

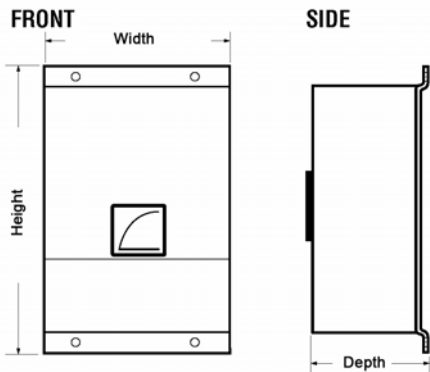

Model	W	D	H	Weight
BCES-12-5	11.1" (281mm)	4.6" (115mm)	5.5" (140mm)	11.9 lbs 5.6Kg

Guardian Model

- CE and UL approvals
- Heavy duty float charging: 10A at 12/24 VDC, 20A at 24 VDC
- Short circuit and reverse polarity protection
- Lead acid calibrations
- Auto boost operation
- Charge fail relay output
- Under volts and over volts alarms
- Temperature compensation
- NFPA 110 alarms

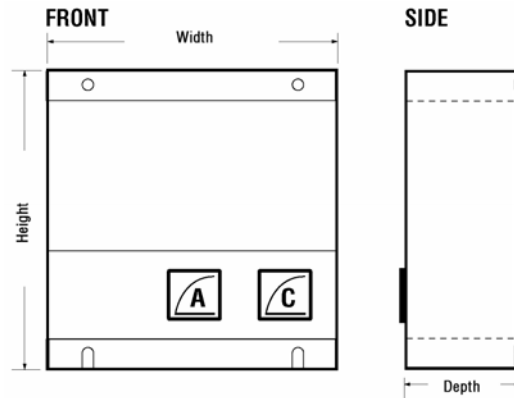

Model	W	D	H	Weight
BCEG-12-10	10.83"	4.92"	11"	22 lbs
BCEG-24-10	(275mm)	(125mm)	(280mm)	10.0Kg
BCEG-24-20	13.9"	5.71"	12.20"	38.5 lbs
	(335mm)	(145mm)	(310mm)	17.5Kg

In order to consistently bring you the highest quality, full featured products, we reserve the right to change our specifications and designs at any time. MURPHY and the Murphy logo, are registered and/or common law trademarks of Murphy Industries, Inc. This document, including textual matter and illustrations, is copyright protected by Murphy Industries, Inc., with all rights reserved. (c) 2007 Murphy Industries, Inc.

Specifications

Sentry Model

Power Supply

- Nominal operating voltages: 120V units
- Permissible voltage variation: $\pm 6\%$ of nominal
- Nominal operation frequency: 50-60Hz

DC Charge Output

- Maximum current ADC: 5
- Nominal voltage VDC: 12

Float/Boost Voltages

Battery Type	Float Volts (VDC)	Boost Volts (VDC)
12V Lead Acid (6 cells)	13.6	14.1

Charge Fail Output

- Relay type: volt free SPDT contacts; relay de-energized on fault
- Contact rating: 1A at 30V, DC (resistive load)

General

- Operating temperature: +14 to +131°F (-10 to +55°C)
- EMC emission/immunity: EN 58801-2 / EN50082-2

Model Info

- BCES-12-5 12 volt, 5A, lead acid cells

Guardian Model

Power Supply

- Nominal operating voltages: 120VAC $\pm 6\%$
- Permissible voltage variation: 120VAC $\pm 6\%$
- Nominal operation frequency: 50-60Hz

DC Charge Output

- Maximum current ADC: 20/20
- Nominal voltage VDC: 24/12

Float/Boost Voltages

Battery Type	Float Volts (VDC)	Boost Volts (VDC)
12V Lead Acid (6 cells)	13.6	14.1
24V Lead Acid (12 cells)	27.2	28.2

Charge Fail Output

- Relay type: volt free SPDT contacts; relay de-energized on fault
- Contact rating: 1A at 30V, DC (resistive load)

	Normal Output VDC	
	12	24
Under Volts Alarm	12.5	25
Over Volts Alarm	15.5	31
Delay on under volts	120 seconds	

General

- Operating temperature: +14 to +131°F (-10 to +55°C)
- EMC emission/immunity: EN 58801-2 / EN50082-2

Mounting hole dimensions:

- Width (between holes): 6.8" (173mm)
- Height (between holes): 10" (255mm)
- Mounting holes $\varnothing=0.2"$ (6mm)

Model Info

- BCEG-12-10 12 volt, 10A, lead acid cells
- BCEG-24-10 24 volt, 10A, lead acid cells
- BCEG-24-20 24 volt, 20A, lead acid cells

FW MURPHY

P.O. Box 470248
Tulsa, Oklahoma 74147 USA
+1.918.317.4100 Fax: +1.918.317.4266
E-mail: sales@fwmurphy.com

INDUSTRIAL PANEL DIVISION

Fax: 918.317.4124
E-mail: ipdsales@fwmurphy.com

MURPHY POWER IGNITION

Web site: www.murphy-pi.com

www.fwmurphy.com

CONTROL SYSTEMS & SERVICES DIVISION

P.O. Box 1819
Rosenberg, Texas 77471 USA
Phone: 281.633.4500 Fax: 281.633.4588
E-mail: sales@fwmurphy.com
Web site: www.fwmurphy.com

FRANK W. MURPHY, LTD

Church Rd Laverstock
Salisbury SP1 1QZ UK
Phone: +44 1722 410055 Fax: +44 1722 410088
E-mail: sales@fwmurphy.co.uk
Web site: www.fwmurphy.co.uk

COMPUTRONIC CONTROLS, LTD

41 - 43 Railway Terrace Nechells
Birmingham B7 5NG UK
Phone: +44 121 327 8500 Fax: +44 121 327 8501
E-mail: info@computroniccontrols.com
Web site: www.computroniccontrols.com

FW MURPHY INSTRUMENTS (HANGZHOU) CO. LTD

77 23rd Street
Hangzhou Economic & Technological Development Area
Hangzhou, Zhejiang, 310018, China
Phone: +86 571 8788 6060 Fax: +86 571 8684 8878



Printed in U.S.A.

Warranty - A limited warranty on materials and workmanship is given with this FW Murphy product. A copy of the warranty may be viewed or printed by going to www.fwmurphy.com/support/warranty.htm

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>