

DRQ™

ceiling speaker

LightSPEED's DRQ ceiling speakers deliver high-quality, full-range sound evenly throughout the classroom. With the supplied T-bridge and integrated enclosure, the DRQ is easily installed into an acoustic ceiling tile. When used with a LightSPEED Classroom Amplification System, four DRQs project the teacher's voice evenly throughout the classroom allowing every child to hear every word. The speaker grille is flush mounted to the ceiling tile, and wires are routed overhead, making for a clean and unobtrusive installation.




overview

room coverage

profile


Four DRQ speakers will cover classrooms of up to 1600 square feet with 9 to 12 foot ceilings.

- Ideal option for rooms with suspended ceilings
- Two-way speaker system produces high-quality, full-range sound
- Integrated speaker enclosure improves sound quality and reduces bleed over
- Easy mounting makes for a simple installation
- Stylish grille blends into classroom surroundings

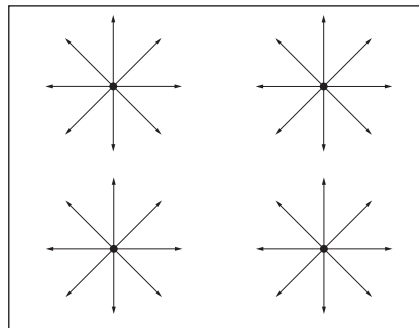


Top View of Room
Covers up to 1600 sq. ft.
(Example: 40 ft. x 40 ft.)

Front View



Side View



DRQ™

ceiling speaker

Description	Two-way speaker system
Driver Size	6.5" driver; 1" horn
Frequency Response	40 Hz–20 kHz
Impedance	8Ω
Power Handling	30 W
Dimensions	9.5" diameter; 5.5" deep
Weight	5.9 lbs.
Enclosure	White ABS ceiling-mount housing with metal grille; UL listed fire-retardant ABS back-enclosure
Tile Support	20-gauge metal tile bridge



LightSPEED Technologies

www.lightspeed-tek.com

800.732.8999

imagine...

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>