

SERVICE FOR YOUR NADY AUDIO PRODUCT

(U.S.) Should your NADY AUDIO product require service, please contact the Nady Service Department via telephone at (510) 652-2411, or e-mail at service@nady.com.


(International) For service, please contact the NADY AUDIO distributor in your country through the dealer from whom you purchased this product.

DO NOT ATTEMPT TO SERVICE THIS UNIT YOURSELF AS IT CAN BE DANGEROUS AND WILL ALSO VOID THE WARRANTY.

NADY[®] AUDIO

OWNER'S MANUAL

NADY[®] MM-141
AUDIO 4-Channel Mini Mixer

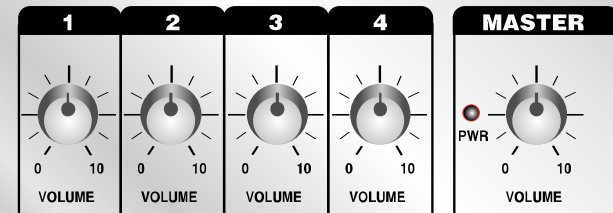

NADY[®] AUDIO

NADY SYSTEMS, INC. • 6701 SHELLMOUND STREET, EMERYVILLE, CA 94608
Tel: 510.652.2411 • Fax: 510.652.5075 • www.nady.com

Download from Www.Somanuals.com and Download.

MM-141

4-Channel Mini Mixer

MM-141



Congratulations on your choice of the mini mixer - you have purchased one of the finest mini mixers on the market today. This unit was developed using the expertise of professional sound engineers and working musicians. You will find that your new NADY MM-141 has superior performance and greater flexibility than any other mini mixers in its price range. Please read this manual carefully to get the most out of your new unit.

Thanks for selecting NADY AUDIO as your choice in mini mixer.

FEATURES

MM-141

- Four 1/4" unbalanced line level inputs with individual volume controls mixed to one 1/4" unbalanced output.
- Master Volume control with integrated Power on/off switch and power on LED indicator
- Ultra low distortion, up to 20dB of gain, S/N ratio over 100dB, and a frequency response from 20Hz-20KHz
- Heavy-duty steel construction with smooth-turn, ultra-stable pots and high quality jacks
- 9VDC powered with either 9V alkaline battery or optional PAD-1 AC/DC external adapter


NOTICE

The information in this document is subject to change, as the Company may make changes to product in order to improve reliability, design, or function, without prior written notice. No part of this manual may be reproduced or transmitted in any form or by any means without the written permission of the company.

IN NO EVENT WILL THE COMPANY BE LIABLE FOR SPECIAL INCIDENTAL OR CONSEQUENTIAL DAMAGES, WHETHER ARISING DIRECTLY OR INDIRECTLY, SUCH AS LOSS OF PROFIT OR GOOD WILL, THAT MAY BE SUFFERED IN CONNECTION WITH THE PURCHASE OF THIS PRODUCT OR FROM THE BREACH OF ANY REPRESENTATION OR WARRANTY.

Download from www.Somanuals.com. All Manuals Search And Download.

CONTROLS AND CONNECTIONS

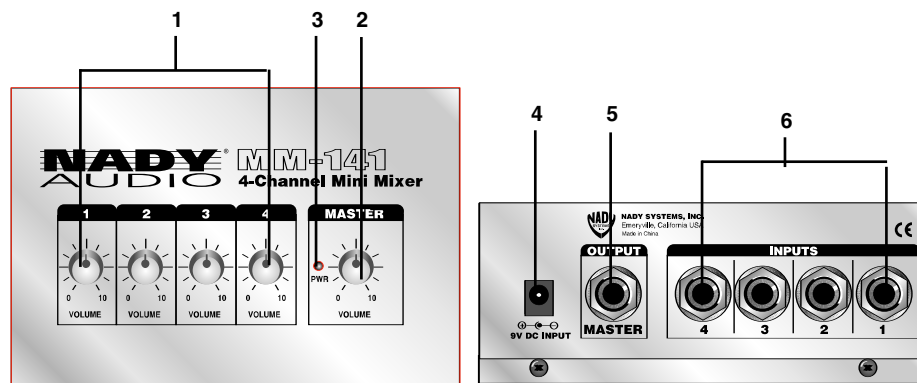

- 1. CHANNEL VOLUME CONTROLS** — These controls separately adjust the volume of the each input.
- 2. POWER SWITCH / MASTER VOLUME CONTROL** — This control turns the mixer on/off and adjusts the volume of the output.
- 3. POWER LED** — Lights when powered on.
- 4. DC INPUT** — Input socket for the optional PAD-1 9V AC/DC adapter. When you use external DC power, the built-in battery power will turn off automatically.
- 5. MASTER OUTPUT** — 1/4" unbalanced output.
- 6. INPUT CHANNELS** — 1/4" unbalanced inputs designed for line level inputs.

SPECIFICATIONS

Input Impedance45K Ω
Maximum Input+5 dBm (1.8 V)
Output Impedance900 Ω
Maximum Output+6.7dBm, 1.7V
Gain20dB
Frequency Respond20Hz – 30KHz
THD0.07%
S/N-103dB
Noise Floor120uV
Current Drain10mA
9V Battery Lifeup to 60 hours
Power Requirements9V battery or optional PAD-1 AC/DC adapter
Dimensions5.8" x 4.3" x 2.1" (147 mm x 109 mm x 53 mm)
Weight1.25 lbs (0.57 Kg)

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>