
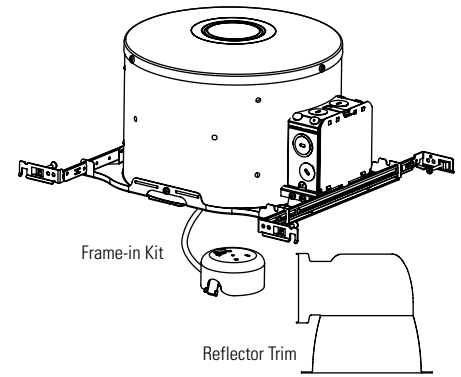
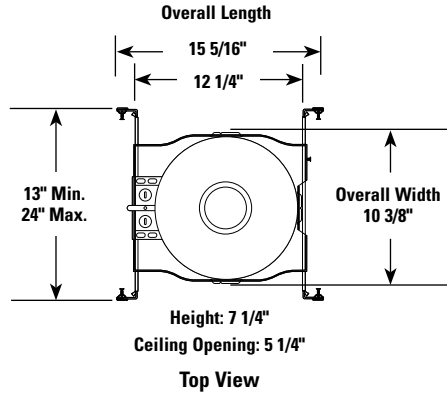


# LIGHTOLIER® Performance Recessed CFL Downlighting **1001FDIC**

Page 1 of 1

5" Aperture, 1 Light, Compact Fluorescent, IC AirSeal®, Dimming, Frame-In Kit

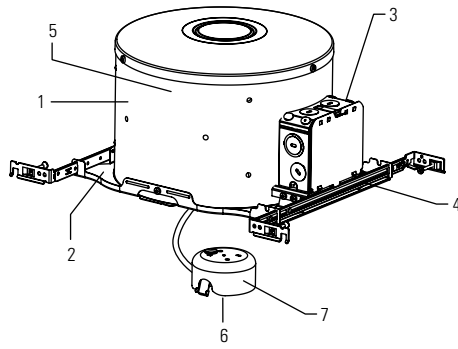

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Frame-In Kit	Uniframe™ Compact Fluorescent Performance Series Reflector Trims					
	Horizontal Open	Horizontal Wall Wash - Single	Horizontal Wet Location Lensed / Diffused		Horizontal Cross Blade	
<b>1001FDICMX1**</b> (Advance Mark10 – 120v) 26w Triple GX24q-3 Base 120v – 0.26amp max  <b>1001FDICMX2**</b> (Advance Mark10 – 277v) 26w Triple GX24q-3 Base 277v – 0.11amp max	<b>1001HCL</b> <b>1001HCD</b> <b>1001HWH</b>	<b>1001HCLSW</b> <b>1001HCDSW</b> <b>1001HWHSW</b>	Clear Lens <b>1001HCLC</b> <b>1001HCDC</b> <b>1001HWHC</b>  Opal Lens <b>1001HCLO</b> <b>1001HCDO</b> <b>1001HWHO</b>	<b>1001HCLF</b> <b>1001HCDF</b> <b>1001HWHF</b>	<b>1001HACB</b> <b>1001HWHCB</b>	
<b>Universal Series Reflector Trims</b> (Reference Trim Spec Sheet for Recommended Lamping)						
	Cone		Satin Cone	Baffle	Wall Wash	Wet Location
	1012*	1071	1008*	1005*	1035	1024
	1013*	1045	1010*	1005BNM	1035WH	1078
	1013BK*	1046		1005WH	1085	
	1013WH	1046CD		1076	1095	
	1013CD*			1076WH	1096	
					1096CD	

\*\*Add N to catalog number for preset nails.

\*Add NM suffix to catalog number for Natural Metal flange and finish.

## Features

- Housing:** .028" (#21ga.) aluminum. UL listed for direct contact with thermal insulation. AirSeal® housing minimizes air leakage to less than 2 CFM at 1.57 PSF (or 75pa), which complies with Model Energy Code (Section 602.3.3) and Washington State Energy Code (Section 502.4) and reduces heat loss and condensation in ceiling. Access door for inspection of junction box.
- Mounting Frame:** .032 (#22 ga.) galvanized steel. Accommodates ceilings up to 1 1/2" thick. 3/8" deep integral lip. Locks into position along length of mounting bars with locking screw and bendable slot. Four slots are positioned 90° apart to simplify alignment. Push-in/twist-out roto-clips hold reflector flush to ceiling.
- Junction Box:** 2" X 4" X 3 1/2" (22 cu. in.) .032" (#22 ga.) galvanized steel. UL listed for maximum of 8 (#12 ga.) 90°C through branch circuit conductors.
- Mounting Bars:** .059" (#16 ga.) galvanized steel. Bars pivot for easy attachment and wire-in below ceiling line. Bars extend to accommodate 16" to 24" O.C. joist spacing. Bars can accommodate 12" O.C joist spacing after a slight field modification (see Instruction Sheet). Features integral self tapping phillips screws for secure attachment to wood or metal construction. Attaches to T-bar ceilings without the need of accessories.
- Ballast:** Mounted inside housing. 120V or 277V UL Listed Electronic Dimming Ballast, end of lamp life protection, class "P" thermally protected, class "A" sound rating.
- Socket:** Four-pin base, molded thermoplastic socket, prewired with No. 18 AWM leads to ballast.
- Socket Housing:** .036" (#20ga.) Galvanized Steel housing attaches to reflector trim by spring clip for precise optic alignment.

## Options & Accessories

- Extra-Thick Ceiling**
- Mounting Ring: 1967B** - 1 1/4" to 2" thick ceilings

## Labels

cULus Listed (Type I.C., Suitable for Damp Location), I.B.E.W.

Complies with Air Leakage Requirements stated in the Model Energy Code and the Washington State Energy Code.

AirSeal® is a registered trademark of Lightolier

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 www.lightolier.com © 2008 Philips Group • D0708

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>