


nextar 

ITEM# NXBT-001

 **Bluetooth**[®]
SOLAR CHARGING
**WIRELESS
SPEAKER**

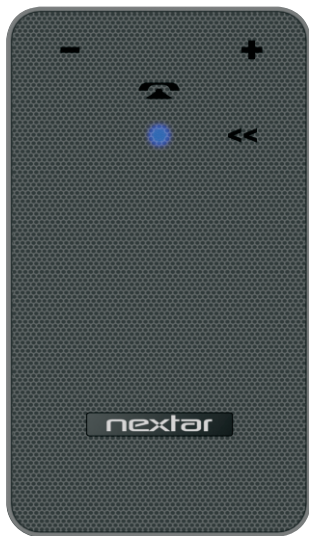

USER MANUAL

FEATURES & FUNCTIONS

- ※ Voice dialing (if supported by cell phone)
- ※ Last call redialing
- ※ Automatic reconnection
- ※ Volume control and mute function
- ※ DSP technology for noise reduction and echo cancellation
- ※ Call transfer between cell phone and NXBT-001 during conversation
- ※ Bluetooth audio streaming (A2DP and AVRCP)
- ※ Supports up to 8 Bluetooth devices in pairing memory
- ※ Can be charged with a 12 volt adaptor or with the built-in solar panel.

ACCESSORIES LIST



NXBT-001




Windshield Mount



Car Charger



Suction Cups

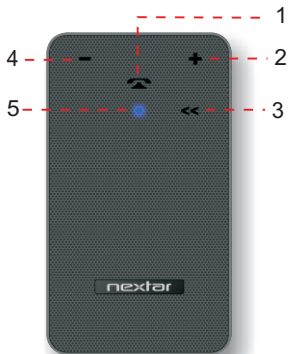

Front


- 1 Multifunction button:**
Pairing,
Answer/End/Reject Call,
Voice Dialing,
Last Number Redialing,
- 2 Volume Up**
Transferring Call,
Playing Forward
- 3 A2DP**
- 4 Volume Down**
Mute
Playing Back
- 5 LED Indicator**



Back

INSTALLATION

It is recommended that the hands-free car kit be positioned and installed on the windshield in front of the driver's shoulder, as shown in the picture below.




Step 1:
Stick the Windshield
Mount to the windshield



Step 2:
Insert the bluetooth
car kit



Step 3: OK

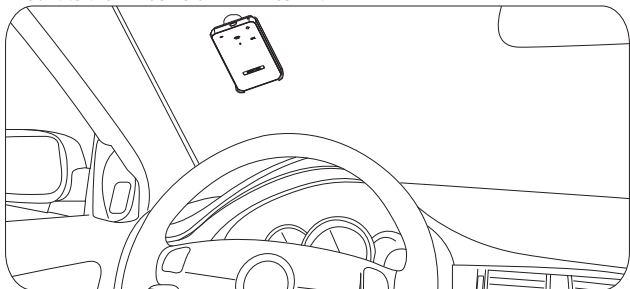

WARNING: Install the Hands-free Car Kit out of the way of any Air Bags for safety reason

GET STARTED

CHARGING THE NXBT-001

Using the car charger

Please charge the NXBT-001 before its first use. When charging, a red LED will be displayed. When the device is fully charged the light will switch off.

Using solar power


Direct the solar panel on the back of the hands-free car kit toward the sun. the operating time will be extended continuously without any additional charge required by the car charger.

Warning: Do not attempt to charge the hands-free car kit with any charger other than the one provided. Using another charger may damage or destroy the hands-free car kit.


Low battery indicator

When the battery is less than 3.5V, the device will make a sound and a red LED will flash thrice every 30 seconds.

TURNING THE NXBT-001 ON








Press and hold the  button for 3 seconds to turn the NXBT-001 on. You will hear an audio cue of "Do Re Mi Fa".

TURNING THE NXBT-001 OFF

Press and hold the  button for 5 seconds to turn the NXBT-001 off. You will hear an audio cue of "Fa Mi Re Do".

PAIRING THE NXBT-001

Initial pairing

-  With the NXBT-001 OFF, press and hold the  button for 5 seconds. You will hear a BEEP sound, and red & blue LED lights will flash alternately.
-  Use your cell phone to search for Bluetooth devices.
-  Select "NXBT-001" on your cell phone.
-  Your cell phone will request a password. Enter "0000".
-  Your cell phone will show that pairing is now complete.
-  The NXBT-001 will stand by if the pairing is not successful within 5 minutes.

Auto reconnection

When the NXBT-001 turns off while connected to a cell phone, it will automatically reconnect to the cell phone when it is turned back on. (Both devices must be within the required range of 33 feet / 10m.)

When the NXBT-001 and your cell phone are separated by a distance of 33 feet (10 meters) or more, the NXBT-001 and cell phone will disconnect. When they are brought back within the required distance, the NXBT-001 will automatically reconnect with the cell phone.


MAKING CALLS

MAKING A PHONE CALL

Dialing with the cell phone


With the NXBT-001 on and paired with your cell phone, dial your cell phone as you would normally.


Voice Dialing

With the NXBT-001 on and paired with your cell phone, press the  button once. After you hear the audio signal, state the desired name.


Note: Your cell phone must support Voice Dialing.

Last Call Redialing

With the NXBT-001 on and paired with your cell phone, press and hold the  button for 2 seconds, the last dialed number will be redialed.

Note: Do not press the  button for more than 2 seconds as the NXBT-001 will turn off.

ANSWERING A PHONE CALL

Press the  button once when the cell phone rings.

ENDING A PHONE CALL


Press the  button once when the conversation has ended.

REJECTING A PHONE CALL

Press and hold the  button for 2 seconds to reject an incoming call.

OPTIONS AVAILABLE DURING A CALL



TRANSFER CALL BETWEEN YOUR CELL PHONE AND THE NXBT-001

Press and hold the  button for 2 seconds during your conversation. You will hear a BEEP sound and the call will transfer between your cell phone and the NXBT-001.

HAND-HOLD MODE

This device supports hand-hold mode. If you don't want to use the loudspeaker, you can turn the volume to the lowest level and use the NXBT-001 as you using your cell phone.

VOLUME CONTROL

With the NXBT-001 on and paired with your cell phone, press  or  to adjust the volume.

MUTE

To activate the mute function, press and hold the **—** button for 2 seconds during a phone call. This will mute your voice to the other party.

To release the mute function, press and hold the **—** button for 2 seconds again.

Audio Player

If you are using a phone that supports A2DP and your phone is already connected with the NXBT-001, you can use the NXBT-001 to play the music stored in your cell phone.

PLAY, PAUSE AND RESUME

Use the **<<** button to play, pause and resume your music.

STOP

Press and hold the **<<** button for 2 seconds to stop your music.

SKIP FUNCTION

Press and hold the **+** button for 2 seconds to skip forward one track. Press and hold the **—** button for 2 seconds to skip back one track.

ANSWER A CALL WHILE MUSIC IS PLAYING

If there is a phone call the music will be stopped automatically. It will be started automatically once the phone call has ended.

SUMMARY OF BUTTON FUNCTIONS

Functions	Status	Action
Power on	Power off	Press the  button for 3s
Power off	Power on	Press the  button for 5s
Pairing	Power off	Press the  button for 5s
Voice dialing	Idle	Briefly press the  button
Answering a call	Ringing	Briefly press the  button
Ending a call	Talking	Briefly press the  button
Rejecting a call	Ringing	Press the  button for 2s
Last number redialing	Idle	Press the  button for 2s
Transferring a call	Talking	Press the  button for 2s
Mute on	Talking	Press the  button for 2s
Mute off	Mute on	Press the  button for 2s
Volume up	Talking	Briefly press the  button
Volume down	Talking	Briefly press the  button
Music play	Idle	Briefly press the  button
Pausing music	Playing music	Briefly press the  button
Stopping music	Playing music	Press the  button for 2s
Skip forward	Playing music	Press the  button for 2s
Skip back	Playing music	Press the  button for 2s

LED INDICATIONS

Status	LED indication
Power on	The blue LED indicator flashes twice
Power off	The red LED indicator flashes twice
Pairing	The red & blue LED indicator flash alternately
Connected	The blue LED indicator flashes once every 3 seconds
Not connected	The blue LED indicator flashed once every 2 seconds
Charging	The red LED indicator on
Charging completed	The LED indicator off
Low battery	The red LED indicator flashes thrice every 30 seconds

SPECIFICATIONS

Specifications

Bluetooth Core Specification:	V2.0+EDR
Supported Profile:	HSP, HFP, A2DP, AVRCP
Frequency Range:	2.402GHz-2.480GHz
Working Range:	≤33ft /10m
Charging Time:	car charger: 2 hours
.....	solar panel: 17hours
Talking Time:	10 hours
Standby Time:	250 hours
Dimension:	94*54*11mm
Weight:	55g

This manual was correct and complete at the time of printing. However, specifications and updates can occur at any time without prior notice. No part of this manual may be copied, republished, reproduced, transmitted, or distributed in any way without the prior written consent of Nextar, Inc. Any unauthorized distribution of this manual is expressly forbidden.

FCC Compliance

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with limits for Class B digital devices, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on. The user is encouraged to try to correct the interference through one or more of the following measures:

- 1. Reorient or relocate the receiving antenna.*
- 2. Increase the separation between the equipment and the receiver. Connect the equipment to an outlet on a circuit different from that to which the receiver is connected.*
- 3. Consult the dealer or an experienced radio/TV technician for help.*

Nextar™ is a trademark of Nextar (Hong Kong) Limited.

Nextar may find it necessary to modify, amend or otherwise change or update this manual. We reserve the right to do this at any time, without any prior notice. All specifications and features are subject to change without notice. All screen shots shown are simulated and may not represent the actual screen on production units sold to consumers.

For instruction manuals, updated drivers or other information, be sure to visit our website at:

www.nextar.com

Or write to us at:

© NEXTAR, INC. AND ITS AFFILIATES

1661 FAIRPLEX DRIVE
LA VERNE, CA 91750. USA

All products distributed by Nextar, Inc. unless otherwise indicated

Made in China

© 2008 Nextar (Hong Kong) Limited. Nextar is a trademark and service mark of Nextar (Hong Kong) Limited. All other brand names, trademarks and service marks are property of their owners.

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>