

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Compact Fluorescent Performance Series Reflector Trims		Compatible Uniframe™ Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
Catalog No.	Description	Catalog No.	Installation Type	Lamping
<b>1013CFL</b>	5" Vertical Open Downlight – Specular Clear	<b>1001F13U</b>	Non-IC 120/277v	13w Quad/Triple
<b>1013CDCFL</b>	5" Vertical Open Downlight – Clear Diffuse	<b>1001F18U</b>	Non-IC 120/277v	18w Triple
		<b>1001FR18U</b>	Non-IC Remodeler 120/277v	
		<b>1001F18UEM</b>	Non-IC Emergency 120/277v	
		<b>1001F26U</b>	Non-IC 120/277v	26w Triple
		<b>1001FR26U</b>	Non-IC Remodeler 120/277v	
		<b>1001F26UEM</b>	Non-IC Emergency 120/277v	
		<b>1001FD26L1</b>	Non-IC Lutron Dimming 120v	26w Triple
		<b>1001FD26L2</b>	Non-IC Lutron Dimming 277v	
		<b>1001FD26MX1</b>	Non-IC Advance Mark10 Dimming 120v	26w Triple
		<b>1001FD26MX2</b>	Non-IC Advance Mark10 Dimming 277v	
		<b>1001FD26M7U</b>	Non-IC Advance Mark7 Dimming 120/277v	

For other finishes please consult factory.

### Features

- Reflector:** Formed aluminum. Matte White flange.
- Finishes:** CL = Specular Clear  
CD = Clear Diffuse
- Performance Data:** 70° Cutoff angle.  
See attached photometric reports for distribution and efficiency data.  
Go to [www.lightolier.com](http://www.lightolier.com) for .IES files.

### Labels

cULus Listed. Suitable for Damp Locations. I.B.E.W.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	


631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
[www.lightolier.com](http://www.lightolier.com) © 2008 Philips Group • 0408

**26W Sylvania Dulux T/E Triple Tube. Lumen Rating = 1800 LMS. Specular Clear Trim**

**Zonal Lumens and Percentages**

Zone	Lumens	% Lamp	%luminaire
0-30	294	16.35	34.91
0-40	501	27.86	59.47
0-60	825	45.89	97.96
0-90	843	46.84	100.00
40-90	341	18.99	40.53
60-90	17	.96	2.04
90-180	0	0.00	0.00
0-180	843	46.84	100.00

\*\* Efficiency = 46.8% \*\*

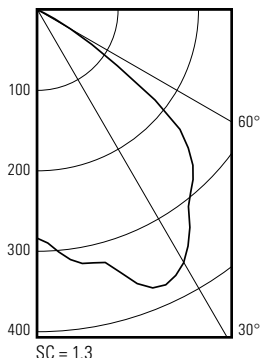

Certified Test Report No. 3724FR  
Computed by LSI Program  
\*\*Test-Lite\*\*

**Candlepower Summary**

Angle	Mean Cp	Lumens
0	284	
5	302	29
10	320	
15	325	94
20	362	
25	377	171
30	363	
35	330	207
40	296	
45	273	208
50	231	
55	121	117
60	47	
65	9	16
70	1	
75	0	1
80	0	
85	0	0
90	0	

**Coefficients of Utilization**

CC	80				70				50				30				10				0
	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	
Wall	Zonal Cavity Method - Effective Floor Cavity Reflectance = .20																				
RCR	Zonal Cavity Method - Effective Floor Cavity Reflectance = .20																				
0	.56	.56	.56	.56	.54	.54	.54	.54	.52	.52	.52	.50	.50	.50	.48	.48	.48	.47			
1	.53	.51	.50	.49	.52	.50	.49	.48	.48	.47	.46	.46	.46	.45	.45	.44	.44	.43			
2	.49	.47	.45	.43	.48	.46	.44	.42	.44	.43	.41	.43	.42	.40	.42	.41	.40	.39			
3	.46	.43	.40	.38	.45	.42	.39	.37	.41	.38	.37	.39	.38	.36	.38	.37	.36	.35			
4	.43	.39	.36	.33	.42	.38	.36	.33	.37	.35	.33	.36	.34	.32	.35	.34	.32	.31			
5	.40	.35	.32	.30	.39	.35	.32	.29	.34	.31	.29	.33	.31	.29	.32	.30	.29	.28			
6	.37	.32	.29	.26	.36	.32	.28	.26	.31	.28	.26	.30	.27	.26	.29	.27	.25	.25			
7	.34	.29	.25	.23	.33	.28	.25	.23	.28	.25	.23	.27	.24	.22	.26	.24	.22	.21			
8	.32	.26	.22	.20	.31	.26	.22	.20	.25	.22	.20	.25	.22	.20	.24	.21	.20	.19			
9	.29	.24	.20	.18	.29	.23	.20	.18	.23	.20	.17	.22	.19	.17	.22	.19	.17	.16			
10	.27	.21	.18	.15	.26	.21	.18	.15	.20	.17	.15	.20	.17	.15	.20	.17	.15	.14			

Determined In Accordance with Current IES Published Procedures  
Luminaire Input Watts = 29.0

Certified Test Report No. 3724FR  
Computed by LSI Program \*\*Test-Lite\*\*

Lytecaster 6.75" Dia. Recessed Vertical Downlight  
Cat. # RA-9743A (Elongated)  
26W Sylvania Dulux T/E Triple Tube. Lumen Rating = 1800 LMS.  
Universal Ballast #C2642UNVBES

IES Visual Comfort Probability

CC, WALL + FC Reflectance = 80, 50, 20  
Work Plane Illuminance = 100.0 Footcandles  
Work Plane Height = 2.5 Feet  
All Dimensions In Feet

Room Dimensions		Luminaires Lengthwise				Luminaires Crosswise			
Height		8.5	10.0	13.0	16.0	8.5	10.0	13.0	16.0
W	L								
20	20	66	59	46	41	66	59	46	41
20	30	66	62	53	43	66	62	53	43
20	40	66	62	53	49	66	62	53	49
20	60	66	63	53	49	66	63	53	49
30	20	66	65	51	42	66	65	51	42
30	30	66	67	58	45	66	67	58	45
30	40	66	67	59	50	66	67	59	50
30	60	66	67	59	51	66	67	59	51
30	80	67	67	59	51	67	67	59	51
40	20	66	65	55	46	66	65	55	46
40	30	66	67	61	49	66	67	60	49
40	40	66	67	61	53	66	67	61	53
40	60	67	67	61	53	67	67	61	53
40	80	67	65	61	53	67	65	61	53
40	100	67	65	61	53	67	65	61	53
60	30	66	67	61	52	66	67	61	52
60	40	67	67	61	55	67	67	61	56
60	60	67	65	61	56	67	65	61	56
60	80	67	65	61	56	67	65	61	56
60	100	67	65	61	56	67	65	61	56
100	40	67	65	61	56	67	65	61	56
100	60	67	65	61	56	67	65	61	56
100	80	67	65	61	56	67	65	61	56
100	100	67	65	61	56	67	65	61	56

**Job Information** **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
www.lightolier.com © 2008 Philips Group • 0408

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>