

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Xceed Compact Fluorescent Lensed Square Reflector Trims

Compatible Xceed Frame-In Kits

(See Individual Frame-In Kit Specification Sheets)

Catalog No.	Description	Catalog No.	Installation Type	Lamping
1050SQINFBW	5" Lensed Square Indirect Flush - White	1050SQ13ES*	IC Airseal® 120v	13w Triple
		1050SQ18ES*	IC Airseal® 120v	18w Triple
		1050SQ26ES*	IC Airseal® 120v	26w Triple
		1050DSQ26ES*	IC Airseal® Energy Star® Dimming 120V	26w Triple

*All frames come standard with preset mounting screws and a 2700K lamp. Models are available with preset nails and/or a 3500K lamp. (13ES = 2700K only). Simply add an N and/or 35 to the end of the model number for those options.

Features

- Upper Reflector:** Formed aluminum. Highly reflective corrosion resistant anodized finish.
- Lower Baffle / Cone:** Injection molded non-yellowing Polycarbonate plastic trim. Matte white finish.
- Lens:** 1/8" thick high transmission soda lime glass. Solite texture to hide visibility to the lamp.
- Finish:** W= Matte white
- Performance Data:** See attached photometric reports for distribution and efficiency data. Go to www.lightolier.com for .IES files.

Labels

cULus Listed. Suitable for damp Locations. I.B.E.W.

Job Information

Type:

Job Name:


Cat. No.:

Lamp(s):

Notes:

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • D0109

LYTECASTER 1050SQINFBW WALL LUMINAIRE, 26W PLT, GX24Q-3 BASE, INITIAL LAMP LUMENS: 1800

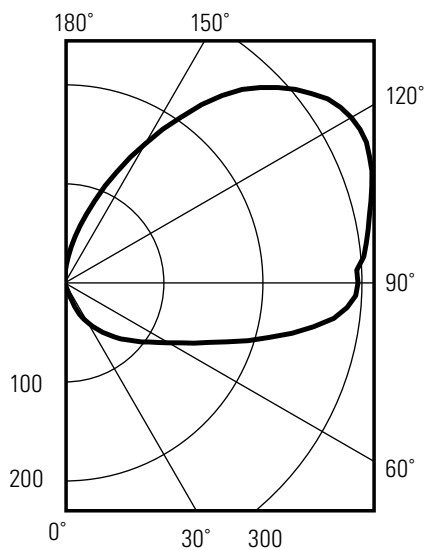

1050SQINFBW
 Report No. 3891FR
 Lamp: 4 Pin , 26W PLT, GX24q-3 Base
 Initial Lamp lumens: 1800
Luminaire Efficiency: 36.6%

TESTED ACCORDING TO
 IES PROCEDURES
 WITH THERMAL INSULATION

180°

Lighting Single Unit - Footcandles 2.5' Above Floor (Plan View)

	1'	2'	3'	4'	5'	6'	7'
7'	1	1	1	1	1	1	1
6'	1	1	2	2	2	2	2
5'	2	2	2	2	2	2	2
4'	2	2	3	3	3	3	2
3'	3	3	3	3	3	3	3
2'	3	5	5	4	4	4	3
1'	4	6	6	5	4	4	3
Luminaire → 0'	4	7	6	5	4	4	4

**Initial Footcandles, luminaire wall mounted 5.5' above floor, luminaire beam toward ceiling.
 Corridor is 8' wide by 8' high. Reflectances : 80% Ceiling, 50% Wall , 20% Floor**

180°

Lighting Single Unit - Footcandles on Floor (Plan View)

	1'	2'	3'	4'	5'	6'	7'
7'	1	1	1	1		1	1
6'	1	1	1	1	1	1	1
5'	1	1	2	2	2	2	2
4'	1	2	2	3	2	2	2
3'	2	4	4	4	3	3	3
2'	5	8	8	6	5	4	3
1'	10	15	12	8	6	4	3
Luminaire → 0'	13	18	14	9	6	4	3

**Initial Footcandles, luminaire wall mounted 24" above floor, luminaire beam toward floor.
 Corridor is 8' wide by 8' high. Reflectances : 80% Ceiling, 50% Wall , 20% Floor.**

Job Information **Type:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
 We reserve the right to change details of design, materials and finish.
 www.lightolier.com © 2008 Philips Group • D0109

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>