
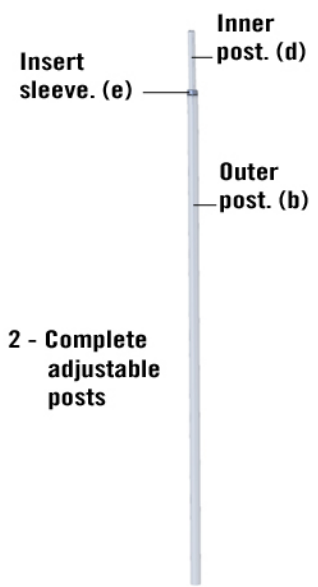


Assembly Instructions for HTS1 Speaker Stand

Parts List






- 2 - base. (a)
- 6 - Steel isolation spikes and adjustment nut. (c)
- 2 - M5 Threaded plug adapter. (f)
- 2 - L-bracket mounting plates. (h)
- 2 - 2"x2" Speaker mounting plate. (g)
- 2 - Adhesive mounting foam. (k)
- 2 - Mounting Screws. (j)



- Inner post. (d)
- Outer post. (b)
- Insert sleeve. (e)
- 2 - Complete adjustable posts

Speaker to bracket mounting screws

STEP 1:
Place speaker stand base(a) upside down on ground and thread steel isolation spikes in the 3 holes. Turn the base over (isolation spikes can scratch floors, use caution) and thread the outer post(b) into the hole in the base. See Fig. 1


Fig. 1



Fig. 2


-  For use with JBL SCS & Harmon kardon.
-  For back of speaker mounting
-  For bottom of speaker mounting

Fig. 3

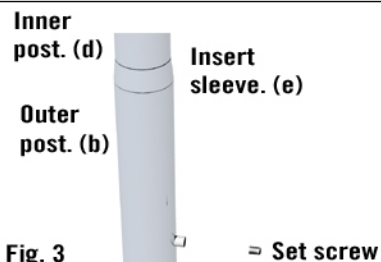

Inner post. (d)
Outer post. (b)
Insert sleeve. (e)
Set screw

Fig. 4

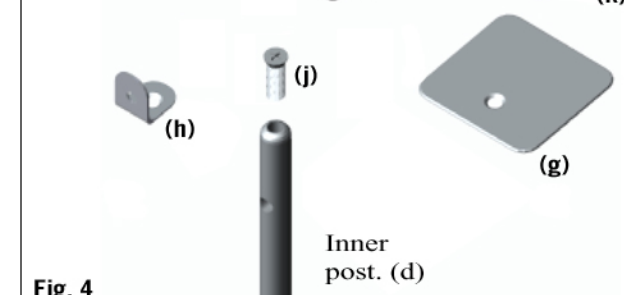

Inner post. (d)
Mounting screw (j)
Mounting plate (g)
Adhesive foam (k)

STEP 2:
Select Appropriate speaker adapter (Fig. 2) for your particular speaker application. If your speaker comes with a threaded insert in the back or bottom use bracket h or f. If your speaker does not come with a threaded insert you will need to use the adhesive foam(k) and mounting plate(g).

STEP 3:
Attach the adapter to the inner post(d) by using the 5mm mounting screw(j), see Fig 4. If you are using the mounting plate (g) you must first remove the backing paper so the adhesive is exposed. Then place the adhesive pad on the mounting plate. Peel back the other side of the backing paper on the mounting foam. Then place the speaker on the center of the mounting plate. If you are using brackets h or f then attach the speaker to the selected bracket using the provided hardware. Set to desired height by tightening the set screw in the outer post(b). See Fig. 3

STEP 4:
Route speaker wires through the hole in the back top of inner post(d) and out the bottom of the base.




Home Entertainment

HTS1 SPEAKER STAND



Home Entertainment

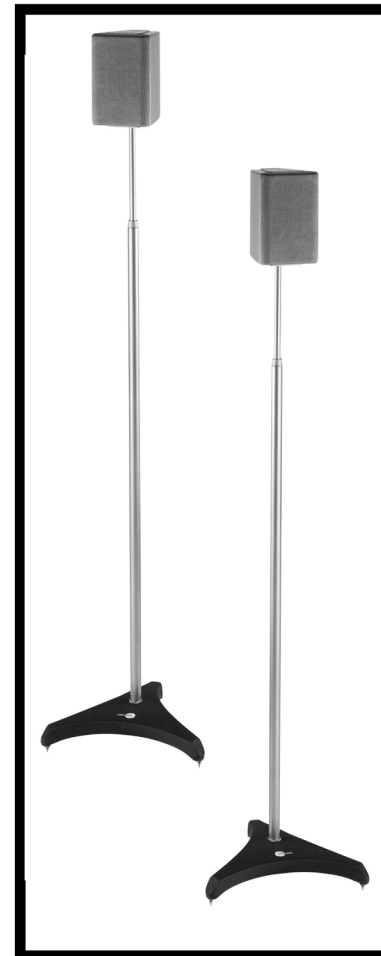

ADAPTABILITY

COMES WITH THREE
INTERCHANGEABLE.
ADAPTERS

CABLE MANAGEMENT

HIDE UNSIGHTLY WIRING.

QUALITY

BUILT WITH POWDER COATED
STEEL.

FLEXIBILITY

SEAMLESS APPEARANCE
AND HEIGHT ADJUSTMENT.

STABILITY

THREE TOUCH POINTS FOR
THE ULTIMATE IN STABILITY.



CABLE MANAGEMENT
THROUGH POST



30-40" HEIGHT ADJUSTABLE
FOR IDEAL LISTENING LEVEL



MULTIPLE ADAPTORS TO FIT
A VARIETY OF SPEAKERS



ALL PARTS INCLUDED
FOR EASY ASSEMBLY

For assistance or more information on other great products from OmniMount Systems, Inc.

contact us at:
OmniMount Systems, Inc.
The Pointe at South Mountain
8201 S. 48th St.
Phoenix, AZ 85044-5302
1-800-MOUNT-IT!
voice: 480-829-8000
fax: 480-756-9000
web: www.omnimount.com

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>