

ONE
FOR ALL[®]



ZAPPERTM

URC-6532
701598

UK Universal remote

D

F

E

P

I

NL



Table of Contents

UK

PICTURE OF THE ONE FOR ALL REMOTE	3
INSTALLING THE BATTERIES	4
FEATURES AND FUNCTIONS	4
SETTING UP THE ZAPPER	
Direct Set-Up	6
Search Method	8
Code Blink Out	9
CODELIST	
Television	66
Videorecorders	73
Satellite Receivers	76
Cable Converters	80
ADVANCED OPERATION	
Controlling Colour & Brightness	10
Scan	10
TROUBLE-SHOOTING	
Helpful Hints	11

About Your ZAPPER


Thank you for purchasing the ZAPPER 3 universal remote control (URC-6532). Your ZAPPER package contains:

- The ZAPPER Remote Control
- The ZAPPER User Guide & Code Book

The User Guide & Code Book explains in simple steps how to set up and operate your new universal remote control. **You may need this guide again in the future, so please be sure to keep it.**

Your ZAPPER needs 2 new "AAA/LR03" batteries.

Your ZAPPER is designed to let you use one remote to operate your Television, VCR and Satellite Receiver (or Cable Converter).

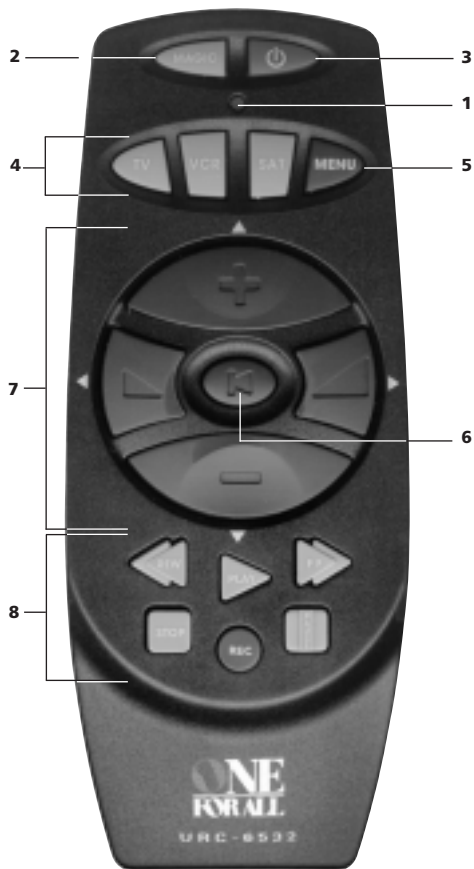

Installing The Batteries

The ZAPPER needs 2 new "AAA/LRO3" alkaline batteries.

- 1 Remove the battery cover from the back of the ZAPPER by pressing down on the tab.
- 2 Match the batteries to the +/- marks inside the battery case, then insert the batteries.
- 3 Press the battery cover back into place.

Important notes:

- In order to avoid having to reprogram your ZAPPER after you remove the batteries, you will need to insert new batteries within 5 minutes.
- Also, it is best that you do not use rechargeable batteries.
- **On the inside of the battery compartment door you will find a label on which to write your set-up codes after your ZAPPER is set up for your devices. Please write down your codes for easy, future reference.**

Features and Functions

See picture of the ZAPPER 3 remote on page 3.

- 1 **LED**
The LED (Light Emitting Diode) will flash red when a key is pressed to show the remote is working
- 2 **Magic**
The MAGIC key is used to set up your ZAPPER and to access special features.
- 3 **Power**
The Power key turns your devices both on and off.
- 4 **Device Keys**
The TV ,VCR and SAT keys select the home entertainment device to be controlled. Pressing the TV key allows the remote to control the functions of your Television. After pressing VCR you can operate your Video Cassette Recorder. After pressing SAT, you can operate your Satellite Receiver or Cable Converter.

5 Menu Key (for SAT only)

When in SAT operation, the Menu key controls the same function as it did on your original remote.

6 Mute/OK

The Mute key operates the same function it did on your original remote. It is also used to activate the Scan feature (page 10). When in SAT operation, whilst in Menu mode, the Mute key will operate the OK function.

7 Volume+/-, Programme +/-

The Volume and Programme keys operate just as on your original remote control. These keys are also used to program the ZAPPER for your devices and to control the Colour and Brightness settings of your television (page 10). When in SAT operation, whilst in Menu mode, these keys can be used as navigation keys.


8 Video Recorder Keys

After pressing the VCR key, the Video Recorder keys operate the functions of your Video Recorder. To prevent accidental recordings, the Record key must be pressed twice.

Setting Up The ZAPPER

Direct Set-Up

To set up the ZAPPER for your Television, Video and Satellite Receiver (or Cable Converter) follow the instructions below. To set up your Television:



- 1  Find your Television code in the Set-Up Code section (page 66-80). Codes are listed by brand name. The most popular codes are listed first. **Make sure that your Television is switched on (not in standby).**


- 2  Press and release the **TV** key to select the device.

- 3  **Press and hold down MAGIC** until the red light blinks twice (it will blink once then twice).

- 4  **Enter your 5-digit** code according to the chart below. The red light will blink twice.

Volume +		=	1
Volume -		=	2

Programme +		=	3
Programme -		=	4

- 5  Now, aim the ZAPPER at your Television and press **POWER**. If your Television switches off, your ZAPPER should be ready to operate your device.

- 6 Turn your device back on and try all the remote's functions to ensure they are working properly. If the functions do not work properly, repeat steps 1-6 using another code listed under your brand.

- 7 **Write the codes for your TV, VCR and SAT in the boxes provided on page 7 and inside the battery compartment for easy future reference.**

Important notes:

- To set up your Video Recorder, Satellite Receiver or Cable Converter, follow the same instructions above, only press the VCR or SAT key during step 2.
- Some codes are quite similar. If your device does not respond or is not functioning properly with one of the codes, follow steps 1-6 with each code listed for your brand.
- If none of the codes listed for your brand operate your device, follow the Search Method described in the next section. The Search Method can be used even if your brand is not listed at all.
- Remember, to control your device after you have programmed it with the ZAPPER, you must press the device key first (TV, VCR or SAT).

TV Code


--	--	--	--	--

VCR Code

--	--	--	--	--

SAT/Cable Code

--	--	--	--	--

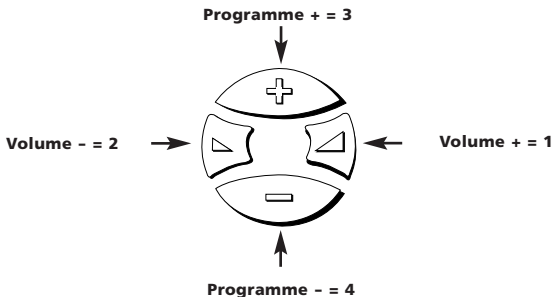









(Example: To enter the Sony TV code 24432, you would press Volume(-), Programme(-), Programme(-), Programme(+), Volume(-).

If your device does not respond to the ZAPPER after you have tried all the codes listed for your brand, try the Search Method.

Make sure you write your correct 5 digit codes in the boxes provided inside the battery compartment and on this page.

Search Method

If your Television, VCR, Satellite or Cable Converter does not respond to the ZAPPER after trying all the codes listed for your brand, try searching for your code. The Searching Method allows you to find the code of your device by scanning through all the codes contained in the memory of the ONE FOR ALL remote control. To search for your TV code:

- 1** Make sure that your Television is switched on (not in standby).
-  **2** Press the **TV** key on the ZAPPER.
-  **3** **Press and hold down MAGIC** until the red light blinks twice (it will blink once then twice).
- 

 **4** Next, press the **Programme(-)** key **three times**.
- 
 **5** Next, slowly alternate between **TV** and **POWER** until your Television turns off. You may have to press these keys many times, so be patient. Remember, you must aim the ZAPPER at your device the entire time you are searching for your code.
-  **6** When your device turns off, press and release **MAGIC**, to store the code.

The zapper should now be ready to operate your television. Turn your television back on and try all the remote's functions to ensure they are working properly. If some of the ZAPPER'S commands are not operating correctly, try the search method again, you may be using the wrong code.









Important notes:

- To search for the code for your VCR, Satellite Receiver or Cable Converter, follow the same instructions above, only press the VCR or SAT key during step 2 and 5.
- If your Video's original remote control does not have a power key, press PLAY instead of POWER when searching for your code.
- During step 5, you may have to press these keys many times (up to 150!), so be patient. Remember, you must aim the ZAPPER at your device the entire time you are searching for your code.

Code Blink Out

After you have used the Search Method, you can find out which code the ZAPPER responded to by blinking back the code. It's useful to know your Television, Video, Satellite Receiver or Cable Converter code for future reference. **Remember, you can only blink back your code after the ZAPPER is operating your device.**

To blink out your TV code:

-  Press the **TV** key on the ZAPPER.
-  Press and hold the **MAGIC** key until the red light blinks twice (it will blink once then twice).
-  Next, press **Programme(-)**, **Programme(-)**, **Programme(+)**.
-  For the first digit of your 5-digit code, **press Volume + (▲)** and count all the red blinks.
-  For the second digit, **press Volume - (▼)** and count all the red blinks.
-  For the third digit, **press Programme(+)** and count all the red blinks.
-  For the fourth digit, **press Programme(-)** and count all the red blinks.
-  For the fifth digit, press **MUTE** and count all the red blinks.









Now you have your 5-digit code. Write your code in the boxes provided previously and inside the battery compartment for easy, future reference.

Important note: To blink out the code for your Video Recorder, Satellite Receiver or Cable Converter, follow the same instructions above, only press the VCR or SAT key during step 1.

Advanced Operation

Controlling Colour & Brightness

Depending on the functions of your original remote control, the ZAPPER may operate the colour and brightness settings of your Television.


Colour up =	Press		then hold	
Colour down =	Press		then hold	
Brightness up =	Press		then hold	
Brightness down =	Press		then hold	

Note: You have 5 seconds to press the Volume or Channel keys for colour or brightness adjustment after pressing MAGIC.


Scan

Your ZAPPER comes with a special Scan function which lets you "scan" through every programme available on your TV, VCR, Satellite or Cable Box.


For example, to scan the programmes on your TV:

- 

Aim the ZAPPER at your TV. Press the **TV** key. Press and release **MAGIC** then press the **MUTE** key.



The ZAPPER will send the command to advance through all the programmes available on your Television stopping at each programme for about three seconds. Remember, you must aim the ZAPPER at your device the entire time you are using scan.


- When you find a programme you would like to watch, simply press **any key** to stop the Scan feature.

Important notes:

- To use Scan with your Video, Satellite or Cable Box, follow the same instructions above, only press the VCR or SAT key during step 1.
- Scan may not function with devices that did not have a Programme +/- key on the original remote control.

Trouble-Shooting

Helpful Hints

Problem:	Solution:
Your brand is not listed in the ONE FOR ALL code section?	Try the search method.
The ONE FOR ALL does not operate your device?	A) Try all the codes listed for your brand. B) Try the search method.
The ONE FOR ALL is not performing commands properly?	You may be using the wrong code. Try Direct Set-Up again trying each code listed under your brand or start the search method over again to locate the proper code.
Your TV switches to programme 1 when you press the POWER key before switching off OR you must press POWER twice to switch on your TV?	Press TV, then press MAGIC until the red light blinks twice. Then press: (Programme-) (Programme+) (Programme-)
You cannot reach channel 10 and above on your TV or Satellite.	If your original remote did not have channel +/- keys, the Zapper may not operate this function.
Video not recording?	As a safety feature on your ONE FOR ALL, you must press the Record key twice .
The ONE FOR ALL does not respond after pressing a key?	Make sure you are using new batteries and are aiming the ONE FOR ALL at your device.
The red light does not blink when you press a key?	Replace batteries with 2 new "AAA/LR03" alkaline batteries

Televisions

Fernseher

Téléviseurs

Televisores

Televisões

Televisori

Televisies

4710991	A.R. Systems	31341	22311
4711271	Abex	11311	
4711306	Accent	31341	
4712089	Acec	11141	
4710010	Admiral	12224	12242 23313 14222 21131
4710012	Adyson	14232	14231
4711080	Agashi	14231	21131
4710015	AGB	31121	
4710997	Agef	12224	
4710017	Aiko	14231	11132 22414 31341 11314 23412 12131 22332 21131 14232
4710018	Aim	31341	21213
4710020	Akai	22332	14211 22414 23412 11314 11132 12131 14233 13314 31121 32233 31341 32122 24311 14232 32424 14231 21131 24111 13413 22432 32243
4710021	Akiba	14233	21233 24124 31341
4710022	Akito	31341	
4710023	Akura	14233	21233 21221 11132 22323 23241 13334 21131 33241 31341
4711267	Alaron	14231	
4710024	Alba	14233	14334 11132 23313 22413 22314 22414 14231 14424 13314 32122 31341 24324 11321 33241 32114
4710026	Alcyon	12141	
4710029	Allorgan	14143	21323 14232
4710032	Allstar	31341	
4710041	Amplivision	14232	23211 22111 22413
4710042	Amstrad	13412	11132 31121 21131 14233 22414 23412 13334 22333 23241 33131 31341
4711094	Anam	31341	11132
4711268	Anam National	31341	

4710044	Anglo	11132	21131
4710045	Anitech	11132	12141 21131 31341
4710047	Ansonic	22413	21321 12323 11132 22423 13314 23234 21114 14424 11141 23341 31341
4710050	Apollo	24232	
4710053	Arc en Ciel	23144	12342 14121 31431 22142 14123
4710054	Arcam	14231	23144 14232
4710057	Aristona	31341	11141
4710059	Arthur Martin	13314	23211
4710060	ASA	12332	22233 12123 12331 12224
4710062	Asberg	31341	12141
4711095	Asora	11132	
4710070	Asuka	14233	21131 14231 21233 14232
4710072	Atlantic	31341	14231 14143 21114 22111
4710074	Atori	11132	
4710075	Auchan	13314	23211
4710080	Audiosonic	31341	12342 14232 22413 22212 21131 14233 23341
4710081	Audioton	14232	22413 21131
4710084	Ausind	12141	
4710085	Autovox	12224	14143 14342 12141 14232 14424
4711156	Awa	11134	11321 11132 13242 22423 23241 14231 32243 31341
4711081	Ayomi	14343	
4711098	AYR	31224	
4710091	Baird	12342	14112 22224 13443 14111 12131 12132 14232 14211
4710093	Bang & Olufsen	31422	12224
4710094	Barco	22441	13314
4710097	Basic Line	14233	11132 22423 31341 13314 21233
4710098	Bastide	14232	
4710099	Baur	13213	21344 31224 14114 22332 24432 31341
4711082	Bazin	14232	
4711079	Beaumark	13413	
4710103	Beko	22413	32243 31341
4710105	Beon	31341	23313 11311
4710106	Best	22212	22413 23322
4710107	Bestar	31341	22413 22423
4710108	Binatone	14232	
4710110	Black Star	14424	
4710111	Blacktron	21233	
4710112	Blackway	21233	
4710113	Blaupunkt	31224	14114 14131 14222 22124 24111
4710114	Blue Sky	14233	21233 24124 31341 24324 33241
4710115	Blue Star	21233	
4710118	Bondstec	14424	
4710119	Boots	14232	
4710121	BPL	21233	31341
4710123	Brandt	12342	23144 14342 22142 14121 14123 21244 22144 31431 32412
4710126	Brinkmann	23313	31341

4711030	Brionvega	31341	12224	22333	4711102	Datsura	14211
4710128	Britannia	14231	14232		4710209	Dawa	31341
4711444	Brother	21131			4710210	Daytron	11132 22423 31341
4710133	Bruns	12224	21332		4710216	de Graaf	14211 11341 13314
4710134	BSR	13314	21323		4710214	Decca	12131 31121 14232 31341
4710138	BTC	14233			4711459	Deitron	31341
4710139	Bush	14233	14334	13314 11132 11321	4710999	Denko	21131
		21233	22314	22414 22423 21131	4710217	Denon	13212
		22332	24324	14211 32122 21323	4711103	DER	14112 13443
		14232	33241	31341	4710220	Desmet	22111 31341
4710149	Capsonic	21131			4711000	Diamant	31341
4711455	Carad	32313	31341		4711310	Digiline	31341
4710150	Carena	24124	31341		4710232	Dixi	11132 31341 21332 14424 14232
4710151	Carrefour	11321	12123 11432		4710235	Domland	23133
4710153	Carver	13333			4711255	Drean	31341
4710998	Cascade	11132	31341		4710239	DTS	11132
4710154	Casio	31341			4710240	Dual	14232 11432 22224 21114 22311
4710155	Cathay	31341					23133 23144 21344 14232 13314
4711231	CCE	31341	14232				21114 31341
4710160	Centurion	31341			4710243	Dumont	12224 12331 12323 14222 14232
4710161	Century	12224	14222 14424 14343				12123 12131
4710162	CGE	12133	12141 14424 13314 21221		4711162	Dux	31341 11141
		23313	22413		4710247	Dynatron	31341
4710167	Cimline	11132	14334 14233		4710252	Elbe	23414 14343 21114 22333 21321
4710168	Citizen	31224					22413 13314 14233 23234 32313
4710169	City	11132					31341
4711073	Clarivox	23313	12123		4710254	Elicit	12224 14424 31121 12323 13314
4710172	Clatronic	14233	21131 22413 22414 14232		4710255	Elekta	21131 21233
		12141	14424 11132 12323 22111		4712093	ELG	31341
		32114	31341		4710259	Elin	14231 31341 12332 12331 22332
4710173	Clayton	23112					24111 13314 11132
4711308	CMS Hightec	14232			4710260	Elite	14233 31341
4710186	Concorde	11132			4710261	Elman	12323
4710187	Condor	14231	14424 21233 22111 22413		4710263	Elta	11132 21131 14231
		11132	12323 23234 23313 31341		4710265	Emerson	13412 14222 12224 13413 14424
4710188	Conic	11311					22414 12123 21233 22111 31341
4710191	Contec	14231	11132 13242 11134 11321		4710267	Emperor	21233
4710192	Continental				4710271	Erres	31341 11141
	Edison	12342	14342 14121 14123 23144		4710272	ESC	31341
		22142	21244 24324 31431		4710273	Etron	31341 11132 13314
4710194	Cosmel	11132	22212		4711632	Eurofeel	21131
4710195	Crezar	14222			4710278	Euroman	14231 21131 31341 14232 23322
4710196	Crosley	12224	14424 12133 12141 13314				22413
		14222			4710279	Europa	31341
4710197	Crown	11132	22413 12141 23322 32114		4710280	Europhon	31341 31121 12323 14222 14232
		23313	14211 24324 11422 31341				14424 13314
4710200	CS Electronics	14424	14231 14233		4710291	Expert	14143 23211 21114 13314
4710201	CTC	14424			4711001	Exquisit	31341 14424
4710202	Curtis Mathes	12242	13212		4711639	Family Life	31341
4710203	Cybertron	14233			4710294	Fenner	22423 11132
4711309	Daas	21332			4710296	Ferguson	12132 21244 14111 13443 22144
4710205	Daewoo	11132	31341 14231 22423 14233				14343 14112 12342 31411 32412
		14232	32411		4710299	Fidelity	14112 14231 22414 13314 21131
4710206	Dainichi	14233	14231				31341
4710207	Dansai	31341	21131 11311 11314 14231		4711164	Filsai	14232
		11132			4710301	Finlandia	14211 22233 22332
4711160	Dansette	23241					
4711083	Dantax	22413					

4710302	Finlux	12332	12331	31341	22233	14232
		12131	13314	12141	31121	12123
		12224	12323	23234	32424	24341
		24311				
4710304	Firstline	21323	22112	14231	31341	22423
		23112	14424	11132	13314	12323
		14232	23234	14343	12131	14334
		33241	14211	32411		
4710305	Fisher	12331	14232	11321	11432	14211
		22413	31334	21332	11342	12224
		13242	22332	13314	21344	12131
4710307	Flint	31341	24124	12131	14233	
4711002	FNR	12323				
4710308	Forgestone	14112				
4710309	Formenti	12224	14222	14231	22111	13314
		12141				
4710310	Fortress	12242	12224			
4710313	Fraba	22413	31341			
4711106	Friac	11132	31341	12323	23322	
4710319	Frontech	14424	21131	24111	14232	11132
4710322	Fujitsu	14143	12131	12323	14232	13314
		11132	22311			
4711457	Fujitsu General	11132	14232			
4710323	Funai	21131	21323			
4710326	Galaxi	12323	31341			
4710327	Galaxis	22413	23313	12323	31341	
4710331	GBC	14222	13314	11132	22423	14233
4710333	GE	31411	12342	13413	21233	21244
		22144	22224			
4711003	Geant Casino	13314	23211			
4710335	GEC	11334	12131	13314	22332	31121
		14232	31341			
4710336	Geloso	14222	14424	11132	13314	22423
4710337	General	12342	21244	24224		
4710338	General Technic	11132				
4710339	Genexxa	14233	31341	23241		
4710341	Germanvox	14222				
4710345	Goldhand	14231				
4710346	Goldline	22212				
4710347	GoldStar	31341	22413	21313	11311	11132
		22432	14232	14424	14231	13314
		13413	22332	11341		
4710349	Goodmans	11321	12131	11132	21131	31121
		21313	22423	24324	22341	22414
		31341	22224	14334	11314	24311
		31411	11311	14232	32411	22144
		22413	23322			
4710350	Gorenje	14233				
4710351	GPM	31341	11422	13333		
4711248	Gradiente	31341	22332	22414		
4710352	Graetz	23211	14313	31341	11141	11342
4710353	Granada	12131	13213	12341	14211	14232
		12141	11321	22214	31121	24232
		22144	31411			
4710354	Grandin	21233	14233	23211	11132	31341
		22111	13314	24124	32114	32313
4711107	Gronic	12323	14232			
4710355	Grundig	31224	14114	24324	12123	12141
		14342	31341			
4710359	Halifax	21131	14231	14232		
4710360	Hampton	14231	14232			
4711108	Hanimex	21323				
4710362	Hanseatic	31341	21321	21233	13314	22332
		23133	14222	22111	11432	23341
		22413	11132	21323	14232	21221
		12224				
4710363	Hantarex	11132	14222	21331	12323	31341
4710364	Hantor	31341				
4711084	Harwood	11132	23241	11311	31341	
4711678	Hauppauge	31341				
4710370	HCM	21131	11132	21233	23241	14232
		14233	23313	31341		
4710372	Hema	14232	11132			
4710374	Hifivox	12342	14121	23144	31431	
4711682	Highline	21131	31341			
4711110	Hikona	14233				
4710377	Hinari	14211	11321	14233	31341	11132
		13314	22341	22314	23434	24324
		14334	21323			
4710380	Hisawa	21233	14233	23211	24124	
4711004	Hit	12224				
4710381	Hitachi	14312	11321	11341	11334	24232
		13314	22224	14121	14123	14232
		11311	21221	31121	12131	13212
		12332	13413	31341		
4711684	Hitachi Fujian	12341				
4711170	Hitsu	11132	24124	14233		
4711085	Hornophone	31341	11141			
4710384	Hoshai	14233	24124			
4711086	Huanyu	22423	14231			
4710388	Hygashi	14232	14231			
4710389	Hyper	11132	14231	14232	14424	
4710390	Hypersonic	22332				
4710391	Hypson	31341	21131	14232	21233	24124
		23211	14343			
4711005	Iberia	31341				
4710393	ICE	21131	14232	31341	22414	14233
		14231	11132			
4711006	Ices	14233	14231			
4710395	Imperial	31341	14424	22413	23313	13314
		12133	12141	14121		
4710396	Indesit	14342	14222			
4710397	Indiana	31341				
4711343	Ingelen	24324	32313			
4710398	Ingersoll	11132				
4710401	Inno Hit	11132	12131	31341	14233	21313
		14232	12141	31121	14424	
4711312	Interactive	23234				
4710404	Interbuy	11132	21131	14424		
4710405	Interfunk	31341	11141	12224	21214	22124
		13314	22332	22413	12342	31431
4711113	Internal	31341				
4710408	Intervision	21233	14232	24124	31341	22414
		22432	24111	22413	23133	24324
		14233	12323	13314	21131	14424

4710410 Irradio	11132 31341 14233 14424 21313 12141	4711009 Lumatron	14143 22333 13314 31341 21114 22332 14232 21131 12132
4710412 Isukai	14233 31341 21233	4710481 Lux May	31341 11132
4710413 ITC	14232	4710485 Luxor	14342 21313 24311 24341 22332 14211 13314 22233 24232
4710414 ITS	31341 22414 14233 21233 21131 14231	4711241 LXI	13413
4710415 ITT	13314 24311 22332 24232 14112 22233 22214 14211	4711316 Madison	31341
4710416 ITT Nokia	22332 13314 24232 24311 22233 14211 22214 32243 32313 32424	4710490 Magnadyne	12224 14424 31121 12323 13314
4710417 ITV	21131 31341 14424	4710491 Magnafon	31121 14222 12141 12323 14231
4711314 Jean	11321	4710492 Magnavox	11321 31341
4710420 JEC	11314	4711071 Magnum	33131
4710425 JVC	11422 13443 11321 14111 14112 22414 14233 32243	4710495 Mandor	21131
4710427 Kaisui	14233 21233 31341 14231 24124 14232 11132	4710496 Manesth	31341 14334 14232 21131 22111 21221 11314 21323
4710428 Kamp	14231	4710497 Manhattan	31341 33241
4710429 Kapsch	14143 13314 22332 21114 12331	4710500 Marantz	31341
4710430 Karcher	31341 23322 22413 21233 12323 32313 21131	4710503 Marelli	12224
4711283 Kawasho	14231	4710504 Mark	31341 14232 14231 22423 11132
4711177 KB Aristocrat	13314	4711342 Masuda	14233 11132 22414
4710432 Kendo	22333 14334 14424 12323 23341 22413 23234 32313 22432 31341	4710508 Matsui	14334 13412 11132 22314 11134 12131 11321 31341 24324 14232 21323 22414 23412 23434 32114 24124 31121 11314 13314 14211 11342 14114 22144
4710433 Kennedy	14143 14222 13314 23414	4710513 McMichael	11334
4710437 Kingsley	14231	4710517 Mediator	31341 11141
4710438 Kneissel	23414 21114 21321 22413 14343 23234 32313 31341	4710518 Medion	31341 33241
4710441 Kolster	31341 12323	4711121 Megas	32313
4710442 Konka	14233 22414 31341	4711291 Megatron	13212 13413
4711315 Kontakt	24324	4710487 Meletronic	22233 31341 12342 22224 11432 14424 12332 12331 22423 11132 14232 24311 24341 14231 23234
4710443 Korpel	31341	4711010 Melvox	23211
4710444 Korting	12224 23322 22413 22111	4710520 Memorex	11132 13413 14433
4710445 Kosmos	31341	4710521 Memphis	22212 12131 11132 23112
4711181 Kotron	23241 21131	4710522 Mercury	31341 11132
4711350 Kraking	14343	4710525 Metz	12224 14114 31224 23444 14344 14222 21214 22344 23121 32134
4711287 KTV	14232	4710526 MGA	13413
4711117 Kyoshu	21131 23241 11311 23313	4711317 Micromaxx	31341 33241
4710471 Kyoto	23112 11311 13314	4711295 Midland	11311
4711471 Lemair	23234	4710531 Minerva	24324 31224 14114 12123 12141 14342
4710454 Lenco	11132 22423 12331 13314 31341	4710532 Minoka	23241 31341
4710456 Lenoir	11132	4710535 Mitsubishi	12341 12242 31341 13413 12224 11321 14342 22323 14112
4710458 Lesa	14424	4710538 Mivar	21321 21313 21314 22413 12141 14231
4710471 Leyco	21131 12131 31341 21323 32114 31341 22413 21313 11311 11132 22432 14232 14424 14231 13314 13413 22332	4711186 Monaco	11132
4711072 LG	31341 22124 11141 11132 21131 22423 31341 14233 33241	4710540 Morgan's	31341
4711008 Liesenkotter	31341 22124 11141	4710541 Motion	12141
4710473 Lifetec	11132	4711297 Motorola	12242
4711240 Lloyd's	11132	4710543 MTC	22413 14231
4710471 Lloytron	11311	4711786 MTEC	11311
4710472 Loewe	31341 12224 21321 22413	4711187 Multibroadcast	14112
4710474 Logik	11134 14112 22414	4710545 Multistandard	12323
4711456 Logix	33241	4711452 Multitec	31341 33241
4710478 Luma	14143 22333 13314 31341 21114 23234 22423 11132		

4710547	Multitech	14232	11132	14231	14424	12323	4710610	Otto Versand	24432	11321	12242	31341	31224
		22413	31341						14114	22332	14334	12342	14222
4710551	Murphy	12331	14231	12131	13314				21323	14313	14424	21344	22111
4711791	Musikland	14233					4710614	Pael	14232				
4710553	NAD	22332	13413					14231					
4711124	Naiko	31341					4710616	Palladium	22413	24432	14131	23313	31341
4711125	Nakimura	22423	31341						14424	22124	12224	13314	14222
4712099	NAT	14313	22221						14232	23234			
4710562	National	14342	14313	22221			4711129	Palsonic	21131	23241	31341	14232	22432
4710564	NEC	13333	11321	22111	24124	11132	4710619	Panama	11132	14232	21131	14231	14424
		22423	14232	11134	31341				31341				
4710565	Neckermann	22413	24432	14131	31341	13314	4710620	Panasonic	14313	14433	21213	14222	22332
		22124	23313	12224	14222	14424			14342	22344	22221	31121	13314
		14232	23234						31341				
4710566	NEI	31341	22212	22414			4710622	Panavision	31341	23234			
4710567	Nesco	14424					4710628	Pathe Cinema	13314	14343	14231	23211	22111
4711292	Netsat	31341							21321				
4710568	Network	11311	22212				4710629	Pathe Marconi	14222	12342	14121	14123	22142
4711012	Neufunk	11132	31341	32313					23144	14342	31431		
4710572	New Tech	11132	31341	22224	14232	24111	4710631	Pausa	11132				
4710571	New World	14233					4710632	Perdio	12131	22111	13314	31341	
4710574	Nicamagic	14231					4710633	Perfekt	31341				
4710576	Nikkai	12131	14233	31341	14232	21131	4711460	Pershin	23211				
		11311	11314	22212	14231	11132	4711131	Phase	11311				
		11321					4710634	Philco	12224	12133	23313	12141	14222
		13413							14424	13314	22413	13212	31341
4710577	Nikko	31341	21131				4710635	Philharmonic	14232				
4711249	Noblex	12323	12141	12123	14231		4710636	Philips	31341	11141	11334	12224	14112
4710578	Noblisko	23144	12342	14121	31431				22224	22423			
4710579	Nogamatic	22332	13314	24311	24341	24232	4710639	Phoenix	31341	12224	22111	22413	23112
4710580	Nokia	22214	14211	22423	32424	32243			14231	13314	12131		
		22233					4710640	Phonola	31341	11141	12224	14112	14231
4710582	Nordmende	12342	21244	23144	14121	22224	4711336	Pilot	31341				
		14123	14222	31431	31411	14114	4710642	Pioneer	23341	31341	22413	22224	22332
		22144	31341						12342				
4711013	Novatronic	31341	12332	22423			4711132	Pionier	22413				
4710588	Oceanic	13314	23211	22332	21323	14211	4710644	Plantron	31341	21131	11132		
4712100	Odeon	21131					4711066	Playsonic	14232				
4710590	Okano	22413	31341	21131	12131		4710645	Policom	31431				
4711014	Omega	21131					4710647	Poppy	11132				
4710595	Onwa	32233	22414	14233	23412	32122	4710648	Portland	22423				
4710596	Opera	31341					4711846	Powerpoint	24324				
4710598	Optimus	14433					4710650	Prandoni-Prince	14424	31121	22332	14222	12141
4711299	Optonica	12242					4710651	Precision	14232				
4710599	Orbit	31341					4710655	Prima	11311	11132	21131		
4710602	Orion	14334	21323	13412	22111	22314	4710656	Prinz	12131	11432			
		11134	11132	22112	22341	21331	4710658	Profex	11132	13314			
		12323	23434	31341	21131	23241	4710660	Profitronic	31341	12323			
		31341	14233				4710662	Proline	22112	12131	31341	11141	32412
4711015	Orline	23112	33241				4710664	Prosonic	31341	14231	22413	22423	32114
4711192	Ormond	12131	14233	11311	14232	21131			22414	33241			
4710605	Osaki	21221	23241	22423	31341		4710665	Protech	31341	14232	11132	14424	12323
		31341							21131	23313	22212	33241	
4711193	Osio	14233					4710667	Proton	13413				
4710607	Oso	13242	12131	11321	11311	14233	4710669	Provision	31341				
4710608	Osume						4710672	Pye	22423	31341	11141	12224	
							4710673	Pymi	11132				
							4711067	Quadra Vision	23211				

4710677	Quasar	14424	14433						4710746	Schneider	31341	11141	11432	21344	23133	
4710678	Quelle	31341	24432	11134	12342	31224					22311	21114	22224	14232	14424	
		22332	11311	11321	14232	14424					22414	14233	22332	13314	33241	
		12133	22124	12123	12331	12332					33131					
		13242	14114	14131	14222	21131				4710750	Scott	13413				
		21313	33241							4711324	Sears	13334	13413			
4710679	Questa	11321	11311							4710753	SEG	21332	14232	21131	11312	14424
4710682	Radialva	12342	14233	13314	31341							11321	12323	22333	13314	14231
4710684	Radiola	31341	11141									33241	24324	31341		
4710685	Radiomarelli	12224	31121	14424	31341					4710754	SEI	12224	24432	12323	13314	31121
4711088	RadioShack	31341	11311	13413								14222	21323	21331	14143	31341
4710686	Radiotone	11132	23341	31341	22413	32114						14143	21114	22333	13314	23234
		23313	21131	23241	33131							11132				
4710688	Rafena	21332										21221	11314	14233	11132	
4710690	Rank	12123										13413				
4710691	RCA	31411	32412	22144	12242							24124	32313			
4710693	Realistic	11311	13413									12242	13242	11321	21323	11422
4711016	Recor	31341										14112				
4712101	Rectiligne	31341										21323				
4710695	Rediffusion	22332	11321									31341				
4711017	Redstar	31341										13314	12224	12323	14222	
4711018	Reflex	31341										31224	14131	14114	14222	22124
4710698	Revox	31341	22413									13242	11311	13213	31341	
4710699	Rex	14143	23234	14424	13314	21114						31341	11141			
4710700	RFT	21332	12224	21321	22413	23341						22413				
		12131	21131									14231	31341			
4711338	Rhapsody	14231										31341	11321	22332		
4710680	R-Line	31341										12224	12323	14424	23211	23414
4710701	Roadstar	11132	21131	14233	23313	31341						11132	31341			
4710703	Robotron	12224										13412	12224	14334	12323	14222
4711885	Rodex	31341										21323	21331	13314	22332	31121
4711197	Roxy	24111										14143	31341	24432		
4710711	Royal Lux	23322	22413	23241								31341				
4710715	Saba	21244	14222	12224	23144	13314						22111				
		12342	31121	22224	22332	24413						11311	22332	12131	13314	
		14121	14123	22144	31431	32412						14233				
4710718	Sagem	24124	32313	21233								14211	22413	22214	14232	
4710720	Saisho	14334	31121	13412	11132	11134						31341				
		14232	13314	21131								31341	11132	21131	21233	14232
4710722	Salora	21313	13314	22332	22341	31121						14211	13314	23211	24432	22332
		22214										31341	22413	21323		
4710723	Sambers	14222	31121	12141	12323							24432	11134	11321	12323	12133
4711340	Sampo	11311										12323	14233	22423		
4710724	Samsung	31341	32134	11132	14232	24111						13413				
		13413	22413	21131	12233	14231						31341	22111	23313	11311	
		21313	11311	12131	14211	33121						11132				
		14231	14232									11311	11132			
4711139	Sanela	14343										11311				
4710727	Sansui	31341	22414									14233	11132	14232	22111	22423
4712102	Santon	11132										31341				
4710729	Sanyo	14211	13242	21321	11321	11134						11132	13314	21131	31341	
		22413	22214	12131	14231	14232						21233	14233			
		12331	14222	11342	13213	11132						14143	21114	13314		
		13314	31334	31341								31341	21131	11132		
4711318	Save	31341										21323	22314	22112	24124	14233
4710743	SBR	31341	11141									14334	24324	31341		
4710745	Schaub Lorenz	32243										22414	31341	11132	32114	
												31341	11132			

4710835 Superla	31121	14231							4710900 Tokai	12131	31341	24111	22212	13314
4710838 Supertech	11132	14231	31341	14233						14232	22423	11132		
4710839 Supra	22423	11132							4710901 Tokyo	14231	11314	24111		
4710840 Susumu	22144								4710902 Tomashi	21233	14233			
4710841 Sutron	11132								4710905 Toshiba	11314	24441	14414	11321	12123
4711319 Swisline	14424									12323	14232			
4710842 Sydney	14231	14232							4710906 Towada	12323	14232			
4710843 Symphonic	13334								4712109 Toyoda	11132				
4711021 Sytong	14231								4712110 Trakton	21131				
4710849 Tandberg	22344	23234	12342	22212	14121				4710908 Trans Continens	14232	31341			
	22333	22332							4712111 Transonic	31341	24124	32134		
4710850 Tandy	14233	12131	14232	14424	21221				4712008 Transtec	14231				
	12242								4710913 Trident	31121	14232			
4710852 Tashiko	11321	11334	14232	13213	13333				4710915 Tristar	14233	14112			
	11311	14231	13314						4710916 Triumph	13412	31121	22233	31341	14414
4710853 Tatung	12131	31121	14232	11134	31341				4710919 Uher	12141	31341	11432	14143	22111
4710854 Teac	31341	24124	21131	11132	13334					21344	22423	23313	22413	21114
	23241	13413							4711148 Ultra	14111				
4710855 TEC	14232	21221	11132	14424	24224				4710920 Ultravox	12224	12323	22423	14424	14231
	22144	22212	21114							13314	14222	31341		
4711320 Tech Line	31341	33241							4711024 Unic Line	31341	24232			
4712107 Techica	14233								4711215 United	31341				
4710856 Technema	22111								4710929 Universum	22233	12332	31224	14114	24232
4710857 Technics	14433									22332	14424	24341	24311	22413
4711453 Tedelex	14232									14131	23313	11134	13213	21323
4711978 Teiron	11132									11321	13242	11311	12123	13314
4710866 Teleavia	12342	21244	14121	23144	22142					21131	12331	23322	23234	21313
	31431									12133	14222	22124	24432	12141
4710870 Telecor	31341	13314	14233	14232	21114					14232	12342	22333	22212	13412
	23133									32424	33241	31341		
4710872 Telefunken	12342	24413	24224	23144	21244				4710930 Univox	22212	12224	31341	13314	14343
	12133	12322	22144	21123	12132				4710937 Vestel	31341	13314	14232		
	22224	14121	31431	32412	31341				4710938 Vexa	11132	31341			
4711213 Telefusion	31341								4710939 Victor	11422				
4710874 Telegazi	31341	13314	21114	14233	21131				4710942 Videologique	14231	14233	14232		
4710878 Telemeister	22111	31341							4710943 VideoSystem	31341				
4710882 Telesonic	31341								4710944 Videotechnic	14231	22111	14232	22423	
4710883 Telestar	31341								4711025 Videoton	13314				
4710884 Teletech	11132	14424	22212	33241	31341				4711322 Vidikron	12323				
4710885 Teleton	14232	21214	14143	13314	21114				4711330 Vidtech	11321	13413			
	11321								4710947 Viper	22212				
4710887 Televideon	22111	13314	14231						4710949 Visiola	14231				
4711022 Televiso	23211								4710950 Vision	31341	22111			
4710889 Temco	21323								4710954 Vistar	21221	14143	22332		
4711334 Tempest	11132	31341							4710956 Vortec	31341				
4710891 Tensai	12331	14233	31341	14232	21323				4710957 Voxson	12224	12141	31341	23313	
	22111	11132	12332	22423	22414				4710958 Waltham	14232	21221	23313	21244	23112
	22432	14424								31341				
4711023 Tenson	22111	11132							4710959 Watson	22111	31341	13314	14233	14222
4711471 Tevion	33131	31341	33241							32114	23133	11132	33241	
4710892 Textet	14232	22423	11132						4710960 Watt Radio	14222	12323	13314	14231	
4710895 Thomson	21244	23144	12342	22142	24224				4710961 Wega	14222	11321	12224	31341	
	22144	14121	14123	14342	22224				4711026 Wegavox	11132				
	31431	31411	32412	31341					4710963 Weltblick	31341	22111			
4710897 Thorn	14112	12132	13443	14343	14111				4711245 Wharfedale	31341				
	12133	12331	22144	22423	11314				4710967 White					
	31341								Westinghouse	22111	14231	31341	22212	
4711329 TMK	13413								4711264 Winco	23241				

4711027	Windstar	21233					
4710976	Xrypton	31341					
4710979	Yamishi	21233	24124	14233	14232	31341	
4710980	Yokan	31341					
4710981	Yoko	14232	31341	14233	21131	11132	
		23322	22413	22214	14231	14424	
4710983	Yorx	14233					
4710984	Zanussi	14143	14232				
4711219	Zenor	22214					

Video Recorders

Videorecorder

Magnétoscopes

Vídeos

Vídeo Gravadores

Videoregistratori

Videorecorders

4721028	Adelsound	11121					
4720012	Adlyson	12131					
4720019	Aiwa	21414	11111	11332	14212	22311	
		11322					
4720020	Akai	12333	21434	11422	11332	11221	
		22311	14411				
4720021	Akiba	12131					
4721029	Akitan	21324					
4720023	Akura	21144	12131	11332			
4720024	Alba	21223	12131	22142	22143	14212	
		22311	14111	11221	21324	11111	
		21434					
4720029	Allorgan	14411					
4720032	Allstar	22113	12212				
4720037	Ambassador	11221					
4720042	Amstrad	11111	22122	22141	21223	12131	
4720045	Anitech	12131	22113				
4720047	Ansonic	11121					
4720057	Aristona	12212					
4720060	ASA	11322	12212				
4720070	Asuka	12131	11322	12212	11111		
4720080	Audiosonic	21223					
4720081	Audioton	11221					
4721156	AWA	11322	21223				

4720091	Baird	12333	21223	12331	12334	11332	
		11111					
4720093	Bang & Olufsen	24414					
4720097	Basic Line	21223	14212	11221	12131		
4720107	Bestar	21223	11221				
4720109	Black Panther	21223					
4720113	Blaupunkt	14313	12212	13233	14314	13313	
		11123	14114	11313			
4720114	Blue Sky	11322	14212	12131	22311		
4720118	Bondstec	11221	12131				
4720120	Bosch	12333					
4720123	Brandt	11332	13434	22111	22112	24342	
4720126	Brinkmann	14212					
4721030	Brionvega	22231					
4720139	Bush	12131	21223	21434	22142	22143	
		14212	22311	11111			
4720150	Carena	14212	12212				
4720151	Carrefour	11342					
4720154	Casio	11111					
4720155	Cathay	21223					
4720156	Catron	11221					
4720162	CGE	11332	11111				
4720167	Cimline	12131	14212				
4720172	Clatronic	11221	12131				
4720180	Combitech	22311					
4720187	Condor	11221	21223				
4720197	Crown	21223	12131	11221	22113	21144	
4720205	Daewoo	21223	11221	11342	14212	22311	
4720207	Dansai	12131	21223				
4720210	Daytron	21223					
4720216	de Graaf	11333	13323	12212	12331	11411	
		11343					
4720214	Decca	11111	11332	12212	12114		
4721459	Deitron	21223					
4720999	Denko	12131					
4721000	Diamant	11322					
4720235	Domland	14212					
4720240	Dual	11332	12212	21223	11111		
4720243	Dumont	11111	12212	12331	12332		
4720252	Elbe	21223					
4720253	Elcatech	12131					
4720259	Elin	14411					
4721031	Elsay	12131					
4720263	Elta	12131	21223				
4720265	Emerson	12131	11342				
4720272	ESC	21223	14411	11221			
4720274	Etzuko	12131					
4720280	Europhon	11221					
4720294	Fenner	11221					
4720296	Ferguson	12334	11332	22111	22112	11422	
		24342	11111	21223			
4720299	Fidelity	11111	12131	22122	14411		
4720301	Finlandia	12331	12212	11333	13323	11111	
		11411					
4720302	Finlux	11111	12212	12331	11333	12332	
4720304	Firstline	12131	14212	11322	11342	11333	
		12231	21223				
4720305	Fisher	11344	12331	11343	11221		

4720307	Flint	14212			
4720319	Frontech	11221	22113		
4720322	Fujitsu	11111			
4720323	Funai	11111			
4720326	Galaxi	11111			
4720331	GBC	11221			
4720335	GEC	12212			
4720337	General	11221			
4720339	Genexxa	12331			
4720345	Goldhand	12131			
4720347	GoldStar	11322	11111		
4720349	Goodmans	11111	12131	14411	21223 11443
		11322	11221	22224	12212 14212
		11332	12331	14411	22231
4720352	Graetz	12331	11343	11411	12212 11123
4720353	Granada	14411	11322	14313	11333 11111
		12131	11322	11221	11111 21223
		14212			
4720355	Grundig	11124	14114	12212	14313 11123
		22111			
4721108	Hanimex	21324	22311		
4720362	Hanseatic	11322	14212	21223	12212
4720364	Hantor	11221			
4721084	Harwood	12131			
4720370	HCM	12131	22113		
4720377	Hinari	11121	12131	14211	14212 22311
		11332	22113	12231	22224 21223
		14212	22311		
4720380	Hisawa	11333	13323	12332	11332 11111
4720381	Hitachi	14411	12212	11121	12331
		12212			
4721085	Hornophone	12131	14212	21223	22311
4720391	Hypson	11221			
4720394	Impego	11111	14411		
4720395	Imperial	11121	14212	14411	
4720398	Ingersoll	11221	14411	21223	22113 12131
4720401	Inno Hit	11322	12131		
4720404	Interbuy	12212	12331		
4720405	Interfunk	12123			
4721113	Internal	21223			
4721114	International	21223			
4720408	Intervision	11111	21223	11322	14212
4720410	Irradio	12131	11322	12212	
4720415	ITT	12333	11332	11343	22231 23111
		12331	14411		
4720416	ITT Nokia	11411			
4720417	ITV	21223	11322	11221	
4720425	JVC	11332	12114	23111	
4720427	Kaisui	12131			
4720430	Karcher	12123			
4720432	Kendo	12333	14212	21434	11422 12131
		11322			
4720434	Kenwood	11332			
4721032	Kimari	11344			
4720438	Kneissel	22311	14212	11322	
4720443	Korpel	12131			
4720448	Kuba	11344			
4722095	Kuwa	14313			
4720451	Kyoto	12131			
4720471	Leyco	12131	12231		
4721072	LG	11322	11111	21223	
4720473	Lifetec	14212			
4720472	Loewe	12212	11123	11322	12332 11121
		13313			
4720474	Logik	11121	14411	12131	12333 14212
4721009	Lumatron	21223			
4720485	Luxor	12333	11343	12131	11443 12331
		11344	11411		
		12212			
4720492	Magnavox	12131	11342	12212	14212
4720496	Manesth	12212	11123	11443	21324 14212
4720500	Marantz	21223	11221		
4720504	Mark	22113			
4721033	Marquant	14212	11121	14111	21324 11322
4720508	Matsui	14211	12231	14411	22311 22141
		11111			
4720517	Mediator	14212	22311		
4720518	Medion	11111	11322		
4720487	Melectronic	12331	11111	11343	11322 11411
4720520	Memorex	11344			
		12131			
4720521	Memphis	14114	12212	13313	14313 14314
4720525	Metz	11123			
		14212			
4721317	Micromaxx	11111			
4720529	Migros	14114			
4720531	Minerva	12114	12212		
4720535	Mitsubishi	11111	12131	11221	12331 22113
4720547	Multitech	11111			
4720551	Murphy	12331			
4720553	NAD	14313	13313		
4720562	National	11332	12114	11331	12331 11322
4720564	NEC	11332	14211	11123	12212 22231
4720565	Neckermann	12131	11111	22311	
4720567	Nesco	14212			
4721012	Neufunk	11221	12131	21223	
4720576	Nikkai	12331	12333	21434	11332 21223
4720580	Nokia	11343	22231	14411	11411 11333
		12212			
4720582	Nordmende	11332	23111	22111	22112 13434
		24343	31211	12114	24342
4720588	Oceanic	11111	11411	12333	12212 12331
		11332	11343		
4720590	Okano	21434	14212	12131	22113 21223
4720602	Orion	14212	11121	12231	14211 21324
		22311	22224	22142	22143
4720604	Orson	11111			
4720605	Osaki	11111	11322	12131	
4720609	Otake	22142	22143		
4720610	Otto Versand	12212			
4720616	Palladium	12131	21434	11322	11332 11123
		14212	11121	14411	
4721129	Palsonic	12131	11111		
4720620	Panasonic	13313	14313	14314	14312
4720628	Pathe Cinema	11121			
4720629	Pathe Marconi	11332			

4720632	Perdio	11111	14212						4720797	Solvax	11221
4720634	Philco	12131							4720801	Sonitron	11344
4720636	Philips	12212	11123						4721035	Sonneclair	12131
4720640	Phonola	12212							4720802	Sonoko	21223
4720642	Pioneer	12114	12212	11333					4720803	Sonolor	11411
4720648	Portland	11221	21223						4720804	Sontec	11322
4720656	Prinz	11111	12231						4720805	Sony	11312 11313 11311 12333
4720658	Profex	22113							4720809	Soundwave	11322 14212
4720660	Profitronic	12212	14411						4721143	Ssanyong	12131
4720662	Proline	11111	22111	22112					4720813	Standard	21223
4721194	Prosc0	21223							4720817	Starlite	11322 12331
4720664	Prosonic	14212	21223	11111					4720823	Stern	21223
4720665	Protech	12212							4720824	Strong	21144
4720669	Provision	21223							4720828	Sunkai	14212 21324 21223
4720672	Pye	12212							4720831	Sunstar	11111
4720678	Quelle	11123	14211	12212	2231				4720832	Suntronic	11111
4720682	Radialva	11322	12131	12212	11411				4720833	Sunwood	12131
4720684	Radiola	12212							4720839	Supra	11322 14411
4720690	Rank	11332							4720843	Symphonic	11111 12131
4720699	Rex	11332	23111						4720847	Taisho	11121 14212 12231
4720700	RFT	11221	12131						4720849	Tandberg	21223
4720701	Roadstar	14411	12131	11322	21223				4720852	Tashiko	11111 11411 14411 12212 11322
4720710	Royal	22113	12131						4720853	Tatung	11111 11332 12212 11422 11411
4720715	Saba	11332	13434	22111	22112	23111					14212 22311
		24343	11443	21223					4720854	Teac	11332 11111 21223 11322 12212
4720720	Saisho	11121	14212	14211	14111	12231					21414
4720722	Salora	11343	12333	12331					4720855	TEC	11221 21223 12131
4720724	Samsung	14411	23411						4720859	TechniSat	14212
4720725	Samurai	11221							4720866	Teleavia	11332 13434
4720727	Sansui	11332	12114	21144	12333	12131			4720872	Telefunken	13434 11332 22111 22112 23111
		22113									24342 24343 21223
4720728	Sanwa	11121							4720884	Teletech	22113 12131 21223 11111
4720729	Sanyo	12331	11343	11344	11411	12114			4721334	Tempest	11221
4720742	Saville	22311	21223	14411					4720890	Tenosal	12131
4720743	SBR	12212							4720891	Tensai	11111 22113 11322 12131 11121
4721200	Scan Sonic	14411							4721471	Tevion	14212
4720745	Schaub Lorenz	11332	22231	12331	11111	12333			4720895	Thomson	11332 23111 22111 22112 24342
		21434									24343 31211
4720746	Schneider	12131	11111	11322	12212	21223			4720897	Thorn	11332 12331 11322
		14411							4720900	Tokai	12131 11322 11332 12331
4722103	Seaway	21223							4722002	Tokiwa	12131
4720753	SEG	12131	14411	22113	21223				4720905	Toshiba	11342 11332 23111 12212
4720755	Sei-Sinudyne	11121	12212						4720906	Towada	22113 12131
4720756	Seleco	11332	23111	11221	11322				4722110	Trakton	11221
4721250	Semivox	11342	14212						4720916	Triumph	14211
4720759	Sentra	12131	11221						4720918	TVA	11221
4721910	Setron	12131							4720919	Uher	11322 14411 22231
4720762	Sharp	11411	11443	11322					4720920	Ultravox	22231 21223
4720766	Shintom	12131	12331						4720924	Unitex	14411
4720768	Shivaki	11322							4720926	United	
4720769	Shorai	12231	11121							Quick Star	21223
4720773	Siemens	14114	11123	11322	12331	11124			4720929	Universum	11111 22122 12212 14411 11322
		12212									12333 14114 11123 14212 22113
4721916	Siera	12212							4720939	Victor	12114
4720780	Silva	11322							4720959	Watson	12212 22311
4720781	Silver	21223							4720963	Weltblick	11322
4720782	Singer	21144							4720967	White	
4720783	Sinudyne	11121	12212							Westinghouse	22231

4720979	Yamishi	12131	21223		
4720980	Yokan	12131			
4720981	Yoko	11322	12131	11221	14411
4721220	ZX	14212			

Satellite Receivers

Satellitenempfänger

Récepteurs satellites

Receptores de satélite

Receptores de satélite

Ricevitori via Satellite

Satelliet-ontvangers

4730994	ABSat	11224			
4730013	Aegir	31131			
4730016	AGS	33241			
4730020	Akai	31114	14131		
4731153	Akena	33241			
4730024	Alba	23322	31114	24124	22333 32322
		34132	34243		
4730027	Aldes	21311	22333	31131	34243
4730030	Allsat	14131	22341	13424	34243
4730031	Allsonic	21311	22412		
4730033	Alltech	32133	34132		
4730034	Alpha	33241	14131		
4730036	Altai	23141			
4730039	Amitronica	34132			
4730040	Ampere	23141	13121	11223	
4730042	Amstrad	11232	22232	14441	14414 34132
		34323	23141	13121	11241 11312
		11313			
4730044	Anglo	34132			
4730046	Ankaro	21311	14232	22412	14241 34132
4730049	Anttron	23322	13424	32322	
4730050	Apollo	23322			
4730056	Arcon	14232	33421		
4730058	Armstrong	14414	14131		
4730060	ASA	23142			
4730061	ASAT	14131			
4731154	ASLF	34132			
4730064	AST	22244	22112		
4730065	Astacom	33241	34123		
4730067	Aston	24133			

4730068	Astra	12341	31213	31234	31112	14414
		32244	22233			
4730069	Astro	13342	22323	31131	32322	22412
		24422	33213			
4730071	Athena	33241				
4730081	Audioton	22341	32322			
4730082	Aura	31234				
4731155	Austar	11241	33113	24412	11244	
4731037	Avalon	23141				
4730088	Axiel	33241				
4730089	Axis	31213	22412	22343	11231	
4730095	Barcom	14232	12341			
4730103	Beko	24124				
4730106	Best	14232	22412			
4730113	Blaupunkt	13342				
4730114	Blue Sky	34132	11313			
4730117	Boca	14414	32142	31112	33334	13121
		11144	11223			
4730122	Brain Wave	22141	33421			
4730129	Broadcast	22233				
4730130	Broco	31213	34132			
4731070	BskyB	11232				
4731531	BT	31114	33241	34123		
4731038	Bubu Sat	34132				
4730139	Bush	22131	13424	22333		
4731039	BVV	33421				
4730143	Cambridge	31114	33334	24422		
4730995	Canal Satellite	11233	21321			
4731159	Carat.Som	22343				
4730163	Channel Master	22333				
4731458	Chess	13242	32242			
4730170	Citycom	23133	12414	32244	11221	
4731099	Clark	32322				
4730172	Clatronic	22141				
4730174	Clemens Kamphus	24423	11231			
4730176	CNT	31131				
4730177	Colombia	33241				
4730179	Columbus	21332				
4730182	Commander	14241				
4730183	Commlink	21311				
4731101	Comunicado	22343				
4730185	Comtec	21311	22343			
4730187	Condor	22412	32244			
4731355	Conifer	11121				
4730189	Connexions	24133	23141	22412		
4730190	Conrad	32244	32142	31442	12414	22412
		24422	11213			
4730191	Contec	23133	32142	22343		
4730193	Cosat	32211	22341			
4730197	Crown	14414				
4730198	Cryptovision	24124				
4731092	D-box	34214	11243			
4730205	Daewoo	34132	23322			
4730208	Dansat	13424				
4731040	Daumling	11144				
4730213	DDC	22333				
4731161	Delfa	11241				
4730221	Dew	22343				

4730222 Diamond 32133
 4731300 Discoverer 32242
 4730227 Discovery 33241
 4731041 Diseqc 34123
 4730229 Disk Express 14232
 4731352 Distratel 12221 11313
 4730230 Distrisat 14131 32211
 4730233 DNR 33421
 4730234 DNT 14131 24133 23141
 4731042 DST 23322
 4730244 Dune 22412
 4730248 Echostar 23141 24123 33241 34132 11233
 11242
 4730250 EIF 23312
 4730251 Einhell 14414 23322 21311 14441 31112
 34132 24422 13121 11144
 4730255 Elekta 31131
 4730263 Elta 22341 23322 14131 22412
 4730264 Emanon 23322
 4730266 Emme Esse 22412 24423 22131 11242
 4731043 Engel 34132
 4730268 EP Sat 24124
 4730275 Eurieult 23312 13131 12221 11313
 4731044 Eurocrypt 24124 12341
 4730279 Europa 14241 32142 24422 14131 32244
 11241
 4731045 European 11144
 4730282 Eurosat 14414 32133
 4730283 Eurosky 14414 22412 32244 21244 13121
 12414
 4730285 Eurostar 31234 32244 11311
 4730289 Exator 23322 31114 32322
 4731046 Fagor 32211 22341
 4730294 Fenner 33241
 4730296 Ferguson 13424 24124 22211 22131 34124
 4730299 Fidelity 14441 24422
 4730301 Finlandia 24124 12341
 4730302 Finlux 24124 12341 23243 31442
 4731165 Flair Mate 34132
 4731301 Foxtel 11244 34211 24412
 4730315 Fracarro 23322 33241 11242
 4730316 France Satellite 21332
 4730317 Freecom 22144 23322 34243
 4730320 FTE 22134 33334 32142 22412 34132
 4730321 Fuba 21332 14232 22412 23141 23322
 23312 13342 23243 31442 23133
 12341
 4730325 G-Sat 13424
 4730326 Galaxi 14232
 4730327 Galaxis 22343 21311 22341 31213 32211
 22412 33421 11214 11231 11233
 11241
 4730328 Galaxisat 22112
 4731449 Gardiner 11221
 4730344 GMI 14414
 4731168 Goldbox 11233 21321
 4730347 GoldStar 22144
 4730349 Goodmans 24124

4730353 Granada 12341
 4730354 Grandin 23312 12221 13131
 4730355 Grundig 11232 13342 22131 31434 34343
 22322 11212 11244 11313
 4730362 Hanseatic 32242
 4730364 Hantor 23322 22141
 4730365 Hanuri 31131
 4731677 Harting und
 Helling 24423
 4731047 Hase & Igel 33421
 4730371 Heliocom 32244
 4730377 Hinari 22333 13424 23322
 21244 23142 23143 13342 31442
 4730379 Hirschmann 24344 23433 24423 24422 23141
 34123 34412
 4730380 Hisawa 22141
 4730381 Hitachi 22131 24124
 4731171 HNE 34323
 4730385 Houston 32211 14241 33241
 11241
 4731172 Humax 22233 32244 22141 22341 22343
 21311 14241 32142 24423 14414
 13121 11144
 4730391 Hypson 23312 13131
 4731175 Imex 12221 13131
 4731114 International 13121
 4730407 Intertronic 14414
 4730408 Intervision 32211 32421 32244 22341
 4731345 Invideo 11242
 4731302 Italtel 11242
 4730416 ITT Nokia 12341 22131 31442 24124 23142
 34214 11243
 4730423 Johansson 22141 22341
 4730424 Jok 34123
 4730425 JVC 31114 31434
 4731048 K-SAT 34132
 4731176 Kamm 11311 34132
 4730431 Kathrein 22134 22323 13342 23133 23433
 24431 24311 14131 32343 12241
 33213 34132 32322 33241 11221
 11321
 4730436 Key West 11144
 4732094 Kiton 12413
 4730440 Kolon 23322
 4731454 Konig 32244
 4731439 Koscom 11231
 4730445 Kosmos 22134 23433 22144 24423
 4730446 KR 32322 32211
 4730447 Kreiselmeier 13342
 4730450 KyoStar 23322 32322
 4731304 L&S Electronic 22412
 4730453 Lasat 31112 31131 22412 32244 22343
 14414 33334 12414 13121 13242
 11213
 4731049 Lemon 33421
 4730454 Lenco 22144 14241 23322 34132 33421
 31213 12414 22412 32244
 4730455 Lennox 32211

4730457	Lenson	24422							4730582 Nordmende	22333	24124	31131	23322
4730460	Lexus	14131							4731360 Norsat	11121			
4730471	Leyco	31114							4730584 Novis	22141			
4731072	LG	22144							4730586 NTC	24423			
4730462	Lifesat	32242	22412						4730588 Oceanic	32133			
4730472	Loewe	14414							4730589 Octagon	23322	14241	22343	32322
4730475	Lorenzen	14241	33421	32244	34323	13121			4730590 Okano	14414	24423	22134	
		11144							4731069 OnDigital	13122	14412	34344	
4730476	Lorraine	22144							4730597 Optex	23133	32211	22341	23312
4730479	Lupus	22412							4731055 Optima	24423			
4730485	Luxor	12341	22232	31442	24422	11243			4731447 Optus	11244			
4730486	M&B1	31234	32242						4730599 Orbit	22244	33134	34414	
4730489	Macab	11121	32133						4730600 Orbitech	24422	32142	31242	23322
4731050	Manata	34123	33241	13131	23312	34132				13242			
4730497	Manhattan	24124	32211	22131	31131	22341			4730601 Origo	24412			
		34123	33241	11231					4730606 Osat	22232			
4730500	Marantz	14131							4730611 Oxford	31114	33241		
4731051	Marave	23312							4730612 Pace	11232	24124	22131	11143
4730505	Mascom	23433								22211	14412	34211	24412
4730506	Maspro	12241	22211	22131	24344	34343				11211	11314		14344
		34132	13342	31434	33421				4730613 Pacific	32133			
4731052	Master's	23133							4731441 Packsat	34123			
4730508	Matsui	31434	34123	22333	13342				4730615 Palcom	21332	22333		
4730509	Max	32244							4730616 Palladium	14414	31434	23322	24422
4730511	MB	32242							4730617 Palsat	24422	21332		
4731053	Mediabox	11233	21321						4731130 Panasat	11244			
4730515	Mediamarkt	14414							4730620 Panasonic	11232	24124	22131	
4730516	Mediasat	11233	31213	24422	21321				4730623 Panda	24124	12341	32244	13342
4730518	Medion	34132	22412							11231			
4731120	Medison	34132							4730627 Paristad	23312			
4730519	Mega	14131							4730630 Patriot	31114	33241		
4730487	Meletronic	11221							4730636 Philips	14131	21321	14241	13424
4730524	Metronic	23322	23312	14414	32322	21311				22131	33234	34343	34123
		31131	12221	13131	11221	11313				32142	14232	33241	31434
4730525	Metz	13342							4730639 Phoenix	13122	11212	11221	11233
4731123	Micro	32244	32322	11213						11321	22343	13424	
4731054	Micro Electronic	34132							4730641 Phonotrend	21311	32211	22341	24423
4730527	Micro Technology	31234	34132	31213					4730642 Pioneer	11233	21321		11241
4731185	Microtec	34132							4731133 Planet	11242			
4730531	Minerva	31434							4730646 Polytron	23133	23141		
4730535	Mitsubishi	24124							4730652 Predki	22141	23322		
4730537	Mitsumi	31112							4730653 Preisner	14414	31112	32142	13121
4730540	Morgan's	14414	14131	31112	33334	34132				33334	11144		
		22341	32142	13121	11144	11223			4730654 Premier	32211	24423		
4731305	Multichoice	33113	11244						4731056 Premiere	11233	21321	11243	
4730546	Multistar	22134							4731853 Pro Visat	34243			
4731452	Multitec	13242							4730661 Profile	33241			
4730550	Muratto	22144	22112						4730663 Prosat	21311	22333	32421	
4730552	Mysat	34132							4730664 Prosonic	34323			
4730563	Navex	22141							4730666 Protek	32133			
4730568	Network	13424							4730669 Provision	31131			
4730569	Neuhaus	31213	24422	14241	32142	33421			4730672 Pye	31434			
		32211	34132	32244	11231				4731087 Pyxis	11231			
4730570	Neusat	33421	34132	11231					4730676 Quadral	22333	21311	22412	32142
4730577	Nikko	14414	34132	34214	34243					33241	34123		
4730580	Nokia	22131	12341	34214	31442	24124			4730678 Quelle	14441	32244	34323	12414
		23142	34214	34344	11233	11243			4730684 Radiola	14131			
		34413							4730687 Radix	23141	24133	11312	

4730689	Rainbow	32322				
4730694	RedStar	22412				
4730695	Rediffusion	11121				
4730696	Redpoint	31213				
4730700	RFT	31242	21311	14241	14131	
4730701	Roadstar	34132				
4730708	Rover	32421	34132			
4730715	Saba	13424	31131	22131	22211	34243
		34123	33421	12414	32244	11213
		11313	34412			
4730716	Sabre	24124				
4730718	Sagem	11222				
4730721	Sakura	22343				
4730722	Salora	12341				
4730724	Samsung	21244	23322	11233		
4730731	SAT	22244	22112	24422	22333	
4730740	Sat Partner	22141	24423	23322	22144	31131
		32322	34243			
4731450	Sat Plus	13242				
4730732	Sat Team	34132				
4730734	Satcom	22233	32242	32244	11213	
4730735	Satec	13424	22131	34132		
4731057	Satelco	22412				
4730737	Satford	22233				
4730738	Satline	32421				
4730739	Satmaster	22233				
4732123	Satplus	34411				
4731058	Schäcke	32322				
4730746	Schneider	33234	34123	11212	11321	
4730747	Schwaiger	23133	13424	32242	24431	32142
		12421	13242	32244	33421	11213
		11313				
4731442	SCS	12414				
4730751	Sedea					
	Electronique	23322				
4730752	Seemann	23141	14414	31213	31114	
4730753	SEG	23322	22412	31234	22141	32242
		34323	12413			
4730756	Seleco	32211	22341	11242		
4731141	Servi Sat	13131	23312	32211		
4730773	Siemens	13342	33334			
4730780	Silva	22144				
4730785	Skantin	34132				
4730786	Skardin	31213				
4731205	Skinsat	24422				
4730787	SKR	34132				
4731298	Sky	11234	11232	11314		
4730789	Skymaster	21311	32242	32421	34132	13242
		11311				
4730790	Skymax	14131	31234			
4731206	Skysat	13242	32242	34411		
4730793	Skyvision	22341				
4730794	SL	33421	13121	34323	14414	
4731207	Smart	13121				
4730805	Sony	11232	34111	24124	11233	
4731059	SR	31112				
4730816	Starion	31234				
4731443	Starland	34132				
4730820	Starring	22141				
4730824	Strong	23322	32322	22412	31131	11233
		11244				
4730826	STVI	23312	13131			
4730827	Sumida	14414				
4730829	Sunny Sound	22412				
4730830	Sunsat	34132	31213			
4730831	Sunstar	31112	14414	22412	13121	11144
4730846	Tagra	22341	21332			
4730851	Tantec	21332	22131	22211	24124	
4730853	Tatung	24124				
4730858	Techniland	22233	32211	22341		
4730859	Technisat	21123	24422	31242	24133	14131
4730860	Technowelt	32244				
4730862	Teco	14414	31112			
4730863	Telesat	32242	12414	32244		
4730868	Teleciel	32322	34243			
4730869	Telecom	34132				
4731060	Teledirekt	13424				
4730872	Telefunken	23322	22131	34123	34412	
4730875	Teleka	14414	23433	32322	23141	34343
		33421	24422	21123	32244	11231
4730876	Telemaster	31131				
4730880	Telesat	32242	32244			
4730883	Telestari	24422				
4730884	Teletech	11311	12413			
4730886	Televest	24124	24422	22131		
4730888	Telewire	32211	22341			
4730891	Tensai	22141				
4730895	Thomson	24124	34132	21321	22131	12414
		32244	33241	34123	11213	11222
		11233				
4730896	Thorens	32133				
4730897	Thorn	22131	24124			
4730898	Tioko	23133	14414			
4730900	Tokai	14131				
4730903	Tonna	22233	24124	32211	33241	22341
		24422	34132	11231		
4730905	Toshiba	24124				
4730992	TPS	11222				
4730910	Trendline	31112				
4732010	Trendplain	31112				
4730911	Triad	22244	22144	22112	22421	
4730912	Triasat	23243	33134	24422		
4731061	Triax	23243	24422	33134	12414	14131
		23141	34132	11233		
4731147	Twinner	23312				
4732019	UEC	11244				
4730922	Uniden	14113				
4730923	Unisat	22343	14414	14131		
4730927	Unitor	14232	22141			
4730929	Universum	13342	31434	23142	32244	12414
		34323				
4730932	Variosat	13342				
4730936	Ventana	14131				
4730937	Vestel	34323				
4732036	Videocrypt	34124				
4730947	Viper	22343				

4730952	Visiosat	22244	34132		
4730955	Viva	14241			
4730956	Vortec	21244	23322		
4730931	Vtech	22244	22112	33134	11221
4730962	Wela	32142	34132	13121	11144
4731091	WeTeKom	13242	32242	24422	11223
4730966	Wewa	24124			
4731217	Wibo	14414			
4730968	Winersat	22141			
4731062	Wintergarten	21311			
4730969	Wisi	32443	13342	22112	11121 22421
		33134	23141	32142	23223 24124
		22244	24422	32244	11231
4730971	Woorisat	31131			
4730972	World	22141			
4732113	Worldsat	33241	34123	34412	
4730976	Xrypton	22412			
4731151	Xcom	11224			
4730993	Xsat	33241	34132	11224	
4732070	Zaunkonig	33421			
4730986	Zehnder	22112	22134	31131	24431 22412
		34323	23133	12413	14232 12414
		11221			
4730987	Zenith	11234			
4731064	Zeta Technology	14131			
4730989	Zodiac	32322			
4730990	Zwergnase	14414	11144		

Cable Converters

Kabelsignalumwandler

Décodeurs de câble

Decodificadores

Conversores de Cabo

Convertitori di reti

Kabel Decoders

4730025	Alcatel	11141	11142		
4731155	Austar	21221			
4731531	BT	12332			
4730141	Cabletime	21144	24111	33232	
4731564	Comcrypt	23434			
4731583	Decsat	23324			

4731641	Filmnet	23434			
4730996	France Telecom	11134	24114		
4731076	General				
	Instruments	21221			
4730421	Jerrold	11114	21221		
4731341	Kabelvision	11114			
4730489	Macab	11134			
4731782	MNet	23434			
4732098	Mr Zapp	11134			
4732072	NTL Cabletell	21221			
4731447	Optus	21221			
4730612	Pace	33333			
4730636	Philips	24114	11134		
4731065	PVP Stereo				
	Visual Matrix	11114			
4730718	Sagem	11134			
4730748	Scientific Atlanta	11131	21222		
4730864	Tele+1	23434			
4730879	Telepiu	23434			
4730925	United Cable	11114			
4730951	Visiopass	24114	11134		
4732055	Westminster	12332			

* Excludes a few models in the LS, LX and MX series.

* Ausschließlich einige Modelle der LX, LS und MX Serie.

* Exclut quelques modèles de la serie LX, LS et MX.

* Excluye unos pocos modelos de la serie LX, LS y MX modelos.

* Exclui alguns modelos da série LX, LS y MX.

* Sono esclusi modelli della serie LX, LS e MX.

* Exclusief een paar modellen in de LX, MX en LS serie.

GARANTIA E UNIVERSAL ELECTRONICS/ONE FOR ALL garantiza al comprador que este producto estará libre de defectos materiales o de fabricación, al menos durante 1 año desde la fecha actual de su adquisición, y en caso de que se utilice de un modo normal y correcto. Este producto será sustituido de forma gratuita siempre y cuando se pueda demostrar que es defectuoso y que esto haya sucedido dentro del año de garantía, corriendo a cuenta del comprador los gastos de su devolución. Esta garantía no cubre embalajes, maletines, envoltorios, pilas, armarios u otros objetos utilizados en conexión con este producto. Se excluyen otras obligaciones, cualesquiera que sean, además de las mencionadas más arriba. Por favor, asegúrese de tener su recibo o ticket de compra para que podamos establecer su legitimidad a este servicio.


GARANTIA P A UNIVERSAL ELECTRONICS INC./ONE FOR ALL garante ao cliente a a protecção deste produto no que respeita a defeitos de fabrico de material, dentro de um período de uso correcto e normal de 1 ano a partir da data da compra do mesmo produto. Este produto será substituído sem qualquer encargo no caso de ter sido comprovada qualquer avaria dentro do período de 1 ano e após o seu retorno (custos de envio da responsabilidade do consumidor) dentro deste mesmo prazo.

Esta garantia não cobre embalagens de cartão, caixas, pilhas, ou outros itens usados em conjunto com este produto. Qualquer outra obrigação para além daquela acima descrita não será tida em consideração. Por favor tome nota que se lhe é pedido o comprovativo de compra, de forma a que possamos confirmar a sua legitimidade para este serviço.


GARANTIA I La compagnia Universal Electronics inc./ ONE FOR ALL garantisce l' acquisto originale che questo prodotto sarà esente da difetti di mano d' opera dietro l' utilizzo proprio di 1 anno. Questo prodotto sarà sostituito gratuitamente se verrà provato che e' difettoso entro l' anno di garanzia e ovviamente accompagnato dalla prova dello scontrino che assicura la data d' acquisto. La garanzia non copre la scatola, l' imballaggio, le pile o ogni altro articolo che abbia a che vedere con il prodotto. Non ci sono ulteriori obblighi di qui sopra elencati. Vi chiediamo cortesemente di conservare lo scontrino affinché noi possiamo stabilire la vostra credibilità, per richiedere un nostro servizio.

GARANTIE NL UNIVERSAL ELECTRONICS INC./ONE FOR ALL garanteert de klant, dat dit produkt bij normaal en correct gebruik vrij van materiële of technische defecten zal blijven voor een periode van één jaar, gerekend vanaf de datum van aankoop. Als aangetoond kan worden dat binnen de periode van één jaar een defect is ontstaan, zal dit produkt gratis vervangen worden als het genoemde produkt op kosten van de klant binnen de garantieperiode teruggestuurd wordt. Deze garantie is niet van toepassing voor verpakkingen, dozen voor transport, batterijen, gebroken of beschadigde kasten of enig ander object, dat in verbinding met dit produkt gebruikt wordt. Elke andere verplichting dan het bovengenoemde wordt uitgesloten. Wij maken u erop attent dat wij uw bewijs van aankoop nodig hebben om vast te stellen of u voor deze garantieservice in aanmerking komt.

Universal Electronics BV
Europe & International
P.O. Box 3332
7500 DH, Enschede
The Netherlands

Guarantee  UNIVERSAL ELECTRONICS INC./ONE FOR ALL warrants to the original purchaser that this product will be free from defects in materials and workmanship under normal and correct use for a period of one (1) year from the date of original purchase. This product will be replaced free of charge if it has been proven to be defective within the one (1) year warranty period. This warranty does not cover cartons, carrying cases, batteries, broken or marred cabinets or any other item used in connection with the product. Any further obligation than listed above is excluded. Please notice that we need your purchase receipt so that we may establish your eligibility for service.

GARANTIE  UNIVERSAL ELECTRONICS INC./ONE FOR ALL garantiert dem Kunden, dass dieses Produkt bei sachgemäßem und ordentlichem Gebrauch für die Dauer eines Jahres vollkommen frei von Defekten materieller oder technischer Art bleiben wird, gerechnet ab Kaufdatum. Falls erwiesen werden kann, dass innerhalb der Garantiezeit eines Jahres ein Defekt entstanden ist, wird dieses Produkt gebührenfrei ersetzt, falls besagtes Produkt innerhalb der Garantiezeit auf Kosten des Kunden zurückgeschickt wird. Diese Garantie erstreckt sich nicht auf Verpackungen, Transportbehältnisse, Batterien, zerbrochene oder beschädigte Gehäuse oder andere Objekte, die in Verbindung mit dem Produkt verwendet werden. Jegliche weitere Verpflichtung als die oben aufgeführte wird ausgeschlossen. Bitte beachten Sie, dass wir Ihren Kaufbeleg brauchen um fest zu stellen ob Sie Anspruch auf unseren Garantieservice erheben können.

GARANTIE  UNIVERSAL ELECTRONICS INC./ONE FOR ALL garantit à l'acheteur d'origine que ce produit est certifié franc de défauts matériels et de main d'œuvre durant une période d'un (1) an à partir de la date d'achat original à la condition exclusive que ce produit ait été utilisé de manière normale et correcte. Ce produit sera remplacé gratuitement s'il s'est révélé défectueux pendant ladite période d'un (1) an, produit devant être retourné à la charge du client durant la période de garantie. Cette garantie ne saurait couvrir d'aucune manière que ce soit emballages en carton, coffrets portables quelconques, piles, corps d'appareil cassé ou endommagé ou tout autre article utilisé en combinaison avec ce produit. Nous nous réservons le droit de rejeter tout autre engagement que ceux cités plus haut. Veuillez noter que la preuve d'achat est obligatoire afin de pouvoir déterminer votre droit à ce service.

Universal Electronics BV
Europe & International
P.O. Box 3332
7500 DH, Enschede
The Netherlands



Printed on Recycled Paper

DD-0202

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>