


# Lytecaster® Performance Recessed CFL Downlighting **1101HSW**

Page 1 of 2

6 3/4" Aperture Horizontal Wall Wash, Compact Fluorescent, Performance Series, Reflector Trim

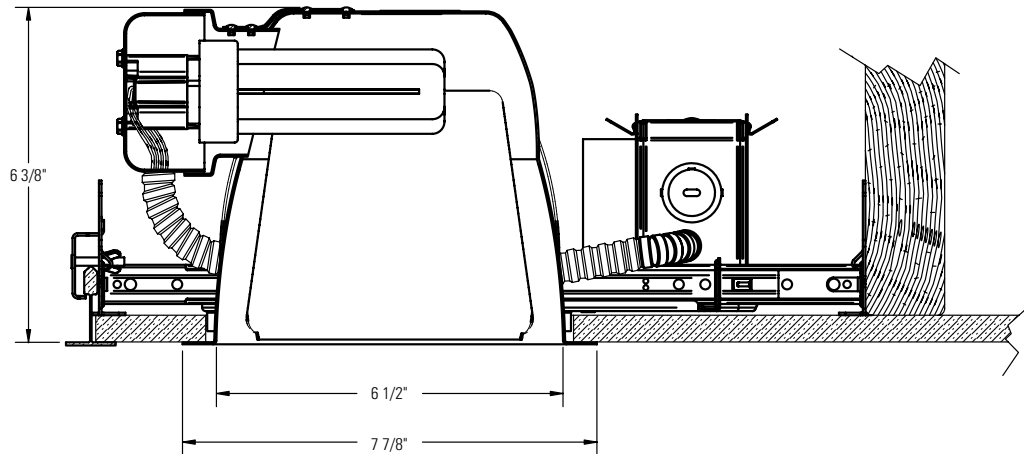

Complete Fixture consists of Frame-In Kit and Reflector Trim. Select each separately.

Uniframe™ Compact Fluorescent Performance Series Reflector Trims		Compatible Frame-In Kits (See Individual Frame-In Kit Specification Sheets)		
Catalog No.	Description	Catalog No.	Installation Type	Lamping
<b>1101HCLSW</b>	6-3/4" Horizontal Single Wall Wash – Specular Clear	<b>1101F18U</b> <b>1101FR18U</b>	Uniframe™ Non-IC 120/277v Uniframe™ Non-IC Remodeler 120/277v	18w Quad/Triple
<b>1101HCDSW</b>	6-3/4" Horizontal Single Wall Wash – Clear Diffuse	<b>1101FD26L1</b> <b>1101FD26L2</b>	Uniframe™ Non-IC Lutron Dimming 120v Uniframe™ Non-IC Lutron Dimming 277v	26w Quad/Triple
<b>1101HWHSW</b>	6-3/4" Horizontal Single Wall Wash – Matte White	<b>1101FD32L1</b> <b>1101FD32L2</b>	Uniframe™ Non-IC Lutron Dimming 120v Uniframe™ Non-IC Lutron Dimming 277v	32w Triple
		<b>1101F2642U</b> <b>1101FR2642U</b> <b>1101F2642UEM</b> <b>1101FD2642MX1</b> <b>1101FD2642MX2</b> <b>1101FD2642M7U</b>	Uniframe™ Non-IC 120/277v Uniframe™ Non-IC Remodeler 120/277v Uniframe™ Non-IC Emergency 120/277v Uniframe™ Non-IC Advance Mark10 Dimming 120v Uniframe™ Non-IC Advance Mark10 Dimming 277v Uniframe™ Non-IC Advance Mark7 Dimming 120/277v	26w Quad/Triple 32w Triple 42w Triple
		<b>1101F18ICU/N</b> <b>1101F2642ICU</b> <b>1101F2642IUN</b>	Performance IC 120/277v Performance IC 120/277v	18w Quad/Triple 26w Quad/Triple 32w Triple 42w Triple
		<b>1101FDICMX1/N</b>	Performance IC Advance Mark10 Dimming 120v	26w Quad/Triple 32w Triple
		<b>1101FDICMX2/N</b>	Performance IC Advance Mark10 Dimming 277v	26w Quad/Triple 32w Triple

## Features

- Reflector:** Formed aluminum. Matte White flange.
- Finishes:** CL = Specular Clear (Iridescent Free coating)  
CD = Clear Diffuse  
WH = Matte White Paint
- Wall Wash Kick Reflector:** Formed aluminum. Clear finish.
- Performance Data:** 60° Cutoff angle.  
See attached photometric reports for distribution and efficiency data.  
Go to [www.lightolier.com](http://www.lightolier.com) for .IES files.

## Labels


cULus Listed. Suitable for Damp Locations. I.B.E.W.

Job Information	Type:
<b>Job Name:</b>	
<b>Cat. No.:</b>	
<b>Lamp(s):</b>	
<b>Notes:</b>	

Lightolier a Genlyte company [www.lightolier.com](http://www.lightolier.com)  
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
We reserve the right to change details of design, materials and finish.  
© 2007 Genlyte Group LLC • C1007

## Lighting Data

### Footcandles On Wall: Multiple Units

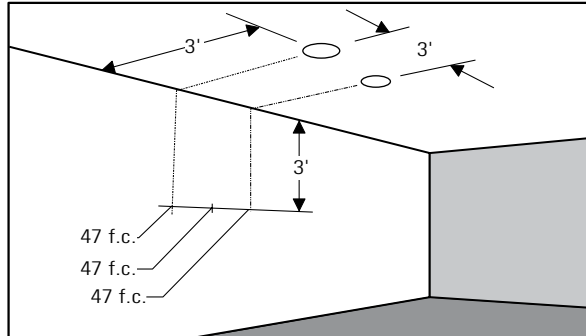

EXAMPLE: 42w with multiple clear reflector units located 3' from wall and spaced 3' on center, the illumination on the wall 3' down from ceiling will be 47 f.c. beneath units and 47 f.c. between units.

### 42w G.E. Triple Biax 3' From Wall-3' On Center 4' From Wall-4' On Center

	← 3' →			
Distance From Ceiling in Feet	1	22	20	22
	2	47	48	47
	3	47	47	47
	4	35	34	35
	5	28	28	28
	6	22	22	22
	7	17	17	17
	8	14	14	14
	9	11	11	11

	← 4' →			
Distance From Ceiling in Feet	1	7	6	7
	2	21	20	21
	3	29	30	29
	4	26	26	26
	5	21	20	21
	6	18	17	18
	7	15	15	15
	8	14	14	14
	9	10	10	10

### 32w G.E. Triple Biax 3' From Wall-3' On Center 4' From Wall-4' On Center

	← 3' →			
Distance From Ceiling in Feet	1	17	14	17
	2	35	36	35
	3	37	36	37
	4	28	28	28
	5	22	22	22
	6	18	18	18
	7	14	14	14
	8	11	11	11
	9	9	9	9

	← 4' →			
Distance From Ceiling in Feet	1	6	4	6
	2	16	14	16
	3	22	23	22
	4	21	20	21
	5	16	17	16
	6	14	13	14
	7	12	12	12
	8	10	10	10
	9	8	8	8

### 26w G.E. Triple Biax 2' From Wall-2' On Center 3' From Wall-3' On Center

	← 2' →			
Distance From Ceiling in Feet	1	49	44	49
	2	64	62	64
	3	43	43	43
	4	30	30	30
	5	21	22	21
	6	16	16	16
	7	11	11	11
	8	9	9	9
	9	7	7	7

	← 3' →			
Distance From Ceiling in Feet	1	13	11	13
	2	26	28	26
	3	29	28	29
	4	21	21	21
	5	17	17	17
	6	13	14	13
	7	11	11	11
	8	9	9	9
	9	7	7	7

### 26w Sylvania Quad Tube 2' From Wall-2' On Center 3' From Wall-3' On Center

	← 2' →			
Distance From Ceiling in Feet	1	39	36	39
	2	49	53	49
	3	36	34	36
	4	25	25	25
	5	18	19	18
	6	13	13	13
	7	9	9	9
	8	7	7	7
	9	5	5	5

	← 3' →			
Distance From Ceiling in Feet	1	10	9	10
	2	21	21	21
	3	22	23	22
	4	18	17	18
	5	14	14	14
	6	11	11	11
	7	9	9	9
	8	7	7	7
	9	6	6	6

Footcandle values are initial, rounded off and based on minimum of six units.

<b>Job Information</b>	<b>Type:</b>
------------------------	--------------

Lightolier a Genlyte company [www.lightolier.com](http://www.lightolier.com)  
 631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710  
 We reserve the right to change details of design, materials and finish.  
 © 2007 Genlyte Group LLC • C1007

## Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>