



Solid Front Under Shelf Fluorescent Luminaire 22", 34", 46" Length, 1 Lamp T5

Features

- 1-1/8" shallow depth.
- Three nominal lengths: 22", 34" and 46"
- Specification grade under shelf luminaire.
- Solid front design.
- Lens removable without tools for easy maintenance.
- 100% acrylic linear prismatic lens to obscure lamp image and uniformly distribute light output
- Lamp T5, CRI=80, color temp 3500K, is standard and included.
- Paint after fabrication with white polyester paint finish.
- All electrical components mounted on an easily removable service tray.
- On/off rocker switch (included in supply pack) 120 volt use only.
- Universal voltage.


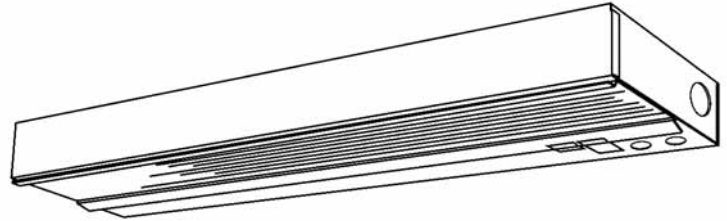


Features

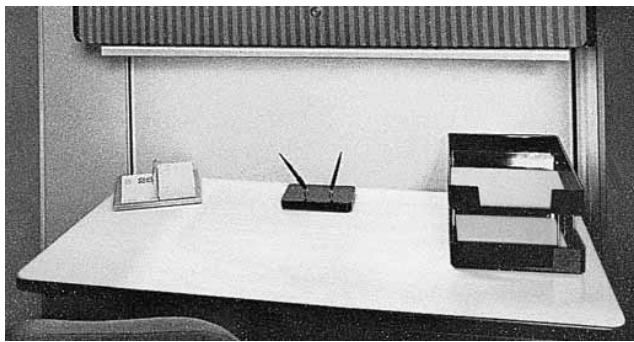

Attractive, unobtrusive lighting

Dimensions

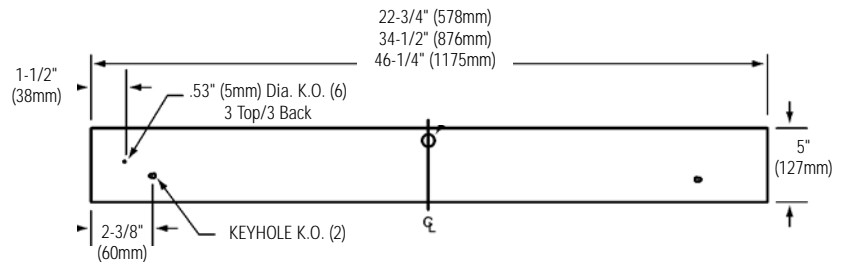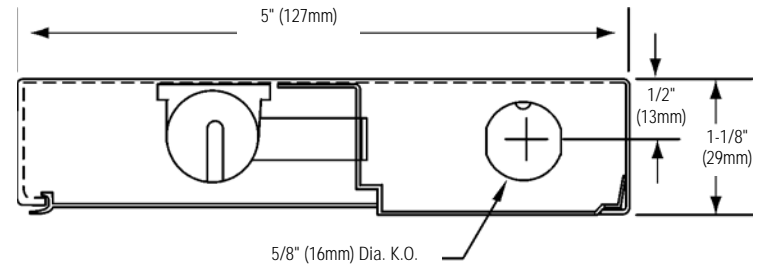

Job Information

Type:

Job Name:

Cat. No.:

Lamp(s):

Volts/Ballast:

For Factory Technical Information: (978) 657-7600 • Fax (978) 658-0595
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 a Philips Group

07/08

Section 3A/Folio H160-12

PHOTOMETRIC DATA

Fixture Efficiency: 79.6%

Catalog Number: TSF128WUNVPG BPR
Test Number: 17847

Lamps: F28T5
Ballast: Electronic



Input Watts: 29
Ballast Factor: 0.88

LUMEN SUMMARY

ZONE	LUMENS	% LAMP	% FIXT
0- 30	821	28.3	35.6
0- 40	1312	45.2	56.8
0- 60	2011	69.4	87.1
0- 90	2309	79.6	100.0
90-180	0	0.0	0.0
0-180	309	79.6	100.0

INITIAL FOOTCANDLES: 4FT-T5 with Solid Front

	A	B	C	D	E
1	120	242	281	240	124
2	96	184	214	186	96
3	51	97	113	97	53
4	24	37	45	40	23

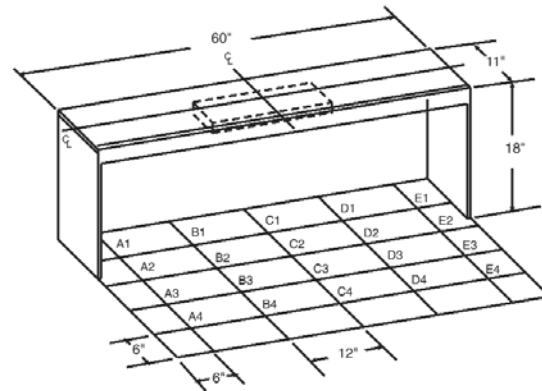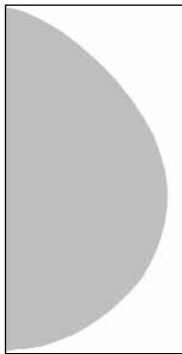

Ordering Information

Explanation of Catalog Number. Example: TCF128WUNVPG BPR

TSF

Taskmaster
Solid Front T5:
Task Lighting

1

Lamp Quantity:
(835K Installed)
1=1 Lamp

Lamp/Fixture
Length/Watts:
14 = 14W T5 (Nominal 22")
21 = 21W T5 (Nominal 34")
28 = 28W T5 (Nominal 46")

W

Finish:
W = White

UNV

Voltage:
UNV=120-277

PG

Ballast:
PG = Program Rapid Start
<10 THD T5

BPR

Bulk Pack Rocker Switch:
Rocker switch is provided uninstalled in a supply pack within fixture carton. *Rocker switch should only be installed in task light when using 120 volt power supply.*

Specifications

Materials: Chassis parts are die-formed code gauge steel.

Lamp Shield: 100% acrylic lens.

Finish: All metal parts painted after fabrication with white polyester paint finish.

Electrical: Electronic ballast is standard. T5 triphosphor (835) lamp is supplied as standard.

Labels: I.B.E.W./UL and ULc Listed.

This product may have a mercury containing lamp. Manage in accord with Disposal Laws.

See: www.lamprecycle.org

Options/Accessories

Electrical Wiring Options:

- GLR-B (6 pack of 3 amp fusing)
- CONV OUTLET (10 PACK)

Accessories will ship as an additional line item when ordered for field installation

Job Information

Type:

For Factory Technical Information: (978) 657-7600 • Fax (978) 658-0595
631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710

We reserve the right to change details of design, materials and finish.

www.lightolier.com © 2008 a Philips Group

Section 3A/Folio H160-12

Free Manuals Download Website

<http://myh66.com>

<http://usermanuals.us>

<http://www.somanuals.com>

<http://www.4manuals.cc>

<http://www.manual-lib.com>

<http://www.404manual.com>

<http://www.luxmanual.com>

<http://aubethermostatmanual.com>

Golf course search by state

<http://golfingnear.com>

Email search by domain

<http://emailbydomain.com>

Auto manuals search

<http://auto.somanuals.com>

TV manuals search

<http://tv.somanuals.com>